

- 1. ALL RESISTANCE VALUES ARE IN OHMS, 0.1 WATT +/- 5%.
- 2. ALL CAPACITANCE VALUES ARE IN MICROFARADS.
- 3. ALL CRYSTALS & OSCILLATOR VALUES ARE IN HERTZ.

SCHEMATIC, CORNHOLIO

5/12/2009


REV	ZONE	ECN	DESCRIPTION OF CHANGE	CK APPD DATE	ENG APPD DATE
?		?	?	?	?


Page	Contents	Sync	Date
1	Table of Contents	N/A	N/A
2	System Block Diagram	N/A	N/A
3	Power Block Diagram	DRAGON	03/13/2008
4	BOM Configuration	N/A	N/A
5	Revision History	N/A	N/A
6	Functional / ICT Test	N/A	N/A
7	Power Aliases	N/A	N/A
8	Signal Aliases	WFERRY_K191	01/13/2009
9	CPU FSB	K24_MLB	02/05/2009
10	CPU Power & Ground	K24_MLB	02/05/2009
11	CPU Decoupling	K24_MLB	02/05/2009
12	eXtended Debug Port (MiniXDP)	K19_MLB	02/05/2009
13	MCP CPU Interface	T18_MLB	02/05/2009
14	MCP Memory Interface	T18_MLB	02/05/2009
15	MCP Memory Misc	T18_MLB	02/05/2009
16	MCP PCIe Interfaces	T18_MLB	02/05/2009
17	MCP Ethernet & Graphics	T18_MLB	02/05/2009
18	MCP PCI & LPC	T18_MLB	02/05/2009
19	MCP SATA & USB	T18_MLB	02/05/2009
20	MCP HDA & MISC	T18_MLB	02/05/2009
21	MCP Power & Ground	T18_MLB	02/05/2009
22	MCP Standard Decoupling	T18_MLB	02/05/2009
23	MCP Graphics Support	K19_MLB	02/05/2009
24	SB Misc	WFERRY_K191	01/06/2009
25	FSB/DDR3 Vref Margining	K24_MLB	02/05/2009
26	DDR3 SO-DIMM Connector A	K19_MLB	02/05/2009
27	DDR3 SO-DIMM Connector B	K19_MLB	02/05/2009
28	DDR3 Support	T18_MLB	02/05/2009
29	Right Clutch Connector	K19_MLB	03/04/2009
30	SECUREDIGITAL CARD READER	K19_MLB	03/23/2009
31	Ethernet PHY (RTL8211CL)	(K19_MLB)	02/05/2009
32	Ethernet & AirPort Support	K19_MLB	02/05/2009
33	Ethernet Connector	K19_MLB	03/13/2009
34	FireWire LLC/PHY (FW643E)	T18_MLB	02/05/2009
35	FireWire Port Power	K19_MLB	03/18/2009
36	FireWire Ports	K19_MLB	02/05/2009
37	SATA Connectors	K19_MLB	03/23/2009
38	External USB Connectors	K19_MLB	02/05/2009
39	Front Flex Support	K19_MLB	02/05/2009
40	SMC	T18_MLB	02/05/2009
41	SMC Support	(K19_MLB)	(11/25/2008)
42	LPC+SPI Debug Connector	K19_MLB	02/05/2009

Page	Contents	Sync	Date
43	K19i SMBus Connections	WFERRY_K191	12/12/2008
44	VOLTAGE SENSING	K24_MLB	02/05/2009
45	Current Sensing	WFERRY_K191	12/16/2008
46	Thermal Sensors	K24_MLB	02/05/2009
47	Fan	K24_MLB	02/05/2009
48	WELLSRING 1	K24_MLB	02/05/2009
49	WELLSRING 2	K24_MLB	02/25/2009
50	Sudden Motion Sensor (SMS)	K19_MLB	02/05/2009
51	DEBUG SENSORS AND ADC	K19_MLB	03/25/2009
52	SPI ROM	K19_MLB	02/05/2009
53	AUDIO: CODEC/REGULATOR	K19_MLB	03/17/2009
54	AUDIO: LINE INPUT FILTER	K19_MLB	03/02/2009
55	AUDIO: HEADPHONE FILTER	K19_MLB	02/05/2009
56	AUDIO:SPEAKER AMP	K19_MLB	02/05/2009
57	AUDIO: JACKS	CASEYHARDY_K19	03/20/2009
58	AUDIO: JACK TRANSLATORS	K19_MLB	03/17/2009
59	DC-In & Battery Connectors	K19_MLB	03/18/2009
60	PBus Supply & Battery Charger	K19_MLB	03/18/2009
61	IMVP6 CPU VCore Regulator	K19_MLB	02/05/2009
62	5V / 3.3V Power Supply	WFERRY_K191	01/13/2009
63	1.5V DDR3 Supply	K19_MLB	02/04/2009
64	MCP CORE REGULATOR	K19_MLB	02/03/2009
65	CPU VTT Power Supply	(K19_MLB)	(12/05/2008)
66	MISC POWER SUPPLIES	K24_MLB	02/25/2009
67	POWER SEQUENCING	K24_MLB	02/05/2009
68	POWER FETS	K24_MLB	03/12/2009
69	LVDS Display Connector	K19_MLB	02/05/2009
70	DISPLAYPORT SUPPORT	K24_MLB	12/19/2008
71	DisplayPort Connector	K19_MLB	02/05/2009
72	LCD BACKLIGHT DRIVER	K19_MLB	02/10/2009
73	LCD Backlight Support	K24_MLB	03/16/2009
74	LCD Backlight Driver (MC34845)	VEMURI_K191	02/09/2009
75	CPU/FSB Constraints	T18_MLB	02/05/2009
76	Memory Constraints	T18_MLB	02/05/2009
77	MCP Constraints 1	T18_MLB	02/05/2009
78	MCP Constraints 2	T18_MLB	02/05/2009
79	Ethernet Constraints	T18_MLB	02/05/2009
80	FireWire Constraints	T18_MLB	02/05/2009
81	SMC Constraints	T18_MLB	02/05/2009
82	K19i Specific Constraints	WFERRY_K191	01/08/2009
83	K19i PCB Rule Definitions	WFERRY_K191	12/12/2008

Integration Issues to be Resolved

JTAG MCP TDO == JTAG MCP TDO
 MAKE_BASE=TRUE XDP TDO
 MAKE_BASE=TRUE XDP TDO
 (Should rename J1300 nets now that JTAG level-shifter is gone)

DIMENSIONS ARE IN MILLIMETERS		METRIC		APPLE INC.	
XX :	_____	DRAPTER	/	DESIGN CK	/
X.XX :	_____	ENG APPD	/	MFG APPD	/
X.XXX :	_____	QA APPD	/	DESIGNER	/
ANGLES :	_____	RELEASE	/	SCALE	NONE
DO NOT SCALE DRAWING		MATERIAL/FINISH NOTED AS APPLICABLE		SIZE	D
 THIRD ANGLE PROJECTION		DRAWING NUMBER		051-7903	REV. A
		SHT		1	OF 83

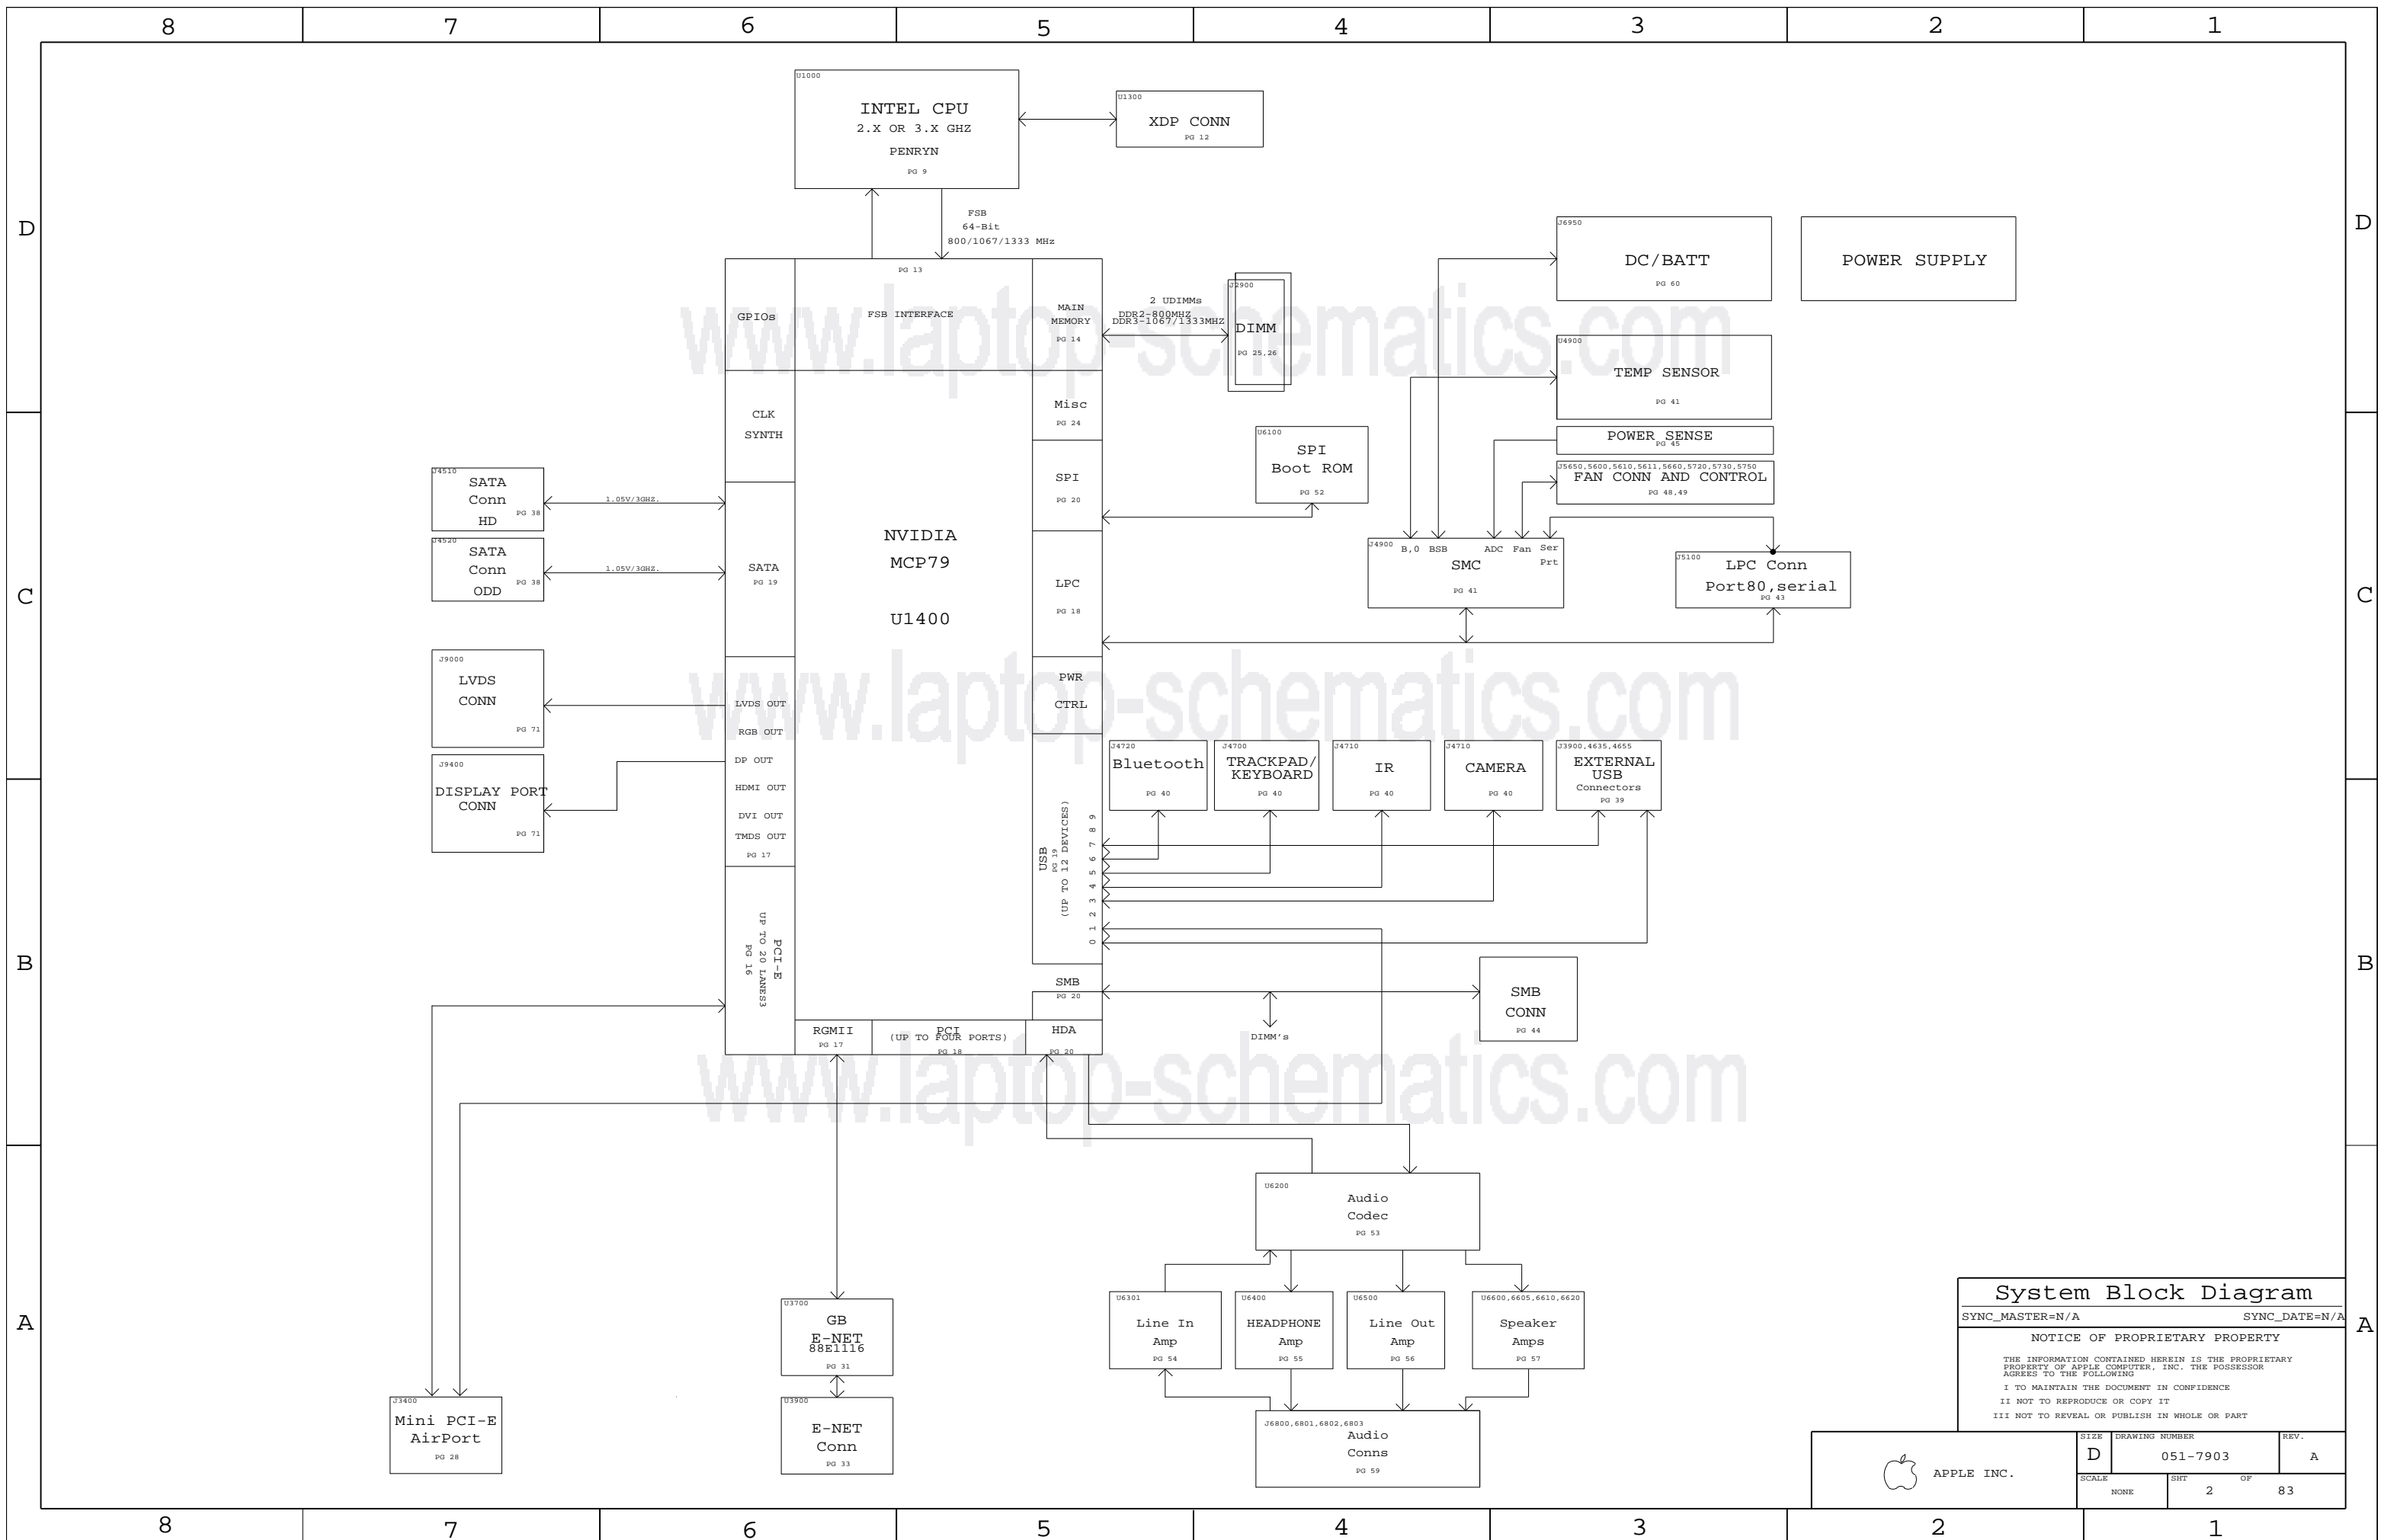

System Block Diagram

SYNC_MASTER=N/A SYNC_DATE=N/A

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT


III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	2	83

POWER SYSTEM ARCHITECTURE

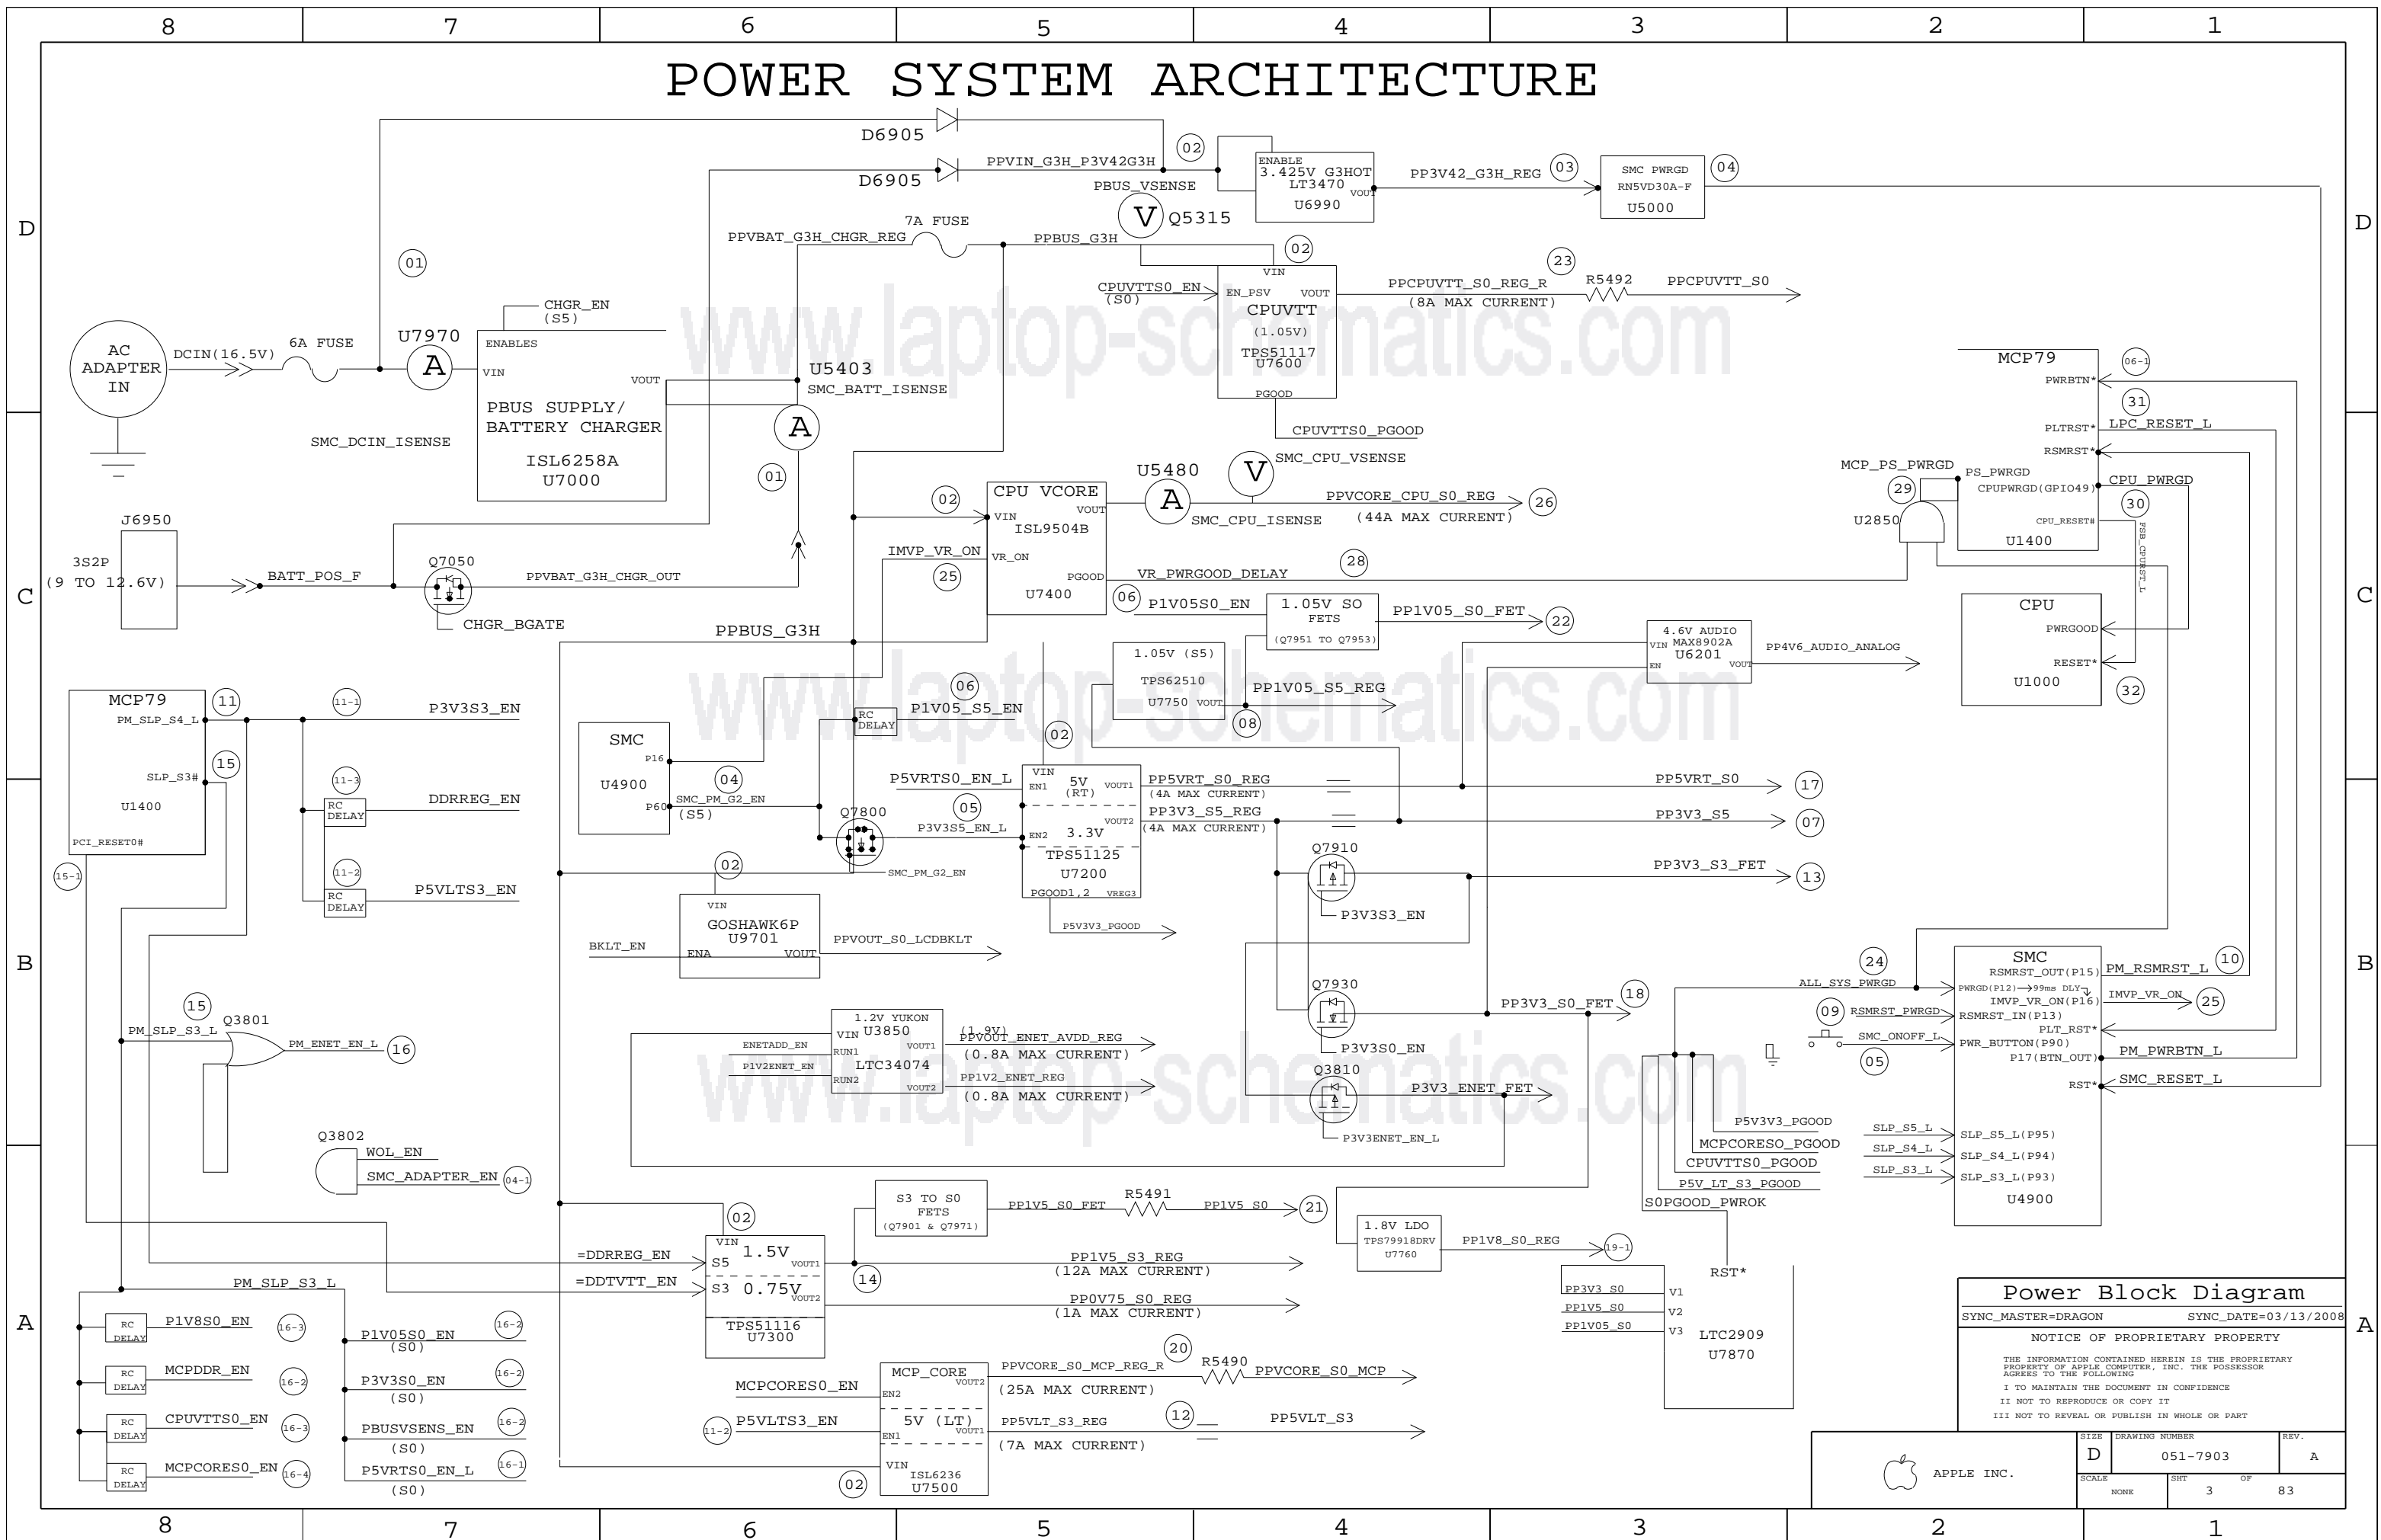

Power Block Diagram
 SYNC_MASTER=DRAGON SYNC_DATE=03/13/2008
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	83
NONE	3		

BOM Variant

BOM NUMBER	BOM NAME	BOM OPTIONS
630-9977	PCBA, CORNHOLIO, MLB, K19I	K19_COMMON, CPU_2_53GHZ, EEE_6Z9
085-0737	K19I MLB DEVELOPMENT	K19_DEVEL_PVT

Bar Code Label / EEE #

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
826-4393	1	LBL, P/N LABEL, PCB, 28MM X 6 MM	[EEE:6Z9]	CRITICAL	EEE_6Z9

BOM Groups

BOM GROUP	BOM OPTIONS
K19_COMMON	COMMON, ALTERNATE, K19_MCP, K19_MISC, K19_DEBUG_PVT, K19_PROGPARTS
K19_MCP	MCP_B03, BOOT_MODE_USER
K19_MISC	DP_ESD, EXTRACT_BUFF, ISL6258A, K19I, KB_BL, MIKEY, LDO_YES
K19_PROGPARTS	BOOTROM_PROG, SMC_PROG, IR_PROG, WELLSRING_PROG
K19_DEVEL_ENG	BMON_ENG, DEBUG_ADC, XDP_CONN, LPCPLUS, VREFMRGN, BKLT_FS
K19_DEVEL_PVT	LPCPLUS
K19_DEBUG_ENG	DEVEL_BOM, SMC_DEBUG_YES, XDP
K19_DEBUG_PVT	DEVEL_BOM, BMON_PROD, SMC_DEBUG_YES, XDP, NO_VREFMRGN
K19_DEBUG_PROD	BMON_PROD, SMC_DEBUG_YES, XDP, LPCPLUS_NOT, NO_VREFMRGN

Module Parts

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
337S3693	1	PDC, SLGE3, PRQ, 2.00, 25W, 1066, R0, 3M, BGA	U1000	CRITICAL	CPU_2_0GHZ
337S3704	1	PDC, SLGE2, PRQ, 2.26, 25W, 1066, R0, 3M, BGA	U1000	CRITICAL	CPU_2_26GHZ
337S3680	1	PDC, LGD2, PRQ, 2.40, 25W, 1066, R0, 3M, BGA	U1000	CRITICAL	CPU_2_4GHZ
337S3640	1	PDC, SL3BX, PRQ, 2.5, 35W, 1066, CO, 6M, BGA	U1000	CRITICAL	CPU_2_5GHZ
337S3756	1	PDC, SLCFG, PRQ, 2.53, 25W, 1066, R0, 3M, BGA	U1000	CRITICAL	CPU_2_53GHZ
337S3641	1	PDC, SLB43, PRQ, 2.8, 35W, 1066, CO, 6M, BGA	U1000	CRITICAL	CPU_2_8GHZ
338S0710	1	IC, MCP79MKT-B3, 35x35MM, BGA1437	U1400	CRITICAL	MCP_B03
338S0694	1	IC, RTL8251CA-VB-GR, GIGE TRANSCEIVER, 48P	U3700	CRITICAL	
338S0654	1	IC, FW643-E, 1394B PHY/ORCI LINK/PCI-E, 12	U4100	CRITICAL	

Programmable Parts

338S0563	1	IC, SMC, HS8/2117, 9X9MM, TLF, HF	U4900	CRITICAL	SMC_BLANK
341S2460	1	IC, PRGRM, SMC EXTERNAL, K19I	U4900	CRITICAL	SMC_PROG
335S0610	1	IC, FLASH, SPI, 32MBIT, 3.3V, 86MHZ, 8-SOP	U6100	CRITICAL	BOOTROM_BLANK
341S2458	1	IC, PRGRM, UNLOCK, K19I	U6100	CRITICAL	BOOTROM_PROG
338S0633	1	IC, CYPRS, CY7C63803-LQXC, 4X4MM, USB, 24-QFN	U4800	CRITICAL	IR_BLANK
341S2384	1	IR, ENCORE II, CY7C63803-LQXC	U4800	CRITICAL	IR_PROG
337S2983	1	IC, PSOC+ W/ USB, 56 PIN, MLP, CY8C24794	U5701	CRITICAL	WELLSRING_BLANK
341S2503	1	IC, TP PSOC, M97, M98	U5701	CRITICAL	WELLSRING_PROG

Development BOM

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
085-0737	1	K19I MLB DEVELOPMENT	DEVEL	CRITICAL	DEVEL_BOM

Alternate Parts

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
138S0603	138S0602		ALL	Murata alt to Samsung
152S0968	152S0966		ALL	Maglayer alt to Delta
128S0220	128S0262		ALL	KEMET alt to SANYO
152S0778	152S0693		ALL	CYNTEC AS ALTERNATE
152S0796	152S0685		ALL	CYNTEC AS ALTERNATE
152S0694	152S0138		ALL	MAGLAYERS AS ALTERNATE
157S0058	157S0055		ALL	DELTA AS ALTERNATE
104S0018	104S0023		ALL	DALE/VISHAY AS ALTERNATE
128S0093	128S0218		ALL	KEMET AS ALTERNATE
152S0874	152S0516		ALL	MAGLAYERS AS ALTERNATE
152S0847	152S0586		ALL	MAGLAYERS AS ALTERNATE


PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
051-7903	1	SCHEM, CORNHOLIO, K19	SCH	CRITICAL	
820-2533	1	PCBF, MLB IG, K19	PCB	CRITICAL	

BOM Configuration

SYNC_MASTER=N/A SYNC_DATE=N/A

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	4	83

8

7

6

5

4

3

2

1

Revision History

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com

D

D

C

C


B

B

A

A

Revision History	
SYNC_MASTER=N/A	SYNC_DATE=N/A
NOTICE OF PROPRIETARY PROPERTY	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING	
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE	
II NOT TO REPRODUCE OR COPY IT	
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART	

 APPLE INC.	SIZE D	DRAWING NUMBER 051-7903	REV. A
	SCALE NONE	SHEET 5	OF 83

NOTE: All page numbers are .csa, not PDF. See page 1 for .csa -> PDF mapping.

8

7

6

5

4

3

2

1



Fan Connectors

TRUE	PP5V_S0	74	56	67	3 TPs
TRUE	FAN_RT_PWM	47			
TRUE	FAN_RT_TACH	47			
TRUE	GND				5 TPs

LVDS Connector

TRUE	PP3V3_S0	58	61	66	67	68	69	71	72	82	
TRUE	PP3V3_SW_LCD	69	11	18	20	21	22	23	24	25	26
TRUE	PPVOUT_S0_LCDBKLT	6	51	69	72	74					
TRUE	LVDS_DDC_CLK	8	17	69							
TRUE	LVDS_DDC_DATA	8	17	69							
TRUE	LVDS_CONN_A_DATA_N<0>	8	69								
TRUE	LVDS_CONN_A_DATA_P<0>	8	69								
TRUE	LVDS_CONN_A_DATA_N<1>	8	69								
TRUE	LVDS_CONN_A_DATA_P<1>	8	69								
TRUE	LVDS_CONN_A_DATA_N<2>	8	69								
TRUE	LVDS_CONN_A_DATA_P<2>	8	69								
TRUE	LVDS_CONN_A_CLK_F_N	69	82								
TRUE	LVDS_CONN_A_CLK_F_P	69	82								
TRUE	LVDS_CONN_B_DATA_N<0>	8	69								
TRUE	LVDS_CONN_B_DATA_P<0>	8	69								
TRUE	LVDS_CONN_B_DATA_N<1>	8	69								
TRUE	LVDS_CONN_B_DATA_P<1>	8	69								
TRUE	LVDS_CONN_B_DATA_N<2>	8	69								
TRUE	LVDS_CONN_B_DATA_P<2>	8	69								
TRUE	LVDS_CONN_B_CLK_F_N	69	82								
TRUE	LVDS_CONN_B_CLK_F_P	69	82								
TRUE	LED_RETURN_1	69	72	74							
TRUE	LED_RETURN_2	69	72	74							
TRUE	LED_RETURN_3	69	72	74							
TRUE	LED_RETURN_4	69	72	74							
TRUE	LED_RETURN_5	69	72	74							
TRUE	LED_RETURN_6	69	72	74							
TRUE	BKL_ISEN1	72									
TRUE	BKL_ISEN2	72									
TRUE	BKL_ISEN3	72									
TRUE	BKL_ISEN4	72									
TRUE	BKL_ISEN5	72									
TRUE	BKL_ISEN6	72									
TRUE	GND										5 TPs

IPD Flex Connector

TRUE	PP3V3_S3_LDO	6	49								
TRUE	PP18V5_S3	6	49								
TRUE	Z2_CS_L	48	49								
TRUE	Z2_DEBUG3	48	49								
TRUE	Z2_MOSI	48	49								
TRUE	Z2_MISO	48	49								
TRUE	Z2_SCLK	48	49								
TRUE	Z2_BOOST_EN	48	49								
TRUE	Z2_HOST_INTN	48	49								
TRUE	Z2_CLKIN	48	49								
TRUE	Z2_KEY_ACT_L	48	49								
TRUE	Z2_RESET	48	49								
TRUE	PSOC_MISO	48	49								
TRUE	PSOC_MOSI	48	49								
TRUE	PSOC_SCLK	48	49								
TRUE	SMBUS_SMC_A_S3_SDA	6	29	40	43	49	81				
TRUE	SMBUS_SMC_A_S3_SCL	6	29	40	43	49	81				
TRUE	PSOC_F_CS_L	48	49								
TRUE	PICKB_L	48	49								
TRUE	GND										2 TPs

SD Card Connector

TRUE	SD_D<7..0>	30	82								
TRUE	SD_CMD	30	82								
TRUE	SD_CLK	30	82								
TRUE	SD_CD_L	30									
TRUE	SD_WP	30									
TRUE	GND										2 TPs

Speaker Connectors

TRUE	BI_MIC_LO	57	58								
TRUE	BI_MIC_SHIELD	57	58								
TRUE	BI_MIC_HI	57	58								
TRUE	SPKRCONN_L_OUT_P	56	57	82							
TRUE	SPKRCONN_L_OUT_N	56	57	82							
TRUE	SPKRCONN_R_OUT_P	56	57	82							
TRUE	SPKRCONN_R_OUT_N	56	57	82							
TRUE	SPKRCONN_S_OUT_P	56	57	82							
TRUE	SPKRCONN_S_OUT_N	56	57	82							
TRUE	GND										6 TPs

Functional Test Points

SATA ODD Connectors

TRUE	PP5V_SW_ODD	6	37	51	4 TPs
TRUE	SMC_ODD_DETECT	37	40		
TRUE	SATA_ODD_R2D_P	37	77		
TRUE	SATA_ODD_R2D_N	37	77		
TRUE	SATA_ODD_D2R_C_N	37	77		
TRUE	SATA_ODD_D2R_C_P	37	77		
TRUE	GND				3 TPs

Keyboard Connector

TRUE	PP3V3_S3	6	7	20	25	29	30	43	48	50	68	
TRUE	PP3V42_G3H	6	7	20	21	24	38	40	41	42	43	45
TRUE	WS_KBD1	48										
TRUE	WS_KBD2	48										
TRUE	WS_KBD3	48										
TRUE	WS_KBD4	48										
TRUE	WS_KBD5	48										
TRUE	WS_KBD6	48										
TRUE	WS_KBD7	48										
TRUE	WS_KBD8	48										
TRUE	WS_KBD9	48										
TRUE	WS_KBD10	48										
TRUE	WS_KBD11	48										
TRUE	WS_KBD12	48										
TRUE	WS_KBD13	48										
TRUE	WS_KBD14	48										
TRUE	WS_KBD15_CAP	48										
TRUE	WS_KBD16_NUM	48										
TRUE	WS_KBD17	48										
TRUE	WS_KBD18	48										
TRUE	WS_KBD19	48										
TRUE	WS_KBD20	48										
TRUE	WS_KBD21	48										
TRUE	WS_KBD22	48										
TRUE	WS_KBD23	48										
TRUE	WS_KBD_ONOFF_L	48										
TRUE	WS_LEFT_SHIFT_KBD	48										
TRUE	WS_LEFT_OPTION_KBD	48										
TRUE	WS_CONTROL_KBD	48										
TRUE	KBDLED_ANODE	6	49								2 TPs	
TRUE	GND											

Airport/BT/Camera Conn.

TRUE	PCIE_MINI_D2R_P	16	29	77							
TRUE	PCIE_MINI_D2R_N	16	29	77							
TRUE	PCIE_MINI_R2D_P	29	77	82							
TRUE	PCIE_MINI_R2D_N	29	77	82							
TRUE	PCIE_CLK100M_MINI_CONN_P	29	82								
TRUE	PCIE_CLK100M_MINI_CONN_N	29	82								
TRUE	MINI_CLKREQ_O_L	29									
TRUE	PCIE_WAKE_L	16	29								
TRUE	MINI_RESET_CONN_L	29									
TRUE	PP5V_WLAN	29									
TRUE	PP5V_S3_BTCAMERA_F	29									
TRUE	SMBUS_SMC_A_S3_SDA	6	29	40	43	49	81				
TRUE	SMBUS_SMC_A_S3_SCL	6	29	40	43	49	81				
TRUE	USB_CAMERA_CONN_P	29	82								
TRUE	USB_CAMERA_CONN_N	29	82								
TRUE	CONN_USB2_BT_P	29	82								
TRUE	CONN_USB2_BT_N	29	82								
TRUE	GND										10 TPs

SATA HDD Connector

TRUE	PP5V_S0_HDD_FLT	6	37	4 TPs
TRUE	PP5V_S3_IR_R	37		
TRUE	SATA_HDD_R2D_P	37	77	
TRUE	SATA_HDD_R2D_N	37	77	
TRUE	SATA_HDD_D2R_C_P	37	77	
TRUE	SATA_HDD_D2R_C_N	37	77	
TRUE	IR_RX_OUT	37	39	
TRUE	SYS_LED_ANODE_R	37		
TRUE	GND			6 TPs

KBD Backlight Conn.

TRUE	KBDLED_ANODE	6	49	2 TPs
TRUE	SMC_KBDLED_PRESENT_L	49		
TRUE	GND			

DC Power Connector

TRUE	PP18V5_DCIN_FUSE	59	3 TPs
TRUE	ADAPTER_SENSE	59	3 TPs
TRUE	GND		

Battery Connector


TRUE	PPVBAT_G3H_CONN	59	60	3 TPs			
TRUE	SMBUS_SMC_BSA_SCL	6	40	43	59	60	81
TRUE	SMBUS_SMC_BSA_SDA	6	40	43	59	60	81
TRUE	SYS_DETECT_L	60	43	59	60	81	
TRUE	GND_BATT_CHGND	8	49	6 TPs			

BIL Connector

TRUE	PP3V42_G3H	2	4	5	6	7	3 TPs
TRUE	SMC_BIL_BUTTON_L	40	41	59	60	81	
TRUE	GND						3 TPs

Power Nets

TRUE	PPVCORE_S0_CPU	7	10	11	44	61									
TRUE	PPVCORE_S0_MCP	7	21	22	44	64									
TRUE	PP0V75_S0_DDRVTT	7	26	27	63	68									
TRUE	PP1V05_S0	7	10	11	15	22	37	66	67	68	82				
TRUE	PP1V5_S0	7	17	23	53	66									
TRUE	PP1V8_S0	7	17	23	53	66									
TRUE	PP3V3_S0	58	61	66	67	68	69	71	72	82					
TRUE	PP1V5_S3	7	26	27	28	63	68								
TRUE	PP3V3_S3	6	7	20	25	29	30	43	48	50	68				
TRUE	PP1V05_S5	6	7	21	22	32	66								
TRUE	PP3V3_S5	7	17	19	21	22	24	28	32	35	36	42			
TRUE	PP3V42_G3H	2	4	5	6	7	20	21	24	38	40	41	42	43	45
TRUE	PPBUS_G3H	59	60	67											
TRUE	PP3V3_ENET	7	17	23	32										
TRUE	PP1V05_ENET	7	17	23	32										
TRUE	PP5V_S3	7	8	29	37	38	39	41	49	51	53	62			
TRUE	PP3V3_S5_AVREF_SMC	40	41												
TRUE	PP18V5_S3	6	49												
TRUE	PP3V3_S3_LDO	6	49												
TRUE	PPVOUT_S0_LCDBKLT	6	51	69	72	74									
TRUE	PP4V5_AUDIO_ANALOG	53													
TRUE	SMC_PM_G2_EN	40	62	67											
TRUE	PM_SLP_S4_L	20	38	40	41	67									
TRUE	PM_SLP_S3_L	20	32	35	40	67	71								
TRUE	PP1V05_S5	6	7	21	22	32	66								
TRUE	PP5V_SW_ODD														

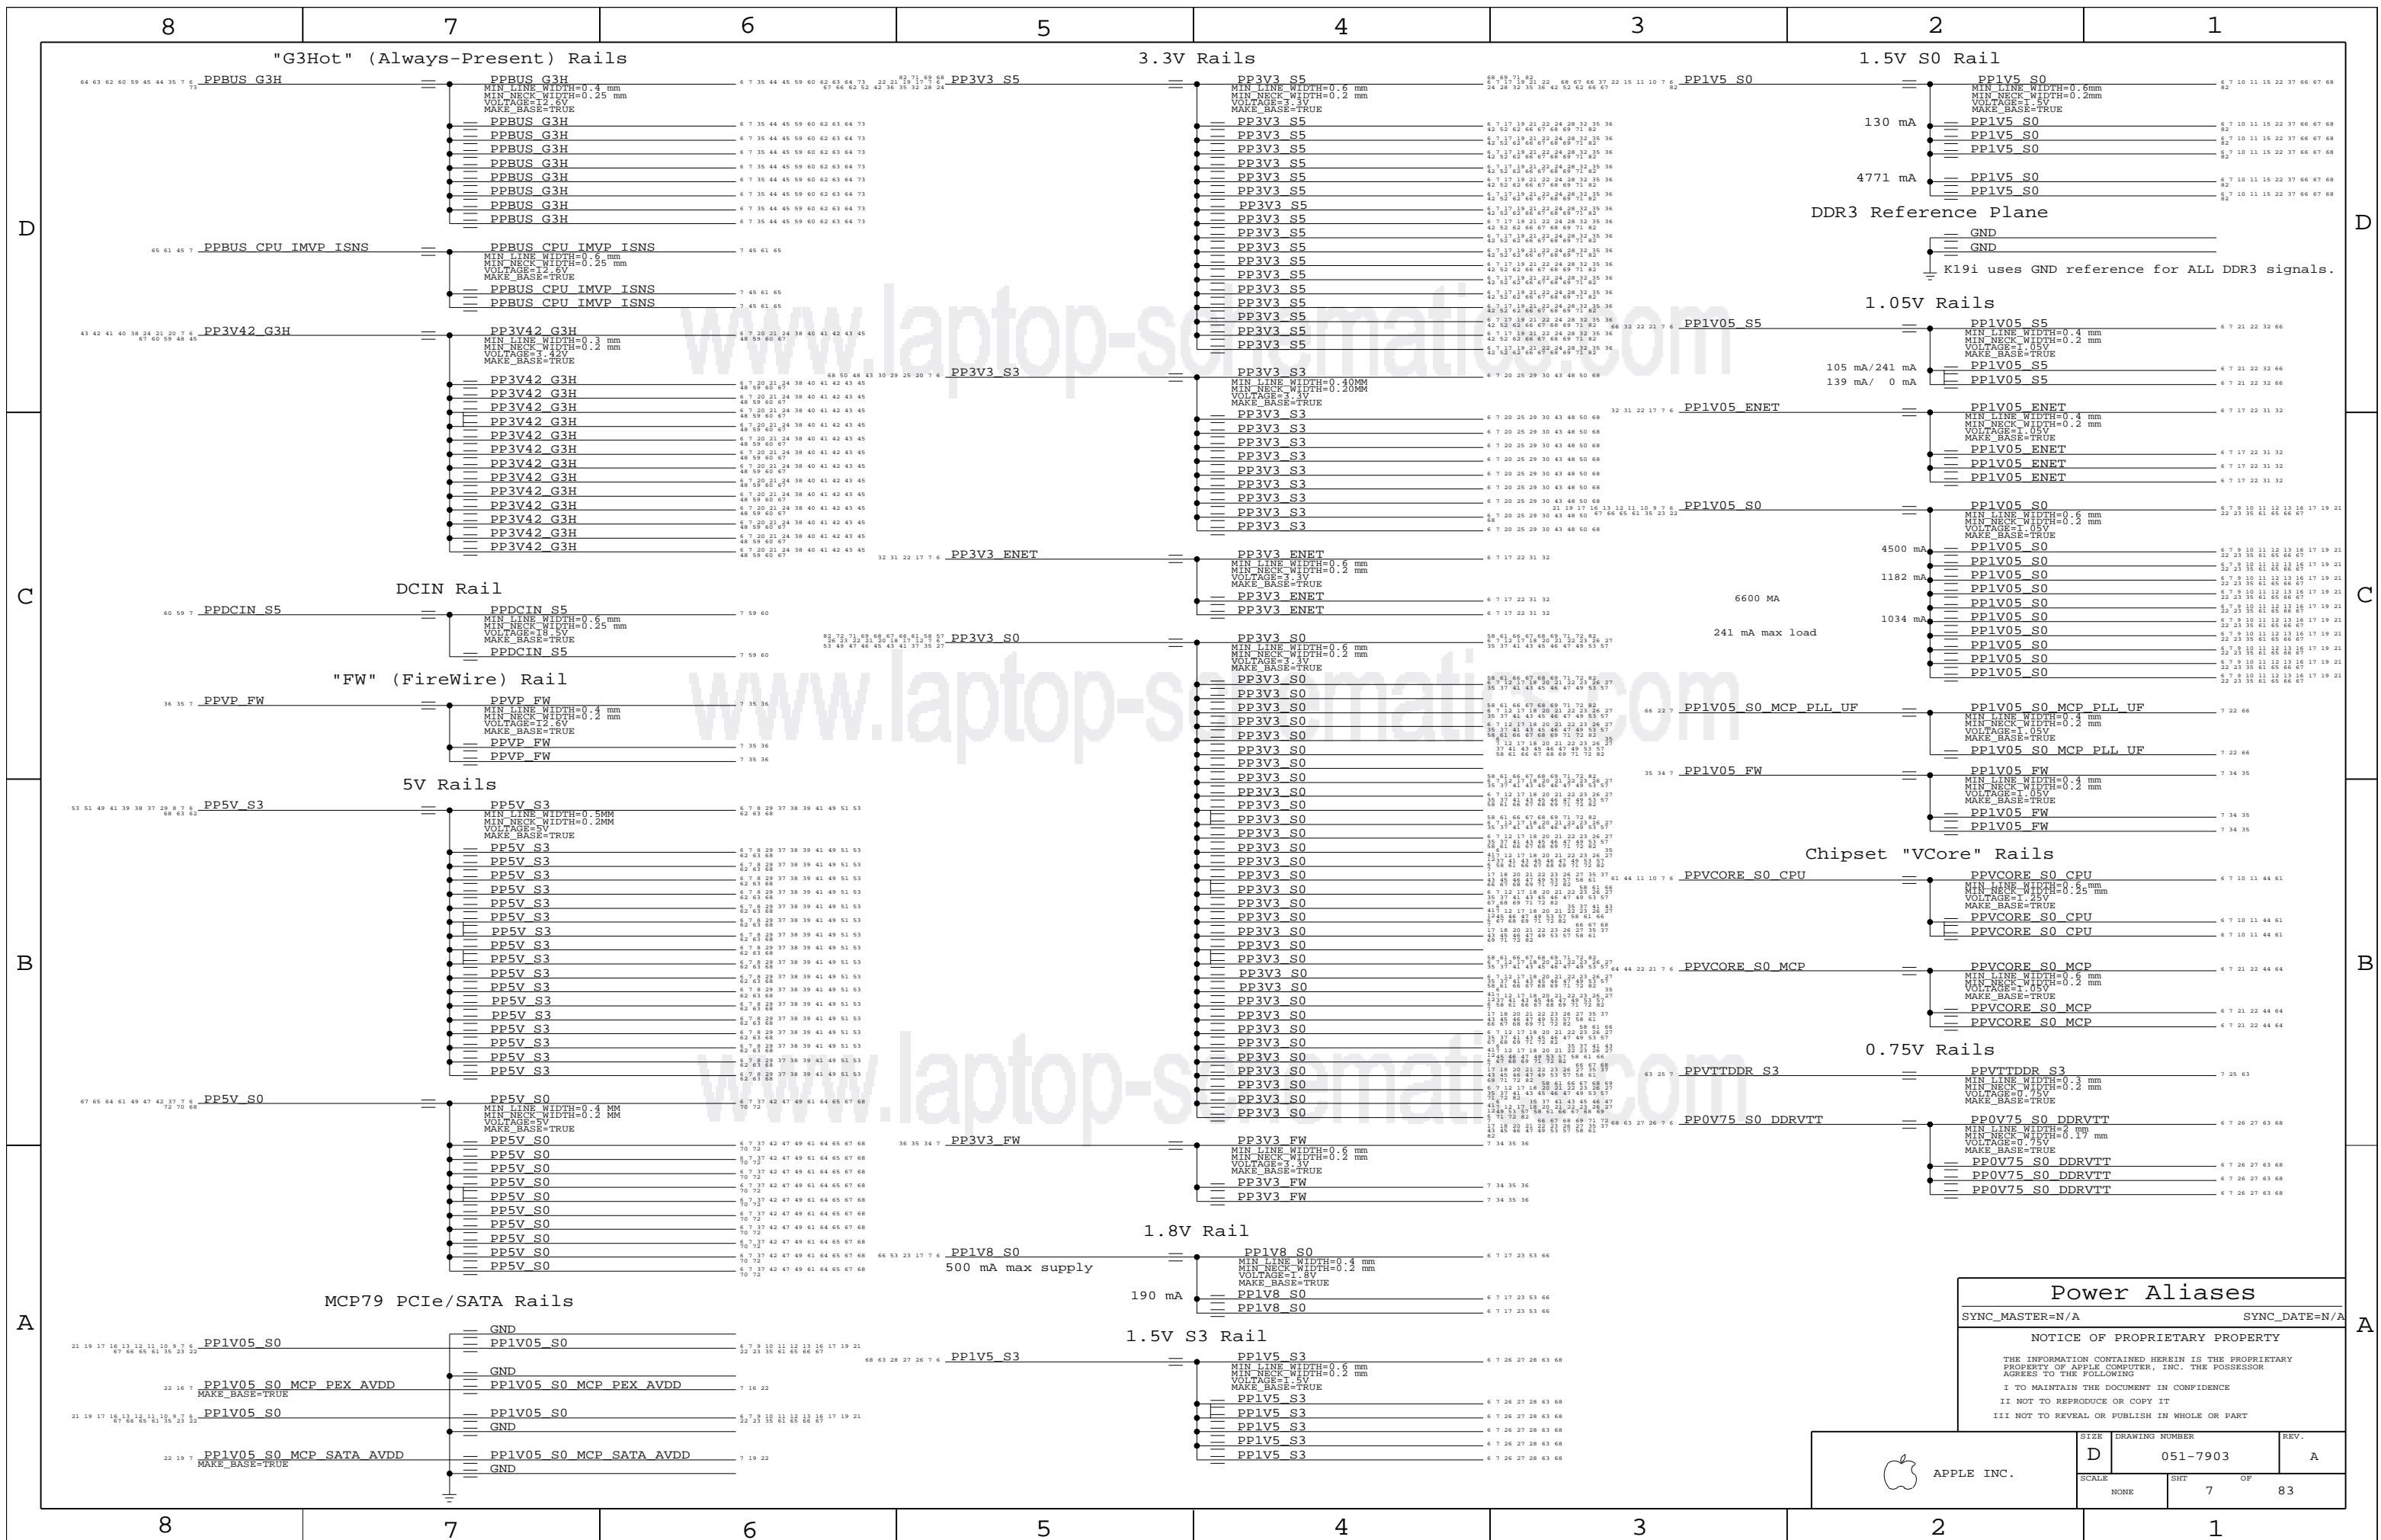

Power Aliases		
SYNC_MASTER=N/A		SYNC_DATE=N/A

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I I TO MAINTAIN THE DOCUMENT IN CONFIDENCE


II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART


APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	NONE	SHT	7 OF 83
















Board Mounting Holes
(Not to scale)

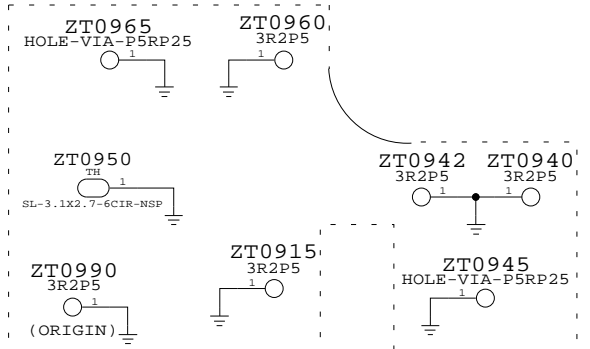


CPU Thermal Module Holes

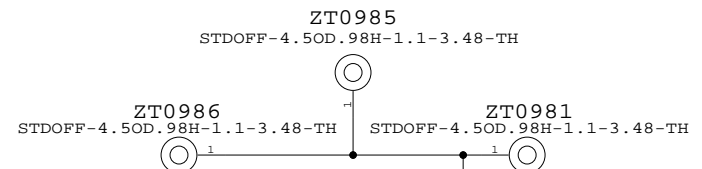


MCP Thermal Module Holes

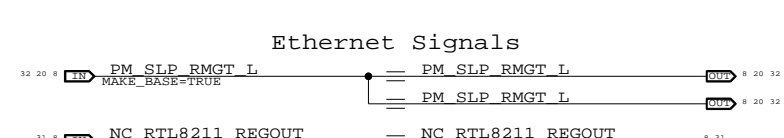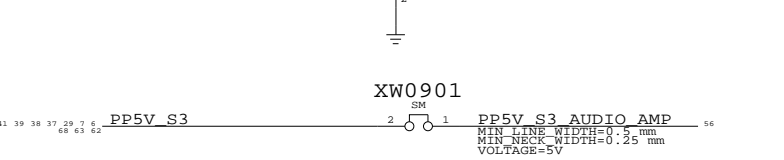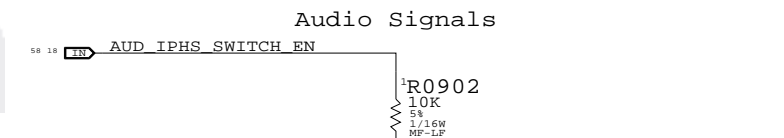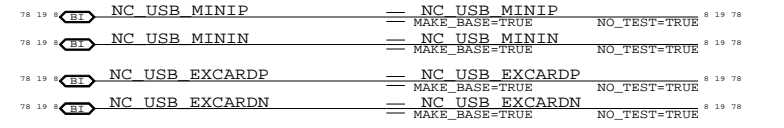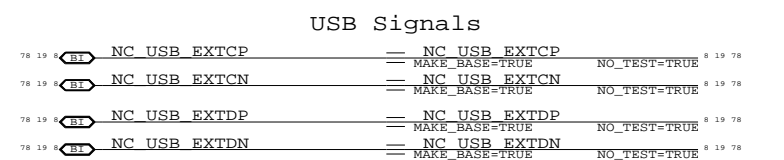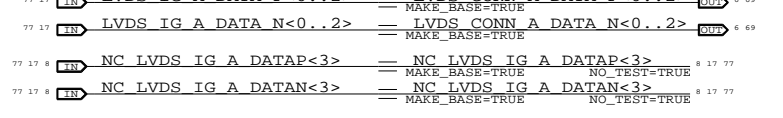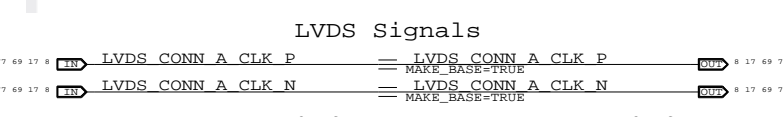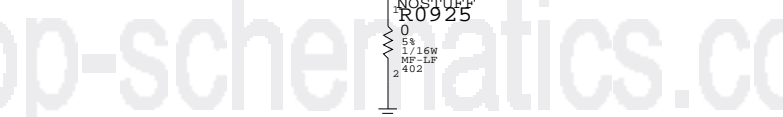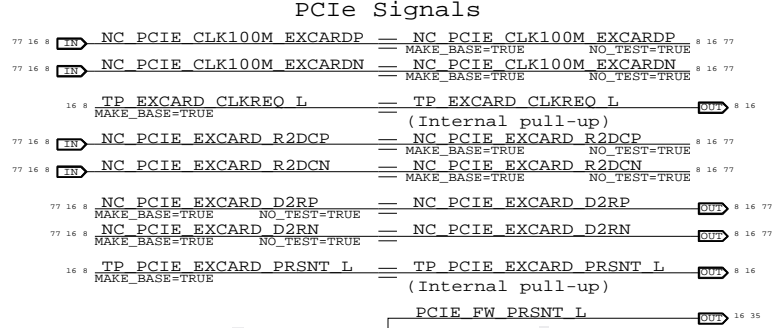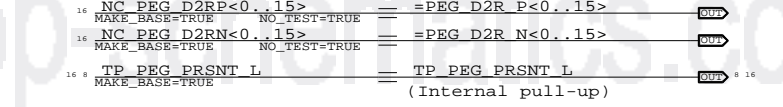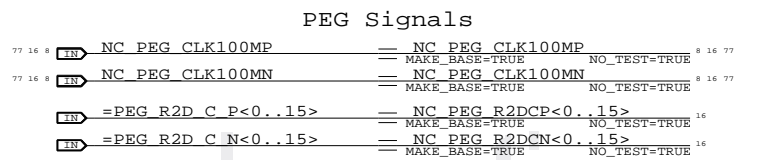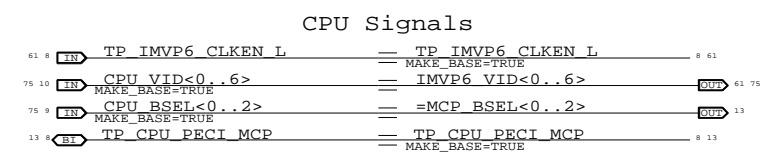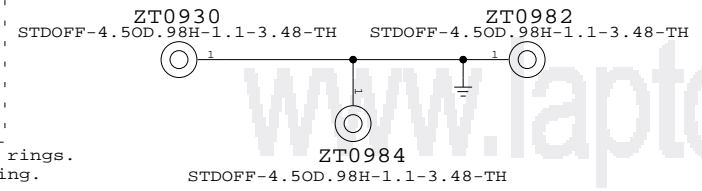


Left Speaker Standoffs

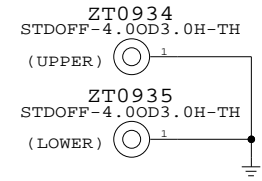


Fan Screw Hole




I/O Row Pogos

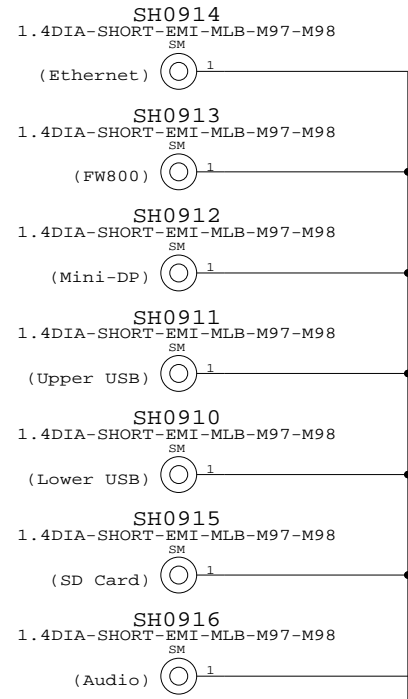


CPU Pogo

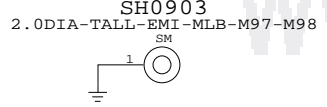


SO-DIMM Pogos

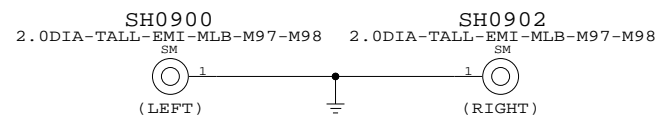


Other Board Pogos

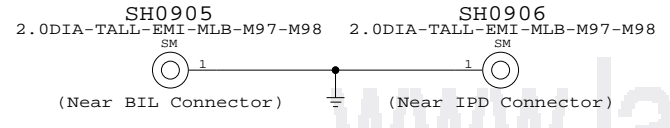

Bosses

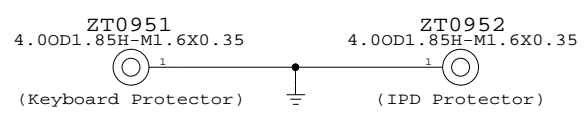

Digital Ground




Signal Aliases

SYNC_MASTER=WFERRY_K19I SYNC_DATE=01/13/2009

NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART


APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	8		83

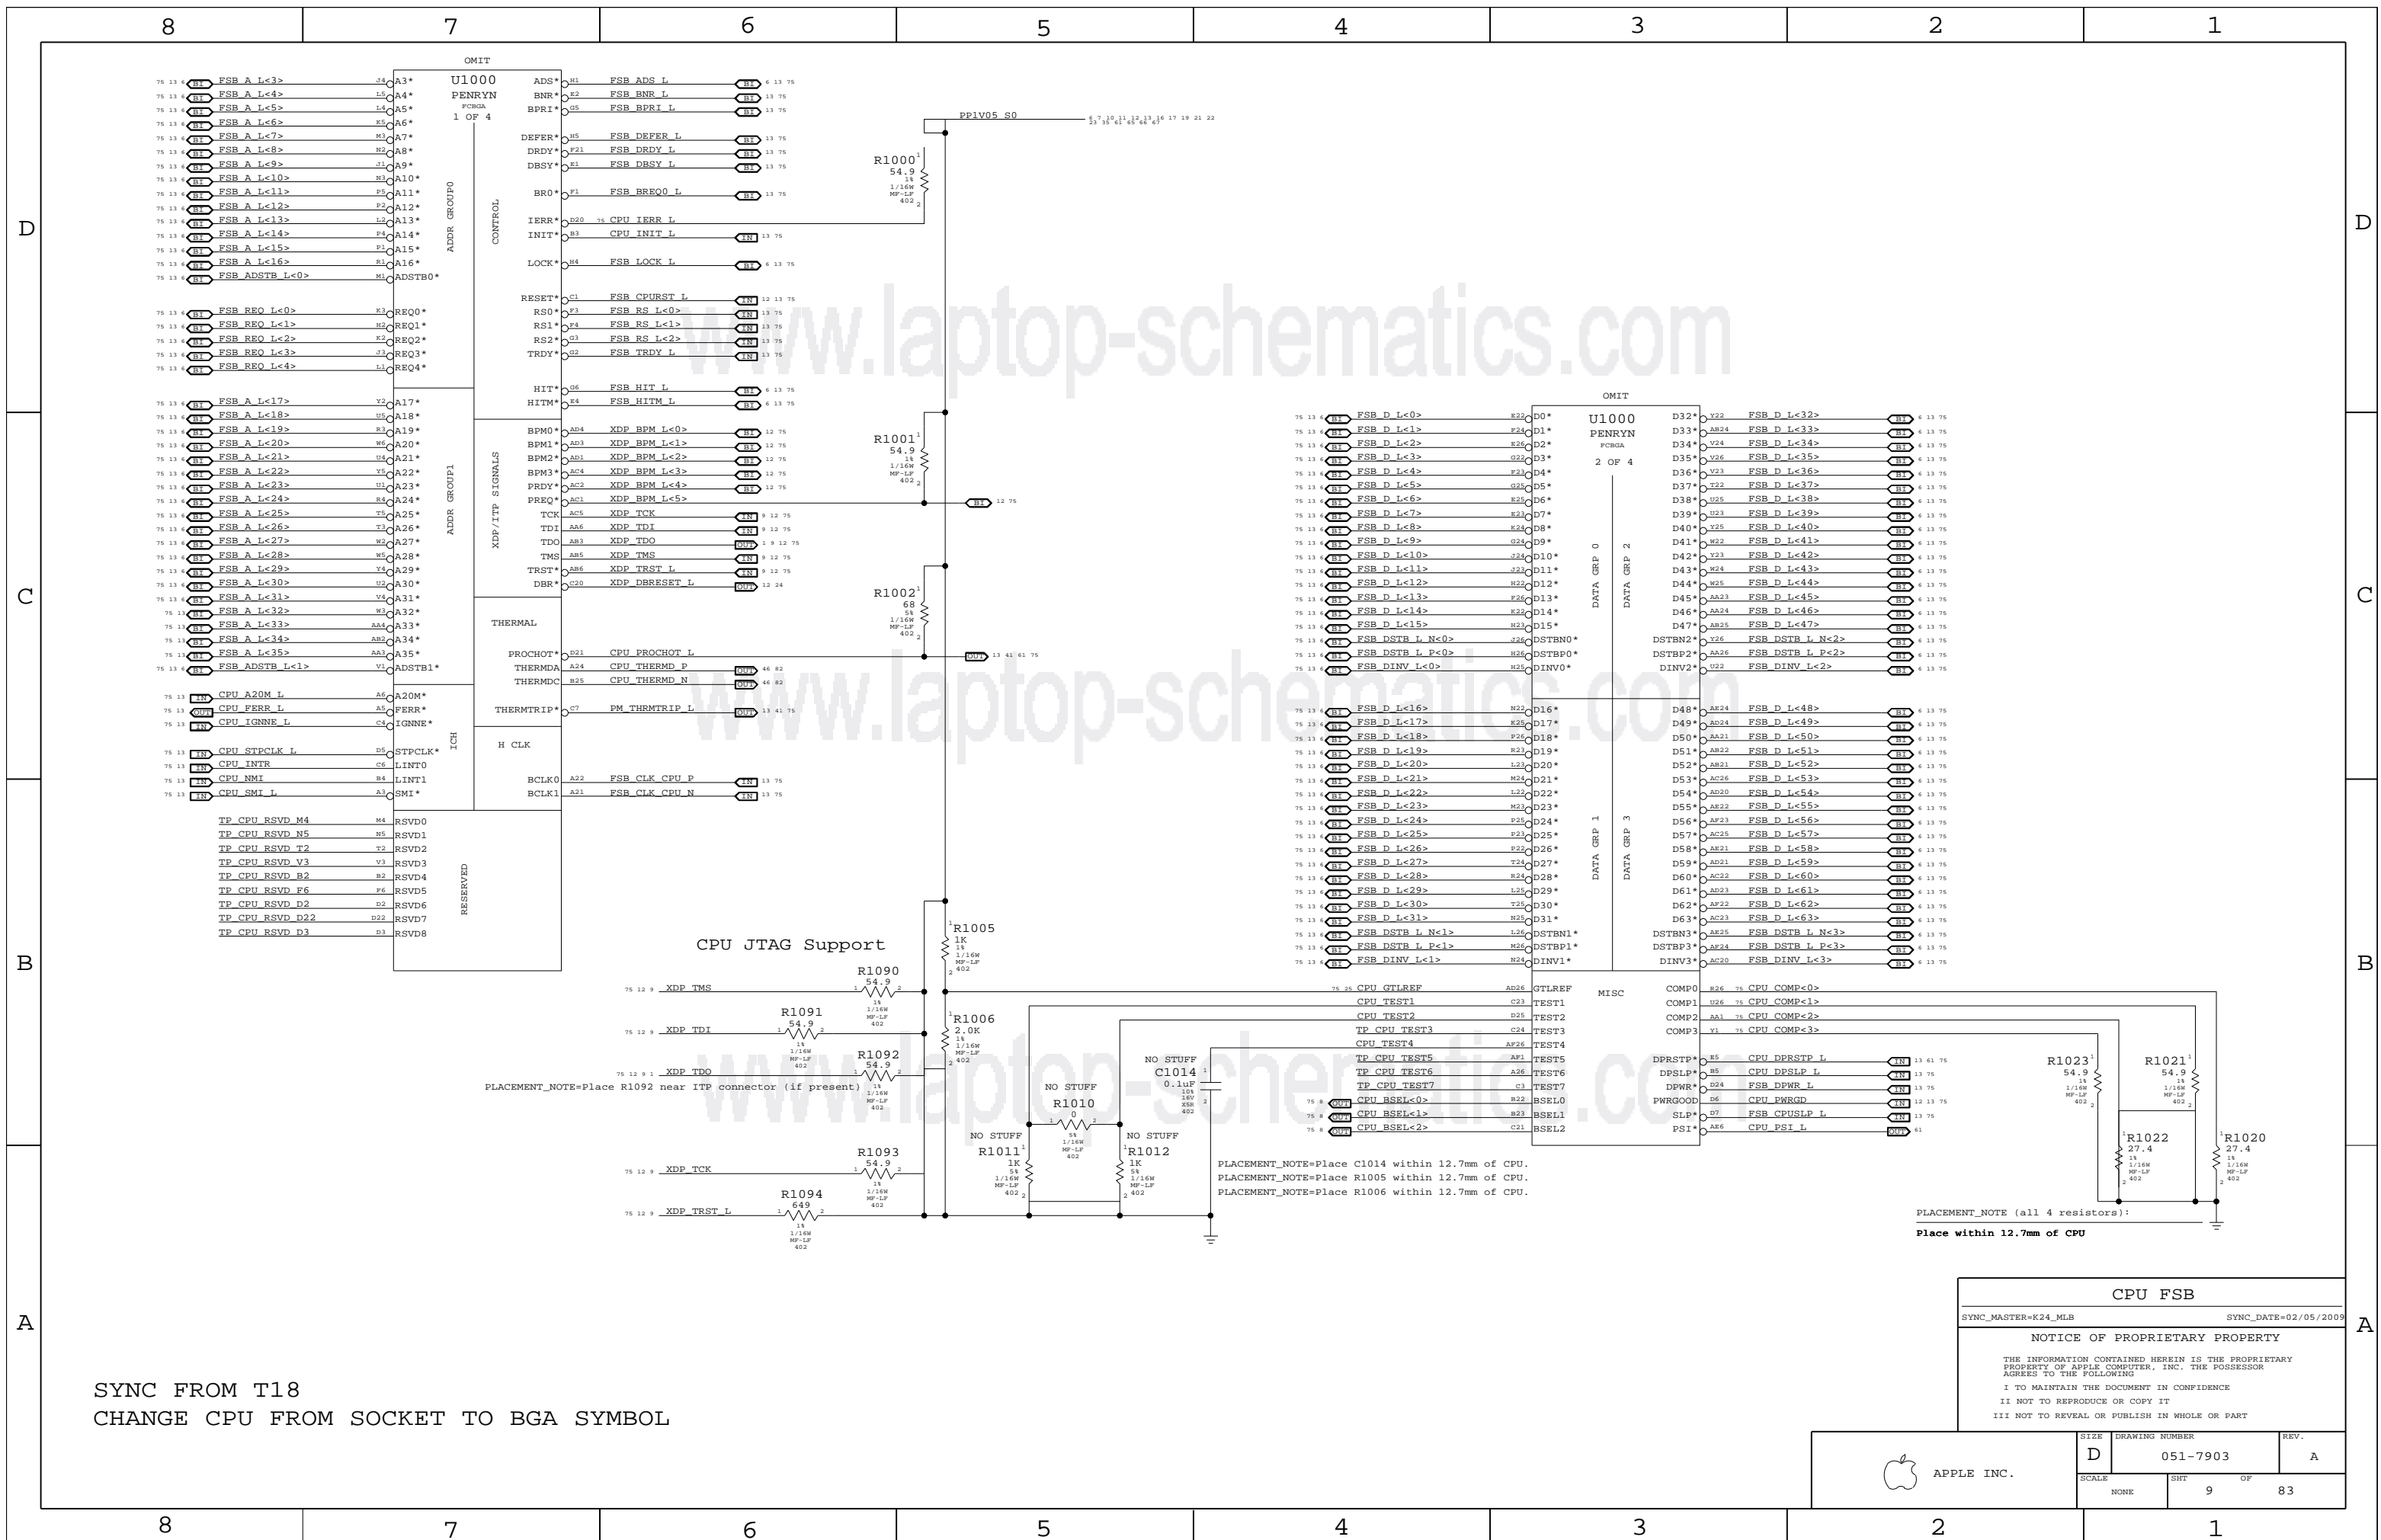

SYNC FROM T18
 CHANGE CPU FROM SOCKET TO BGA SYMBOL

CPU FSB		
SYNC_MASTER=K24_MLB	SYNC_DATE=02/05/2009	
NOTICE OF PROPRIETARY PROPERTY		
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING		
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE		
II NOT TO REPRODUCE OR COPY IT		
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART		

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	NONE	SHT	OF 83

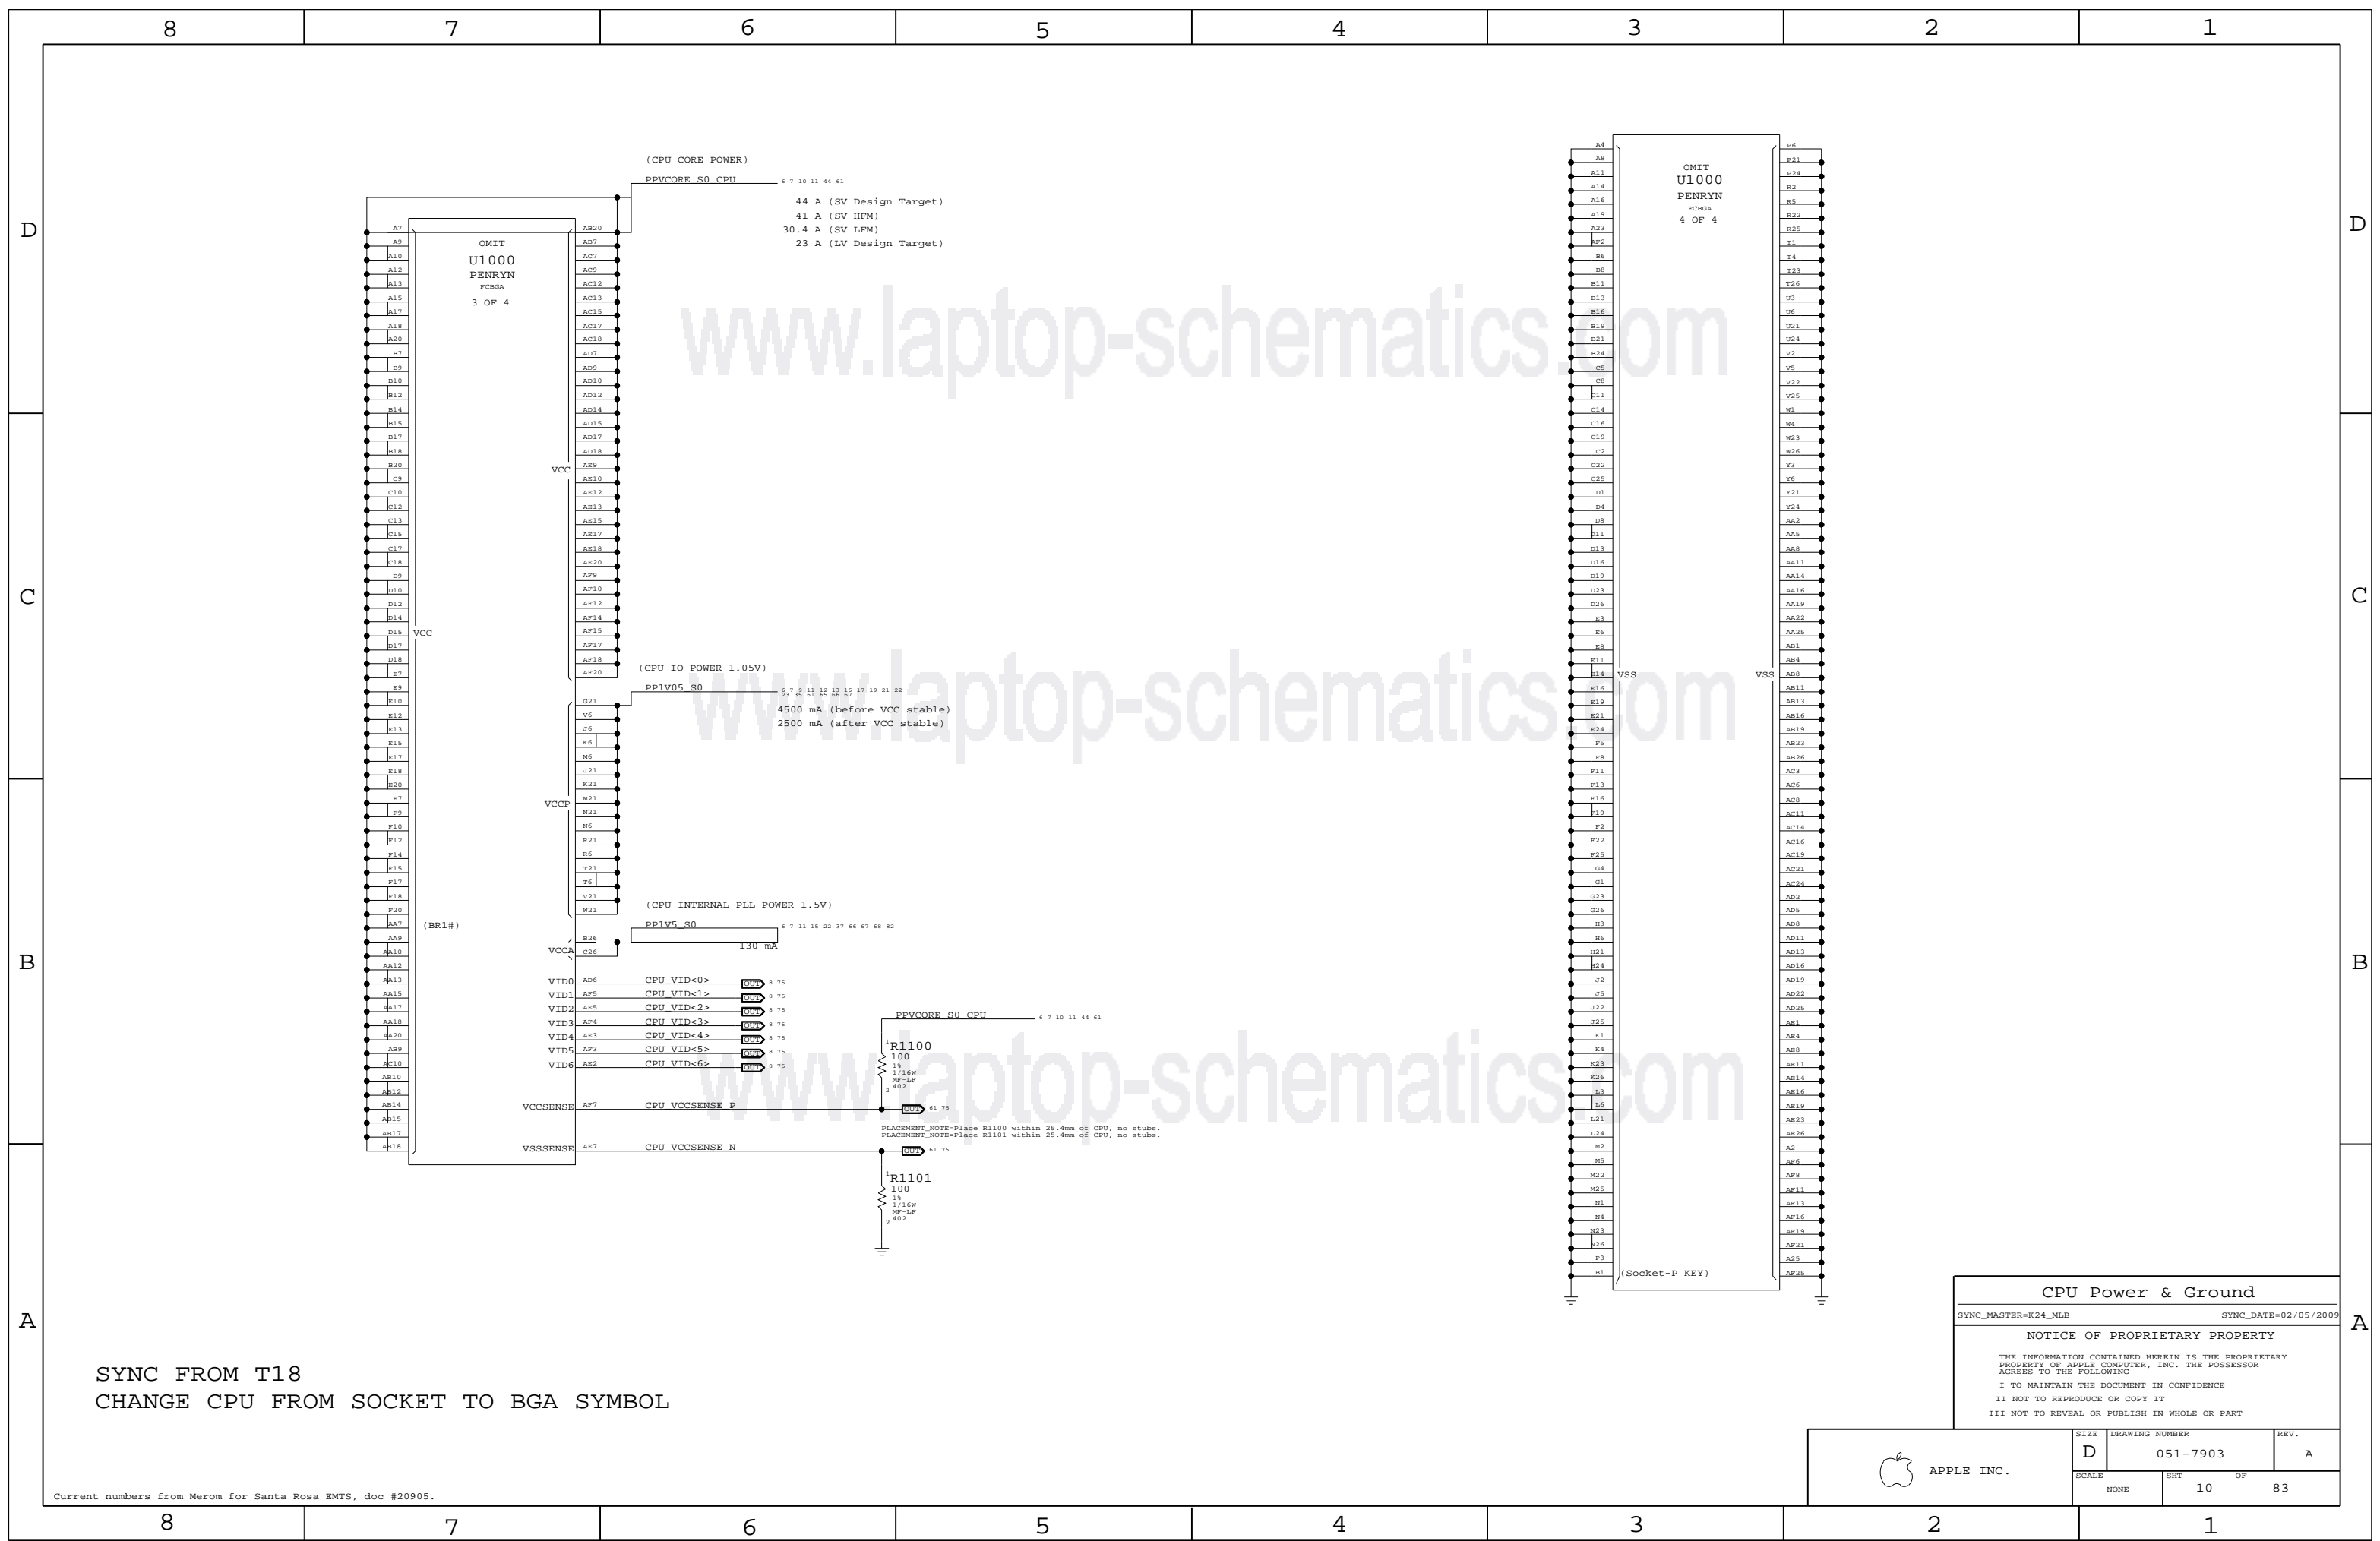

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com

SYNC FROM T18
CHANGE CPU FROM SOCKET TO BGA SYMBOL

Current numbers from Merom for Santa Rosa EMTS, doc #20905.

CPU Power & Ground

SYNC_MASTER=K24_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

 APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	10	83	

8

7

6

5

4

3

2

1


CPU VCore HF and Bulk Decoupling

4X 330UF, 20X 22UF 0805

PLACEMENT_NOTE (C1200-C1219):


61 44 10 7 6 PPVCORE_S0_CPU

Place inside socket cavity on secondary side.

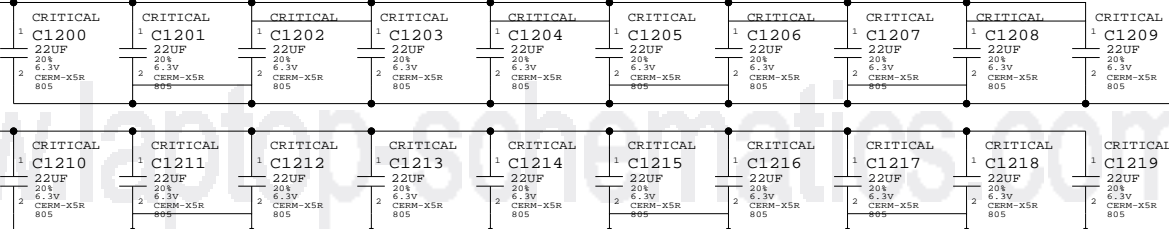

PLACEMENT_NOTE (C1240-C1243):

Place on secondary side. Place on secondary side.

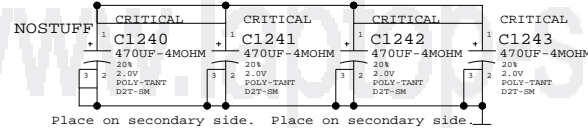


VCCA (CPU AVdd) DECOUPLING

1x 10uF, 1x 0.01uF

82 48 47 66 37 22 15 10 7 6 PP1V5_S0

PLACEMENT_NOTE=Place C1251 near CPU pin B26.




VCCP (CPU I/O) DECOUPLING

1x 330uF, 6x 0.1uF 0402

22 21 19 17 16 13 12 10 9 7 5 PP1V05_S0

PLACEMENT_NOTE=Place C1260 between CPU & NB.

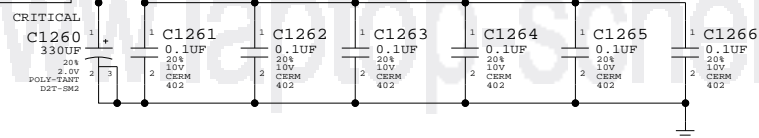

SYNC FROM T18
 REMOVE NO STUFF CAPS C1220 TO C1231
 REMOVE C1244 & C1245
 CHANGE C1240-C1243 AND C1260 FROM 128S0241(9 MILLI-OHM) TO 128S0231(6 MILLI-OHM)

CPU Decoupling		
SYNC_MASTER=K24_MLB	SYNC_DATE=02/05/2009	
NOTICE OF PROPRIETARY PROPERTY		
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING		
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE		
II NOT TO REPRODUCE OR COPY IT		
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART		

	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	11	83	

8

7

6

5

4

3


2

1

Mini-XDP Connector

NOTE: This is not the standard XDP pinout.
Use with 920-0620 adapter board to support CPU, MCP debugging.

MCP79-specific pinout

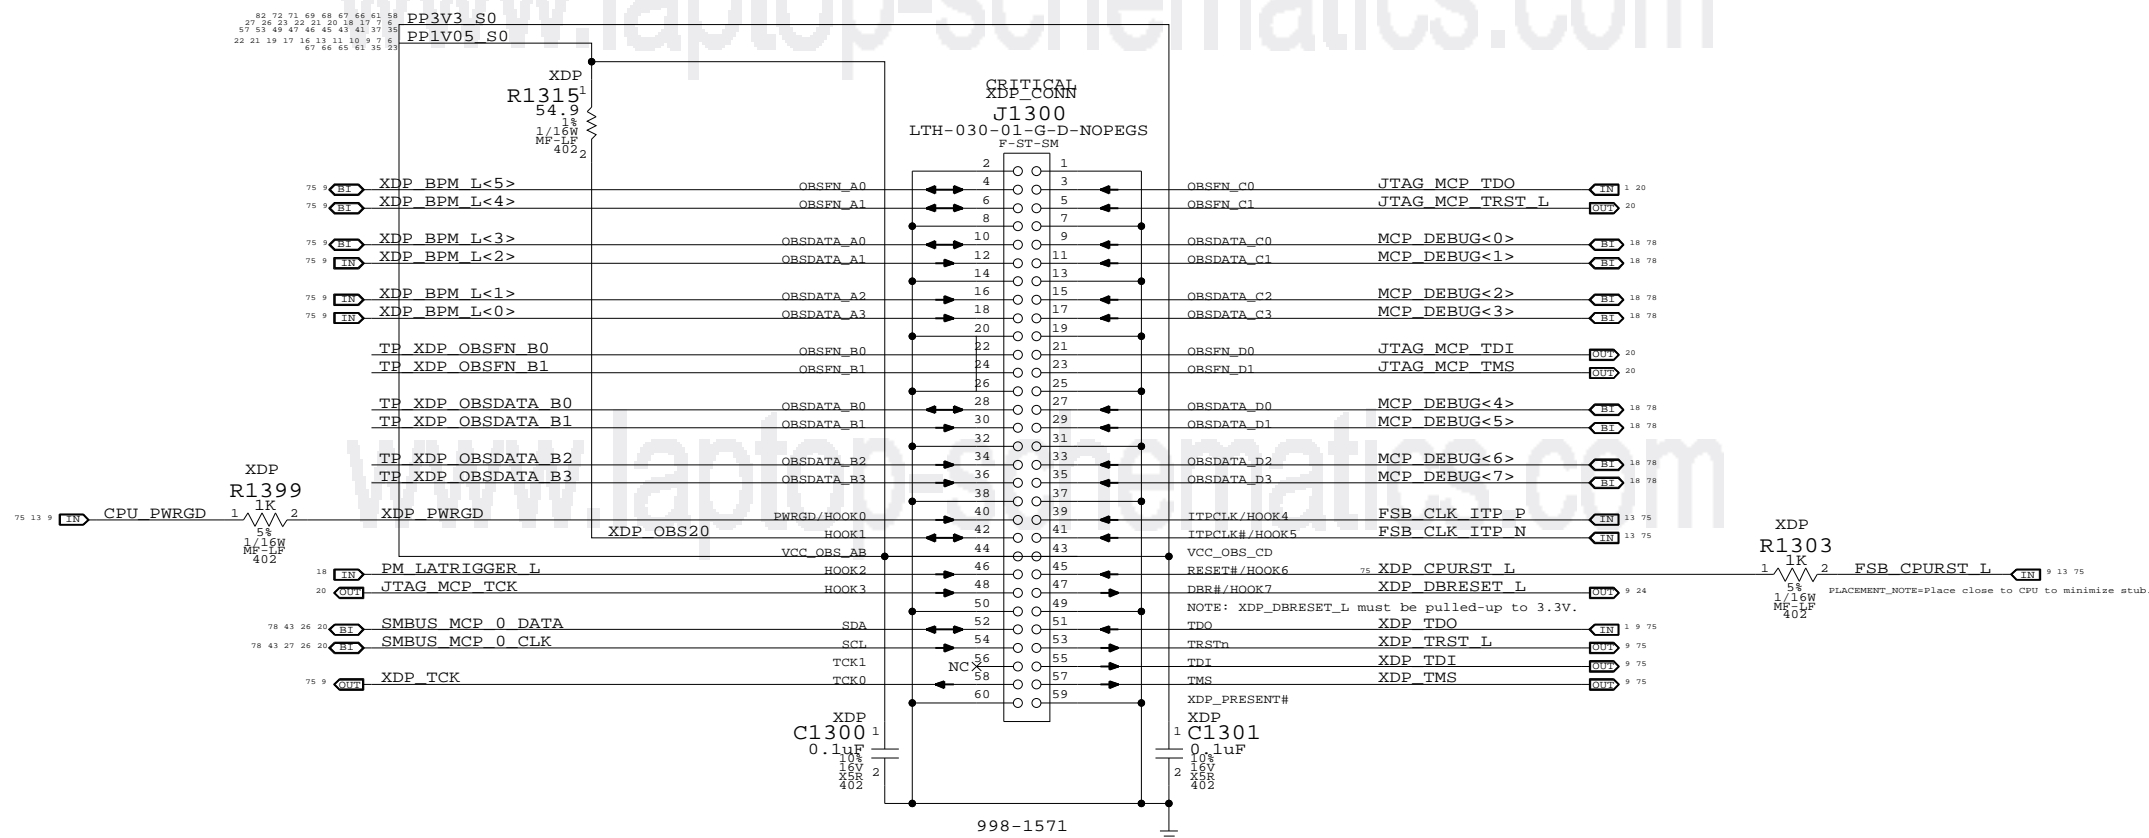

Direction of XDP module

Please avoid any obstructions
on even-numbered side of J1300

eXtended Debug Port (MiniXDP)

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY


THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART


APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT OF		
NONE	12 OF		83

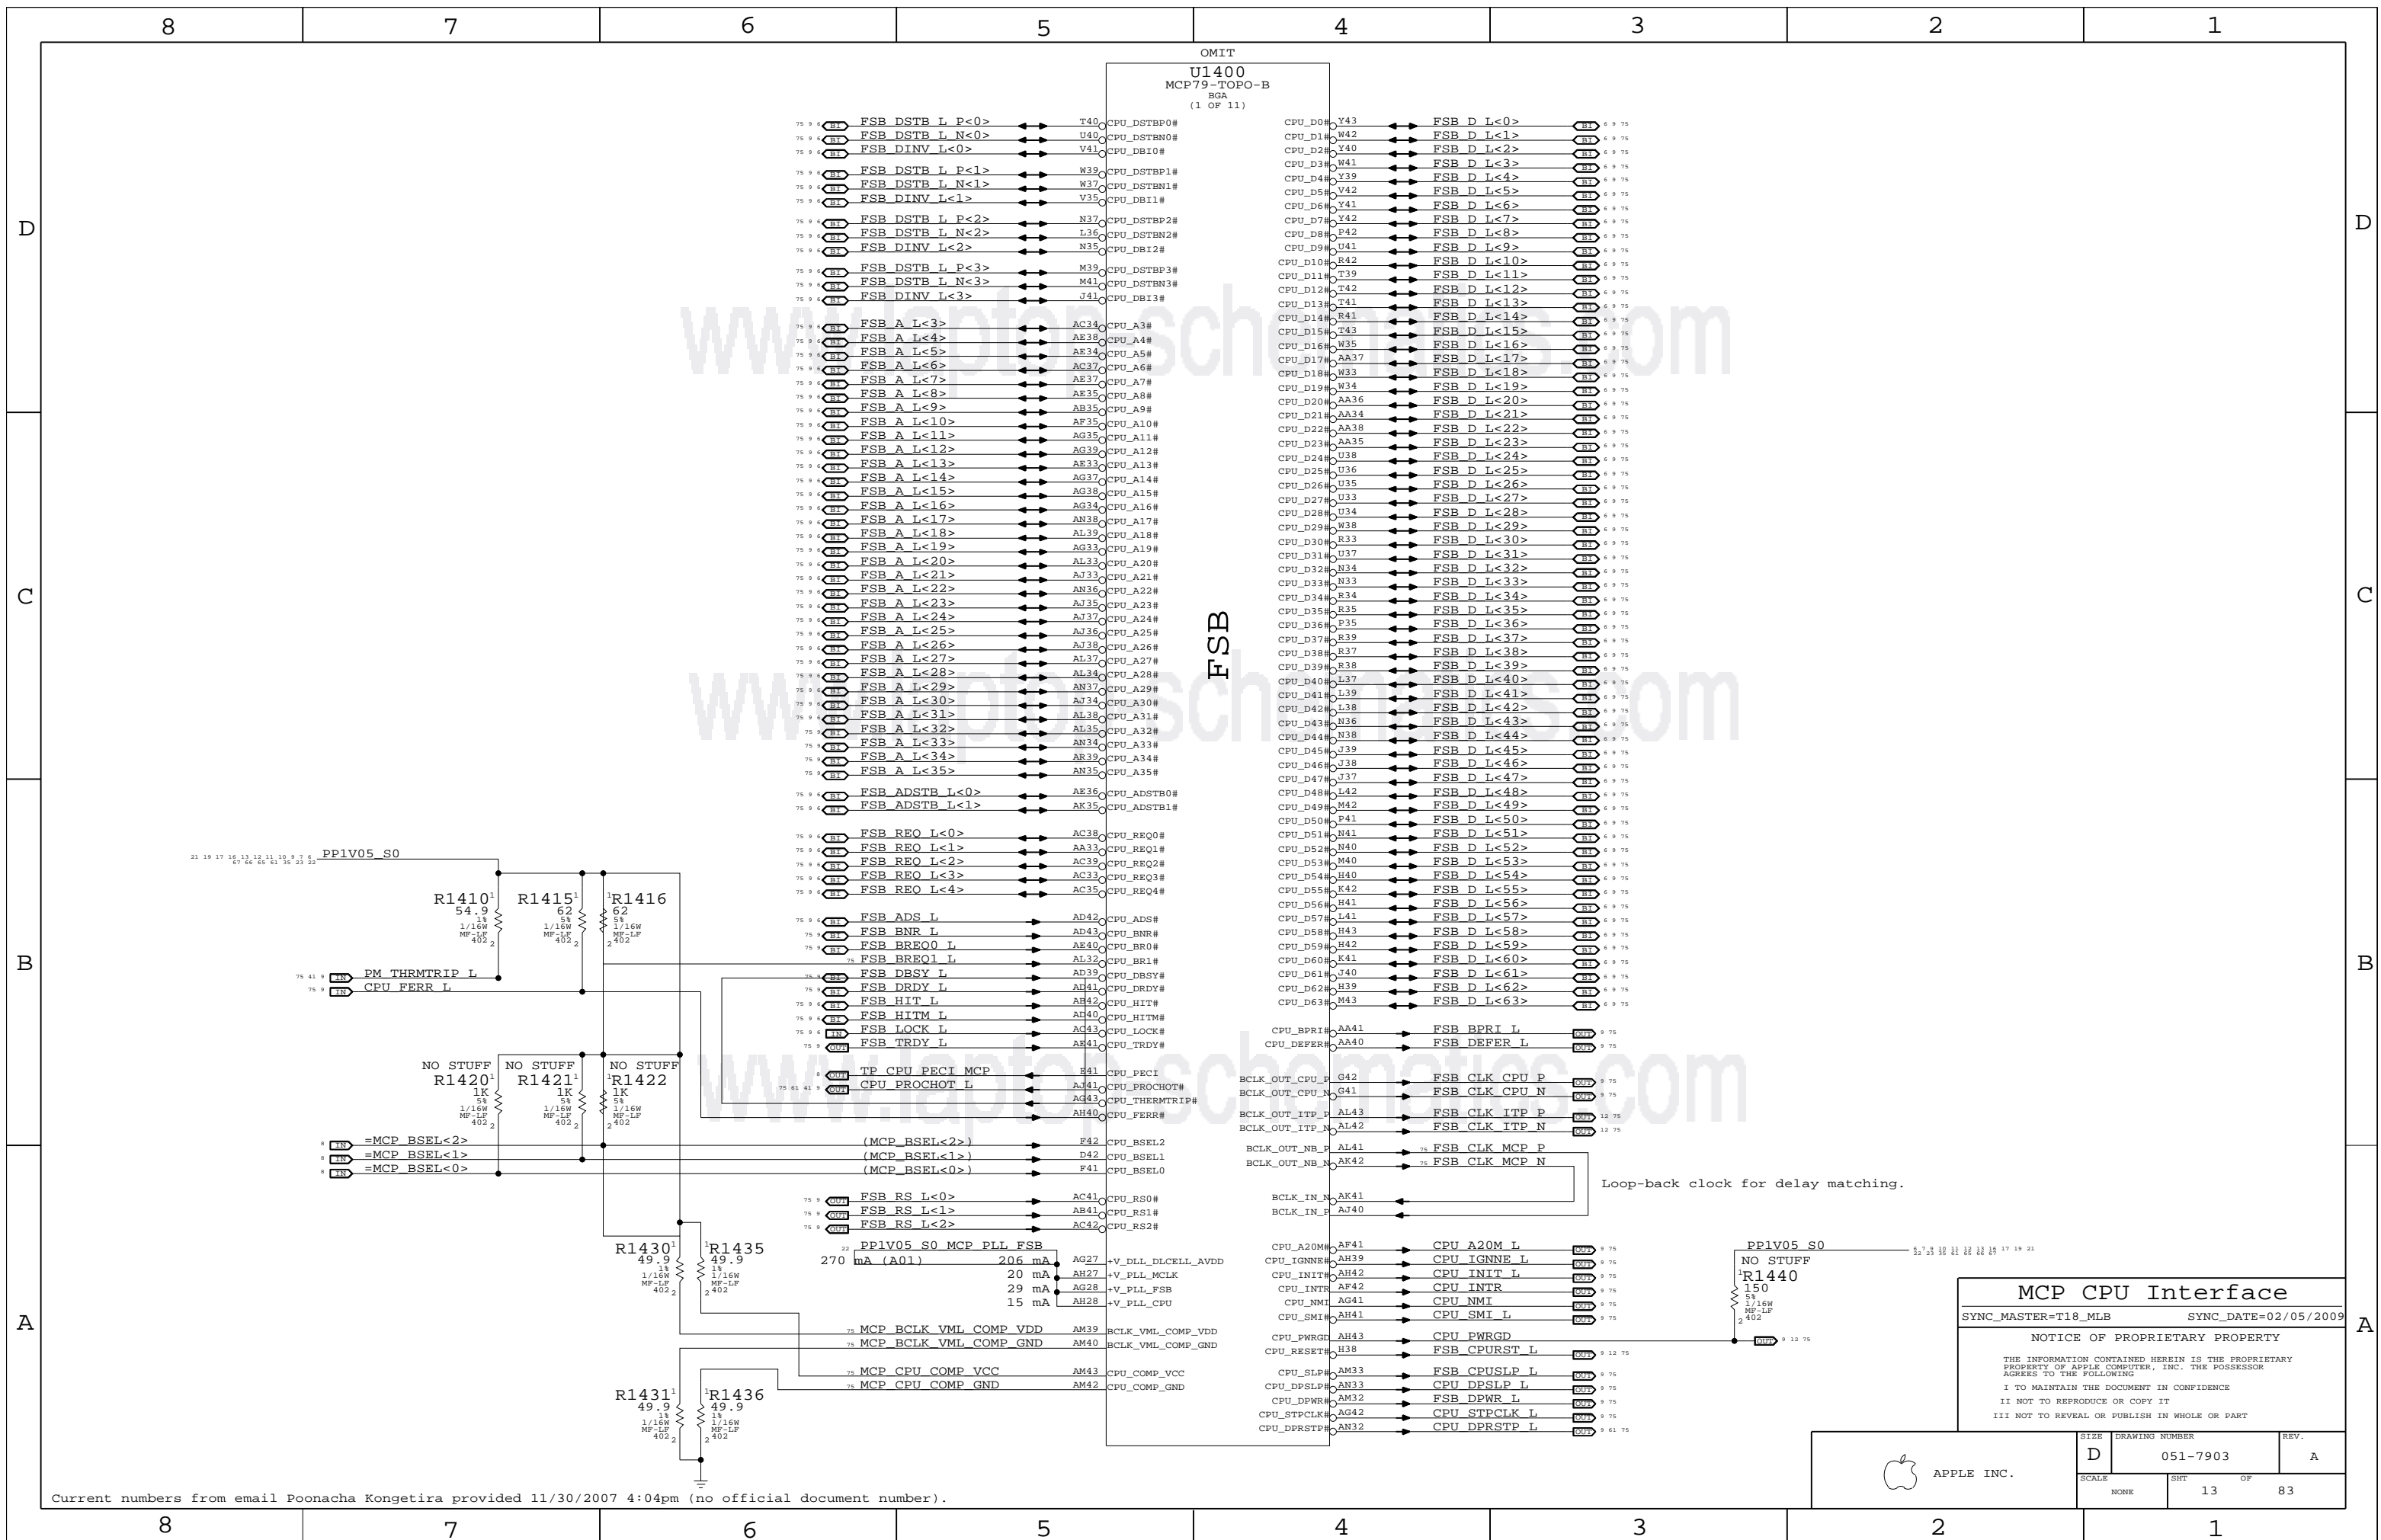

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

MCP CPU Interface
 SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	13		83

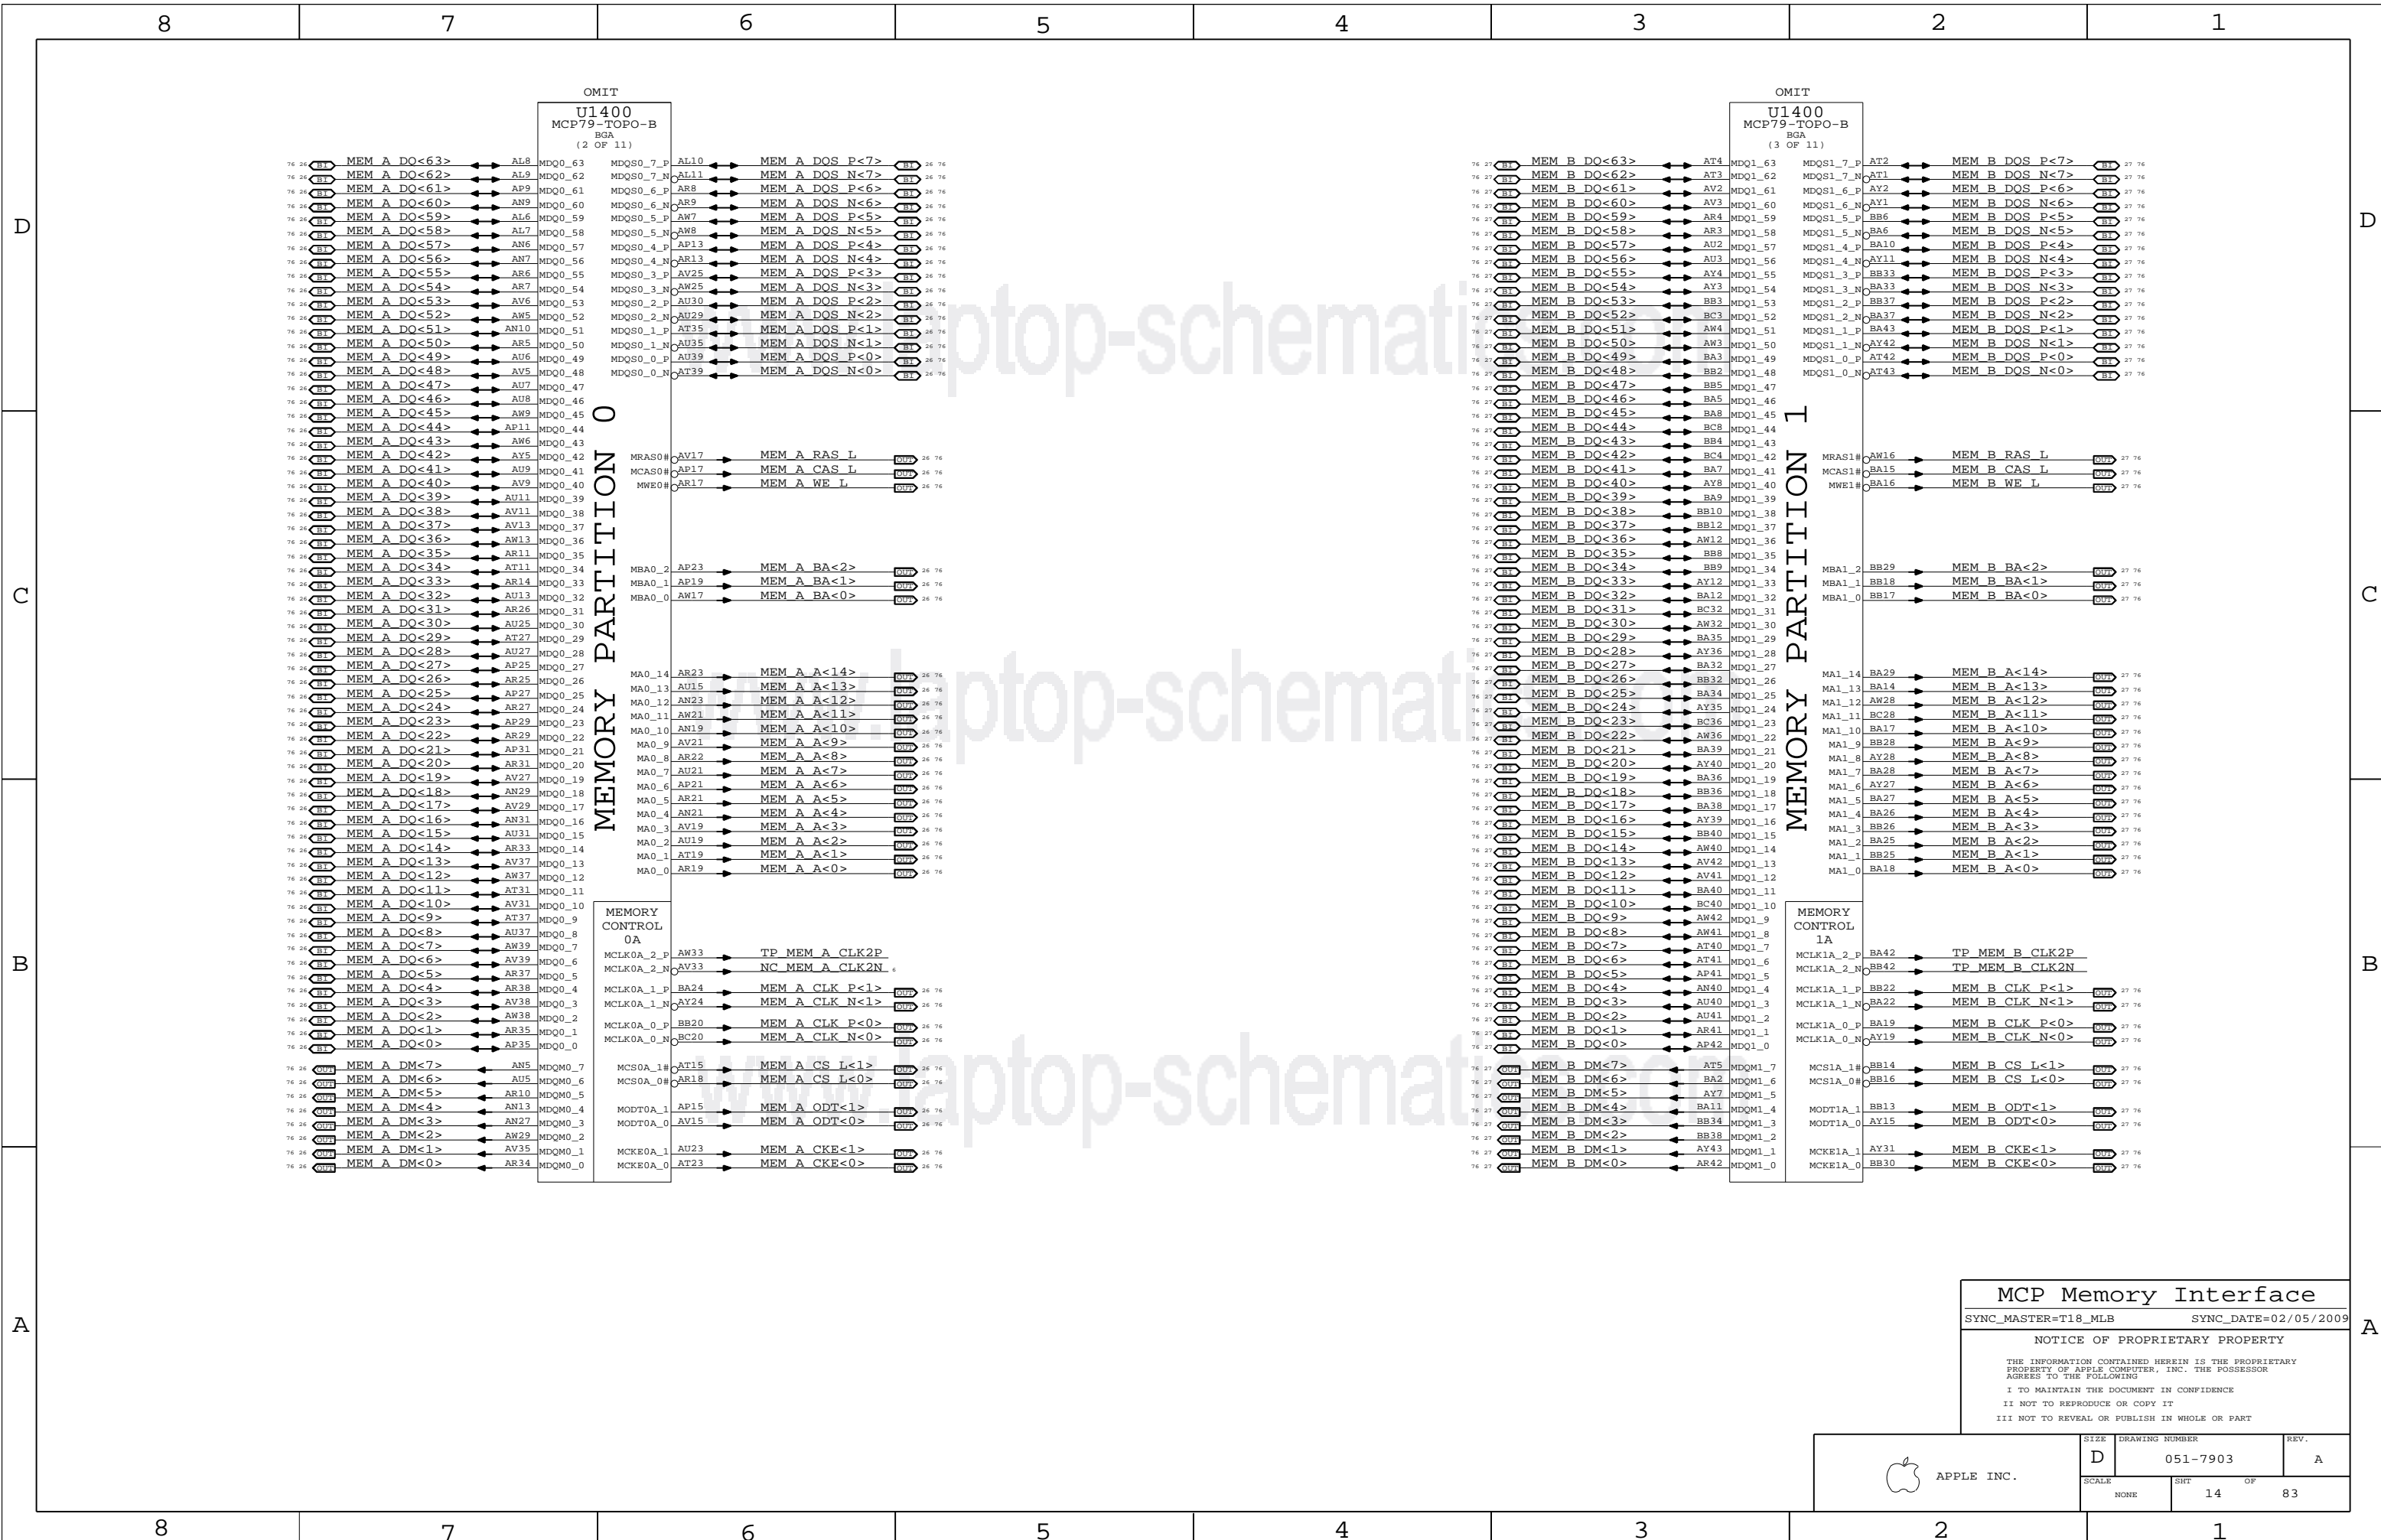


MCP Memory Interface

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	NONE	SHT	14 OF 83

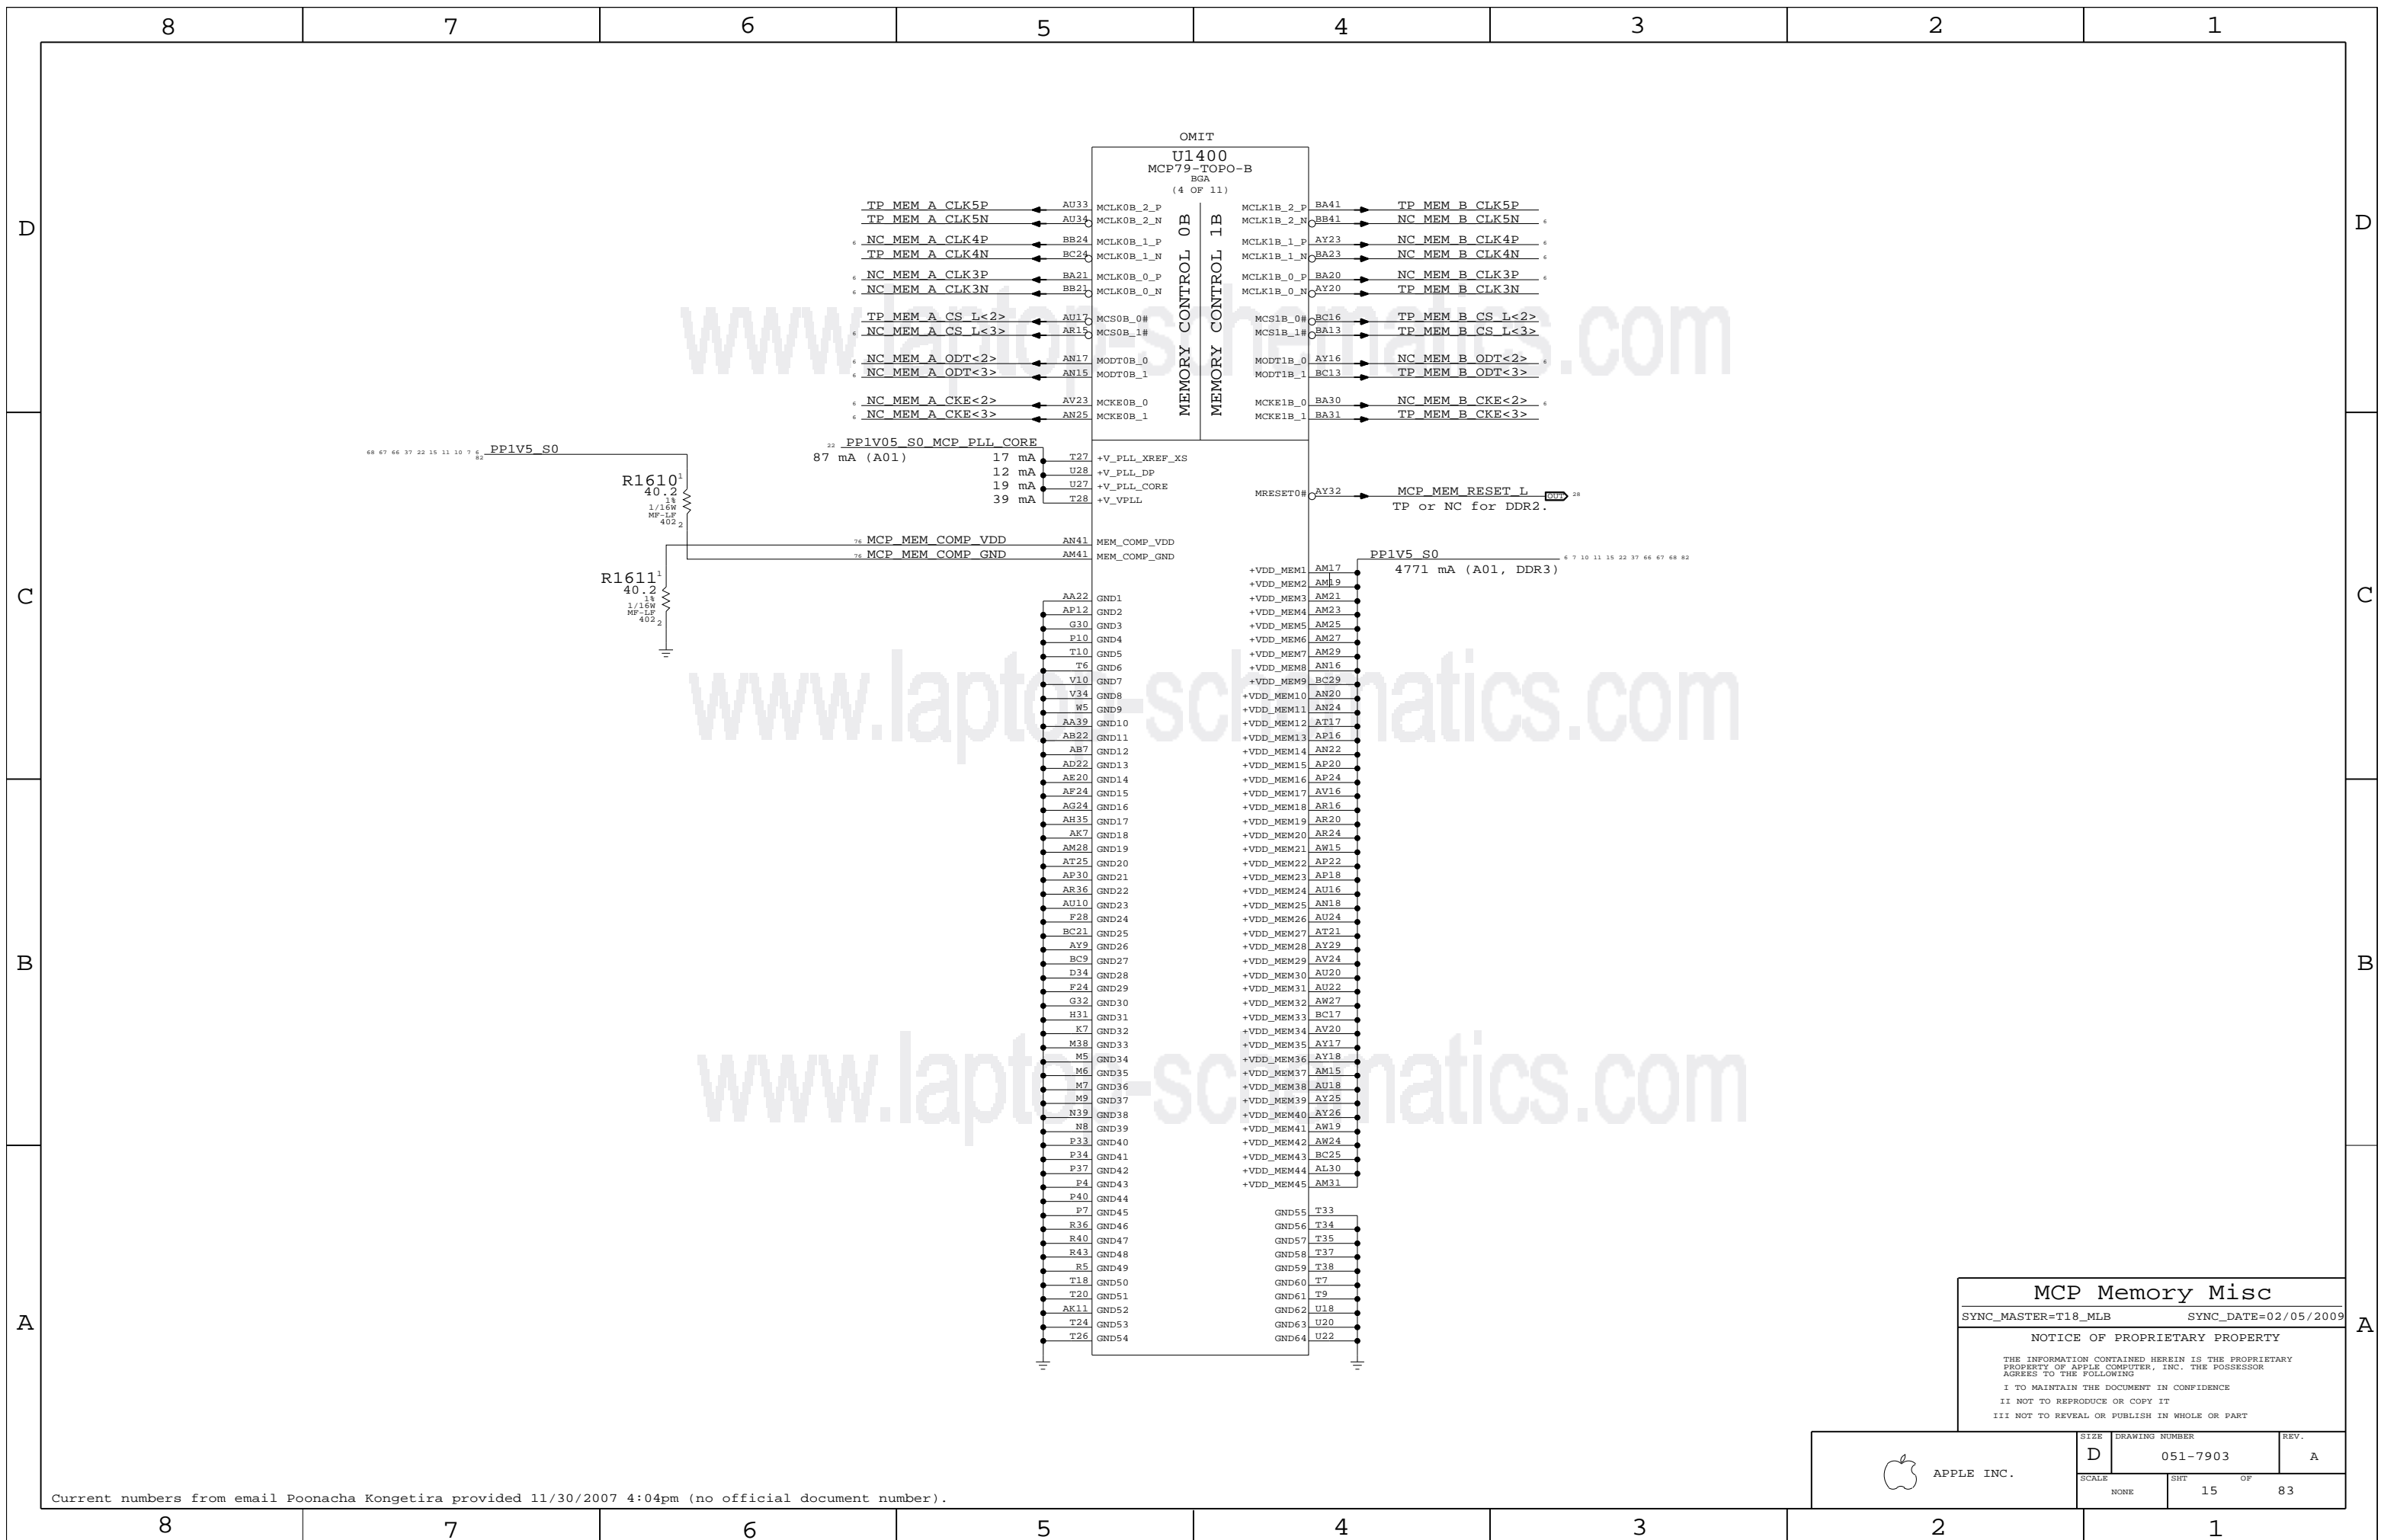


MCP Memory Misc
 SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

 APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	15		83

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

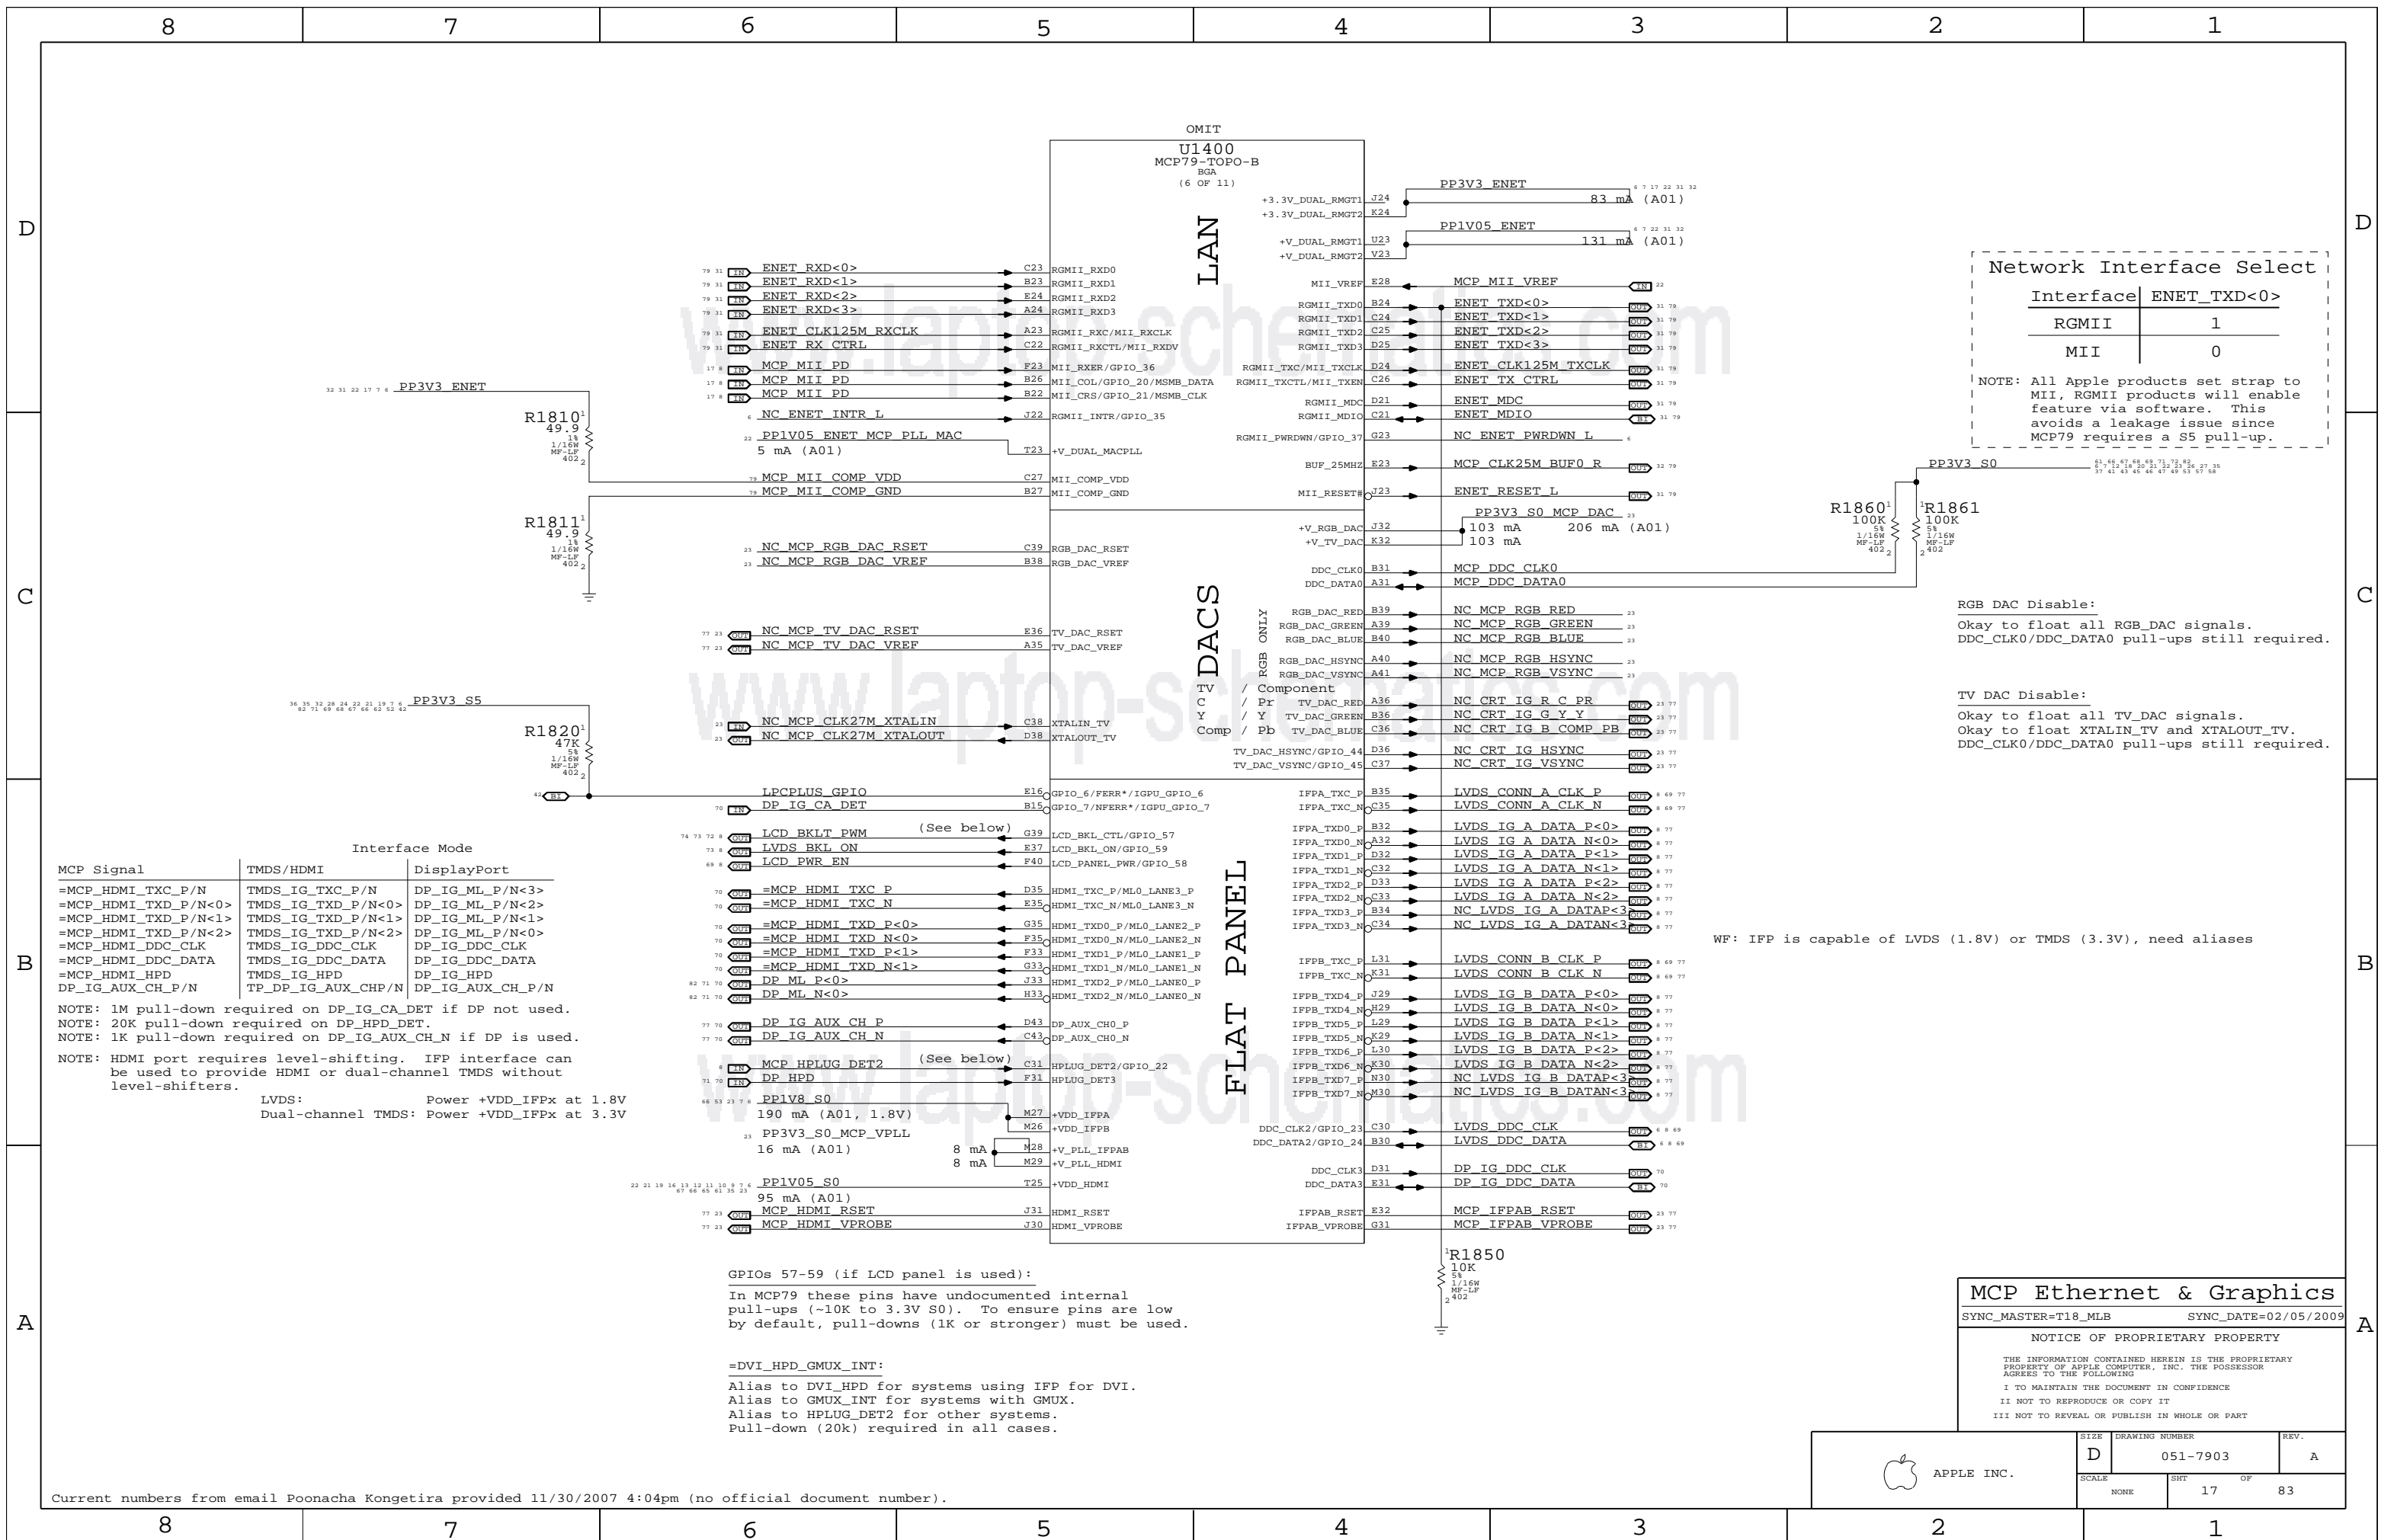

Network Interface Select

Interface	ENET_TXD<0>
RGMII	1
MII	0

NOTE: All Apple products set strap to MII, RGMII products will enable feature via software. This avoids a leakage issue since MCP79 requires a S5 pull-up.

RGB DAC Disable:
Okay to float all RGB_DAC signals.
DDC_CLK0/DDC_DATA0 pull-ups still required.

TV DAC Disable:
Okay to float all TV_DAC signals.
Okay to float XTALIN_TV and XTALOUT_TV.
DDC_CLK0/DDC_DATA0 pull-ups still required.

Interface Mode

MCP Signal	TMDS/HDMI	DisplayPort
=MCP_HDMI_TXC_P/N	TMDS_IG_TXC_P/N	DP_IG_ML_P/N<3>
=MCP_HDMI_TXD_P/N<0>	TMDS_IG_TXD_P/N<0>	DP_IG_ML_P/N<2>
=MCP_HDMI_TXD_P/N<1>	TMDS_IG_TXD_P/N<1>	DP_IG_ML_P/N<1>
=MCP_HDMI_TXD_P/N<2>	TMDS_IG_TXD_P/N<2>	DP_IG_ML_P/N<0>
=MCP_HDMI_DDC_CLK	TMDS_IG_DDC_CLK	DP_IG_DDC_CLK
=MCP_HDMI_DDC_DATA	TMDS_IG_DDC_DATA	DP_IG_DDC_DATA
=MCP_HDMI_HPD	TMDS_IG_HPD	DP_IG_HPD
DP_IG_AUX_CH_P/N	TP_DP_IG_AUX_CH_P/N	DP_IG_AUX_CH_P/N

NOTE: 1M pull-down required on DP_IG_CA_DET if DP not used.
NOTE: 20K pull-down required on DP_HPD_DET.
NOTE: 1K pull-down required on DP_IG_AUX_CH_N if DP is used.
NOTE: HDMI port requires level-shifting. IFP interface can be used to provide HDMI or dual-channel TMDS without level-shifters.

LVDS: Power +VDD_IFP_x at 1.8V
Dual-channel TMDS: Power +VDD_IFP_x at 3.3V


GPIOs 57-59 (if LCD panel is used):
In MCP79 these pins have undocumented internal pull-ups (~10K to 3.3V S0). To ensure pins are low by default, pull-downs (1K or stronger) must be used.

=DVI_HPD_GMUX_INT:
Alias to DVI_HPD for systems using IFP for DVI.
Alias to GMUX_INT for systems with GMUX.
Alias to HPLUG_DET2 for other systems.
Pull-down (20k) required in all cases.

MCP Ethernet & Graphics
SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	17		83

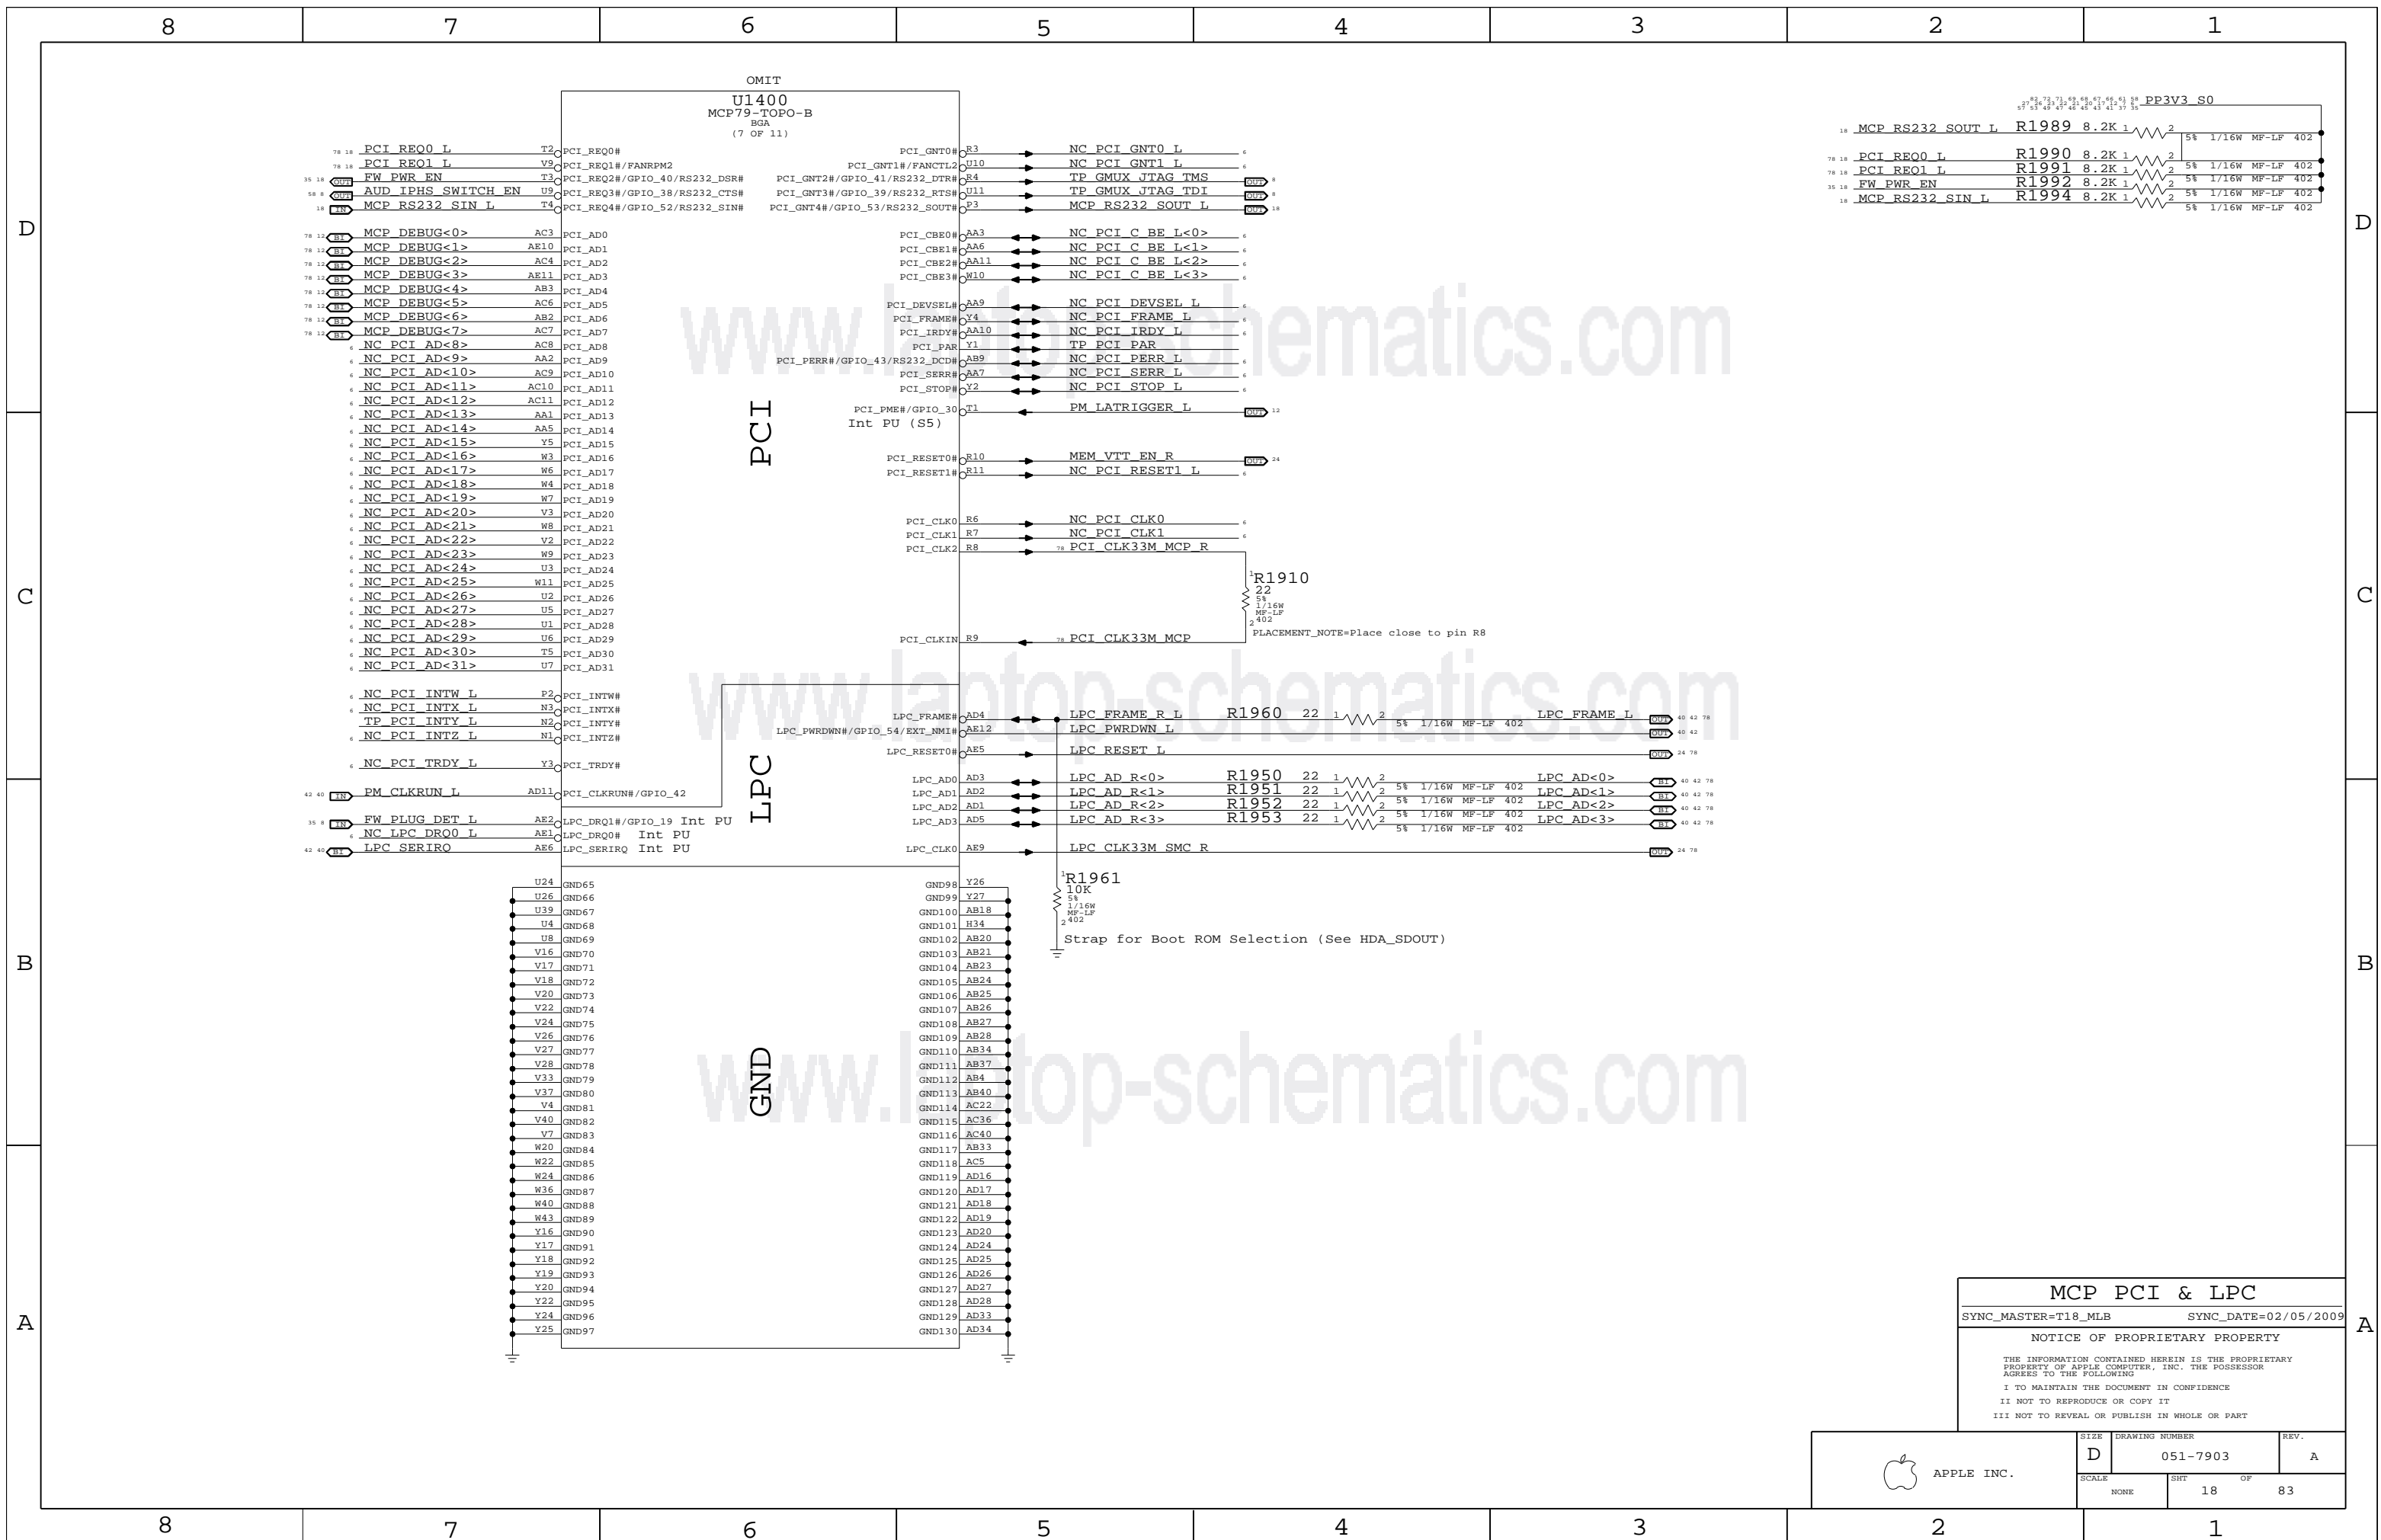

MCP PCI & LPC

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY


THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART


 APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	18		83

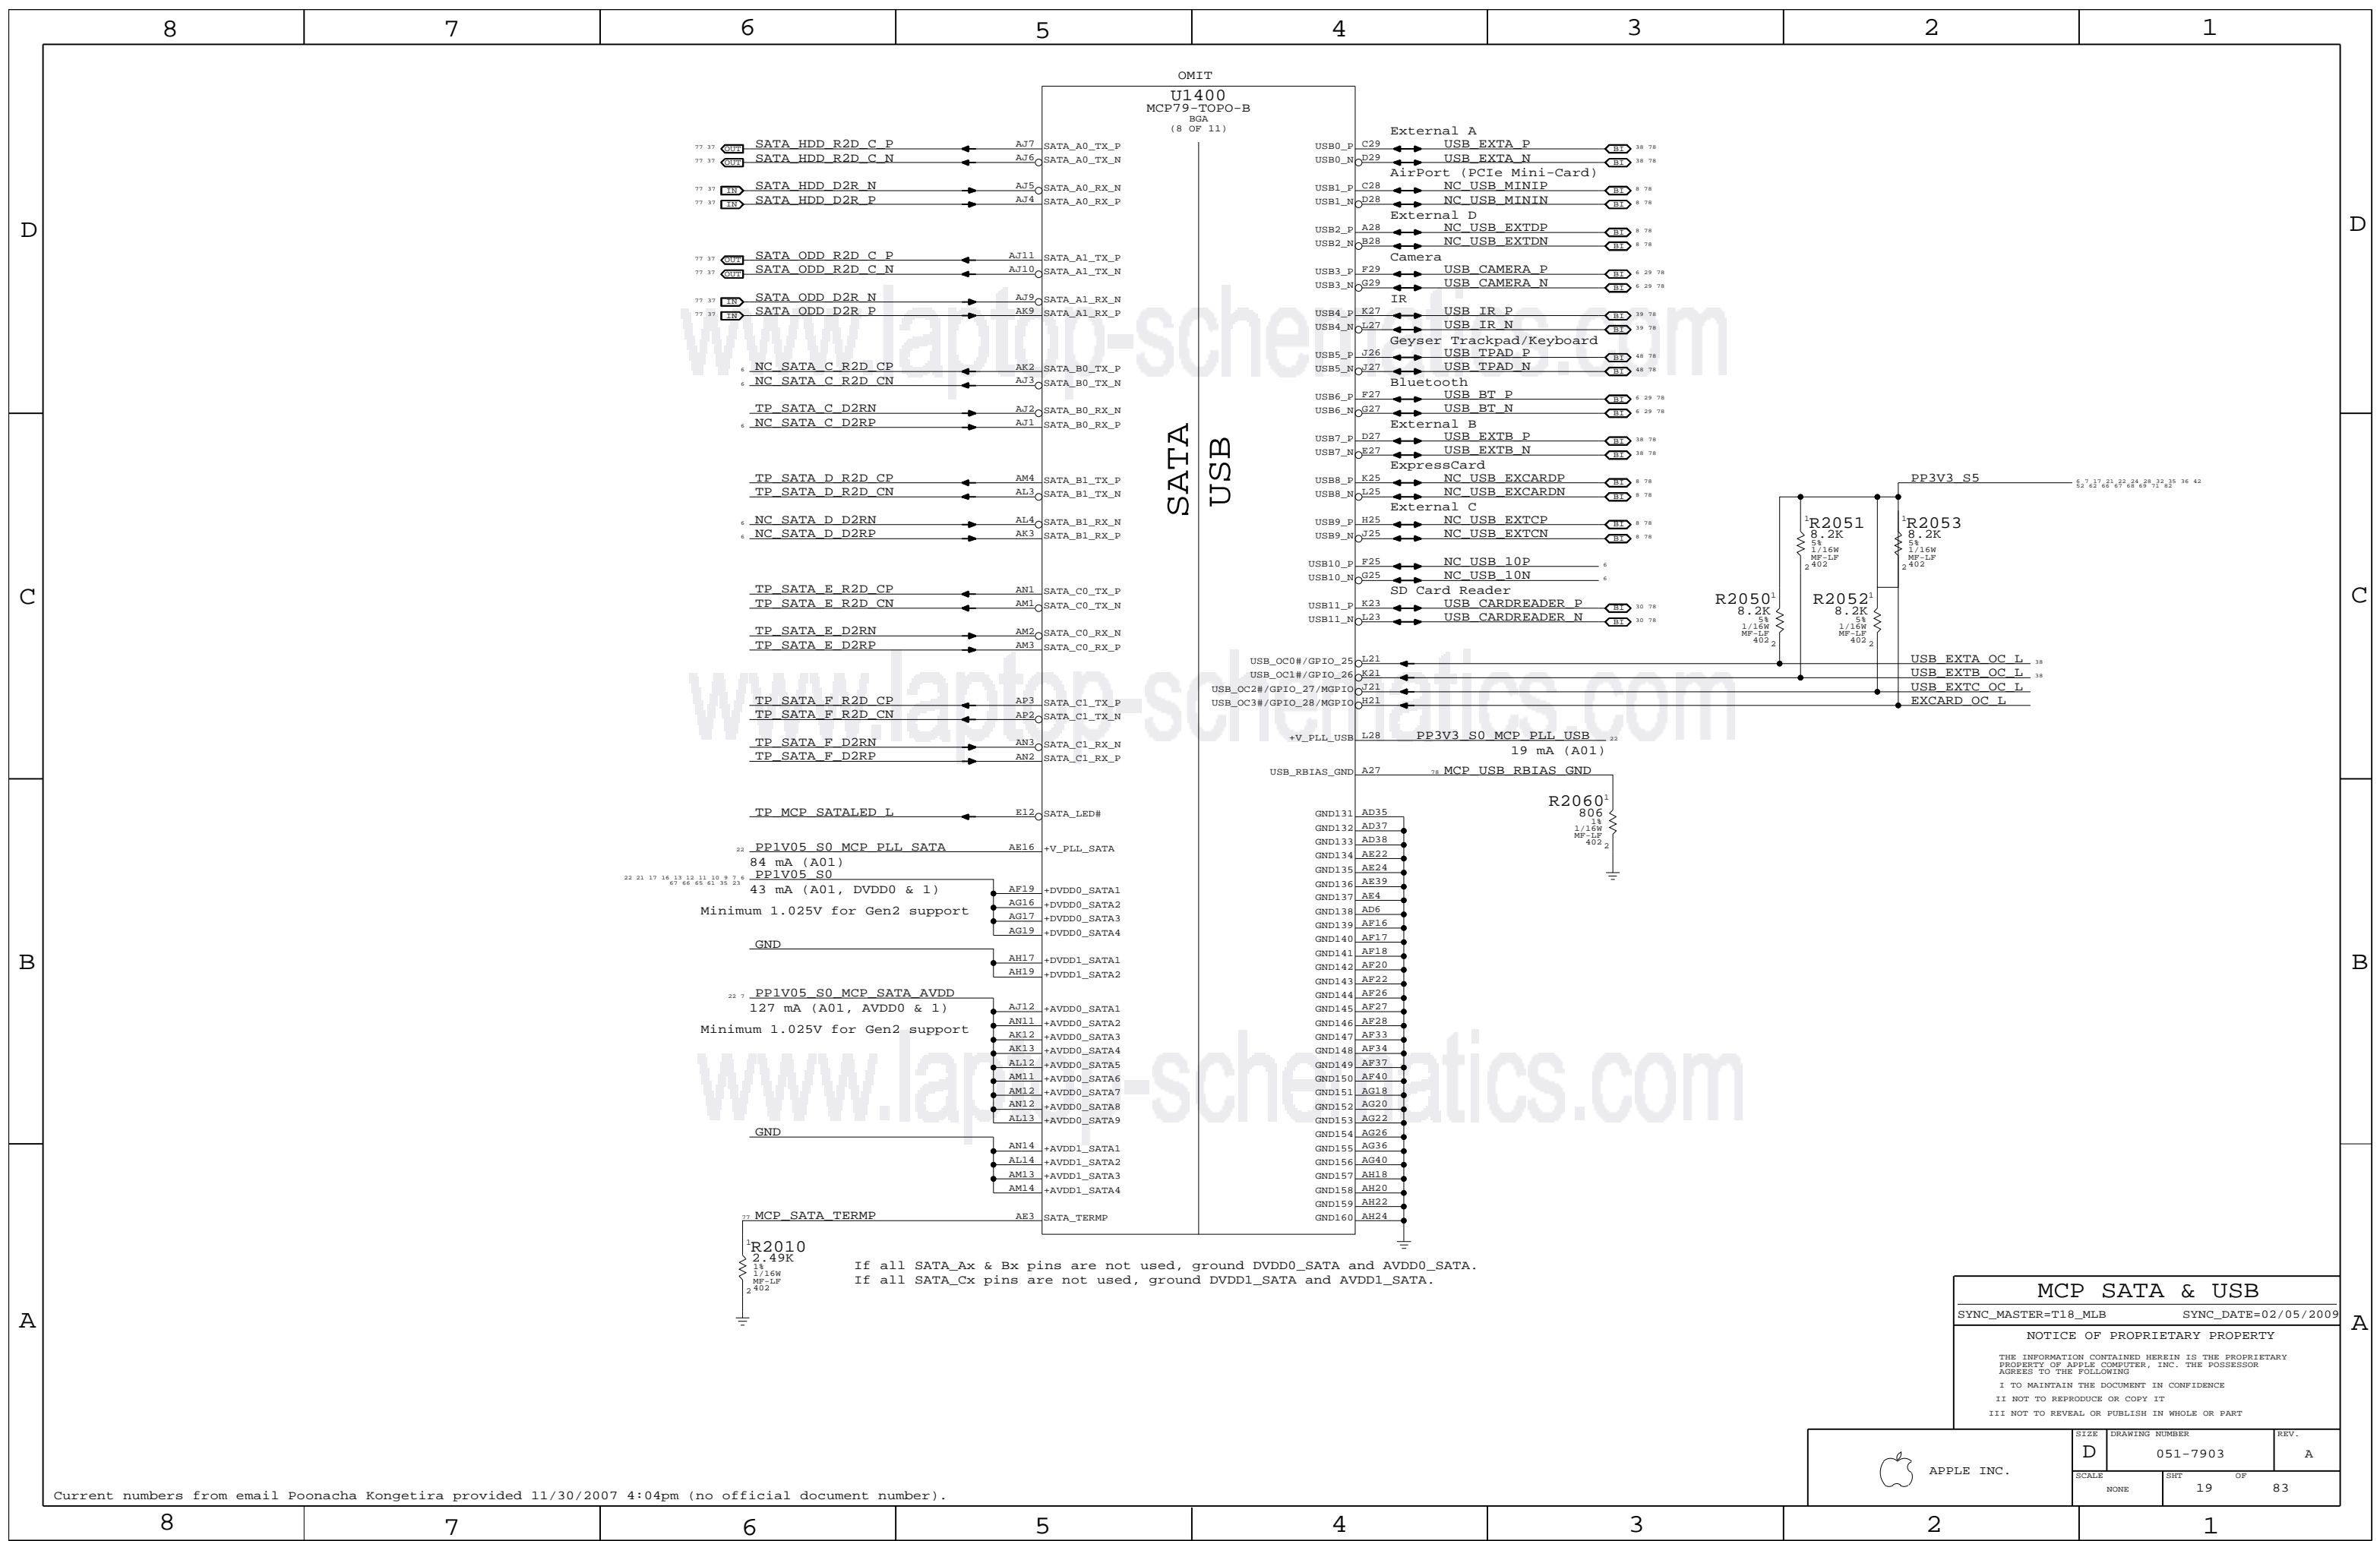

If all SATA_Ax & Bx pins are not used, ground DVDD0_SATA and AVDD0_SATA.
 If all SATA_Cx pins are not used, ground DVDD1_SATA and AVDD1_SATA.

MCP SATA & USB
 SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	19		83

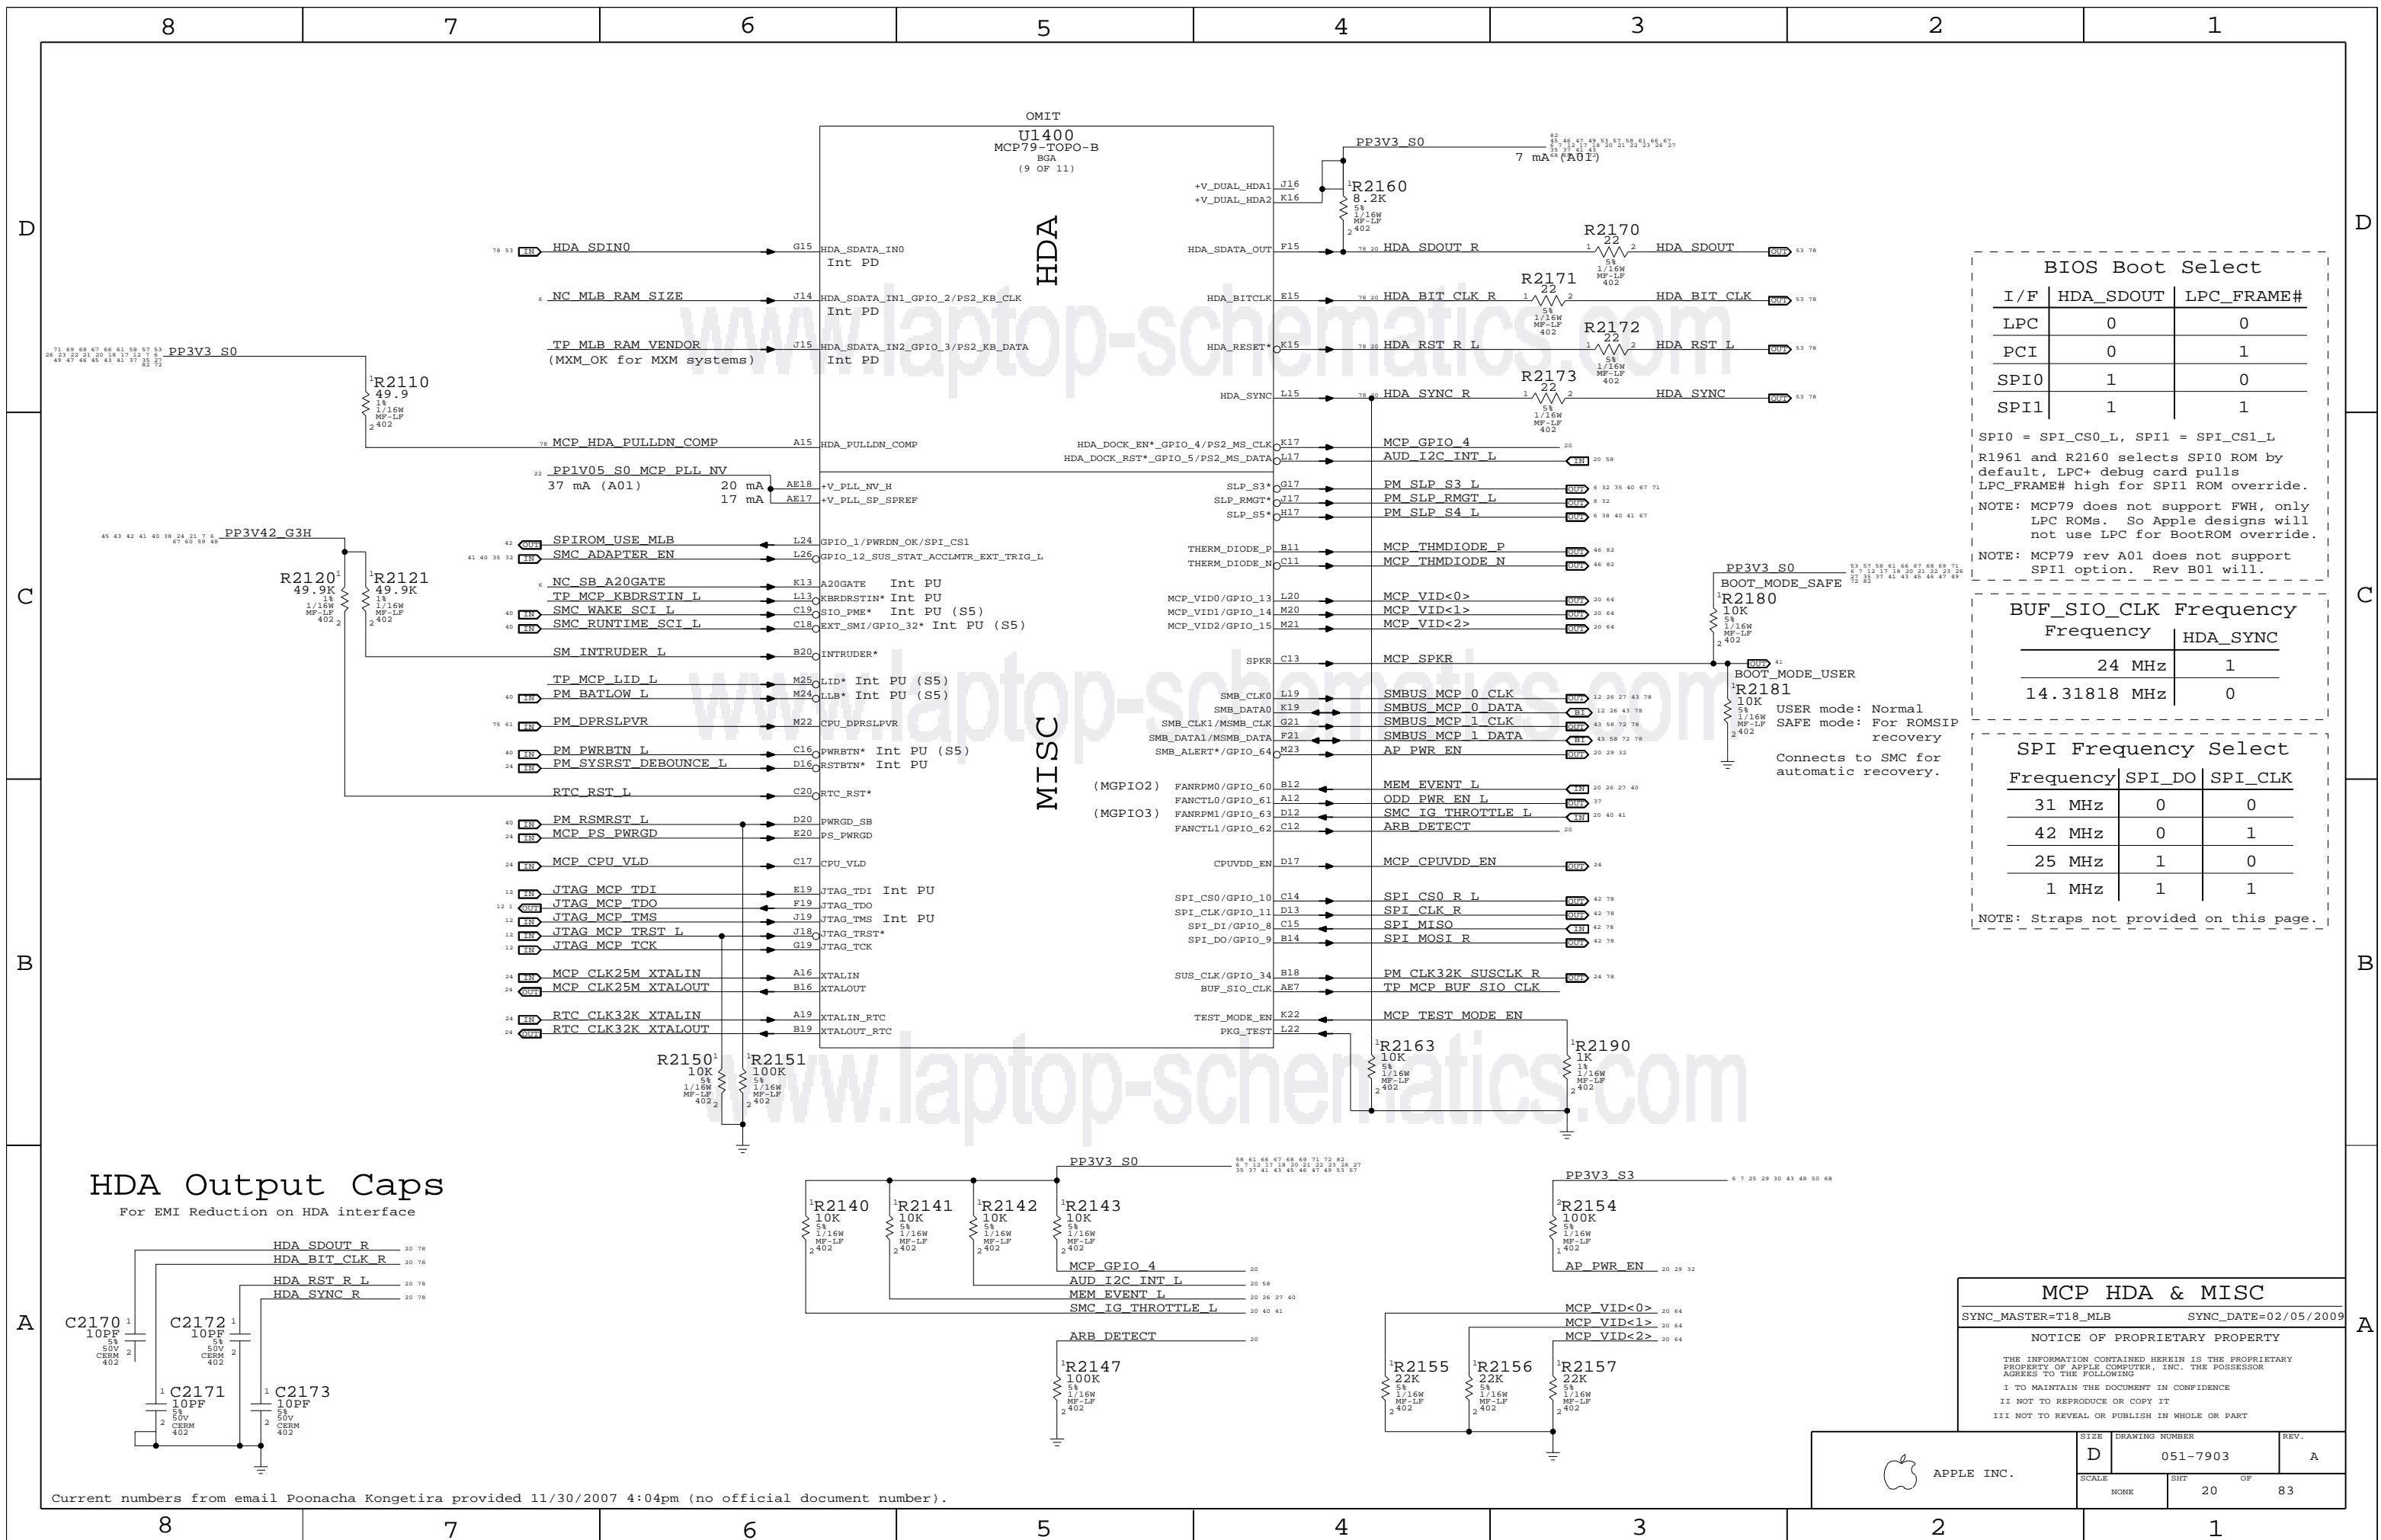

BIOS Boot Select

I/F	HDA_SDOUT	LPC_FRAME#
LPC	0	0
PCI	0	1
SPI0	1	0
SPI1	1	1

SPI0 = SPI_CS0_L, SPI1 = SPI_CS1_L
 R1961 and R2160 selects SPI0 ROM by default, LPC+ debug card pulls LPC_FRAME# high for SPI1 ROM override.
 NOTE: MCP79 does not support FWH, only LPC ROMs. So Apple designs will not use LPC for BootROM override.
 NOTE: MCP79 rev A01 does not support SPI1 option. Rev B01 will.

BUF_SIO_CLK Frequency



Frequency	HDA_SYNC
24 MHz	1
14.31818 MHz	0

SPI Frequency Select

Frequency	SPI_DO	SPI_CLK
31 MHz	0	0
42 MHz	0	1
25 MHz	1	0
1 MHz	1	1

NOTE: Straps not provided on this page.

HDA Output Caps
 For EMI Reduction on HDA interface

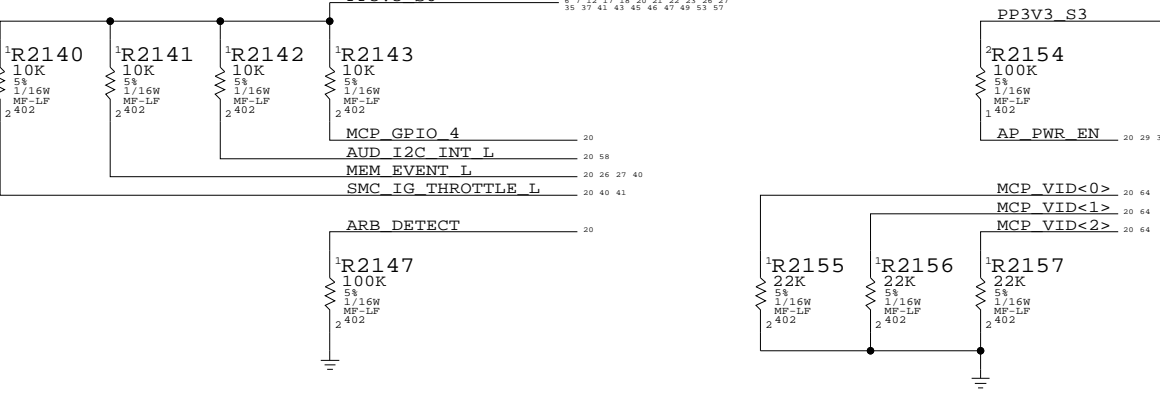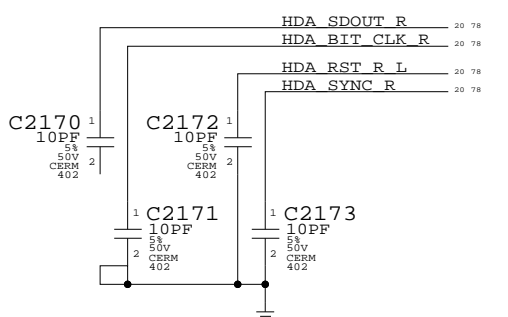

MCP HDA & MISC

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING


I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	20		83

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

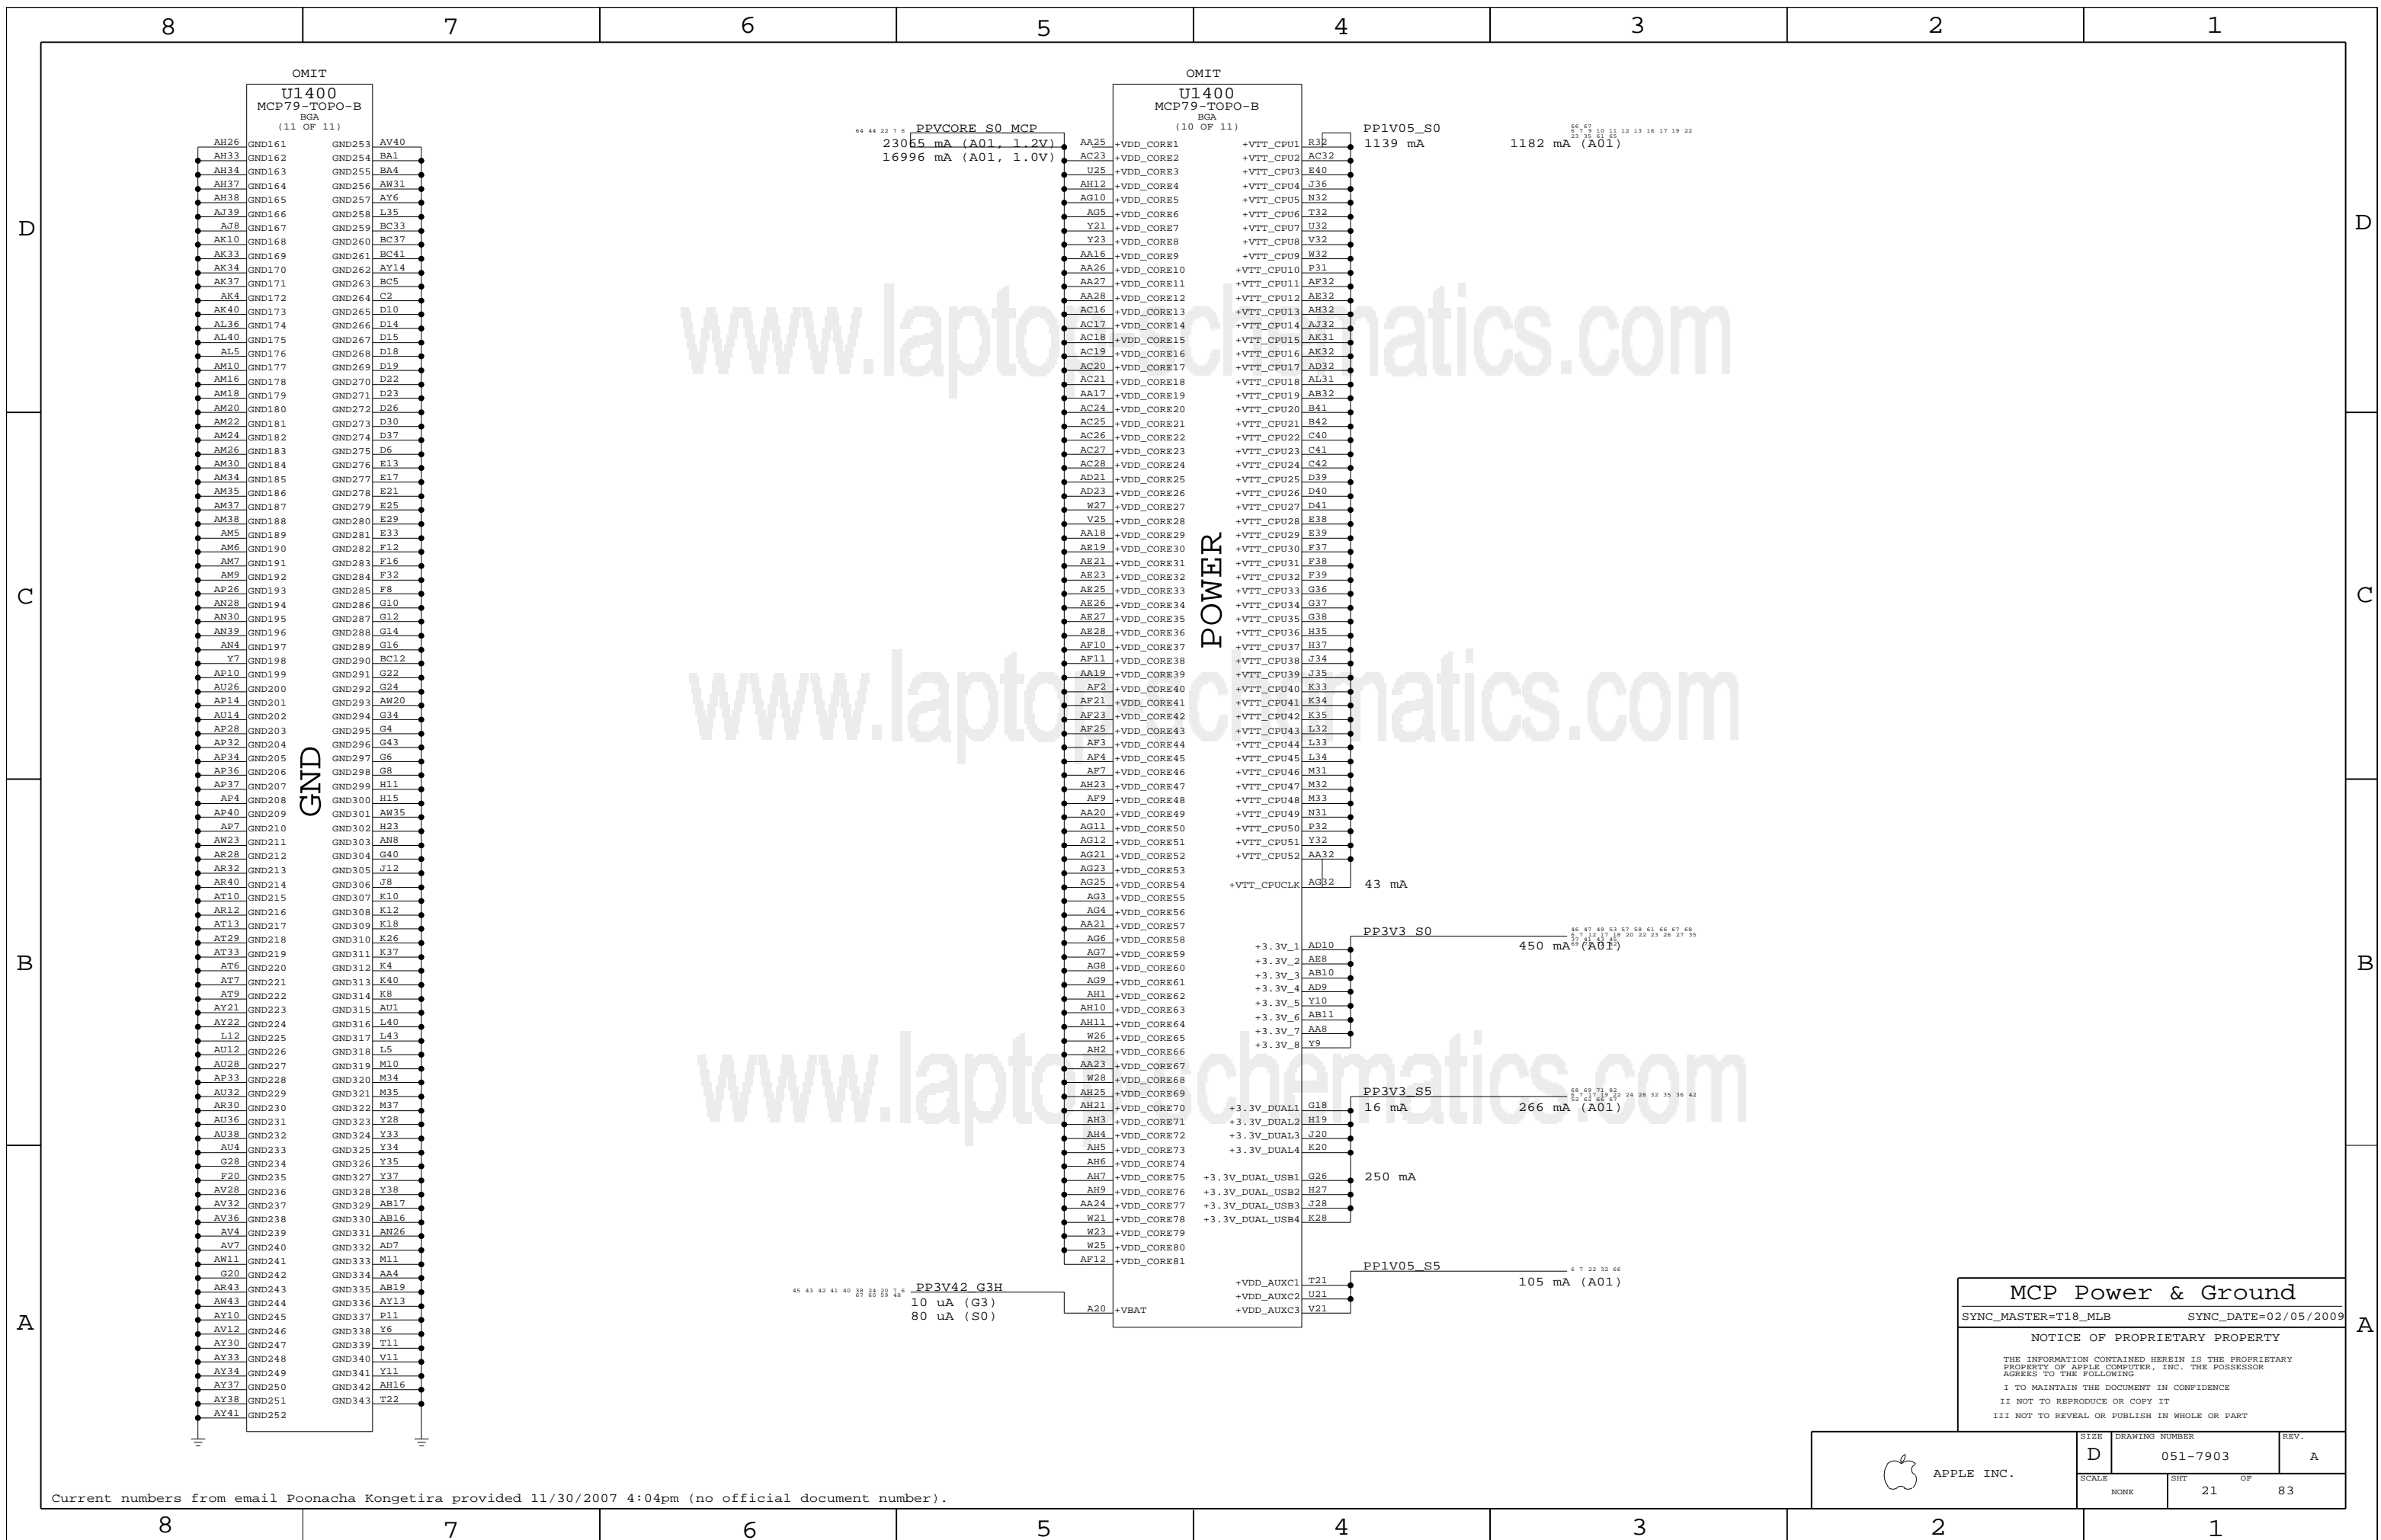

www.laptopchematics.com

www.laptopchematics.com

www.laptopchematics.com

MCP Power & Ground


SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	21		83

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

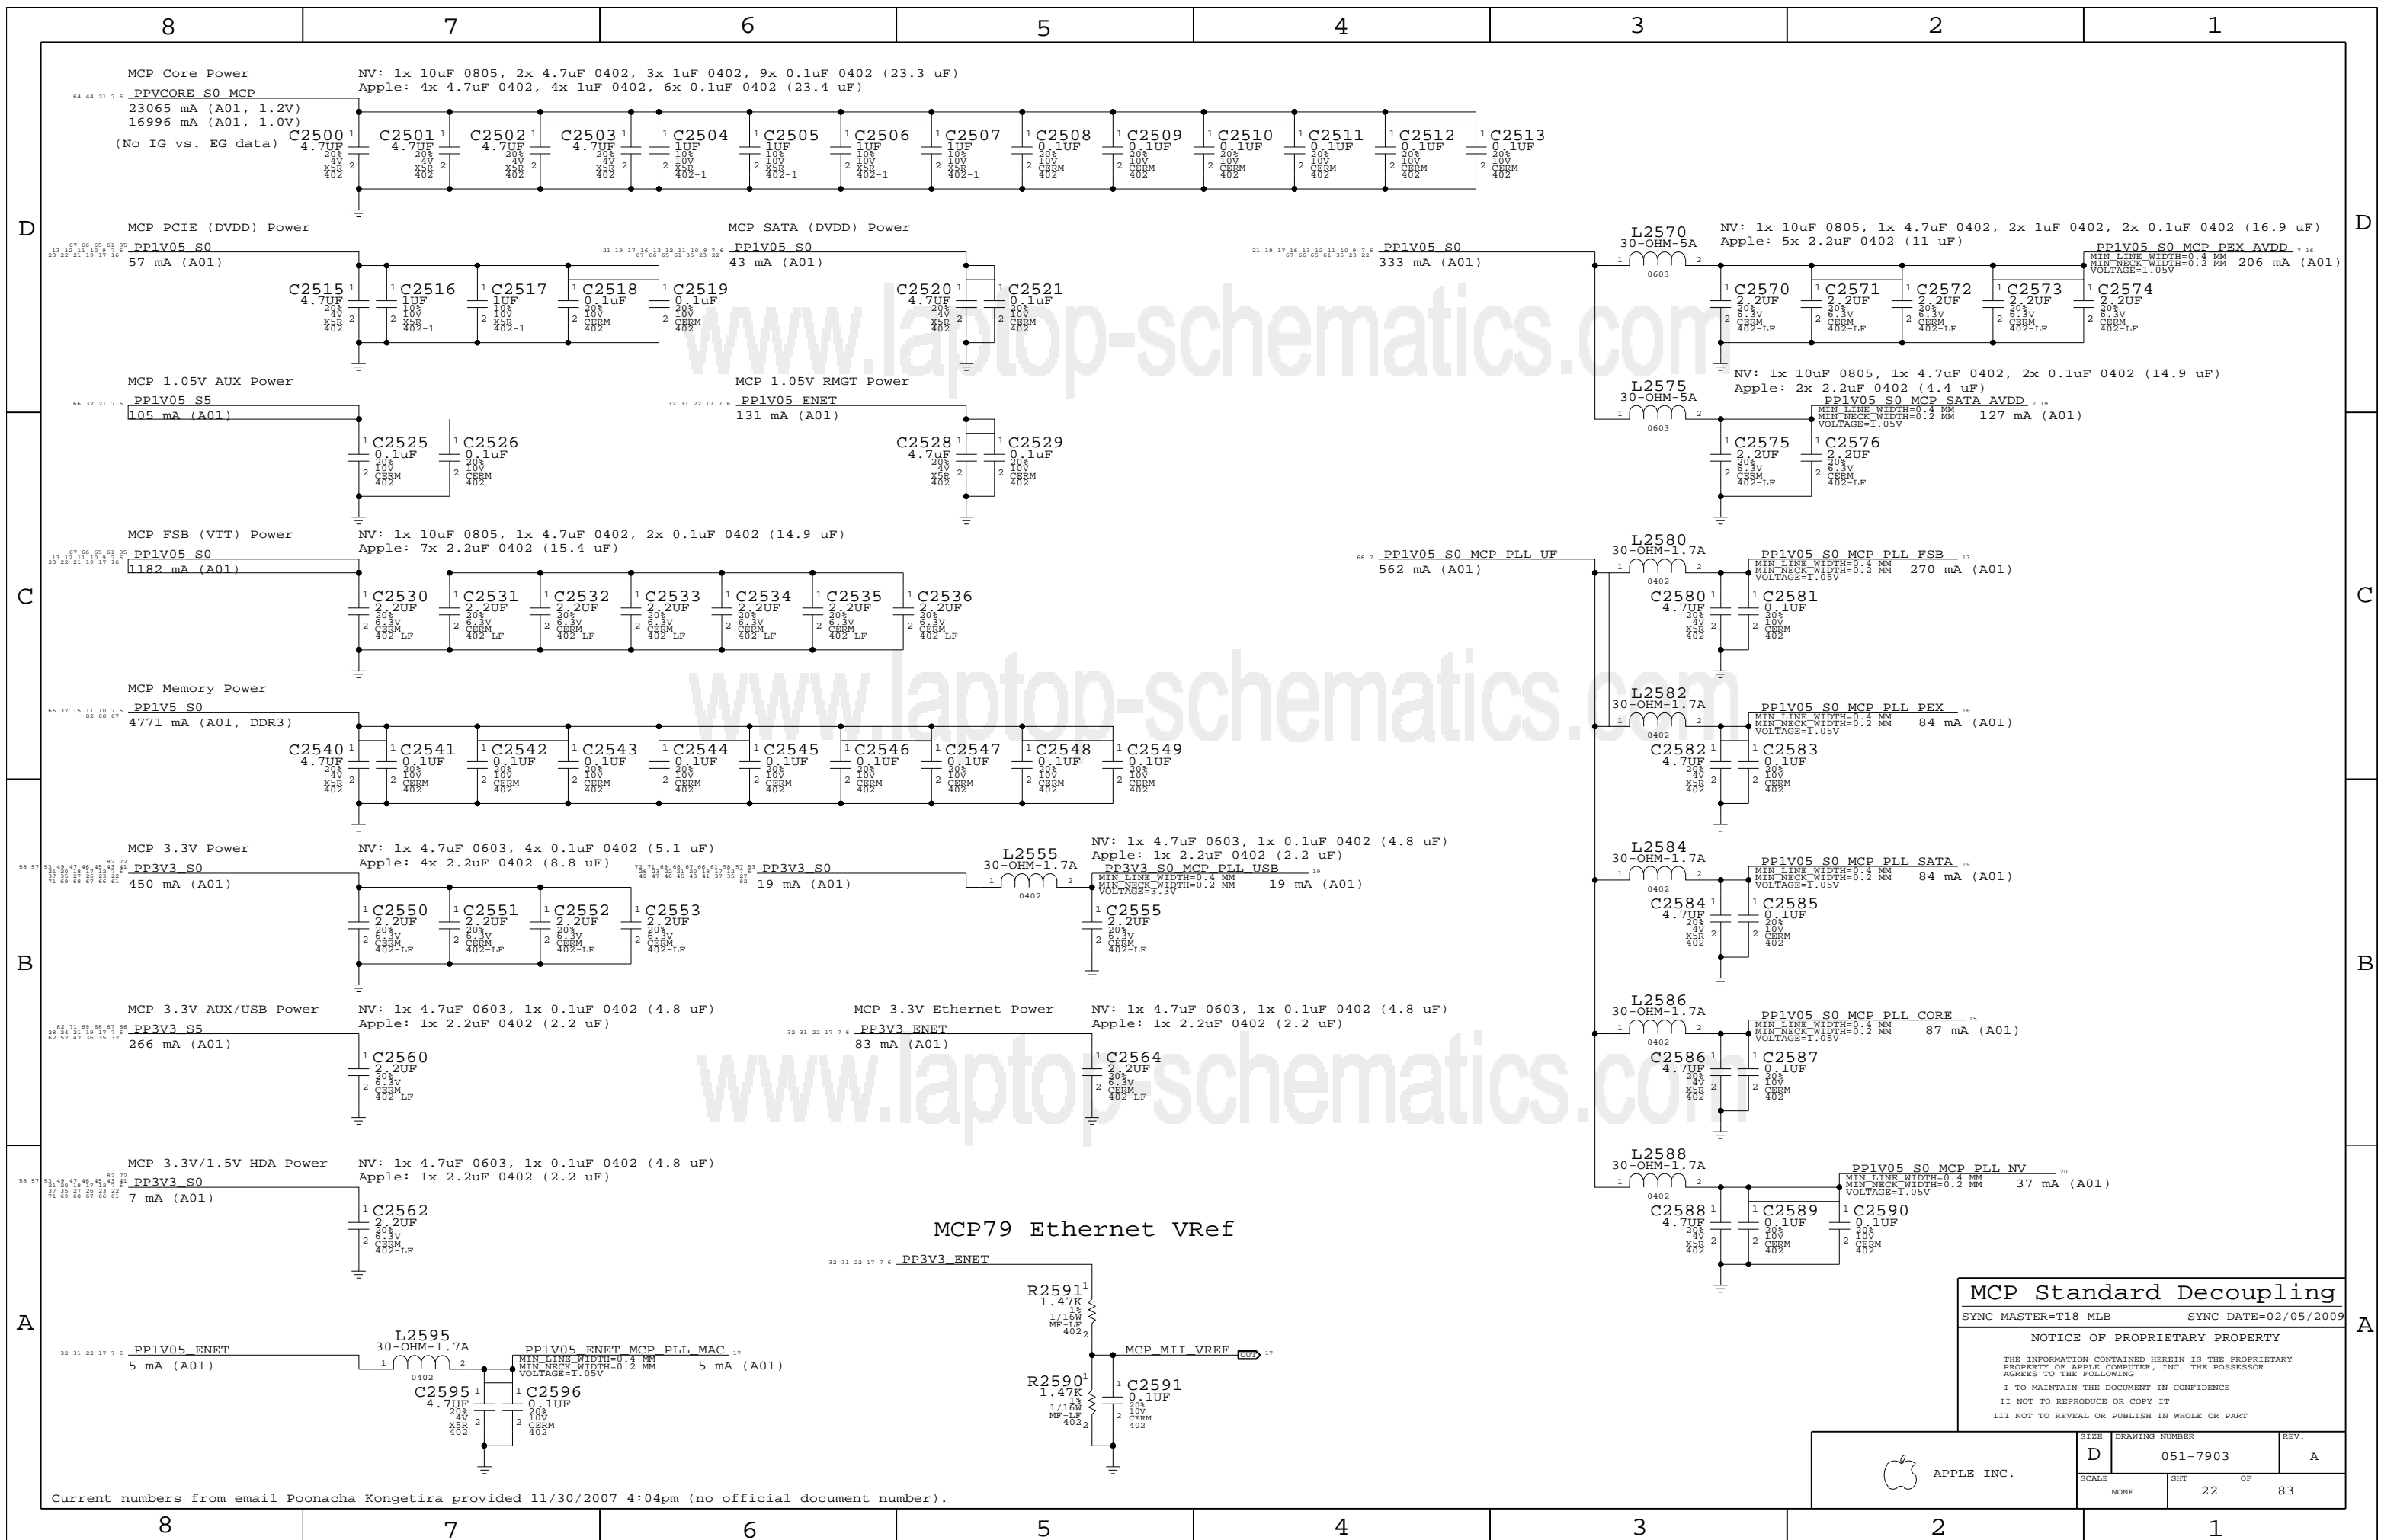

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com

MCP Standard Decoupling
 SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHEET	OF	
NONE	22	83	

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

8

7

6

5

4






3

2


1

WF: Checklist says 0-ohm resistor placeholder for ferrite bead.

NV: 1x 4.7uF 0603, 1x 0.1uF 0402 (4.8 uF)
Apple: 1x 2.2uF 0402 (2.2 uF)

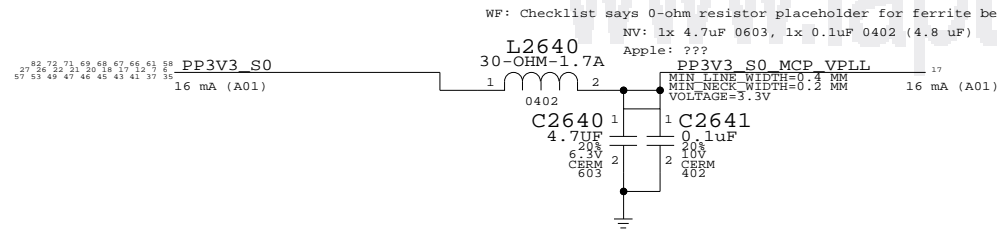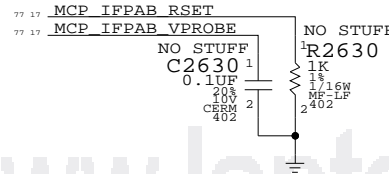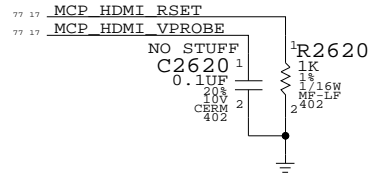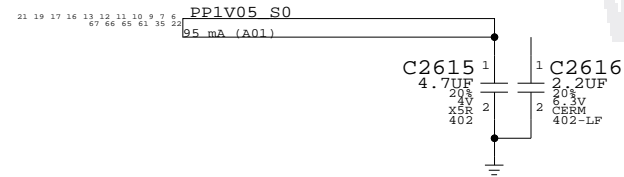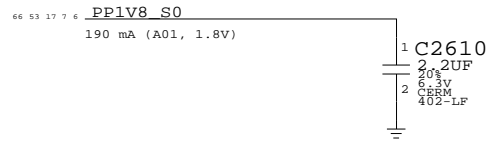

NV: 1x 4.7uF 0603, 2x 0.1uF 0402 (4.9 uF)
Apple: 2x 2.2uF 0402 (4.4 uF)

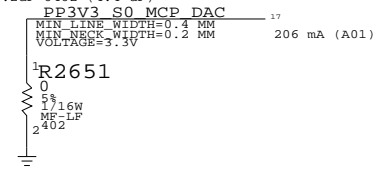

23 17	NC MCP RGB RED	==	NC MCP RGB RED	17 23
23 17	NC MCP RGB GREEN	==	MAKE_BASE=TRUE NO_TEST=TRUE	17 23
23 17	NC MCP RGB BLUE	==	NC MCP RGB GREEN	17 23
23 17	NC MCP RGB HSYNC	==	MAKE_BASE=TRUE NO_TEST=TRUE	17 23
23 17	NC MCP RGB VSYNC	==	NC MCP RGB BLUE	17 23
77 23 17	NC CRT IG R C PR	==	MAKE_BASE=TRUE NO_TEST=TRUE	17 23 77
77 23 17	NC CRT IG G Y Y	==	NC MCP RGB HSYNC	17 23
77 23 17	NC CRT IG B COMP PB	==	MAKE_BASE=TRUE NO_TEST=TRUE	17 23 77
77 23 17	NC CRT IG HSYNC	==	NC MCP RGB VSYNC	17 23
77 23 17	NC CRT IG VSYNC	==	MAKE_BASE=TRUE NO_TEST=TRUE	17 23 77
23 17	NC MCP RGB DAC RSET	==	NC CRT IG R C PR	17 23
23 17	NC MCP RGB DAC VREF	==	MAKE_BASE=TRUE NO_TEST=TRUE	17 23
77 23 17	NC MCP TV DAC RSET	==	NC CRT IG G Y Y	17 23 77
77 23 17	NC MCP TV DAC VREF	==	MAKE_BASE=TRUE NO_TEST=TRUE	17 23 77
23 17	NC MCP CLK27M XTALIN	==	NC CRT IG B COMP PB	17 23
23 17	NC MCP CLK27M XTALOUT	==	MAKE_BASE=TRUE NO_TEST=TRUE	17 23

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com

MCP Graphics Support

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	23	83	

8

7

6

5


4

3


2

1


RTC Power Source

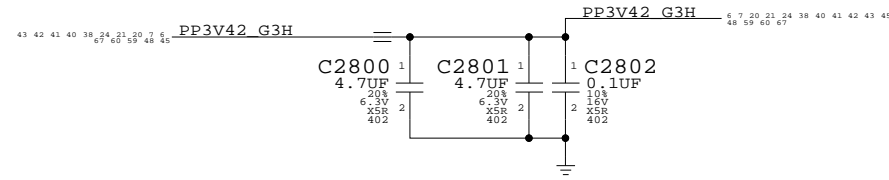


RTC Crystal

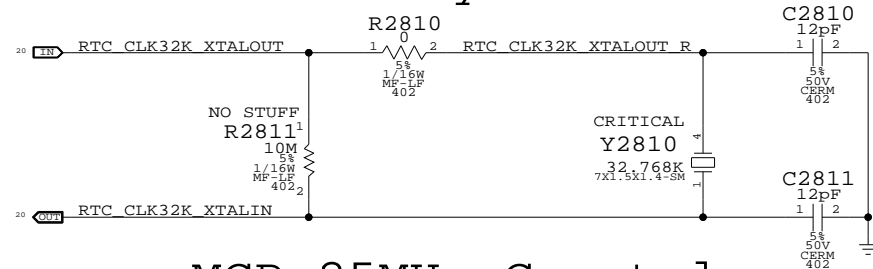

MCP 25MHz Crystal

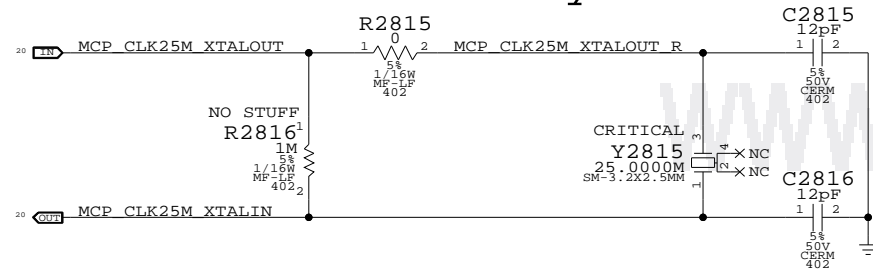


MCP S0 PWRGD & CPU_VLD



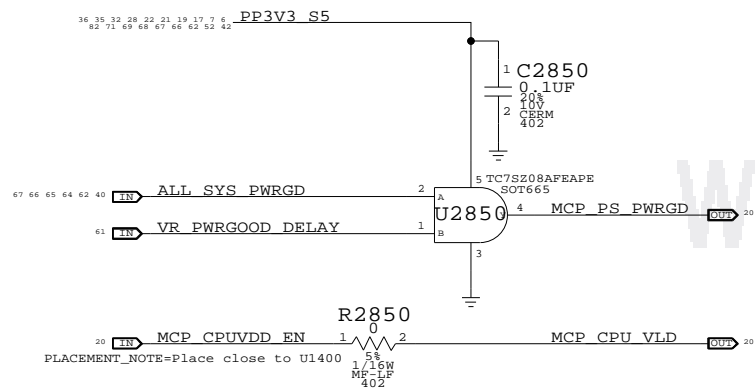


Platform Reset Connections


LPC Reset (Unbuffered)

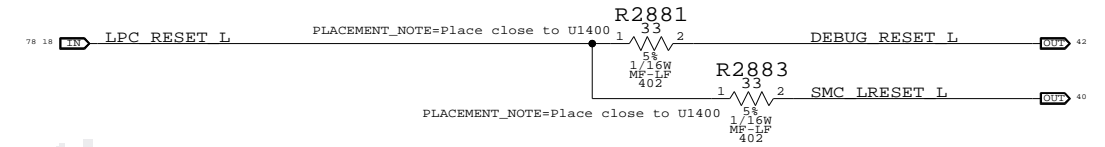

PCIE Reset (Unbuffered)

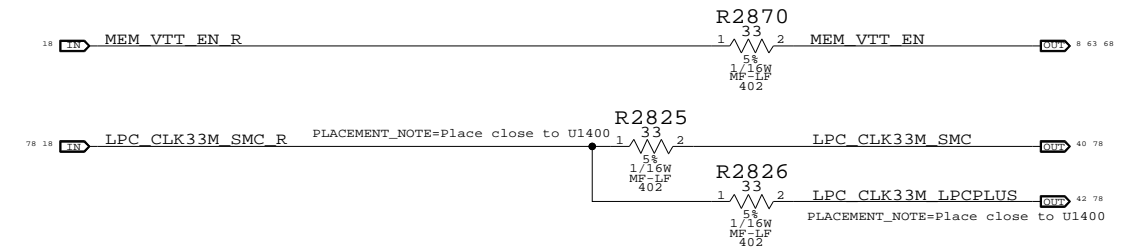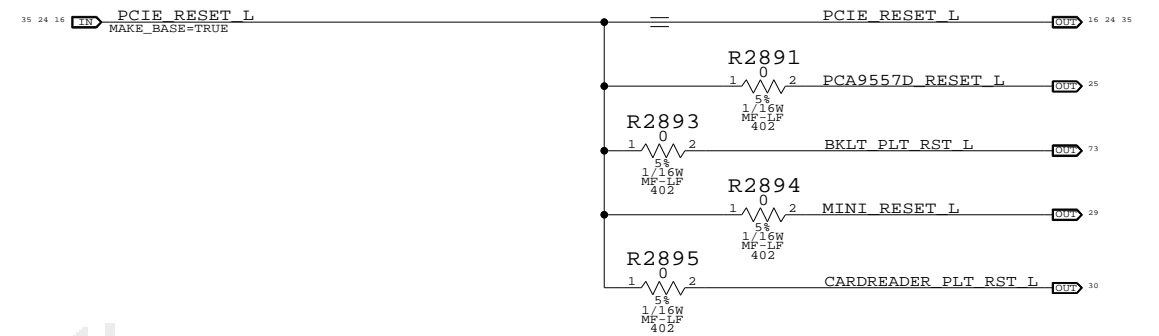

System Reset Circuit

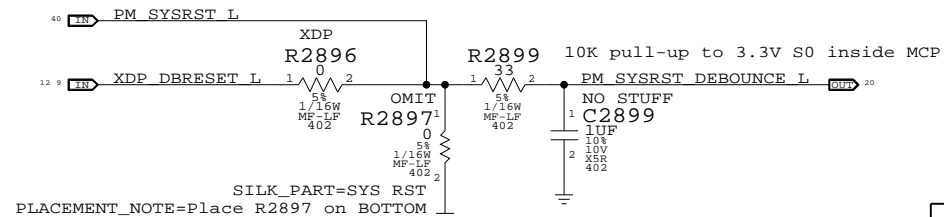


SB Misc

SYNC_MASTER=WFERRY_K19I SYNC_DATE=01/06/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	24	83

Page Notes


Power aliases required by this page:
 - =PP3V3_S3_VREFMRGN
 - =PP3V3_S5_VREFMRGN
 - =PPVTT_S3_DDR_BUF

Signal aliases required by this page:
 - =I2C_VREFDACS_SCL
 - =I2C_VREFDACS_SDA
 - =I2C_PCA9557D_SCL
 - =I2C_PCA9557D_SDA

BOM options provided by this page:
 VREFMRGN
 NO_VREFMRGN

	MEM A VREF DQ	MEM A VREF CA	MEM B VREF DQ	MEM B VREF CA	CPU FSB VREF
DAC channel	A	B	A	B	C
Min DAC code	0x00	0x00	0x00	0x00	0x00
Max DAC code	0x87	0x87	0x87	0x87	0x55
Max sink I	-3.75 mA	-3.75 mA	-3.75 mA	-3.75 mA	-0.91 mA
Max source I	5 mA	5 mA	5 mA	5 mA	0.52 mA
Nominal Vref	0.75 V	0.75 V	0.75 V	0.75 V	0.70 V
Min Vref	0.375 V	0.375 V	0.375 V	0.375 V	0.091 V
Max Vref	1.250 V	1.250 V	1.250 V	1.250 V	1.044 V
Vref Stepping (per DAC LSB)	6.5 mV	6.5 mV	6.5 mV	6.5 mV	11.2 mV

SO-DIMM A and SO-DIMM B Vref settings should be margined separately (i.e. not simultaneously) due to current limitation of TPS51116 regulator.

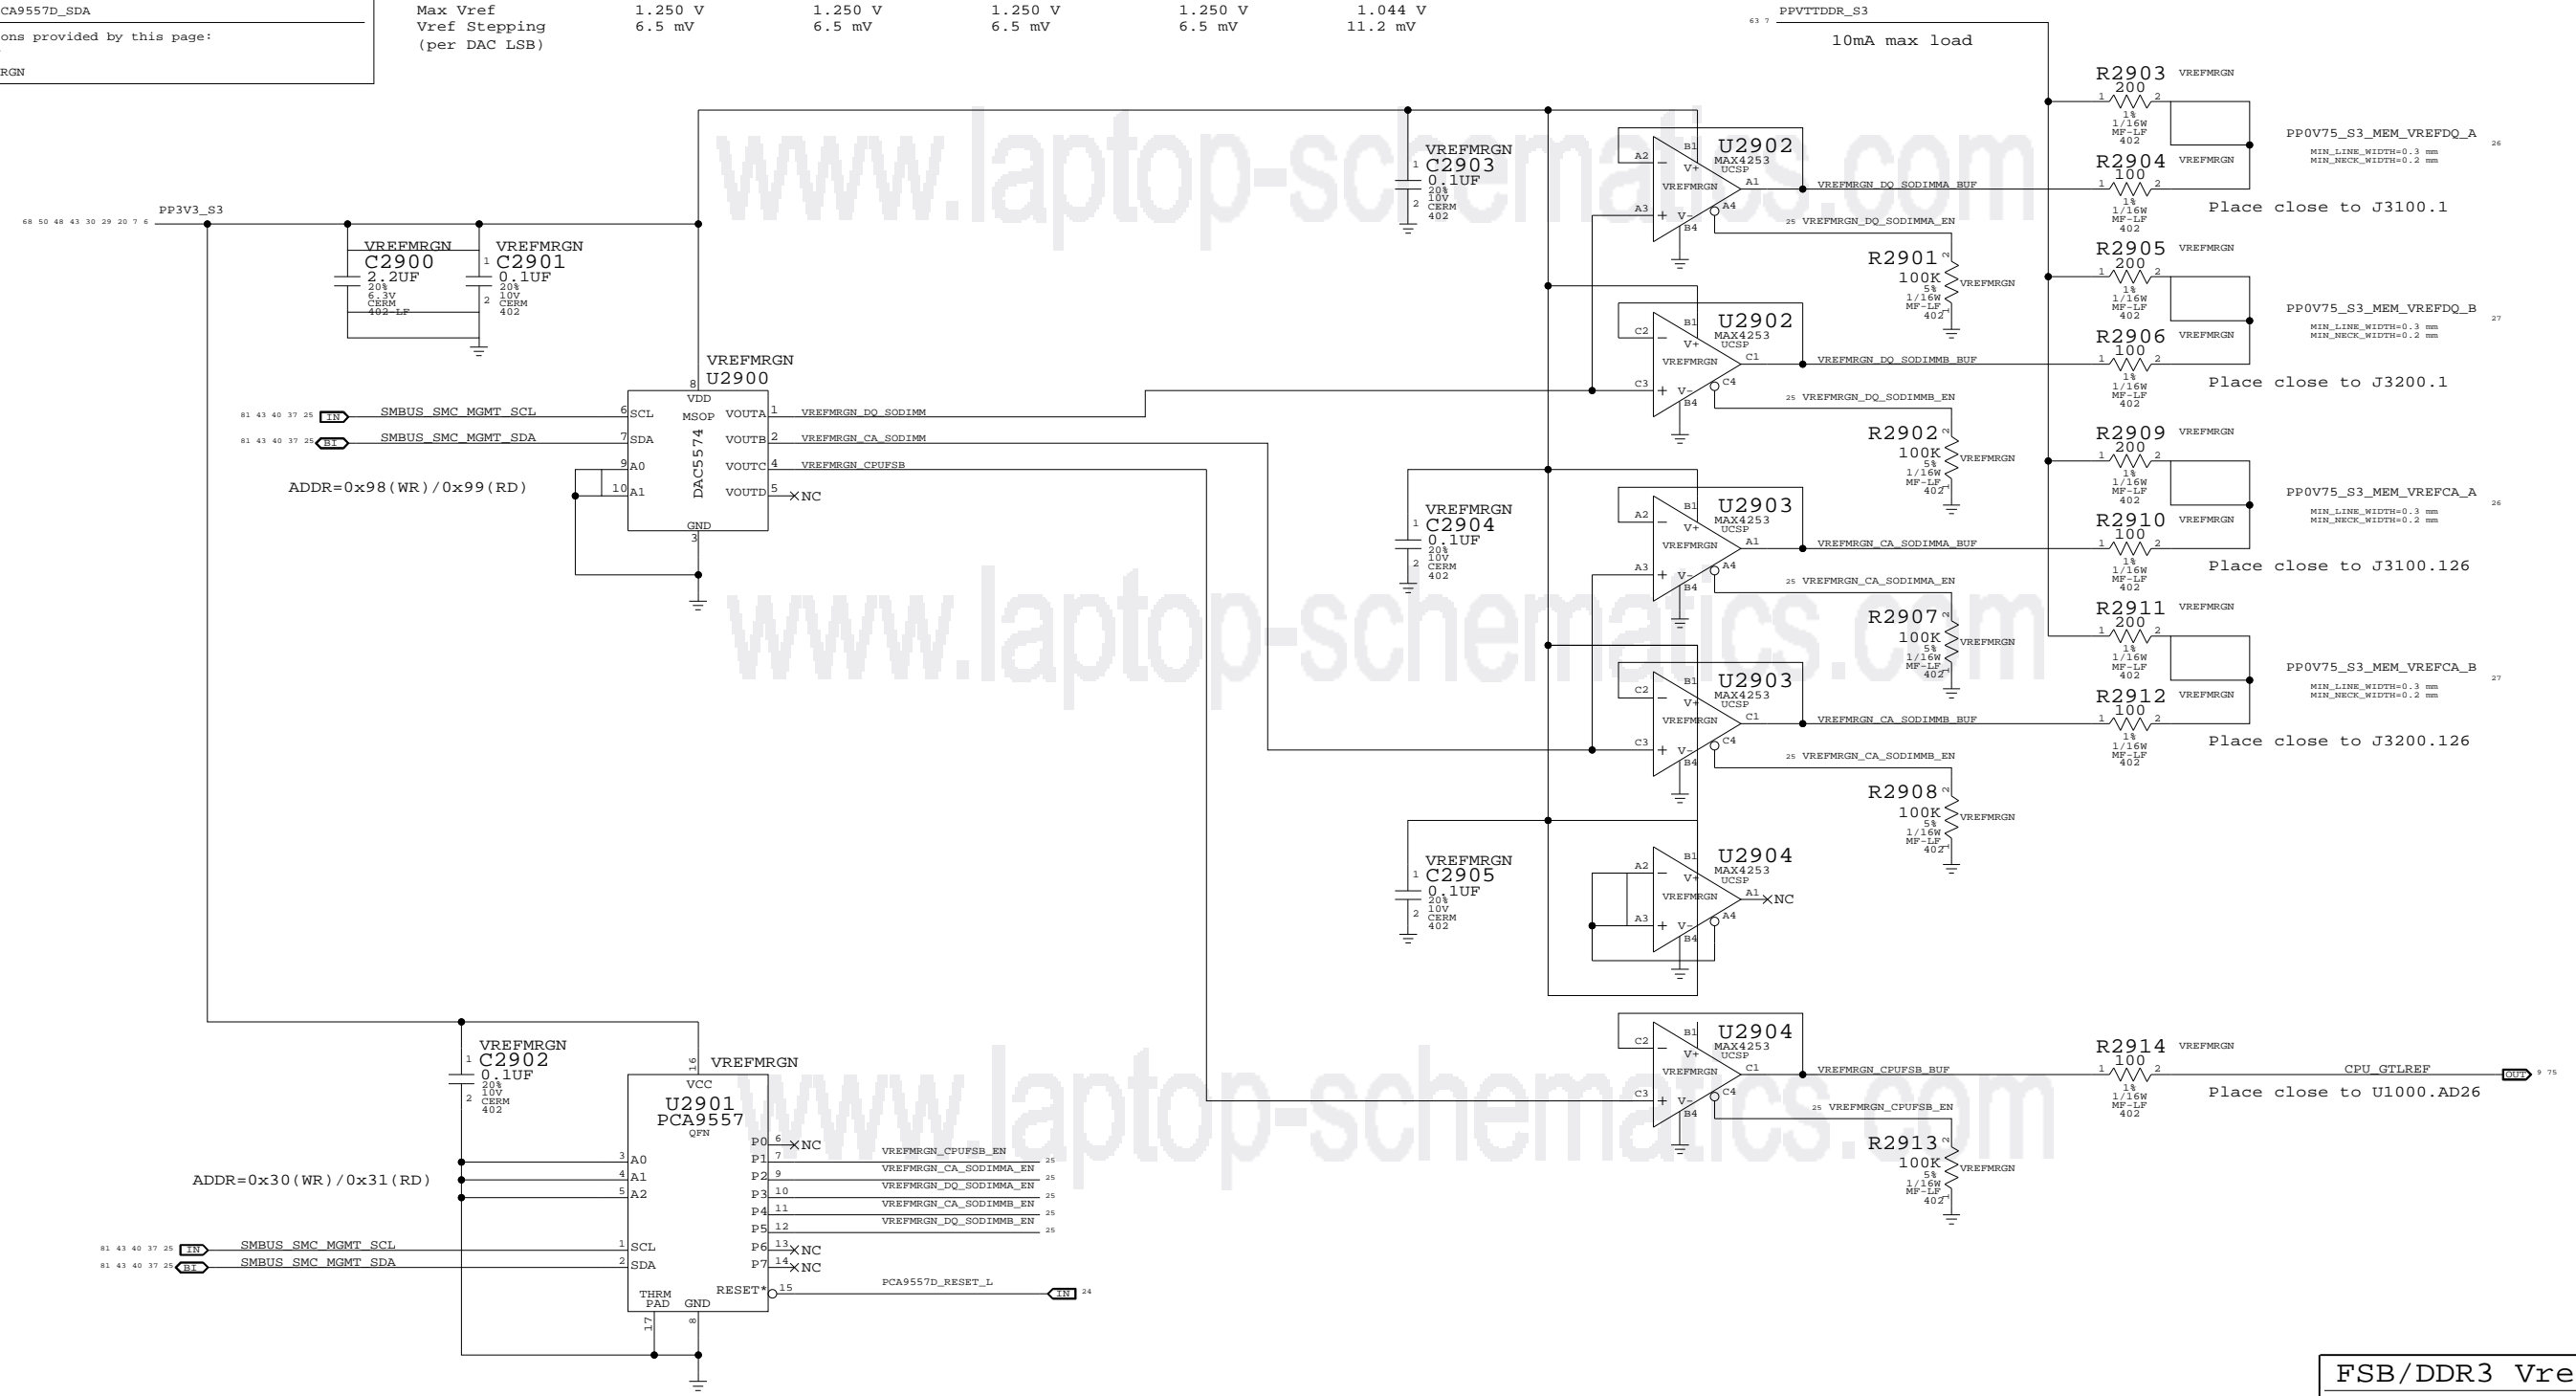

Required zero ohm resistors when no VREF margining circuit stuffed

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
116S0004	1	RES.MTL FILM, 0,5%, 0402, SM, LF	R2903	CRITICAL	NO_VREFMRGN
116S0004	1	RES.MTL FILM, 0,5%, 0402, SM, LF	R2905	CRITICAL	NO_VREFMRGN
116S0004	1	RES.MTL FILM, 0,5%, 0402, SM, LF	R2909	CRITICAL	NO_VREFMRGN
116S0004	1	RES.MTL FILM, 0,5%, 0402, SM, LF	R2911	CRITICAL	NO_VREFMRGN

FSB/DDR3 Vref Margining

SYNC_MASTER=K24_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	83
NONE	25		

DDR3 PLANE STITCHING CAPS (SPACE EVENLY ACROSS PLANE SPLIT)

Page Notes

Power aliases required by this page:


- PP1V5_S3_MEM_B
- PP1V5_S3_MEM_L
- PP0V75_S3_MEM_VTT_B
- PP0V75_S3_MEM_VTT_L
- PP0V75_S3_MEM_B (2.5 - 3.3V)

Signal aliases required by this page:

- I2C_SODIMM_SCL
- I2C_SODIMM_SDA

DRM options provided by this page:

- (NONE)

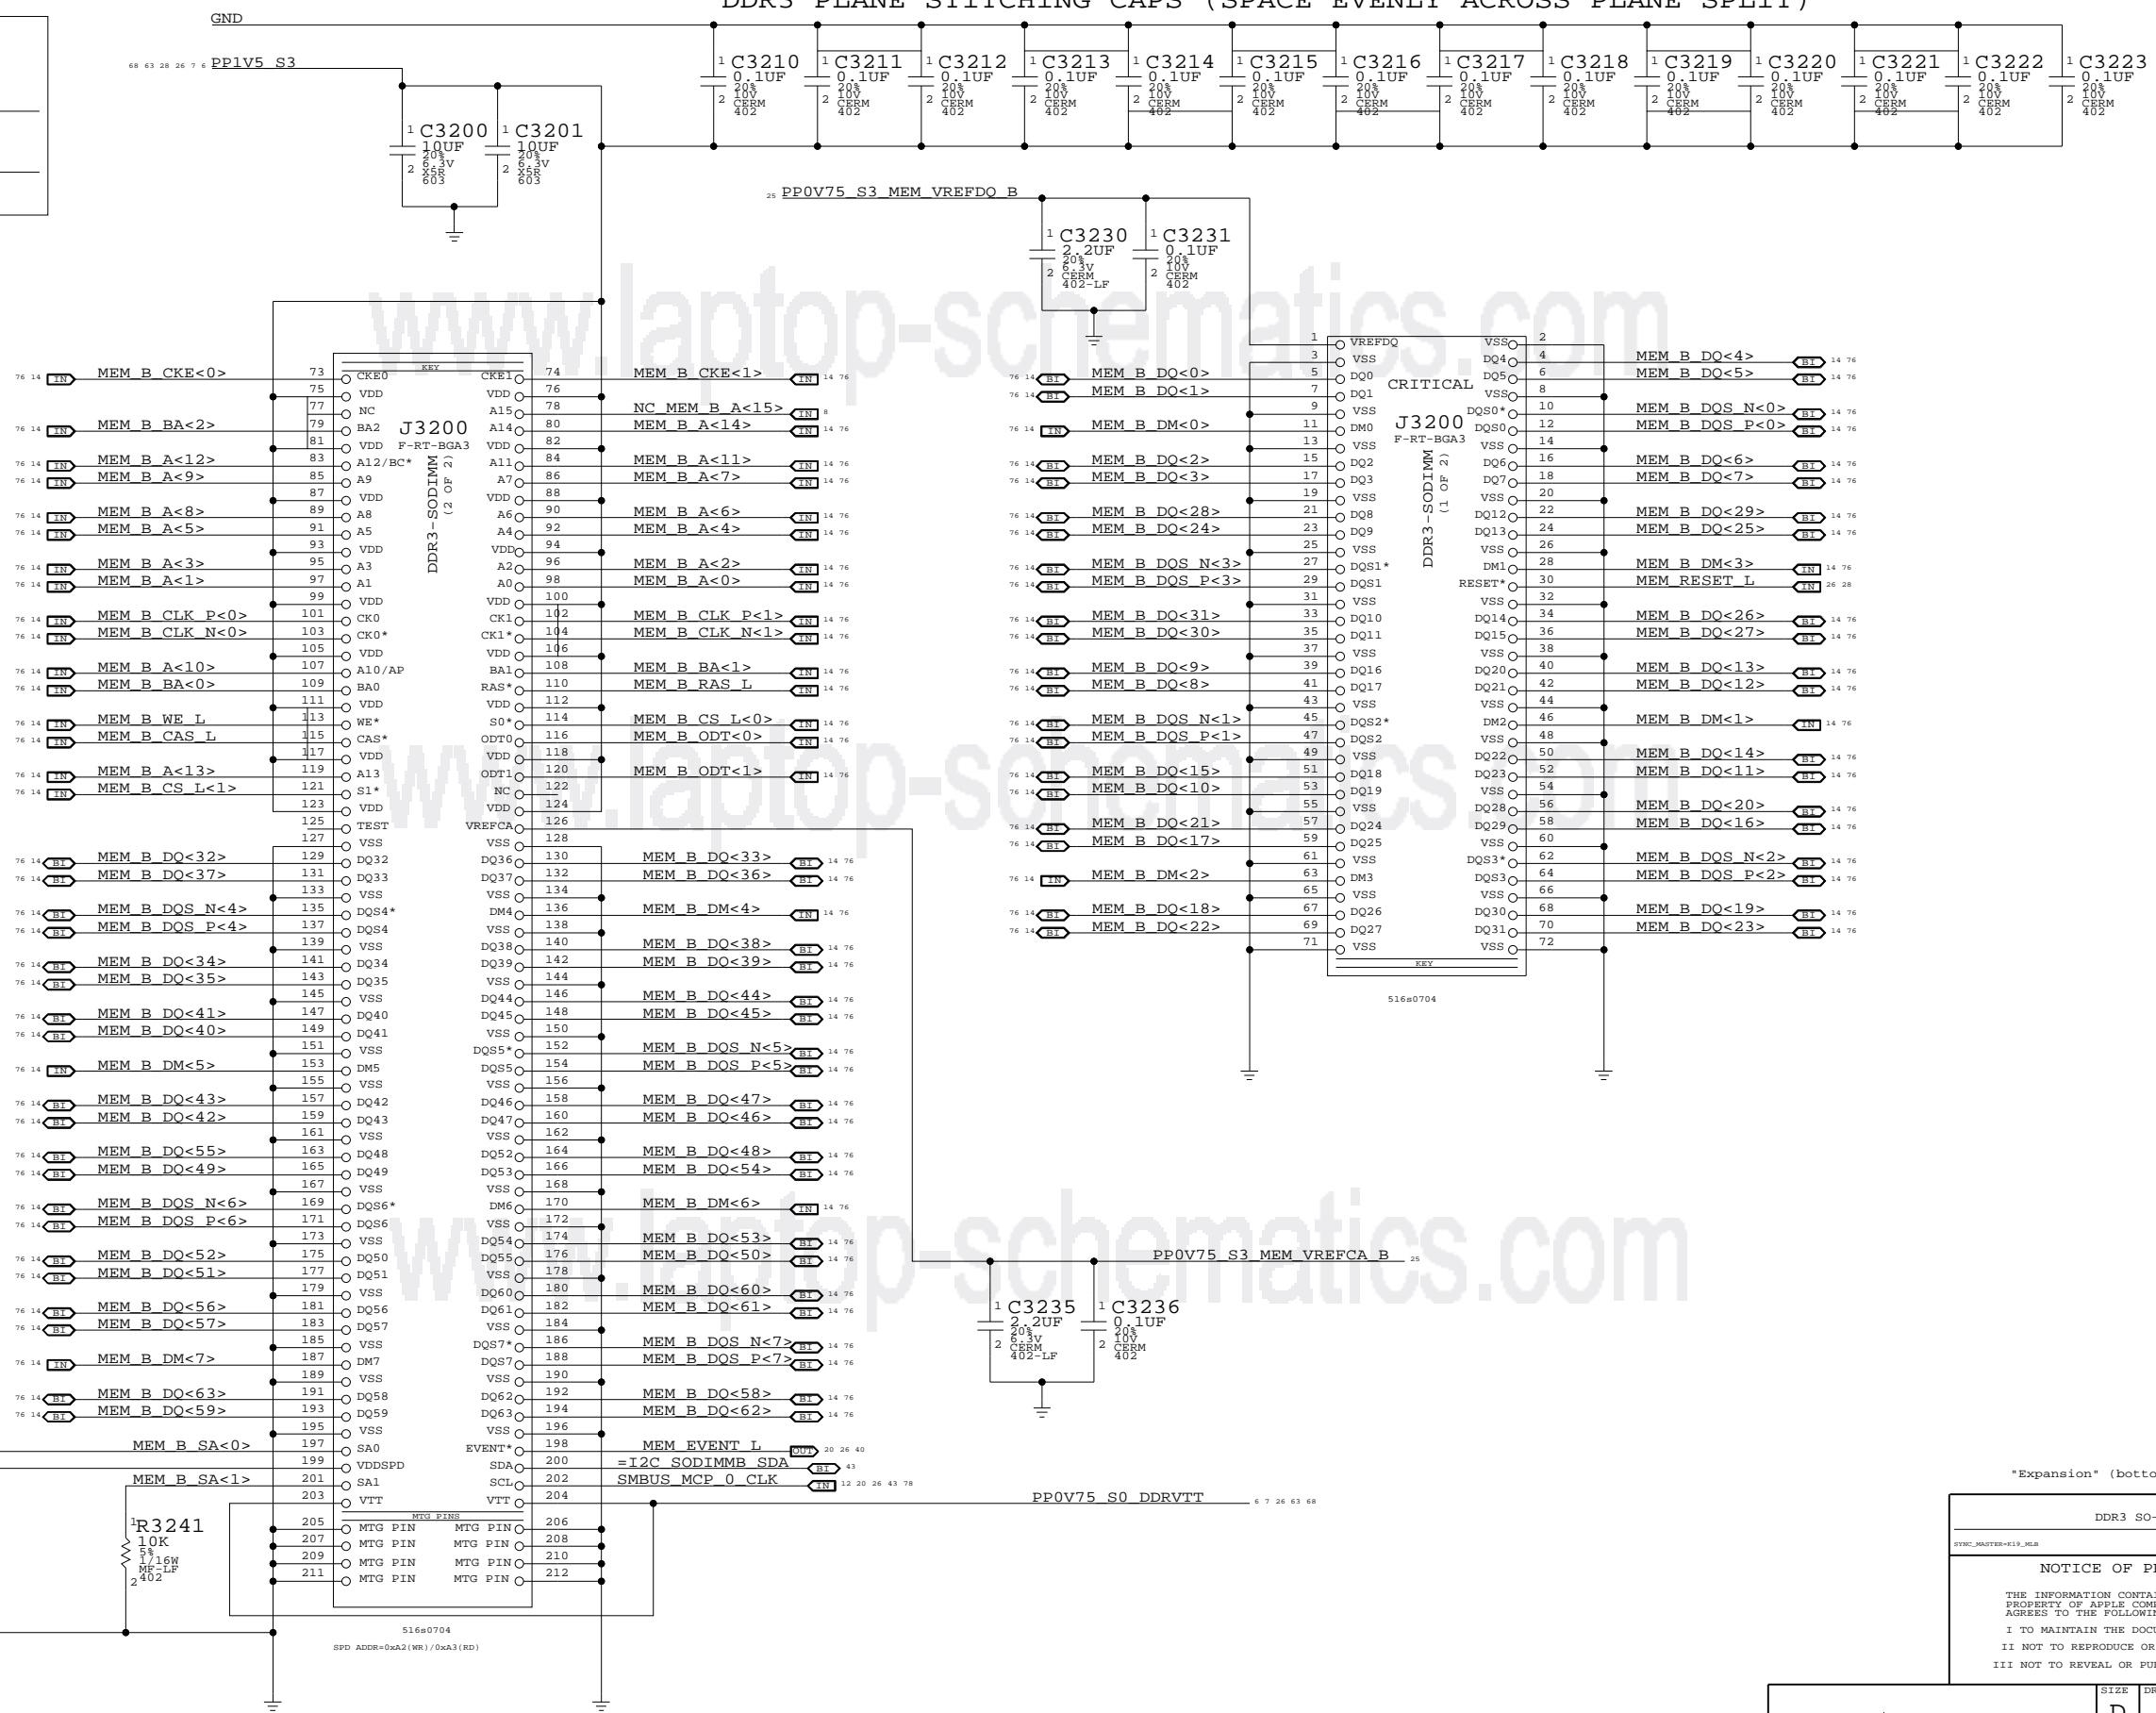

"Expansion" (bottom) slot

DDR3 SO-DIMM Connector B

SYMC_MASTER=K19_MEM SYMC_DATE=02/09/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE


II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

www.laptop-schematics.com

DDR3 RESET Support

Required because MCP79 does not meet DDR3 spec power-up reset timing requirement.

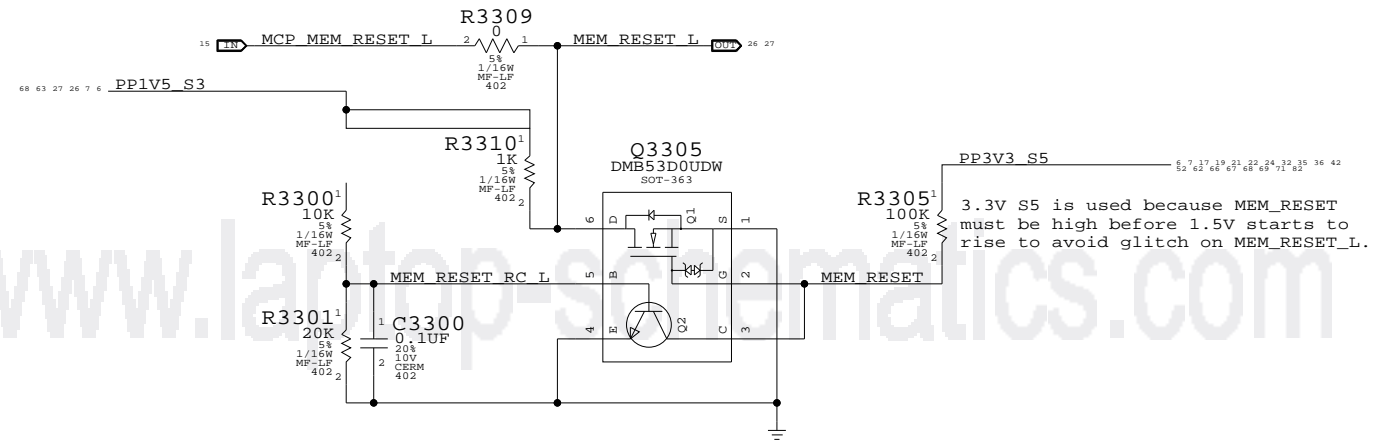

www.laptop-schematics.com

www.laptop-schematics.com

DDR3 Support

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING


I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	28	83

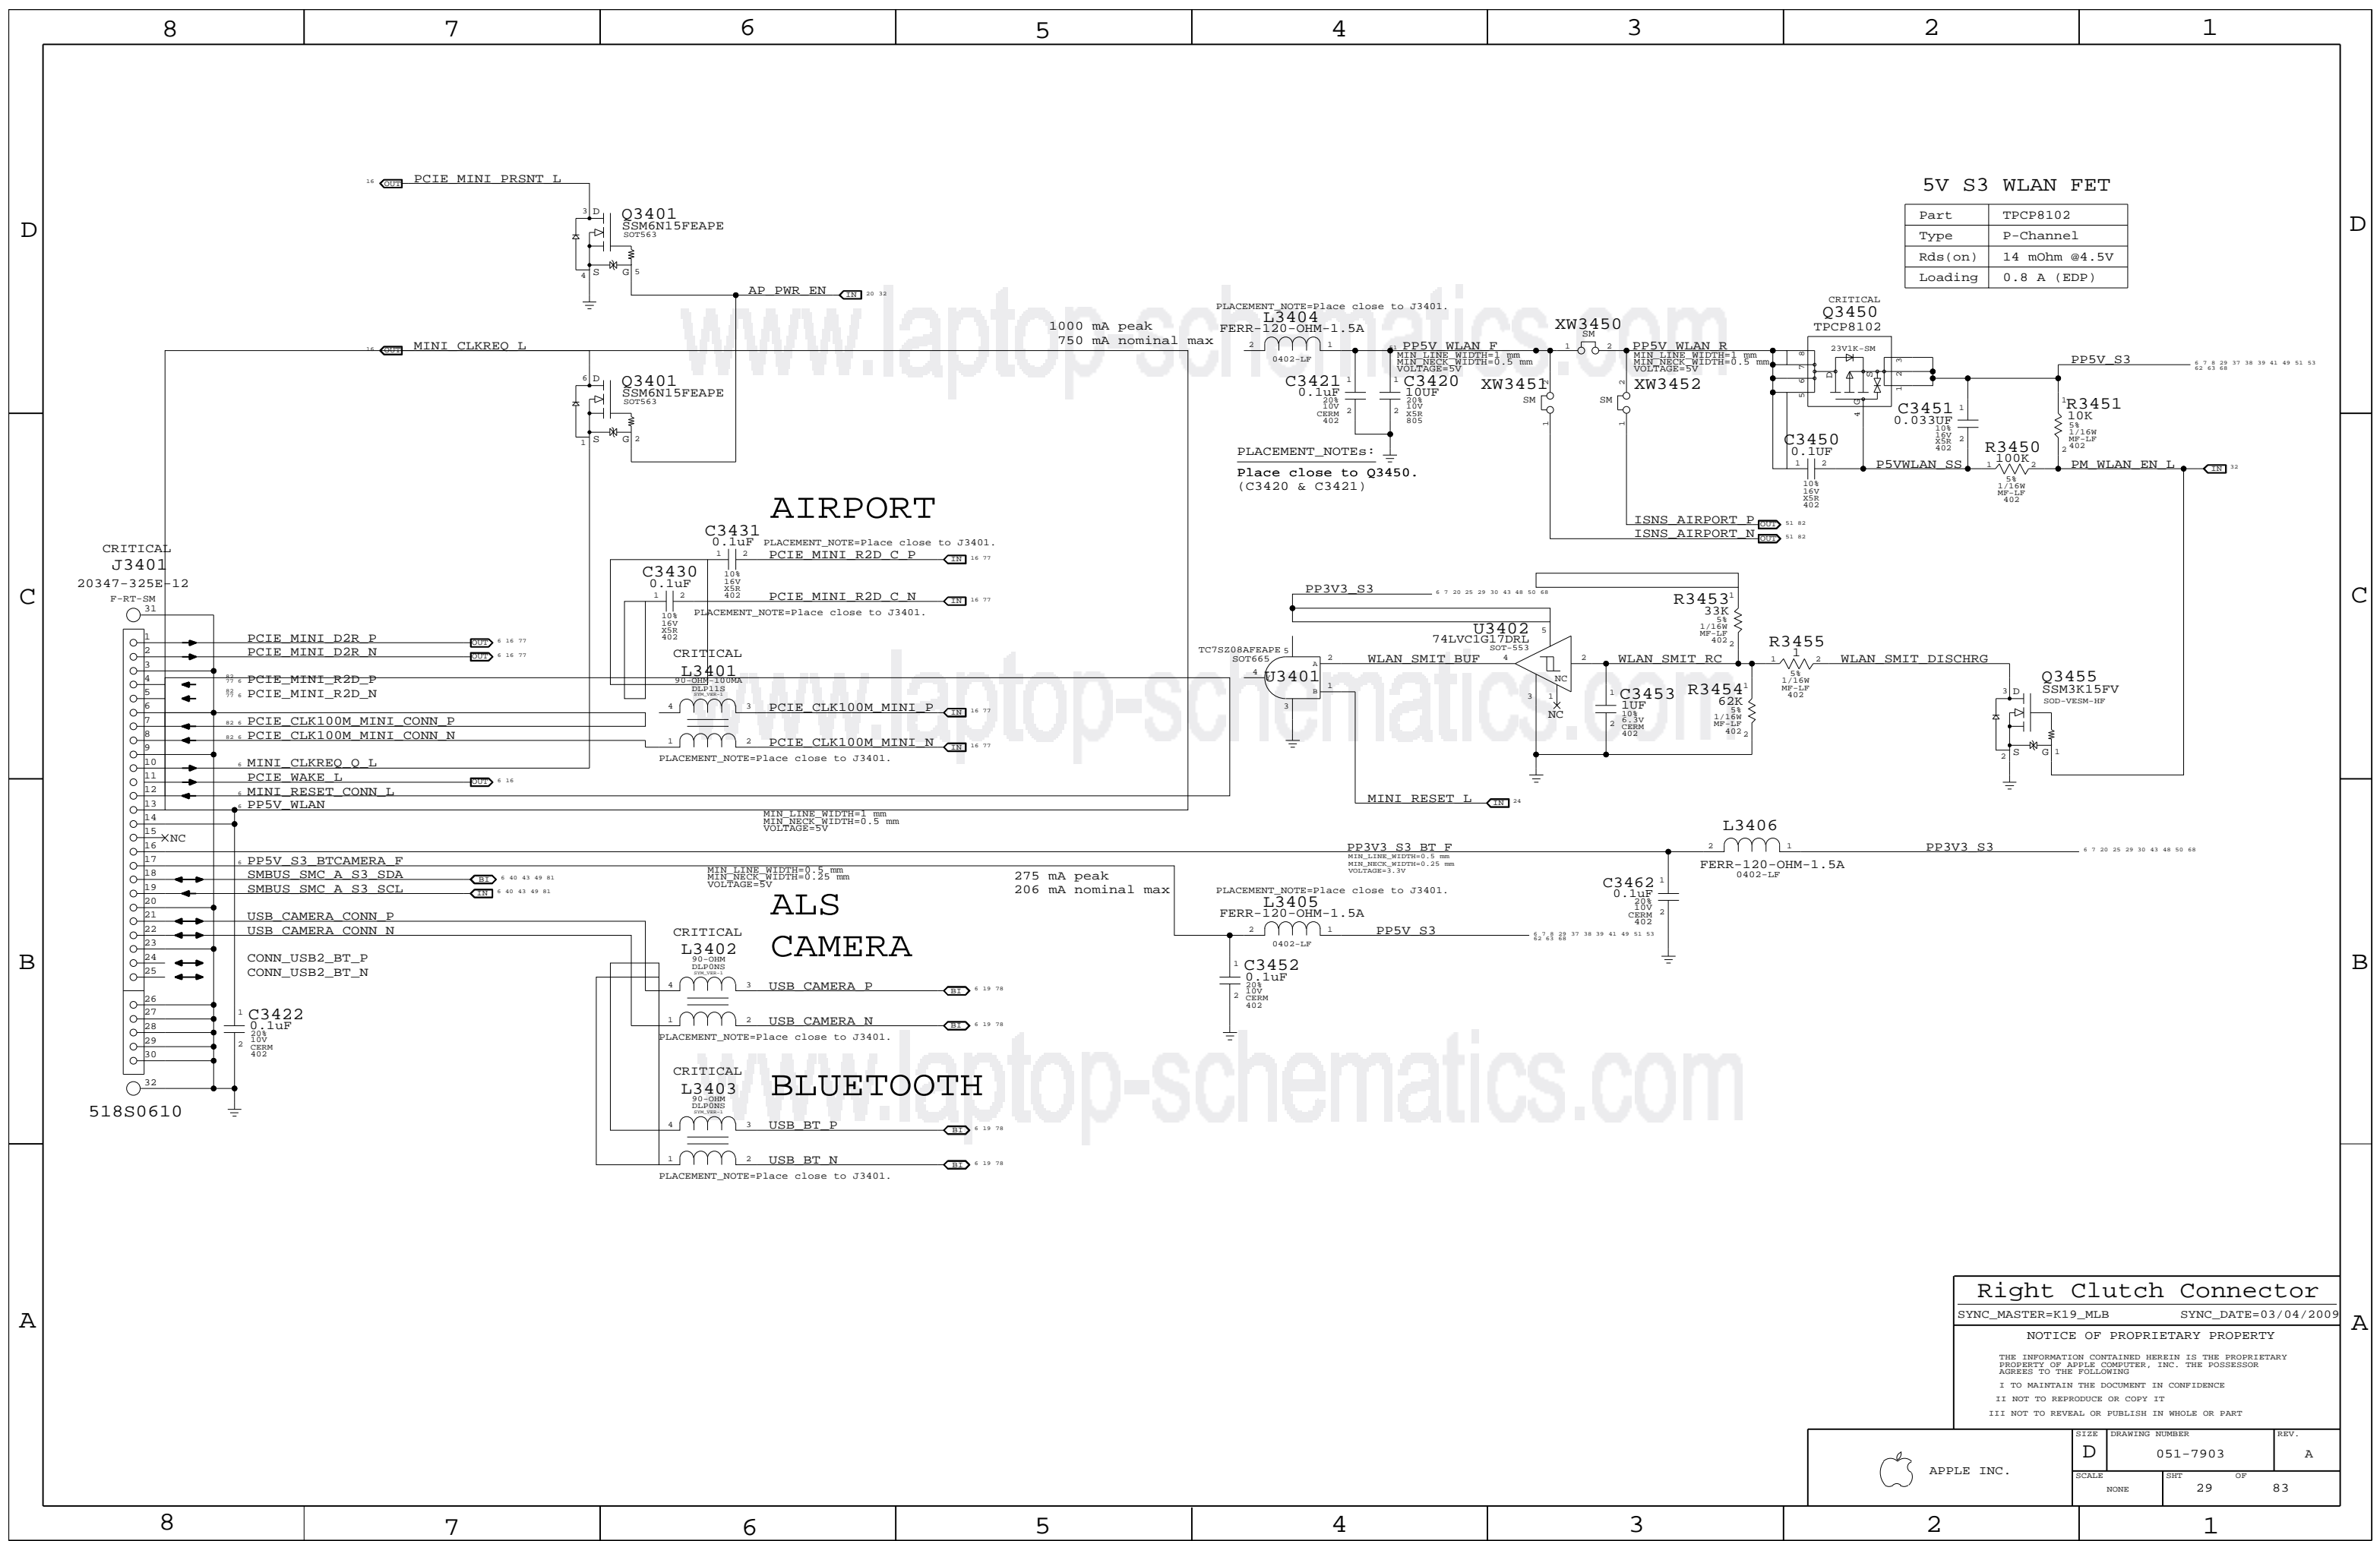

5V S3 WLAN FET

Part	TPCP8102
Type	P-Channel
R _{ds(on)}	14 mOhm @4.5V
Loading	0.8 A (EDP)

AIRPORT

ALS CAMERA

BLUETOOTH


Right Clutch Connector

SYNC_MASTER=K19_MLB SYNC_DATE=03/04/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	REV.
NONE	29	83	

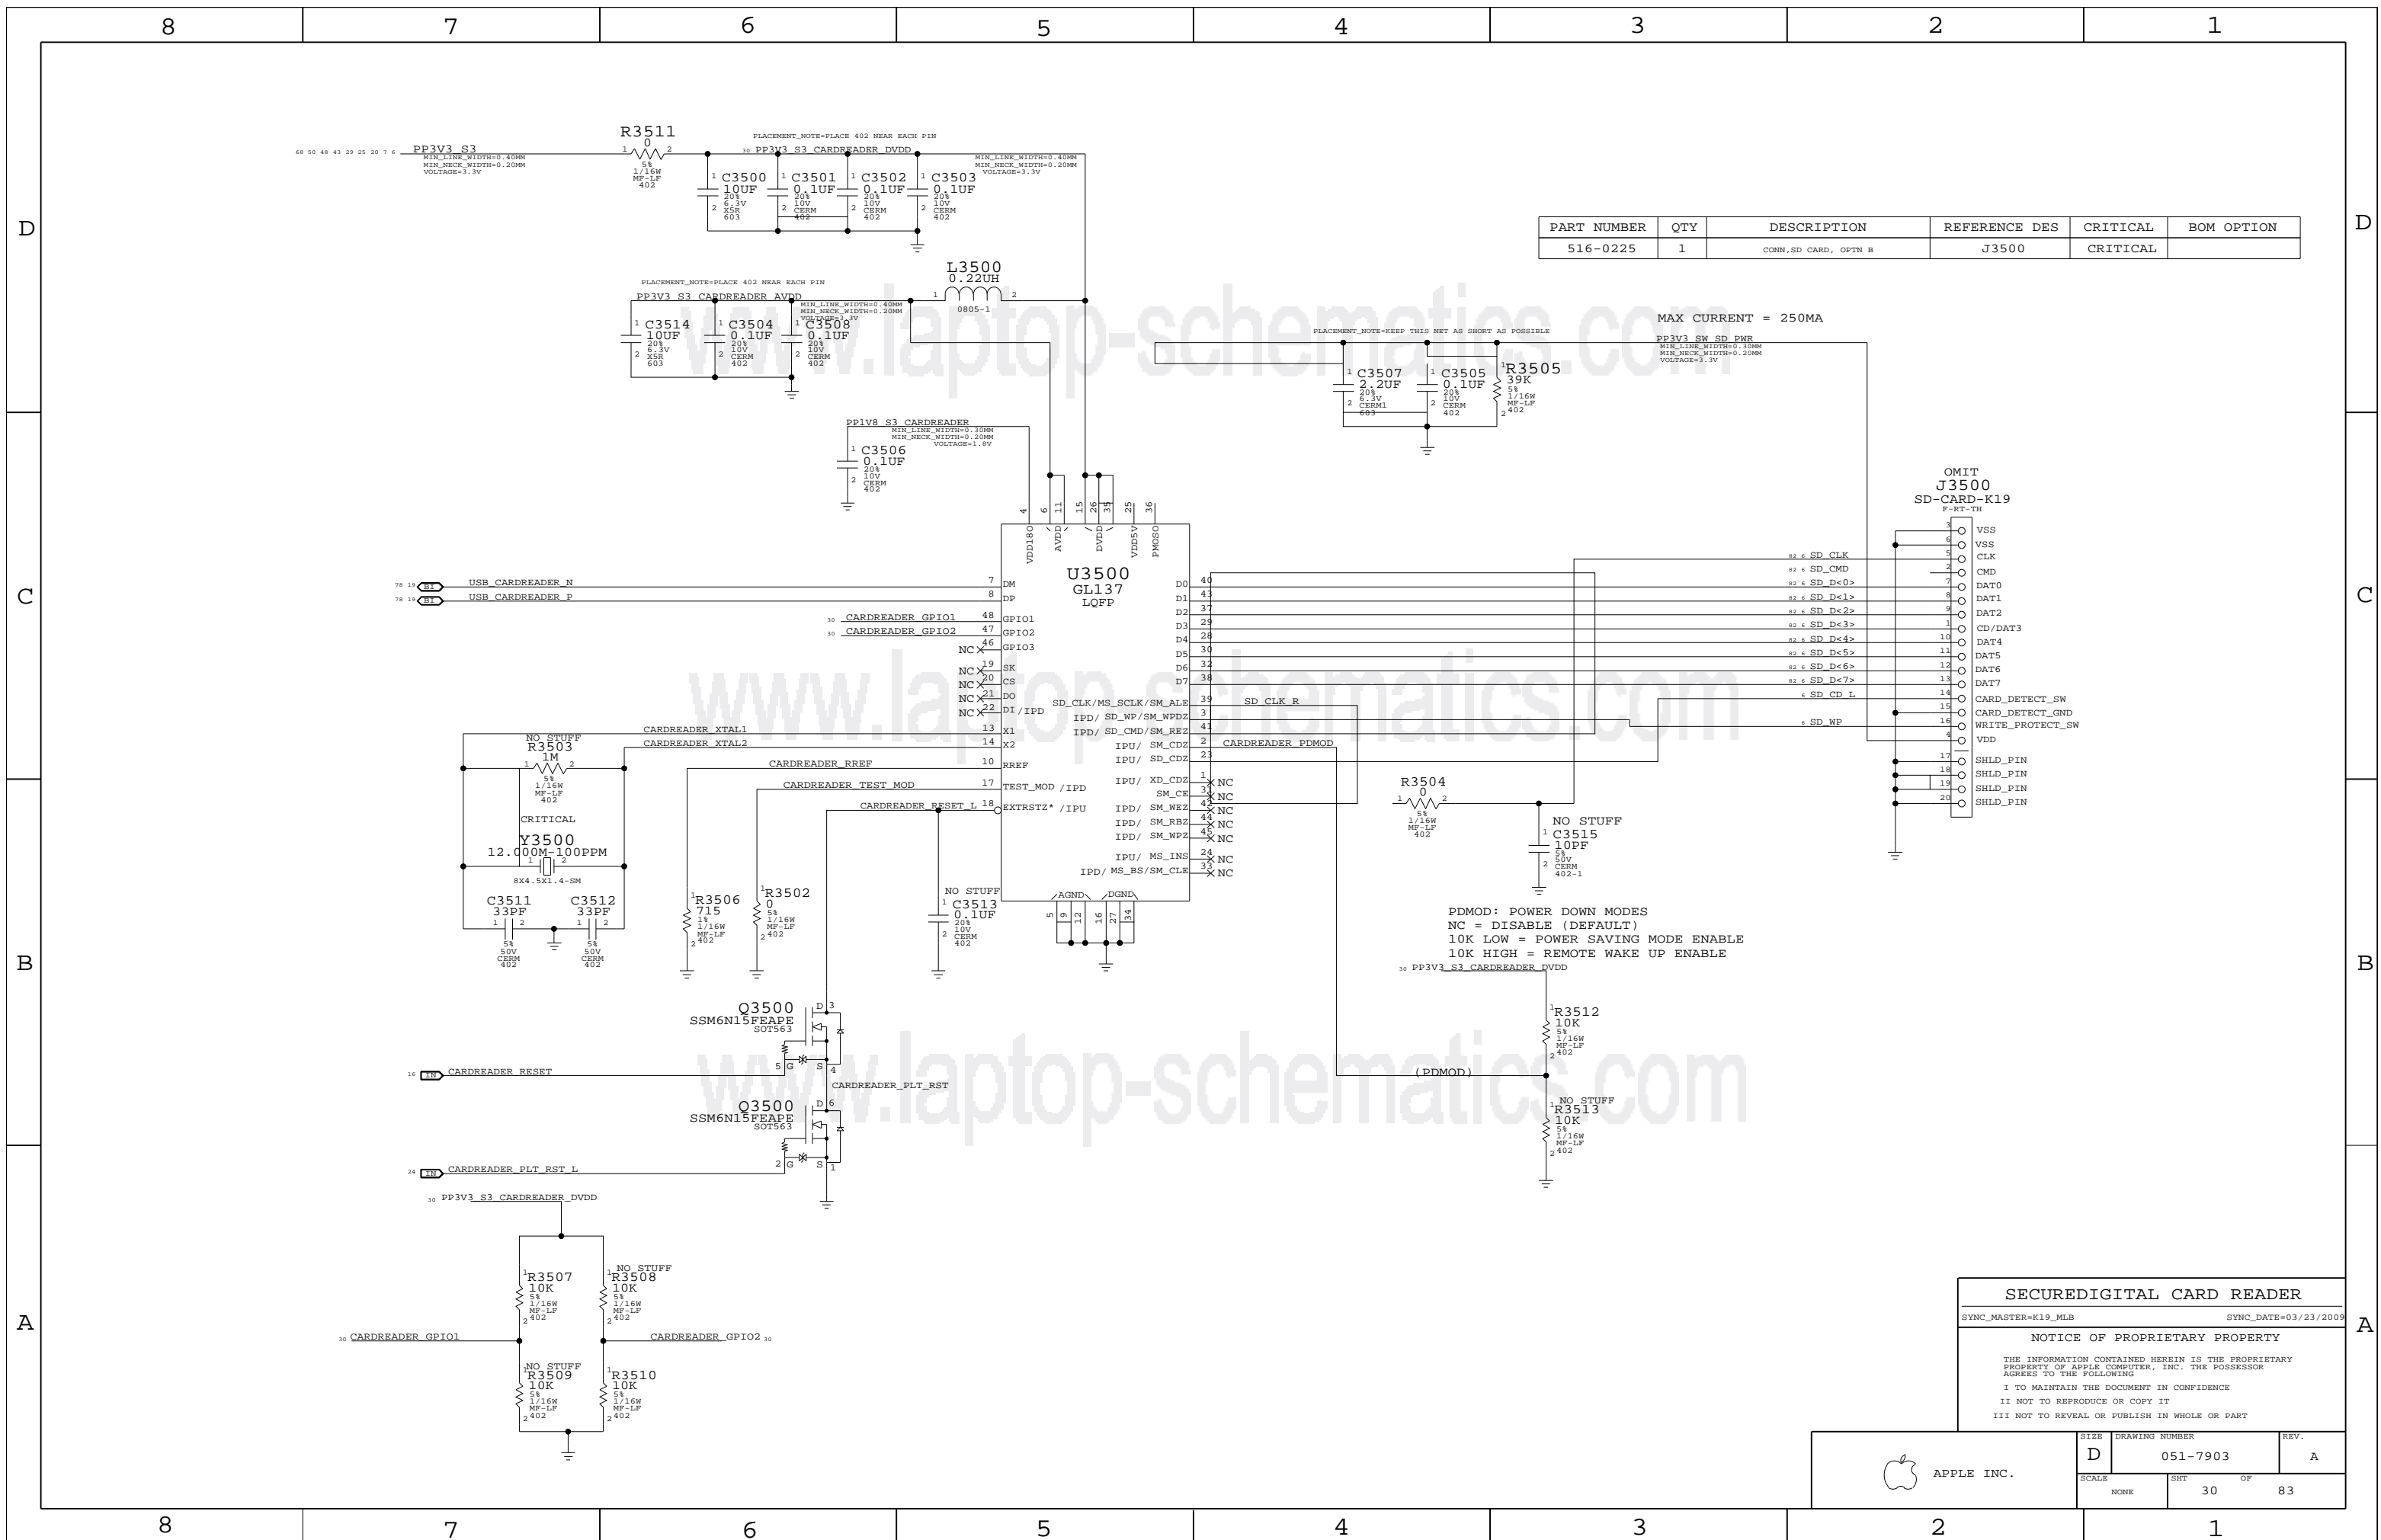


PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
516-0225	1	CORN, SD CARD, OPTN B	J3500	CRITICAL	

MAX CURRENT = 250MA

PDMOD: POWER DOWN MODES
 NC = DISABLE (DEFAULT)
 10K LOW = POWER SAVING MODE ENABLE
 10K HIGH = REMOTE WAKE UP ENABLE

SECUREDIGITAL CARD READER
 SYNC_MASTER=K19_MLB SYNC_DATE=03/23/2009
NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	83
NONE	30		

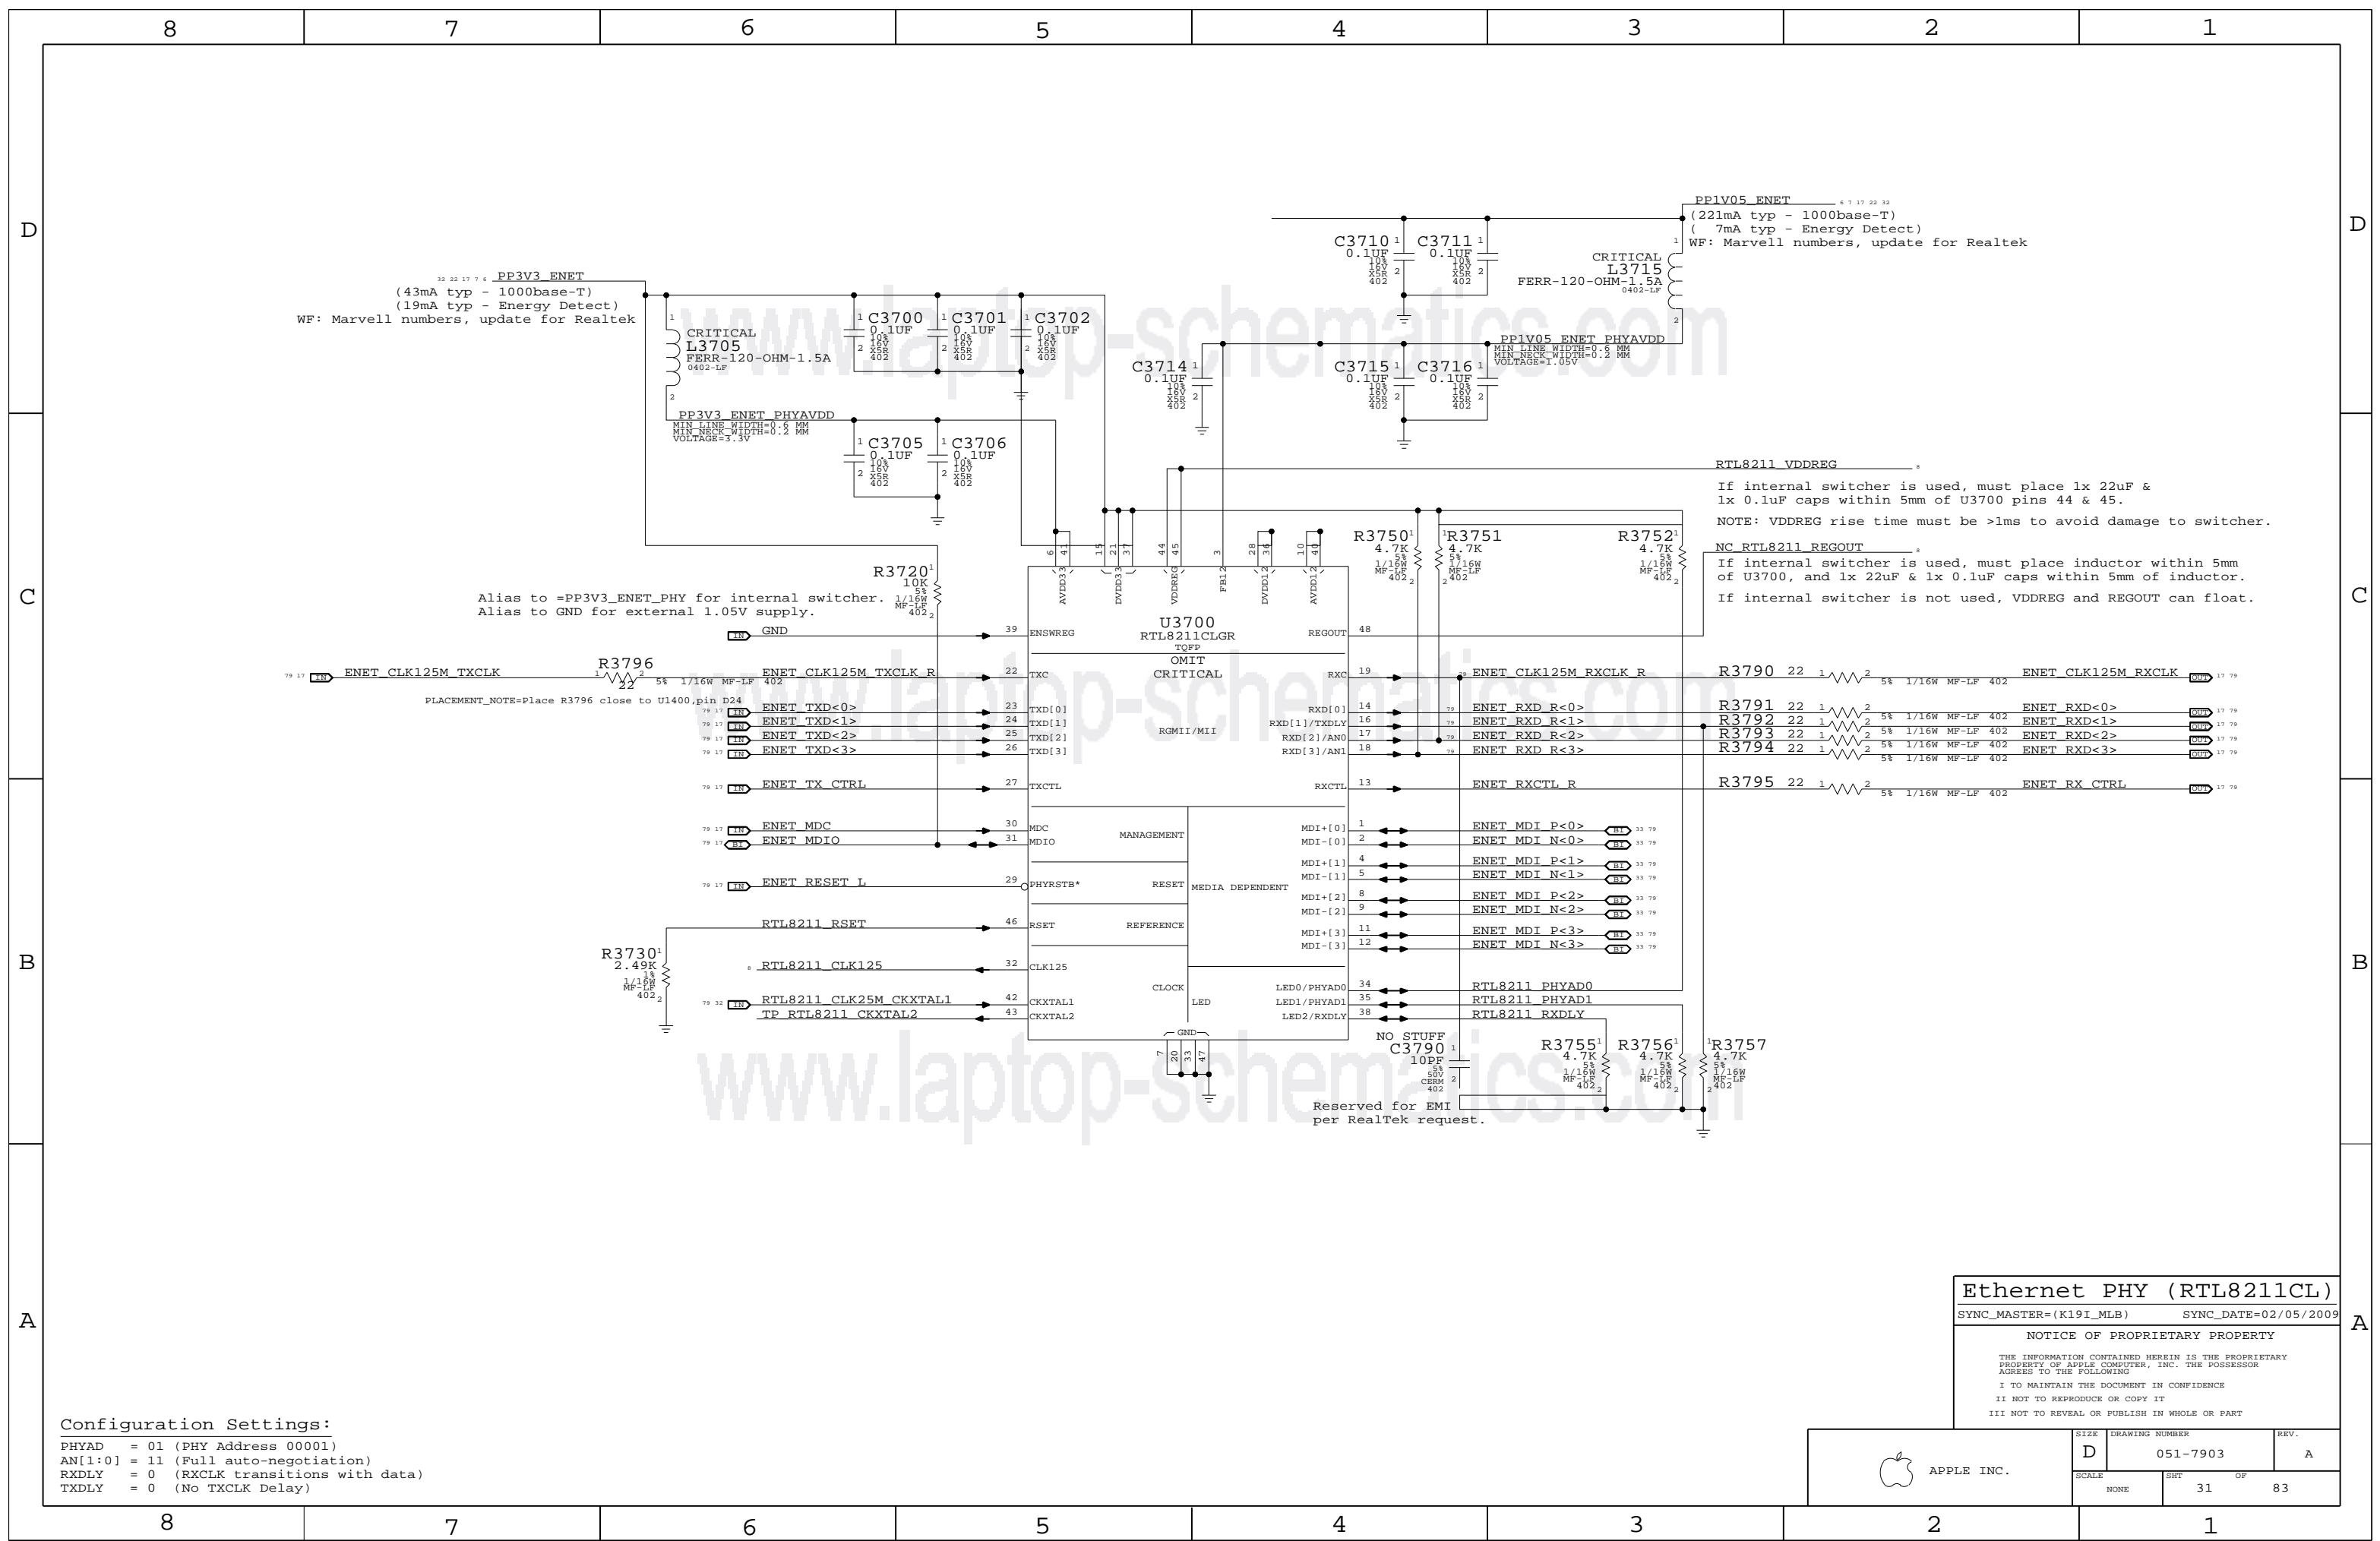

D
C
B
A

D
C
B
A

Configuration Settings:
 PHYAD = 01 (PHY Address 00001)
 AN[1:0] = 11 (Full auto-negotiation)
 RXDLY = 0 (RXCLK transitions with data)
 TXDLY = 0 (No TXCLK Delay)


Ethernet PHY (RTL8211CL)
 SYNC_MASTER=(K19I_MLB) SYNC_DATE=02/05/2009
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

 APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	REV.
NONE	31	83	

3.3V ENET FET

@ 2.5V Vgs:
 Rds(on) = 90mOhm max
 I(max) = 1.7A (85C)

CRITICAL
Q3810
 NTR4101P
 SOT-23-HF

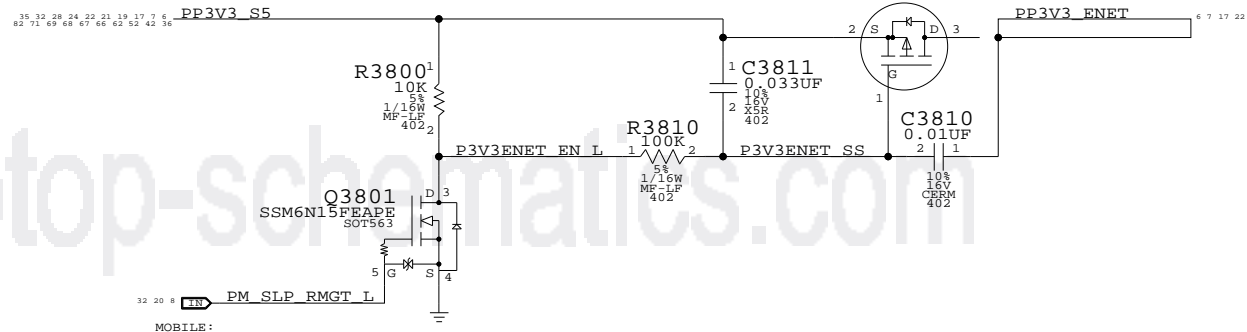


MOBILE:
 Recommend aliasing PM_SLP_RMGT_L and =P3V3ENET_EN. Nets separated on ARB for alternate power options.


WLAN Enable Generation

"WLAN" = ("S3" && "AP_PWR_EN" && ("AC" || "S0"))

NOTE: S3 term is guaranteed by S3 pull-up on open-drain AP_PWR_EN signal.

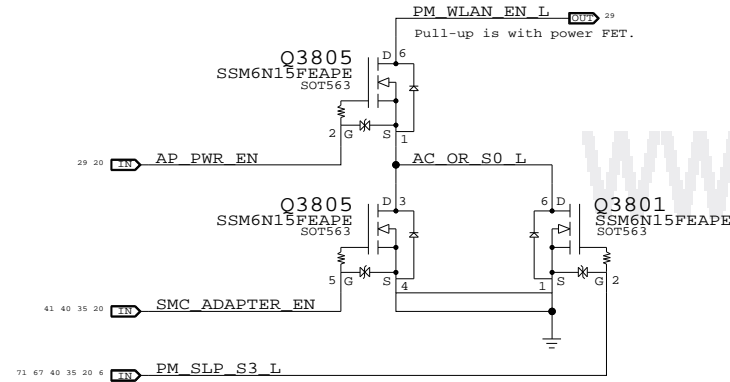


1.05V ENET FET

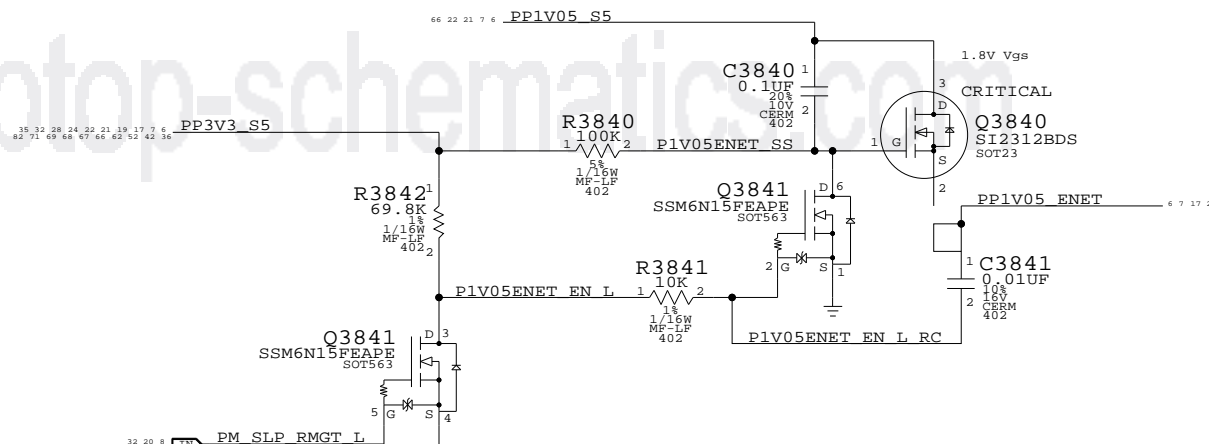

Non-ARB:
 Recommend aliasing PM_SLP_RMGT_L and =P1V05ENET_EN. Nets separated on ARB for alternate power options.

RTL8211 25MHz Clock

NOTE: MCP79 can provide 25MHz clock, but clock runs whenever RMGT rails are powered.
 Designs must ensure PHY is powered whenever RMGT rails are, or use separate crystal.

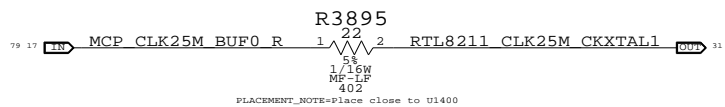


Ethernet & AirPort Support

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	32	83


Page Notes

Power aliases required by this page:
(NONE)

Signal aliases required by this page:
(NONE)

BOM options provided by this page:
(NONE)

www.laptop-schematics.com

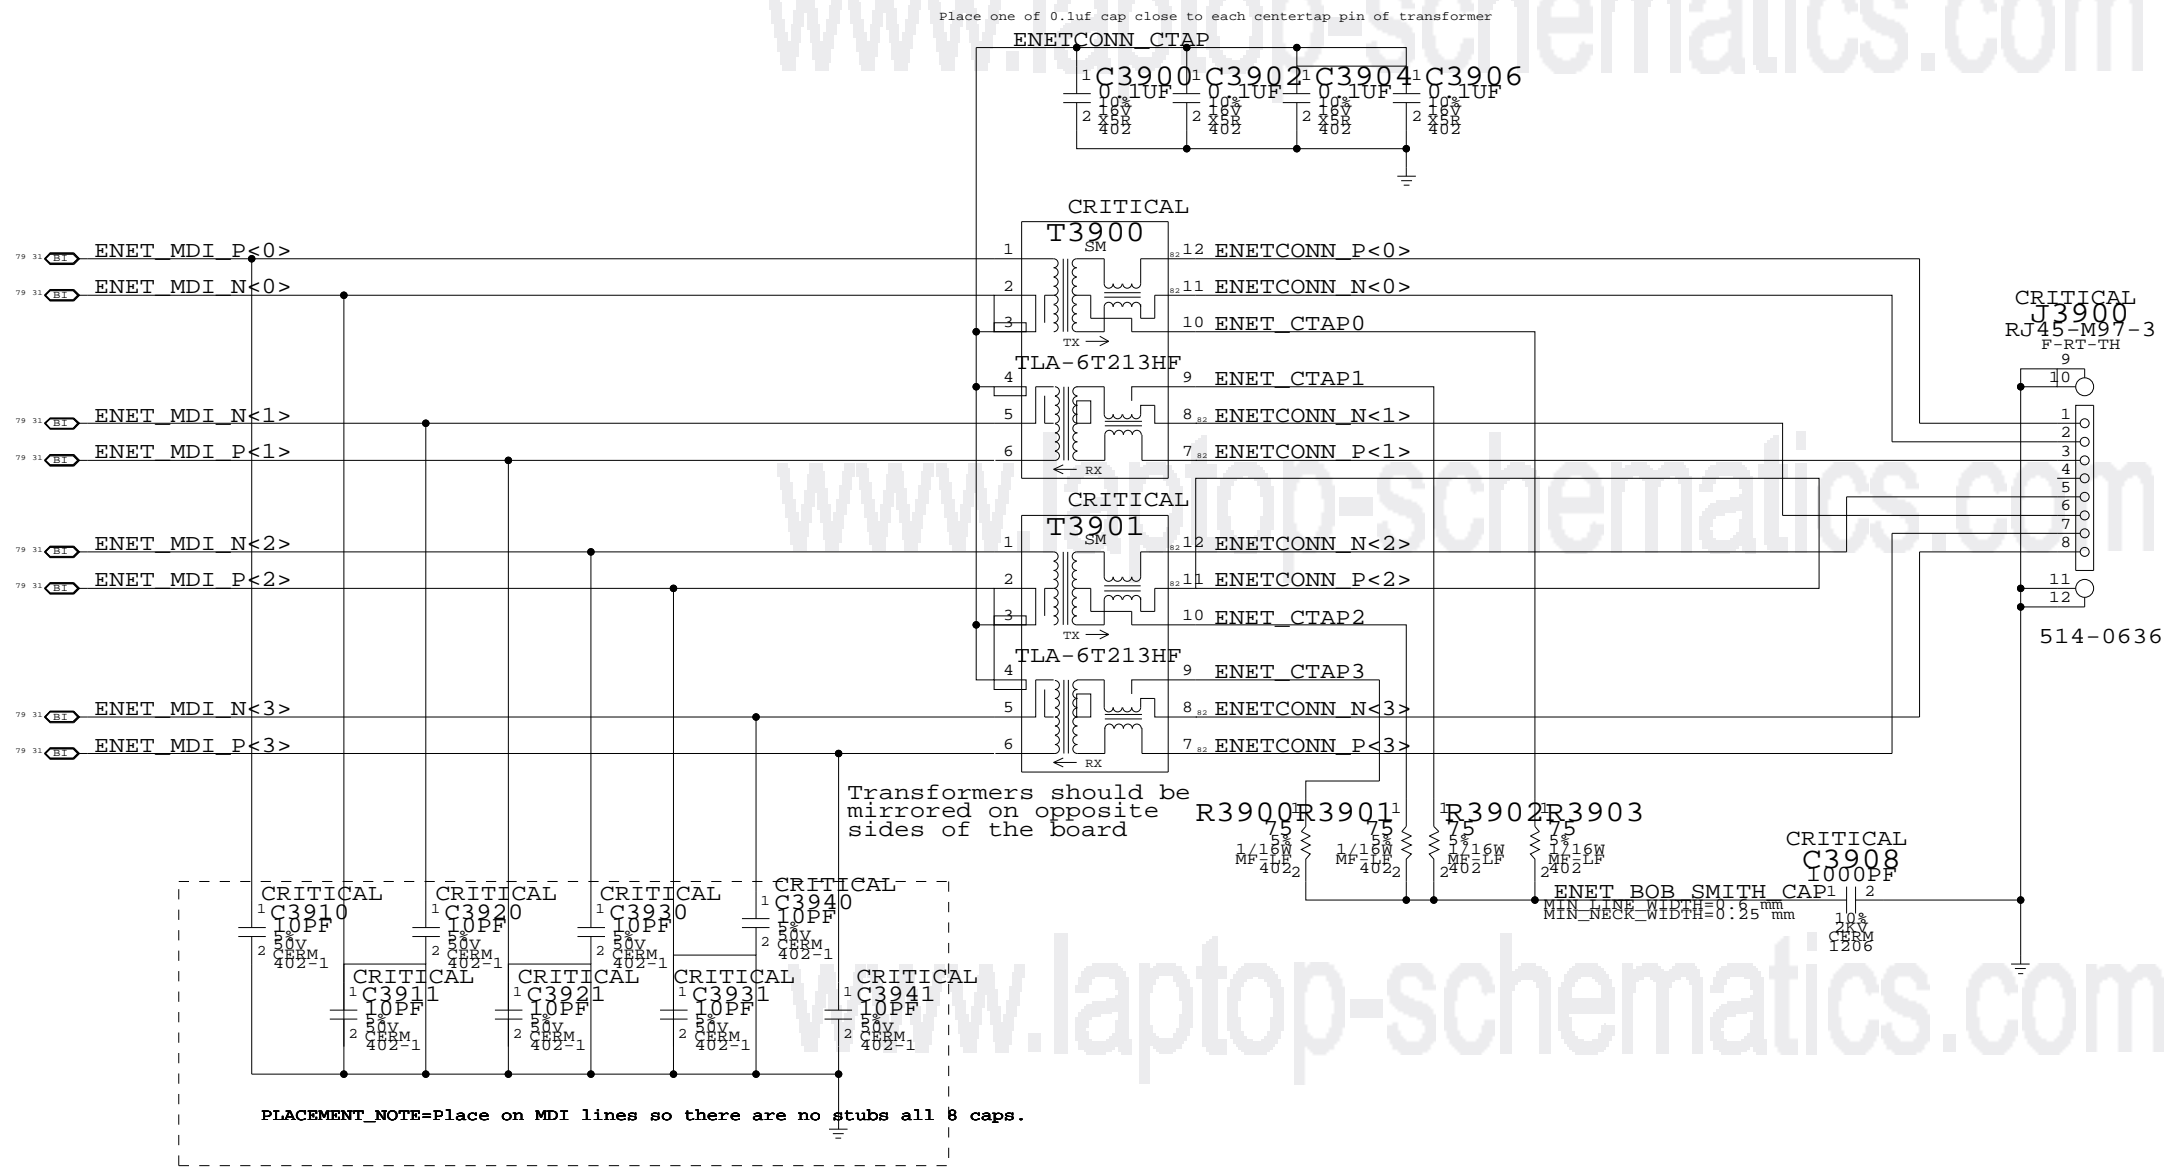

Ethernet Connector

SYNC_MASTER=K19_MLB SYNC_DATE=03/13/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE		SHT	OF
NONE		33	83

D

D

C

C


B

B

A

A

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
114S0556	1	RES, 549mOHM, 1%, 1/16W, 0402	R4100	CRITICAL	

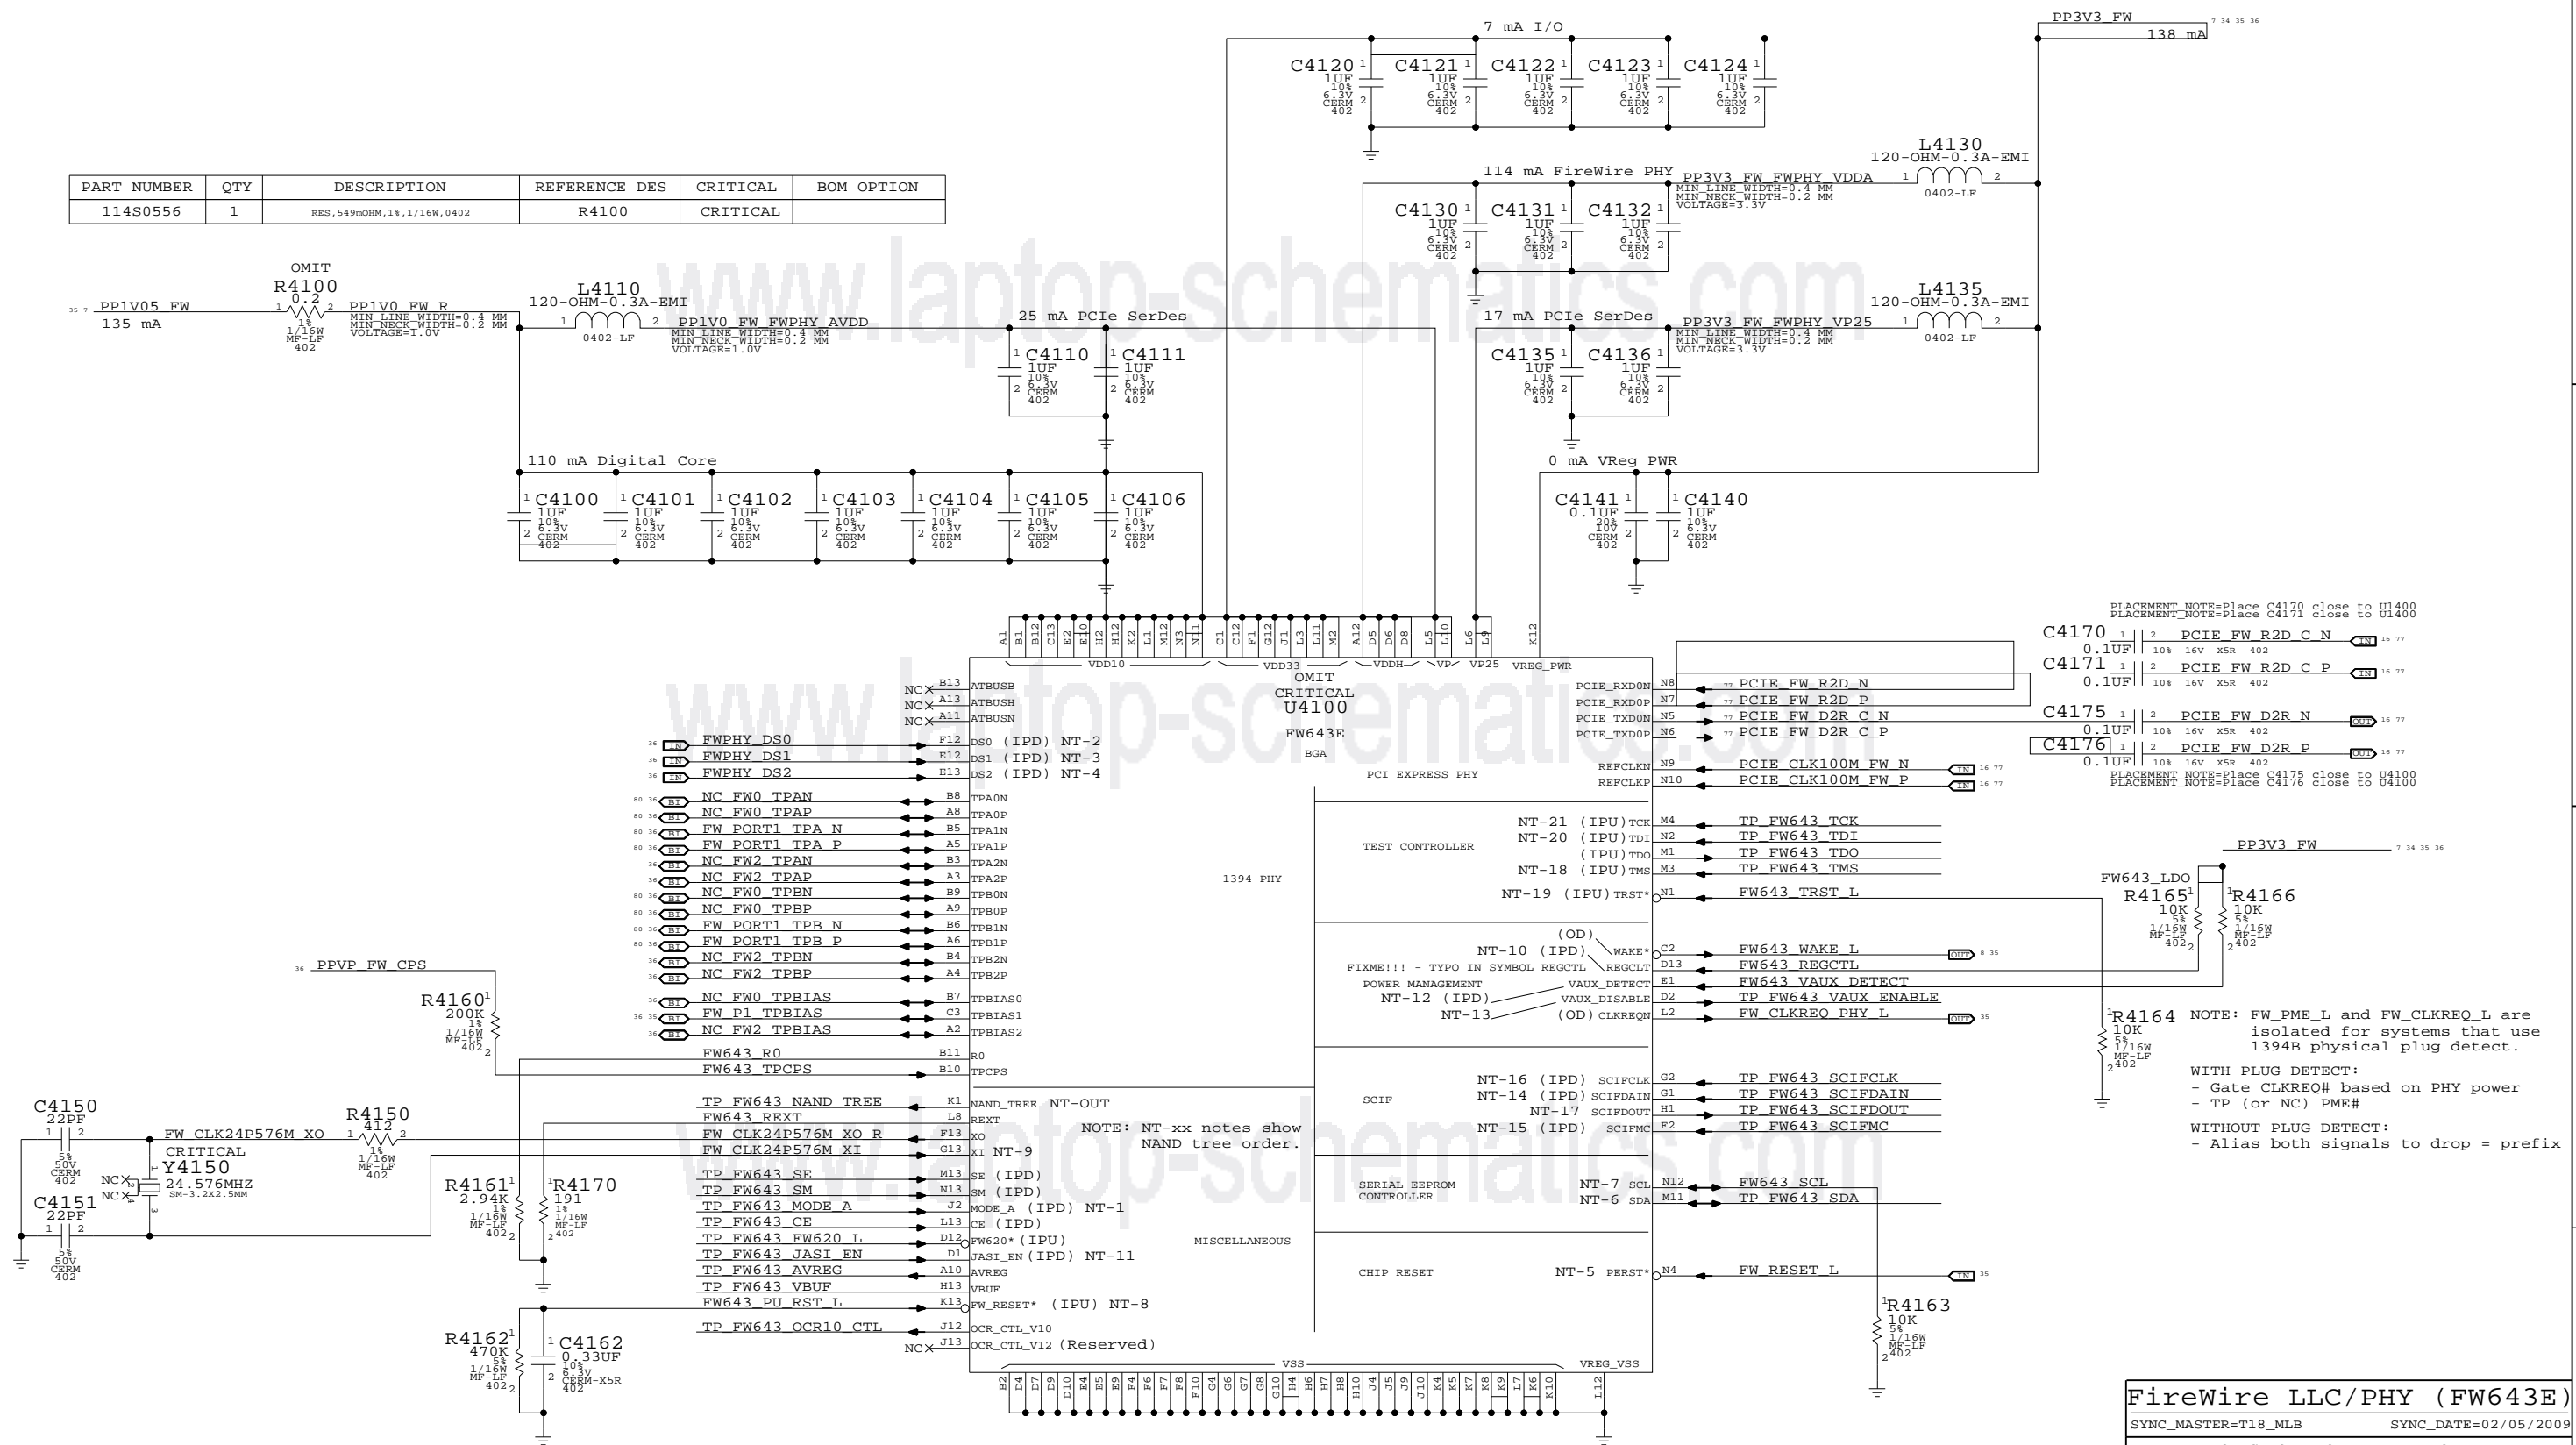

- PLACEMENT NOTE-Place C4170 close to U1400
 PLACEMENT NOTE-Place C4171 close to U1400
- C4170 1 2 PCIE_FW_R2D_C_N 0.1UF 10% 16V X5R 402
 - C4171 1 2 PCIE_FW_R2D_C_P 0.1UF 10% 16V X5R 402
 - C4175 1 2 PCIE_FW_D2R_N 0.1UF 10% 16V X5R 402
 - C4176 1 2 PCIE_FW_D2R_P 0.1UF 10% 16V X5R 402
- PLACEMENT NOTE-Place C4175 close to U4100
 PLACEMENT NOTE-Place C4176 close to U4100

- NOTE: FW_PME_L and FW_CLKREQ_L are isolated for systems that use 1394B physical plug detect.
- WITH PLUG DETECT:
 - Gate CLKREQ# based on PHY power
 - TP (or NC) PME#
- WITHOUT PLUG DETECT:
 - Alias both signals to drop = prefix

FireWire LLC/PHY (FW643E)
 SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

Page Notes

Power aliases required by this page:
 -PPBUS_S5_FWPWRSW (system supply for bus power)
 -PP3V3_FW_LATEVG_ACTIVE
 -PPVFW_FWSUMMODE (power passthru summation mode)

Signal aliases required by this page:
 (NONE)

BOM options provided by this page:

3.3V FW FET

@ 2.5V Vgs:
 Rds(on) = 90mOhm max
 I(max) = 1.7A (85C)

CRITICAL
 Q4291
 NTR4101P
 SOT-23-HF

1.05V FW FET

CRITICAL
 Q4295
 SI2312BDS
 SOT23

FireWire Port Power Switch

Late-VG Event Detection


FWLATEVG Hysteresis:
 3.08V when port power is on
 2.91V when late Vg event and port power is off

FireWire Port Power
 SYNC_MASTER=K19_MLB SYNC_DATE=01/18/2009

NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY
 PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR
 AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	35	83

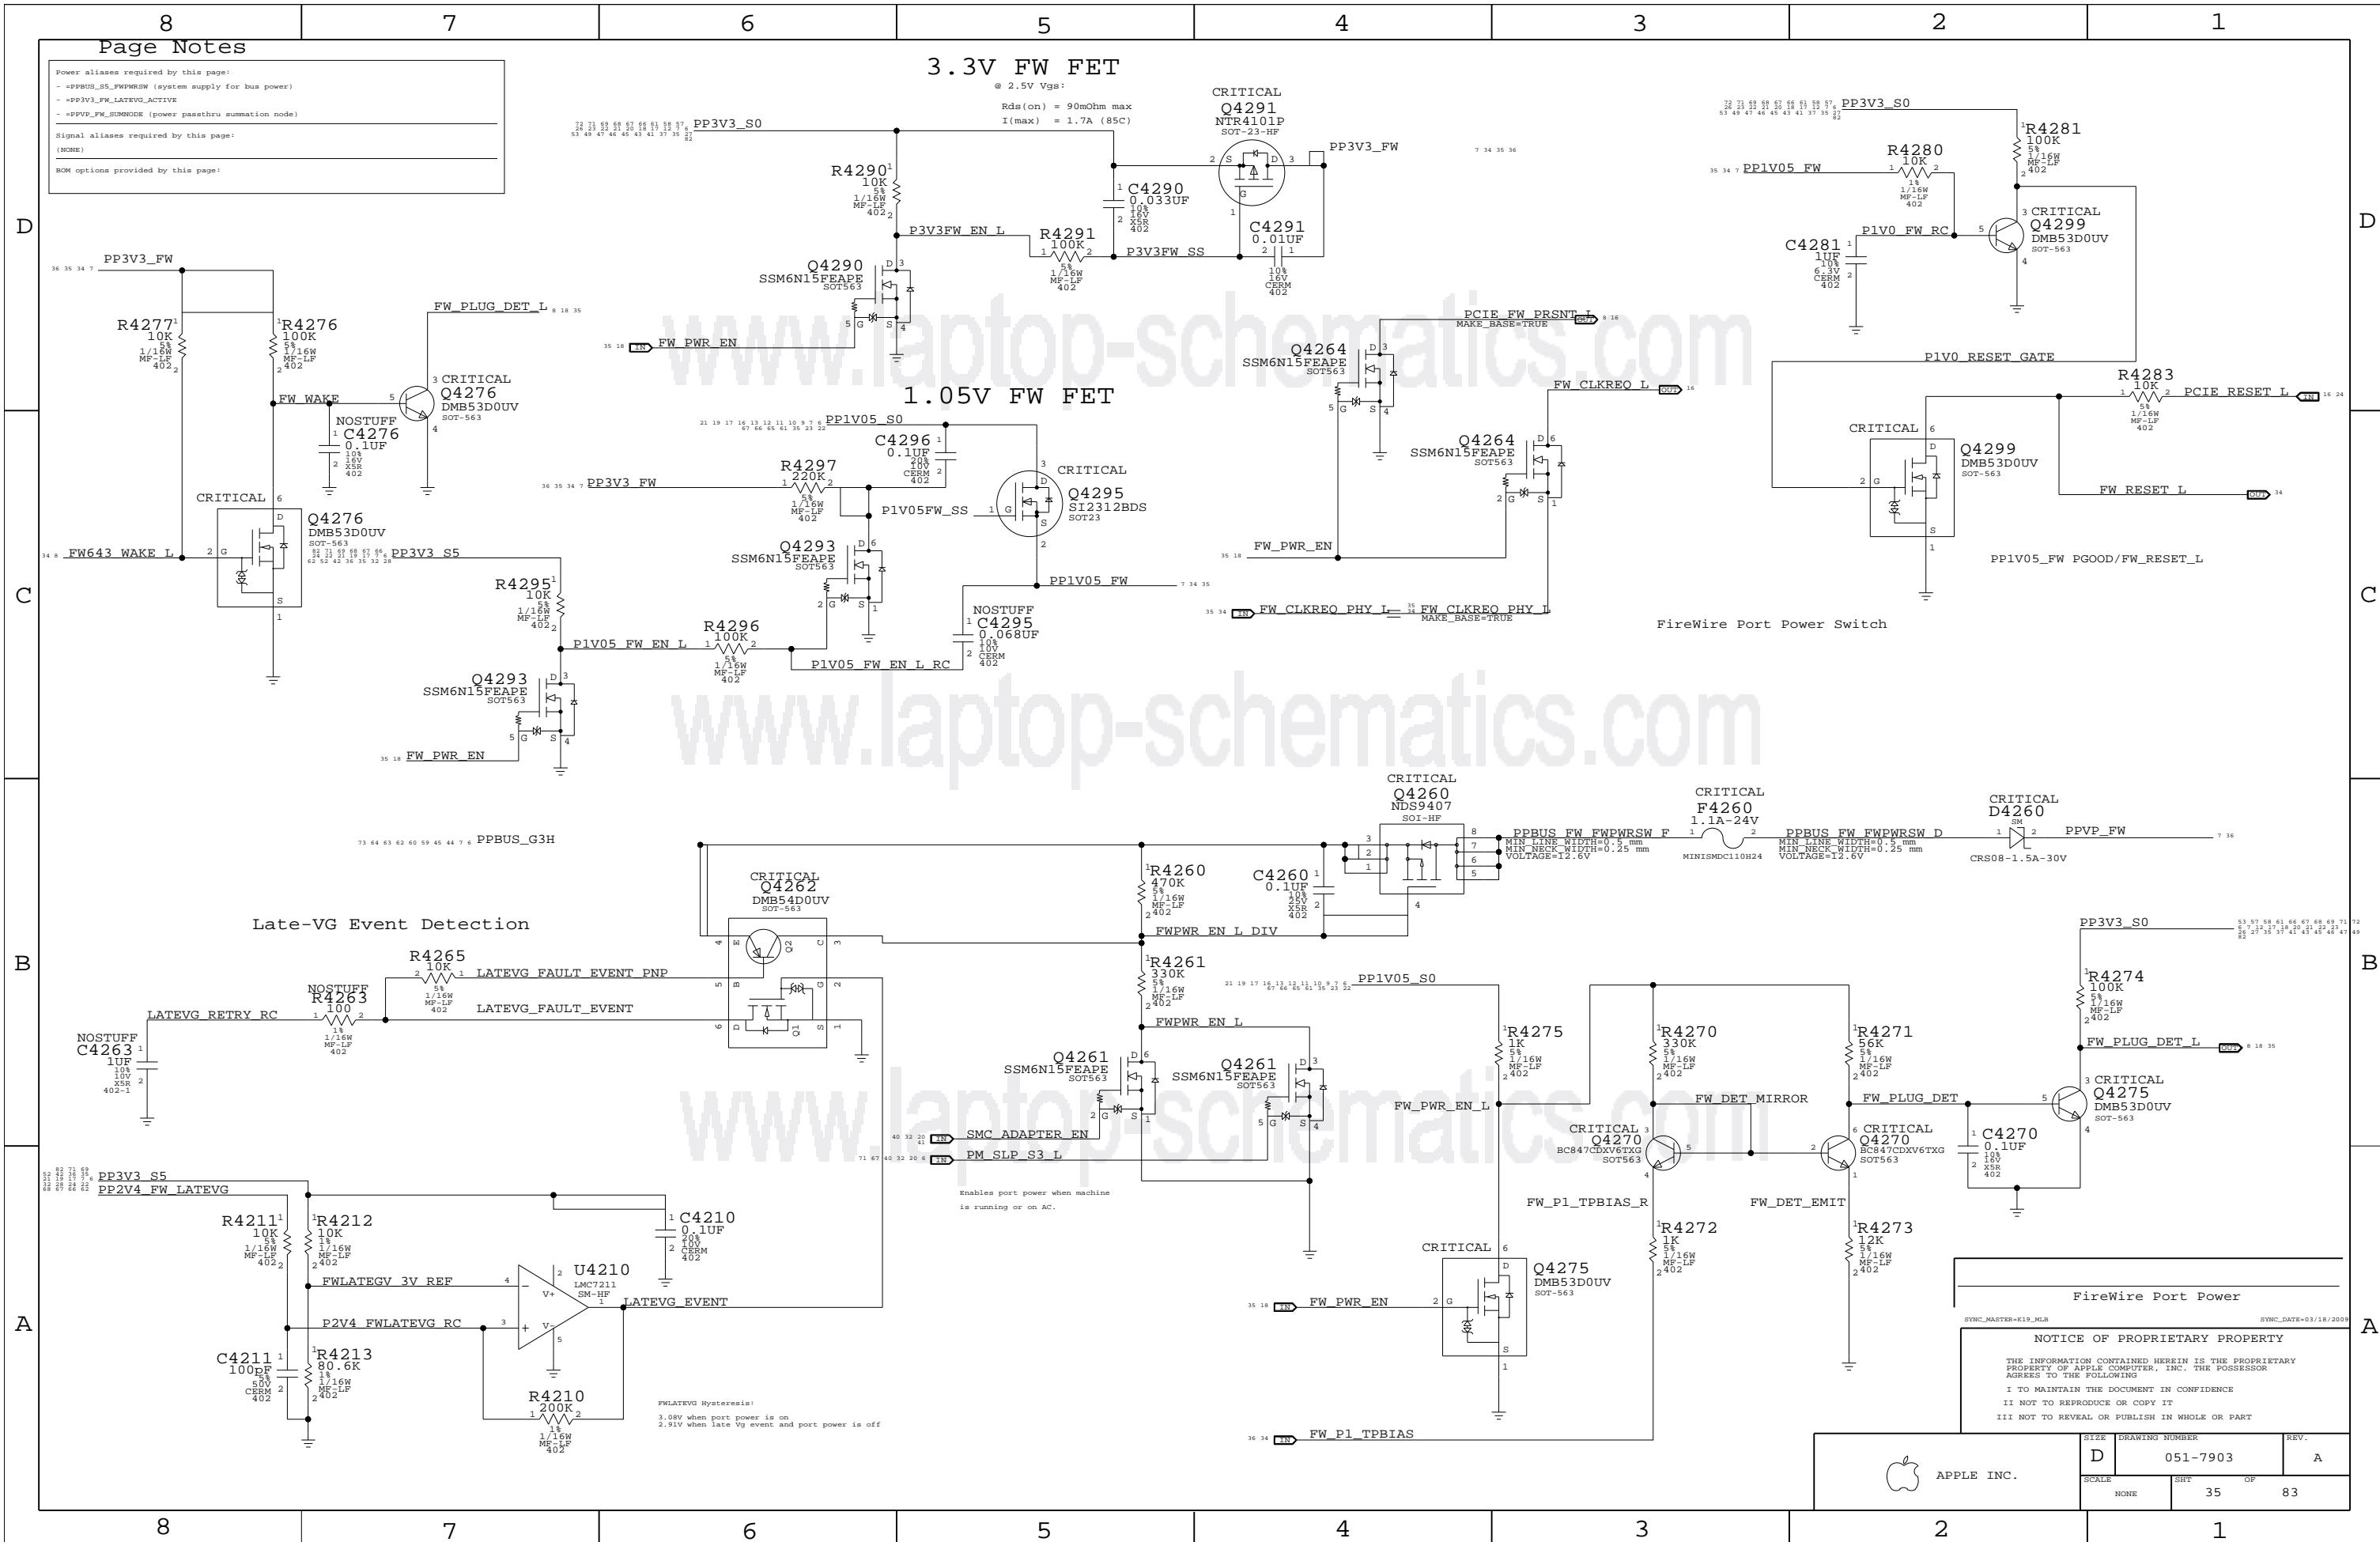

Page Notes

Power aliases required by this page:
 - =PPVP_FW_PORT1
 - =PP3V3_FW_LATEVG

Signal aliases required by this page:
 (NONE)

NOTE: This page is expected to contain the necessary aliases to map the FireWire TPA/TPB pairs to their appropriate connectors and/or to properly terminate unused signals.



BOM options provided by this page:
 (NONE)

NOTE: FireWire TPA/TPB pairs are NOT constrained on this page. It is assumed that FireWire PHY page will provide the appropriate constraints to apply to entire TPA/TPB XNets.

1394b implementation based on Apple FireWire Design Guide (FWDG 0.6, 5/14/03)



FireWire PHY Config Straps

Configures PHY for:
 - 1-port Portable Power Class (0)
 - Port "1" Bilingual (1394B)

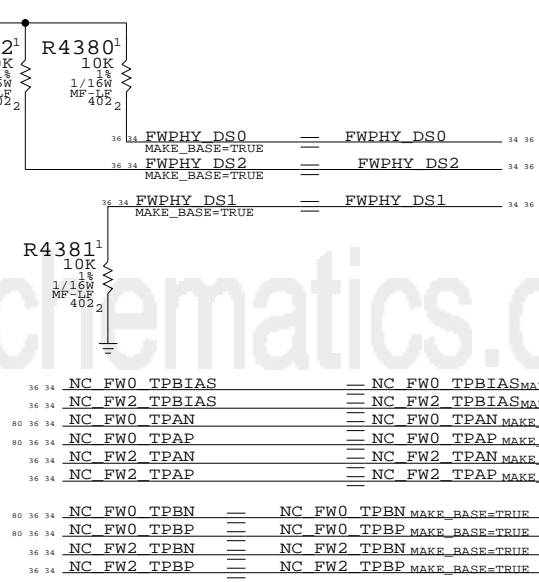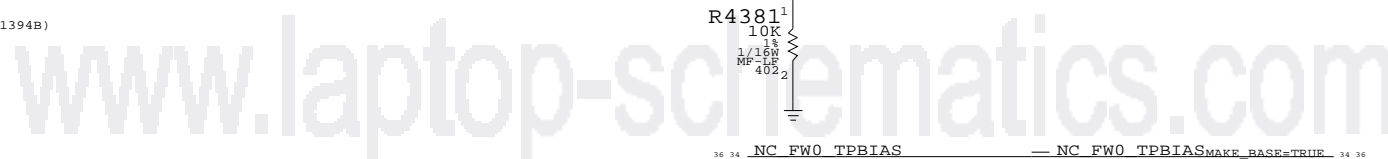


Termination


Place close to FireWire PHY

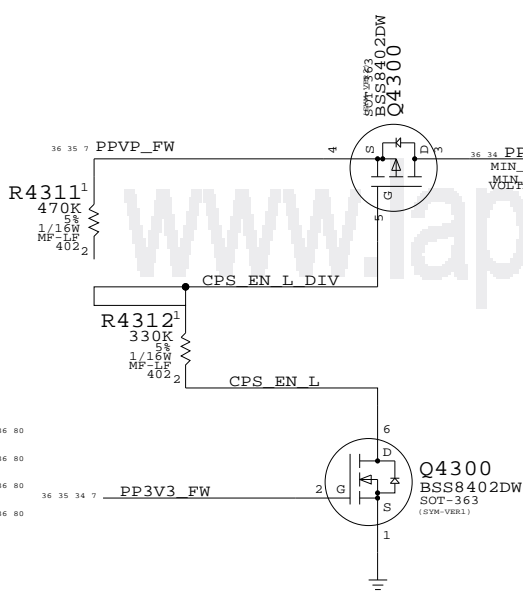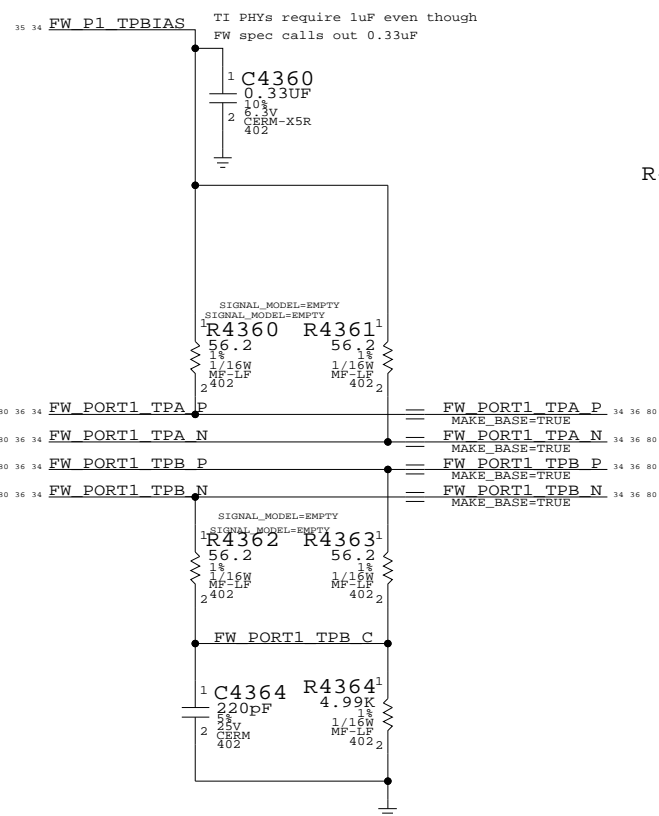


"Snapback" & "Late VG" Protection

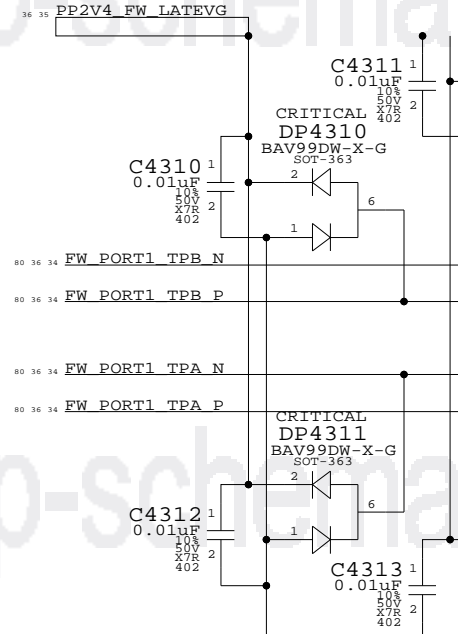

Cable Power

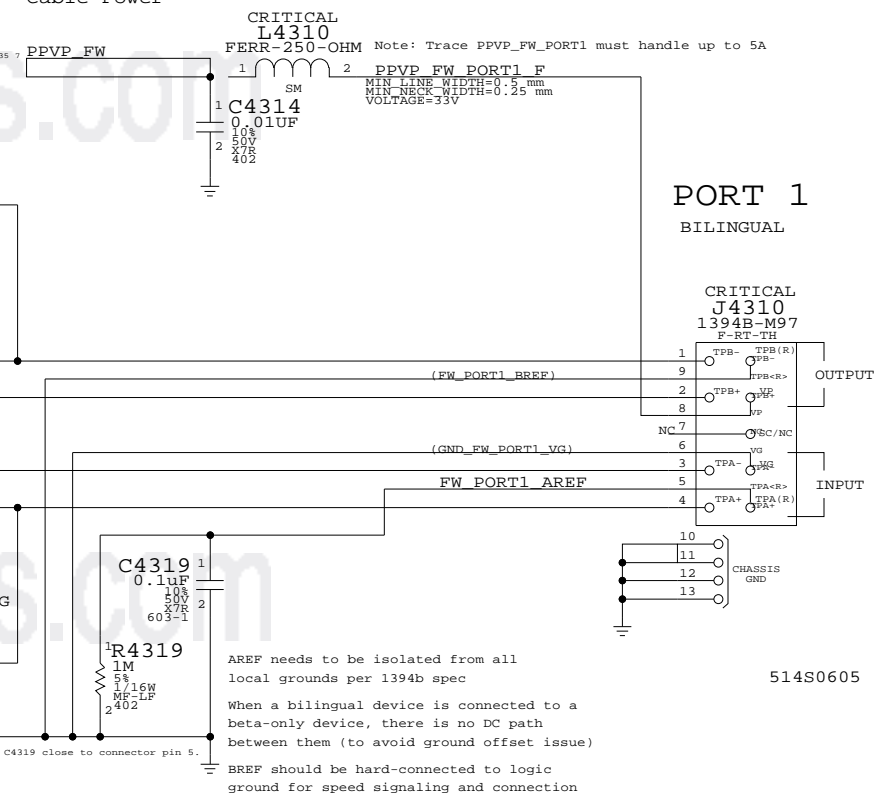

Late-VG Protection Power

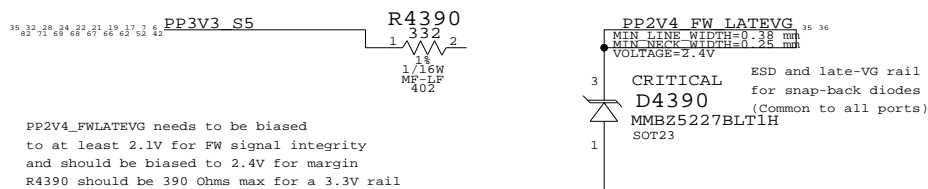

FireWire Ports

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE


II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	83
NONE	36		

Port Power Switch


Left USB Port A

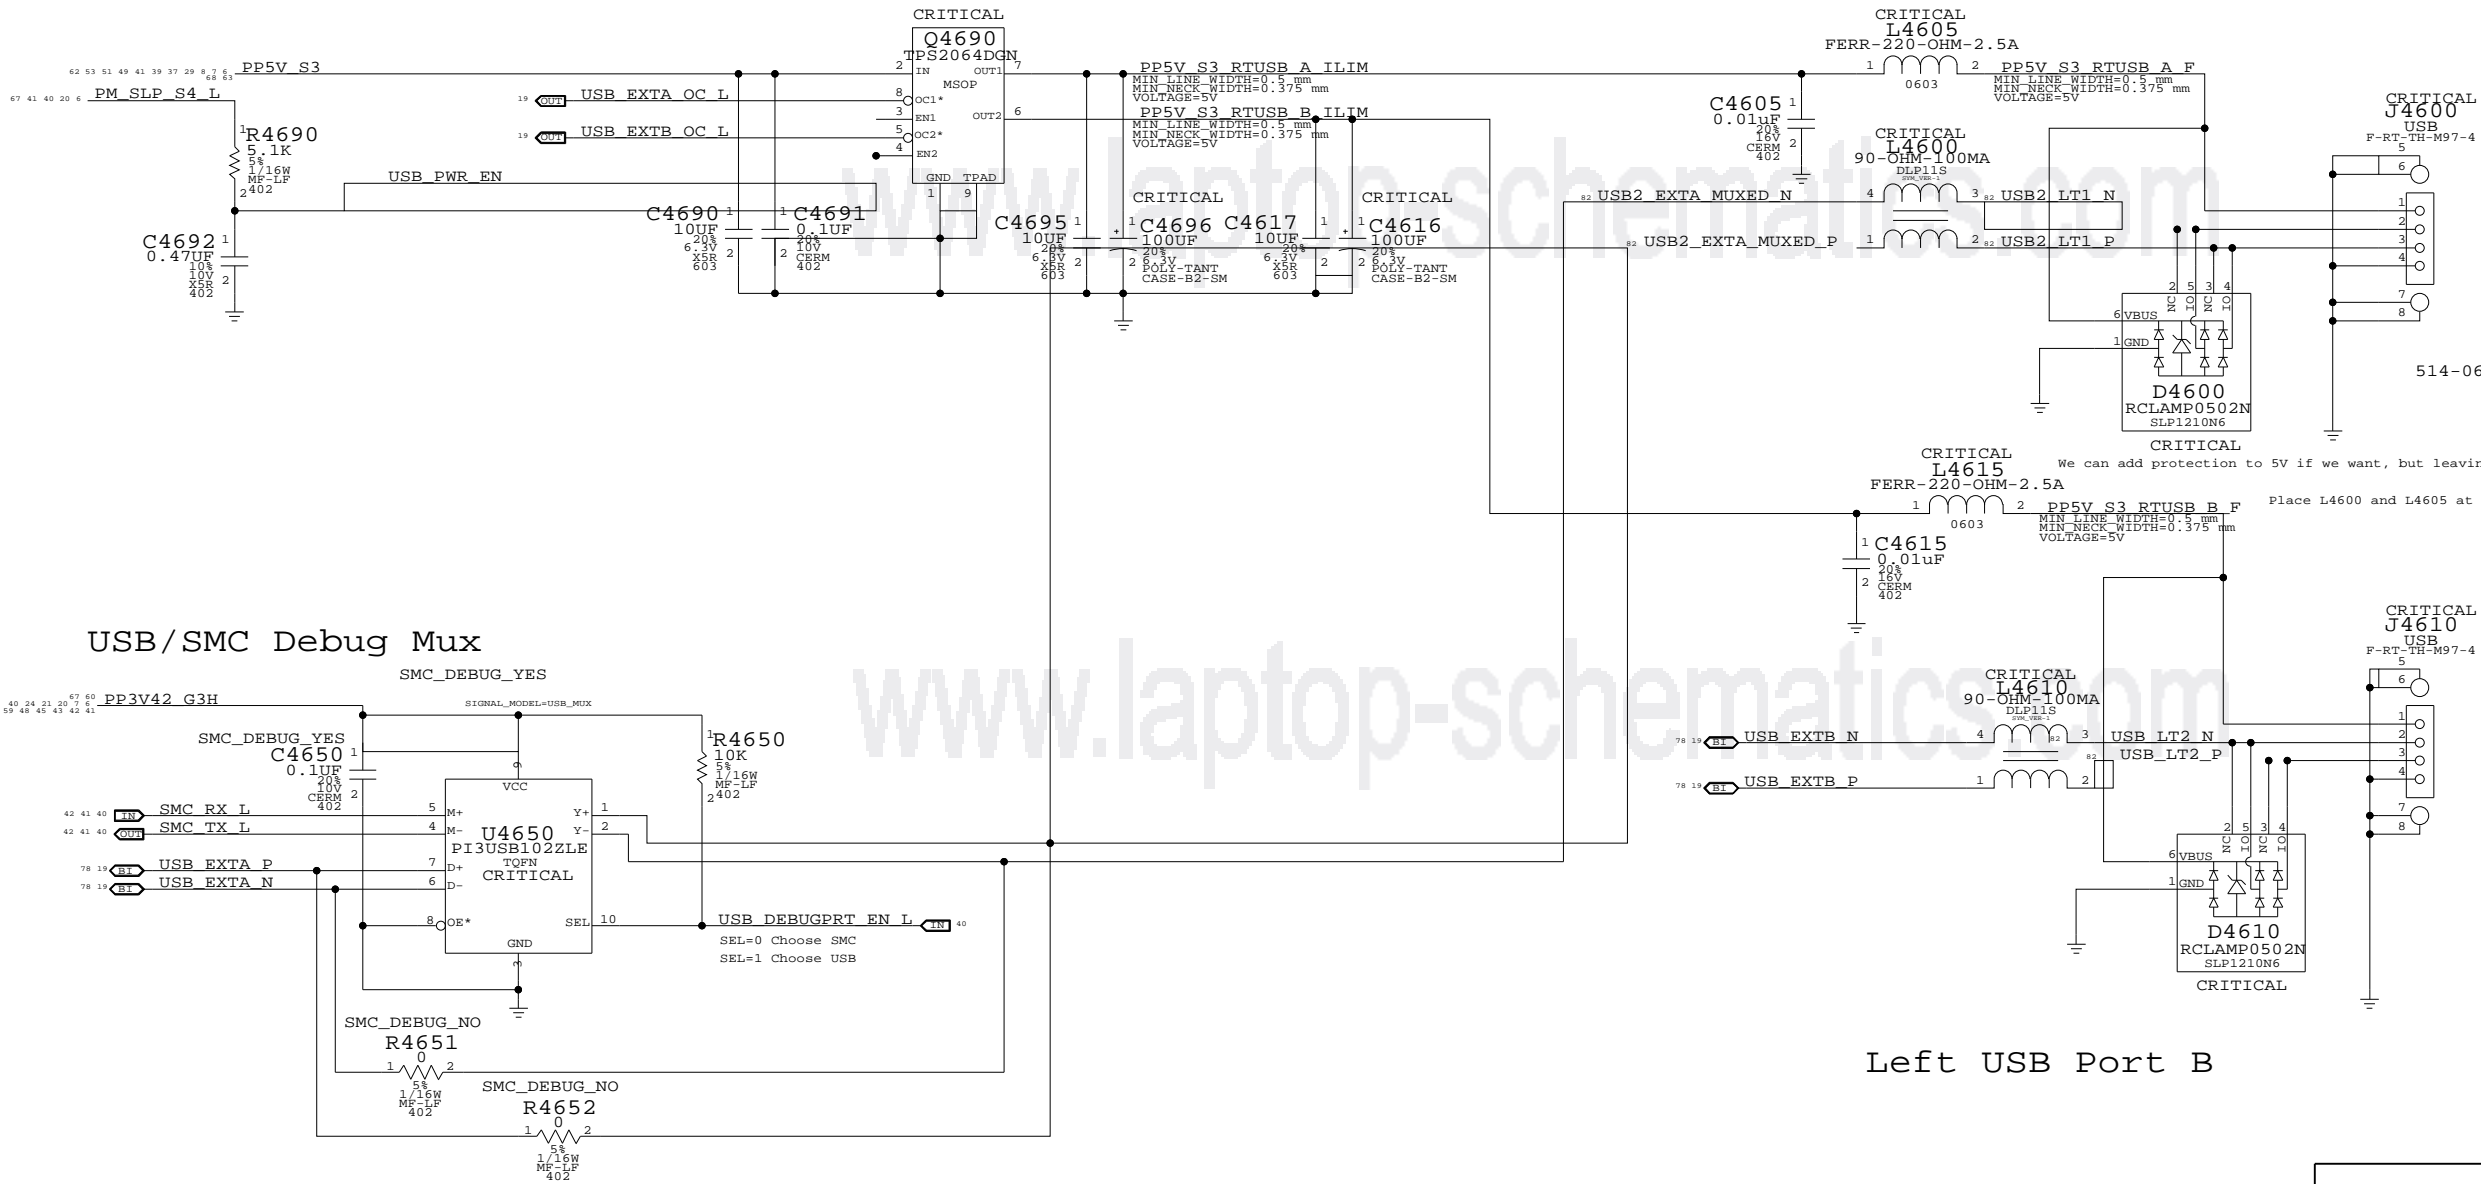

External USB Connectors
SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009
NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	38	83	

IR SUPPORT

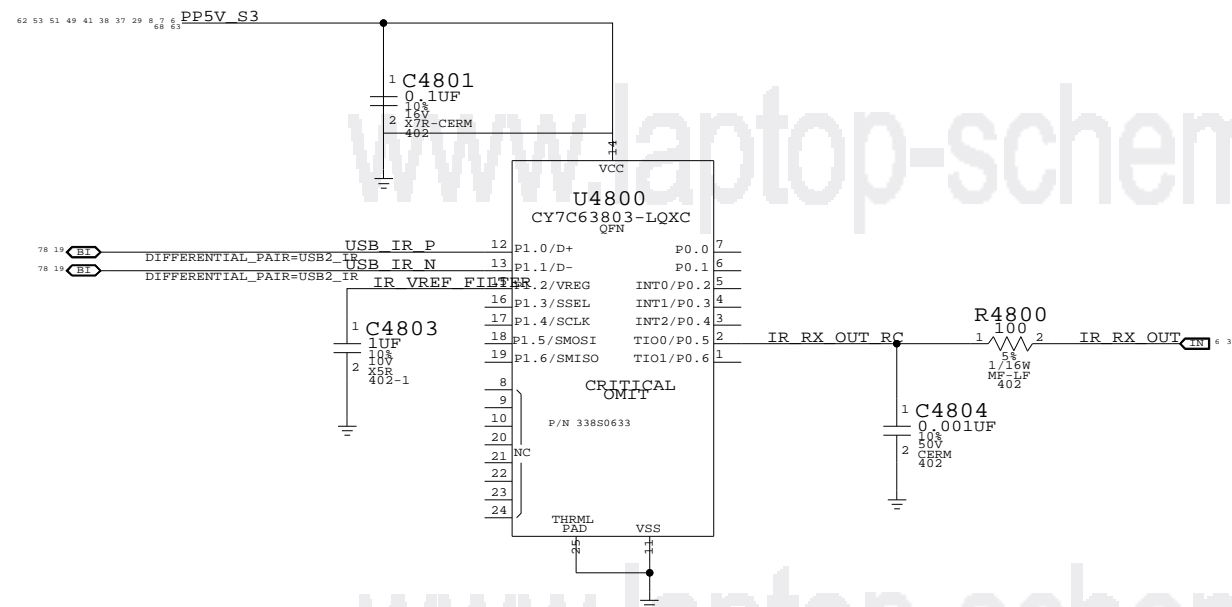





Front Flex Support

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT OF		
NONE	39 OF		83

NOTE: Unused pins have "SMC_Pxx" names. Unused pins designed as outputs can be left floating, those designated as inputs require pull-ups.

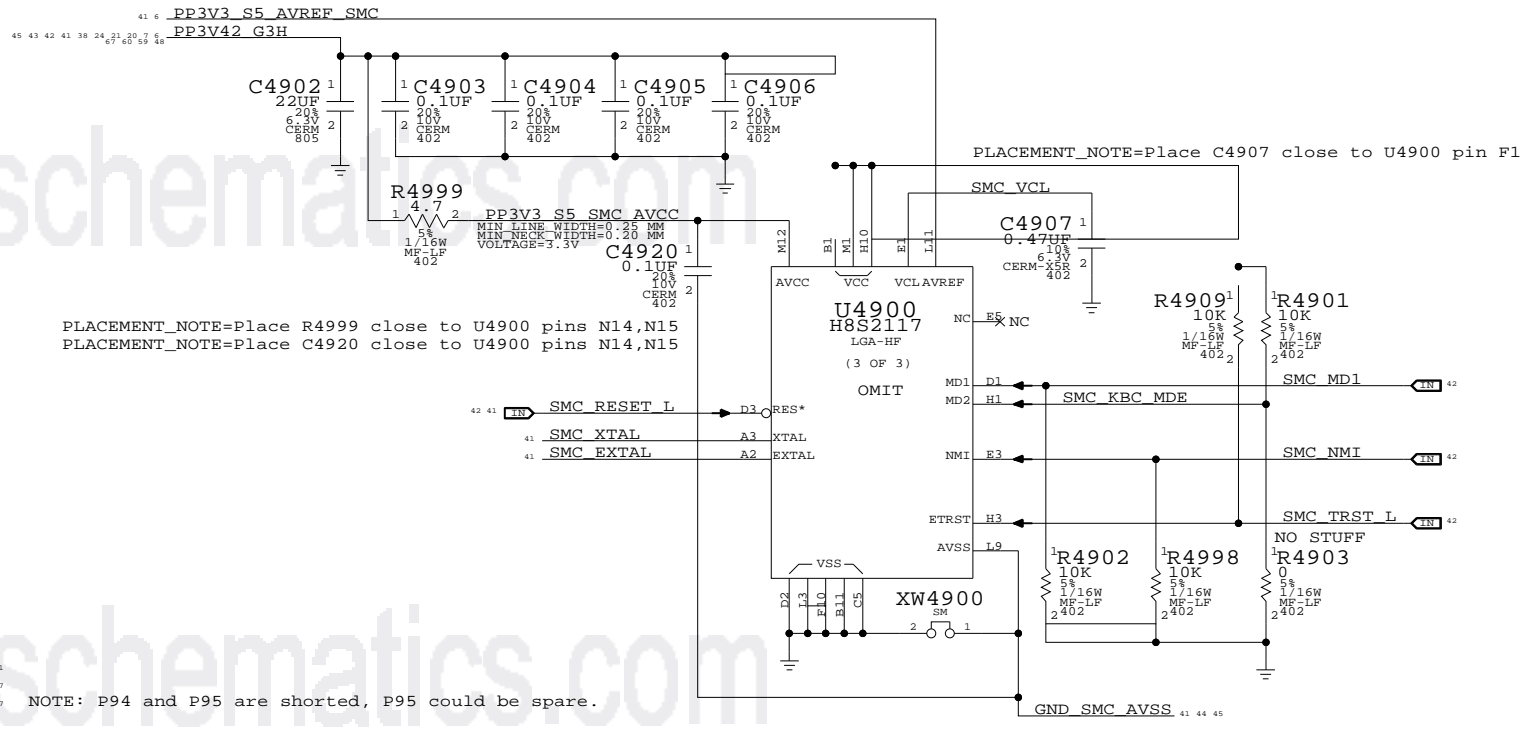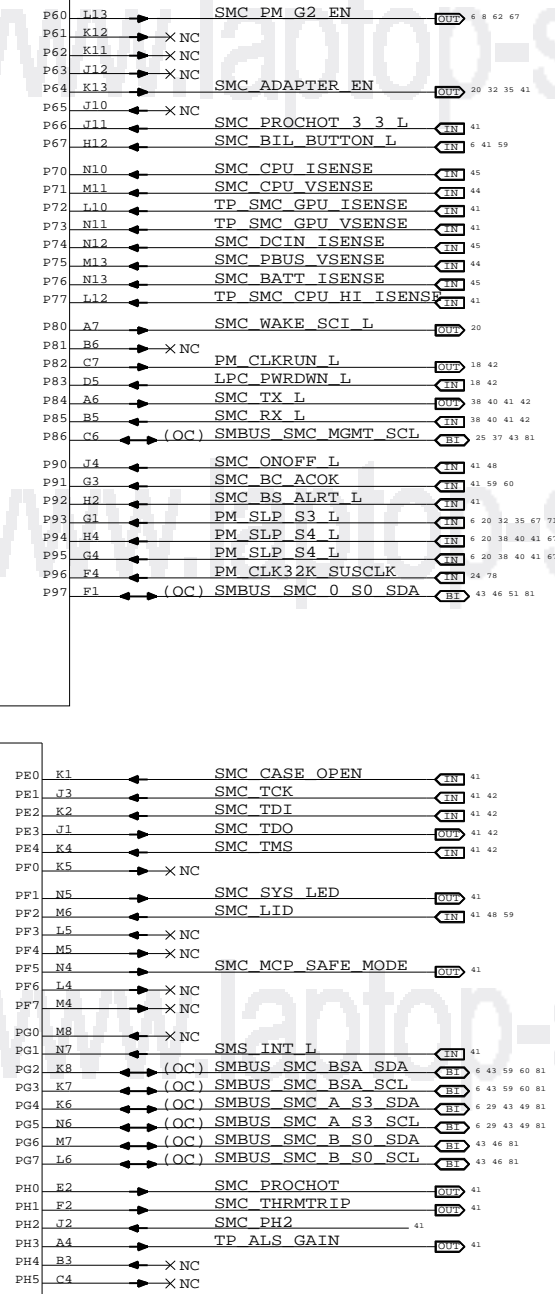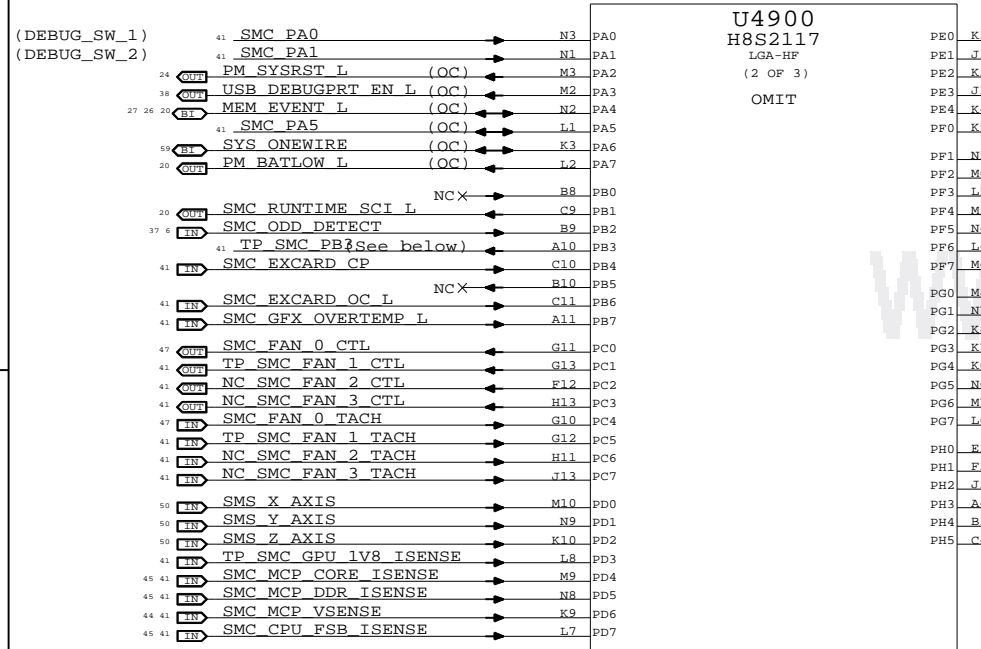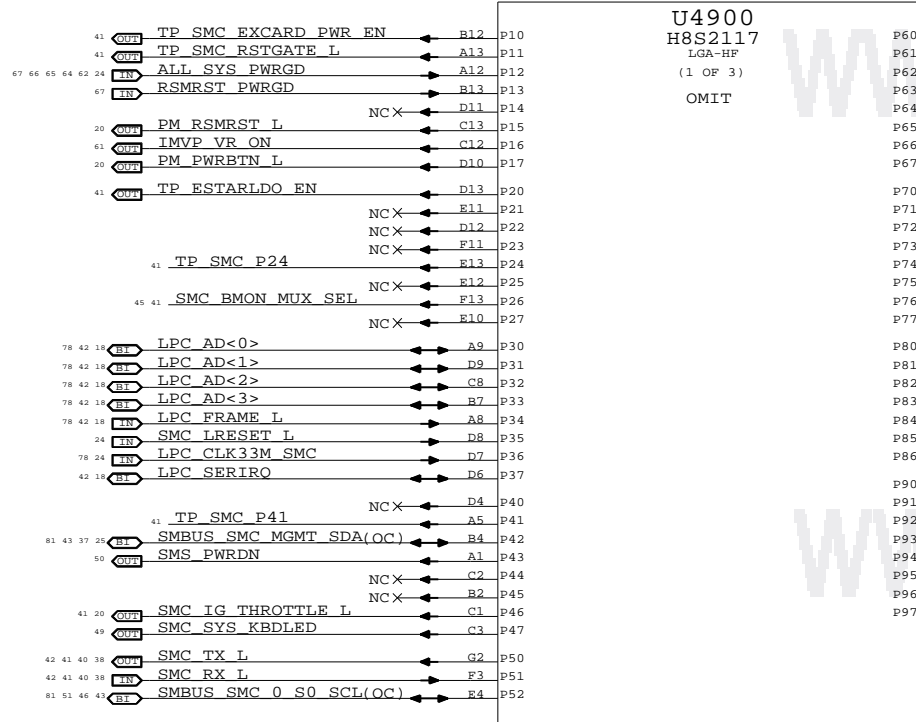


SMC_PB3:
SMC_IG_THROTTLE_L for MG systems.
Otherwise, TP/NC okay (was ISENSE_CAL_EN)


SMC
SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009
NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	40		83


SMC Reset "Button" / Brownout Detect

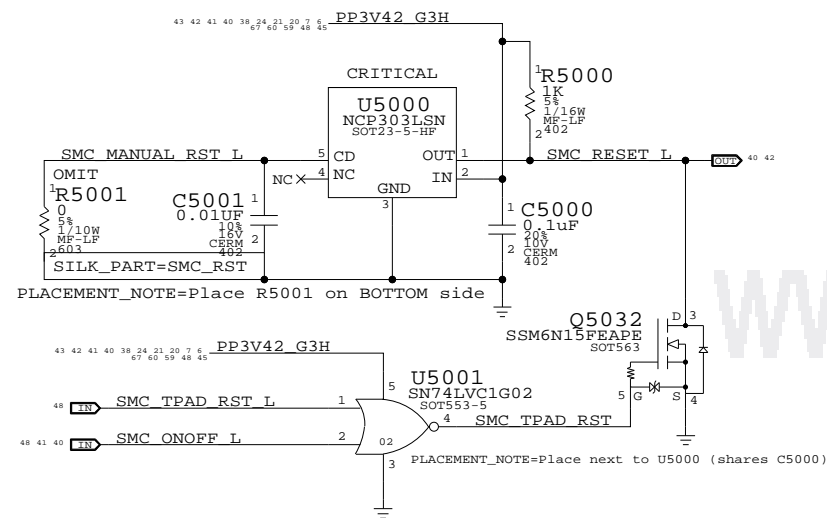


SMC AVREF Supply

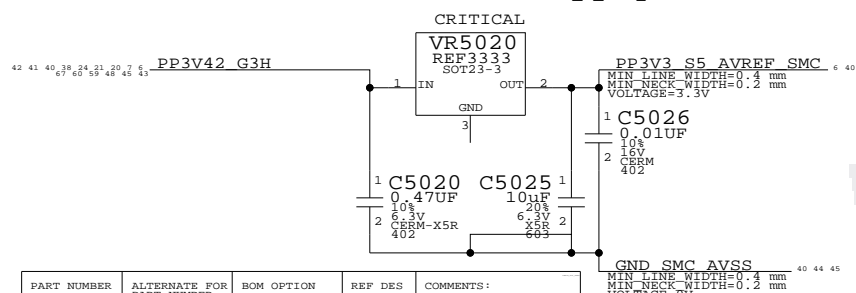


Debug Power "Buttons"

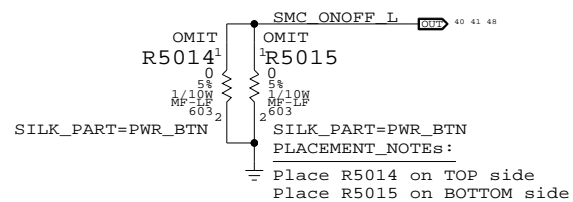


System (Sleep) LED Circuit

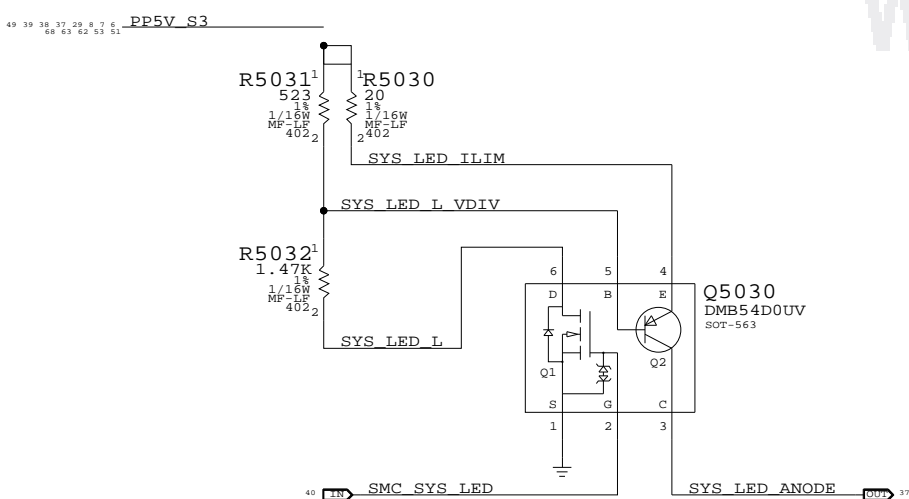


SMC Aliases

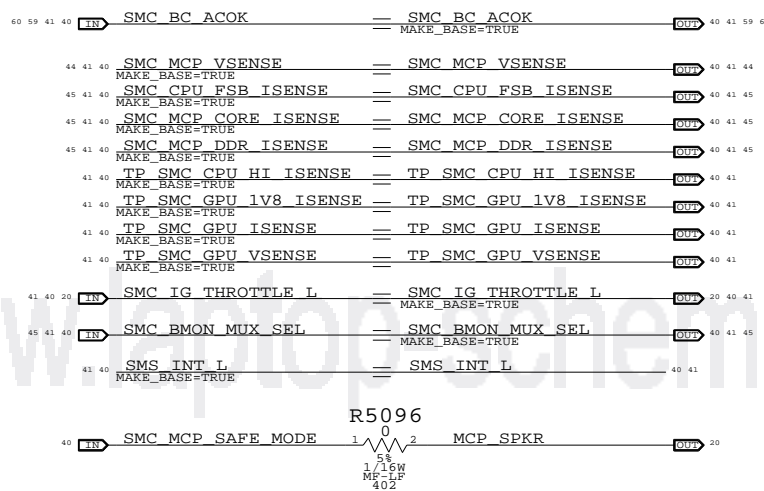


Unused Pins

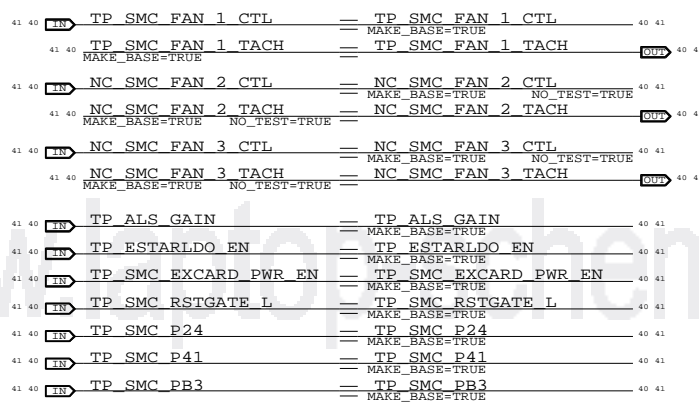


SMC Crystal Circuit

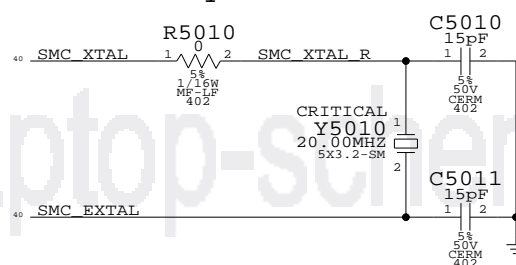


SMC FSB to 3.3V Level Shifting

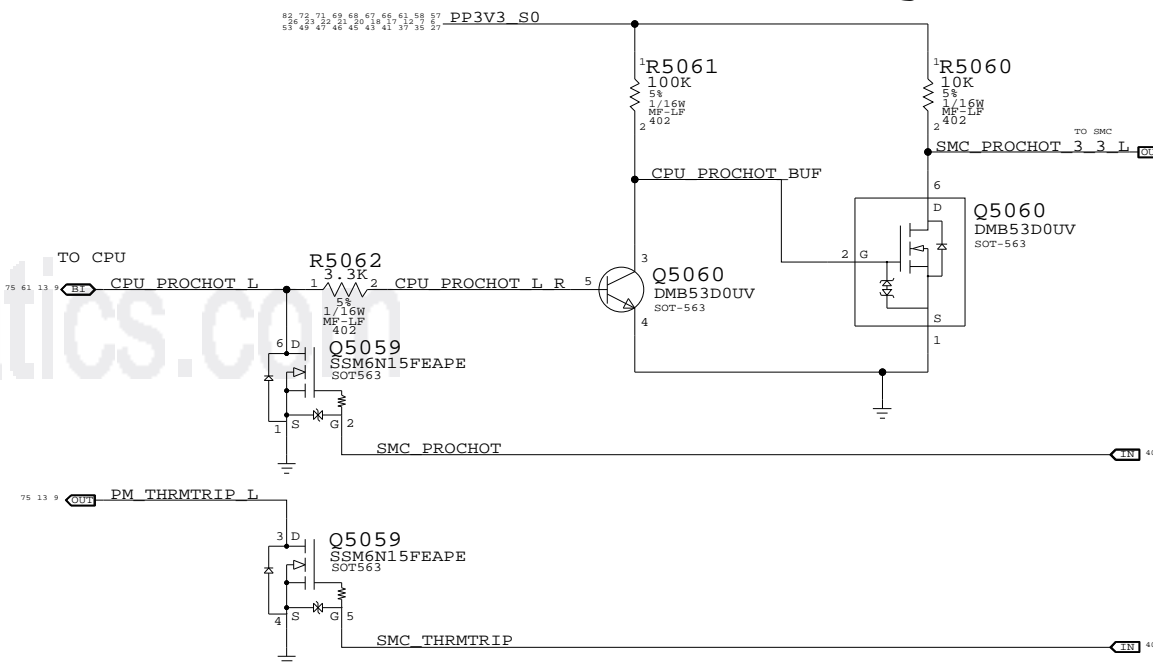

SMC Pull-ups

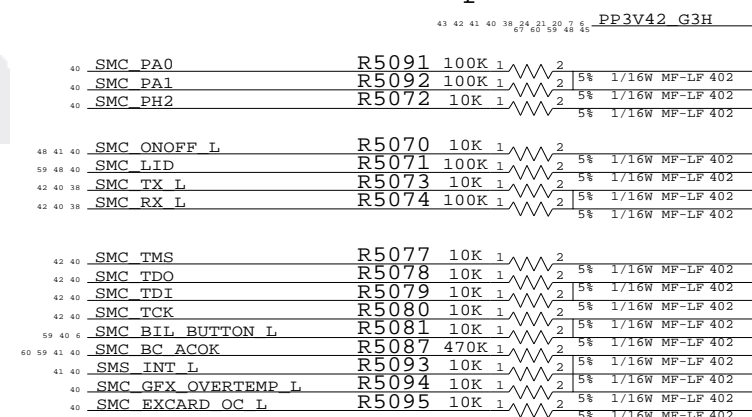

SMC Pull-downs

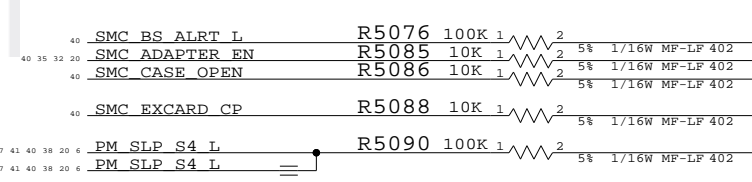


SMC Support

SYNC_MASTER=(K19_MLB) SYNC_DATE=(11/25/2008)

NOTICE OF PROPRIETARY PROPERTY


THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART




APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	41	83


LPC+SPI Connector

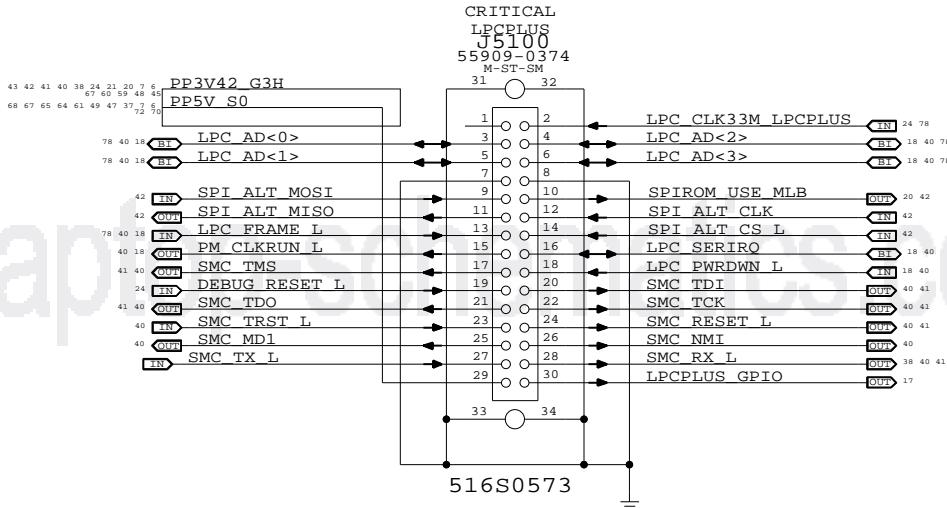

Alternate SPI ROM Support

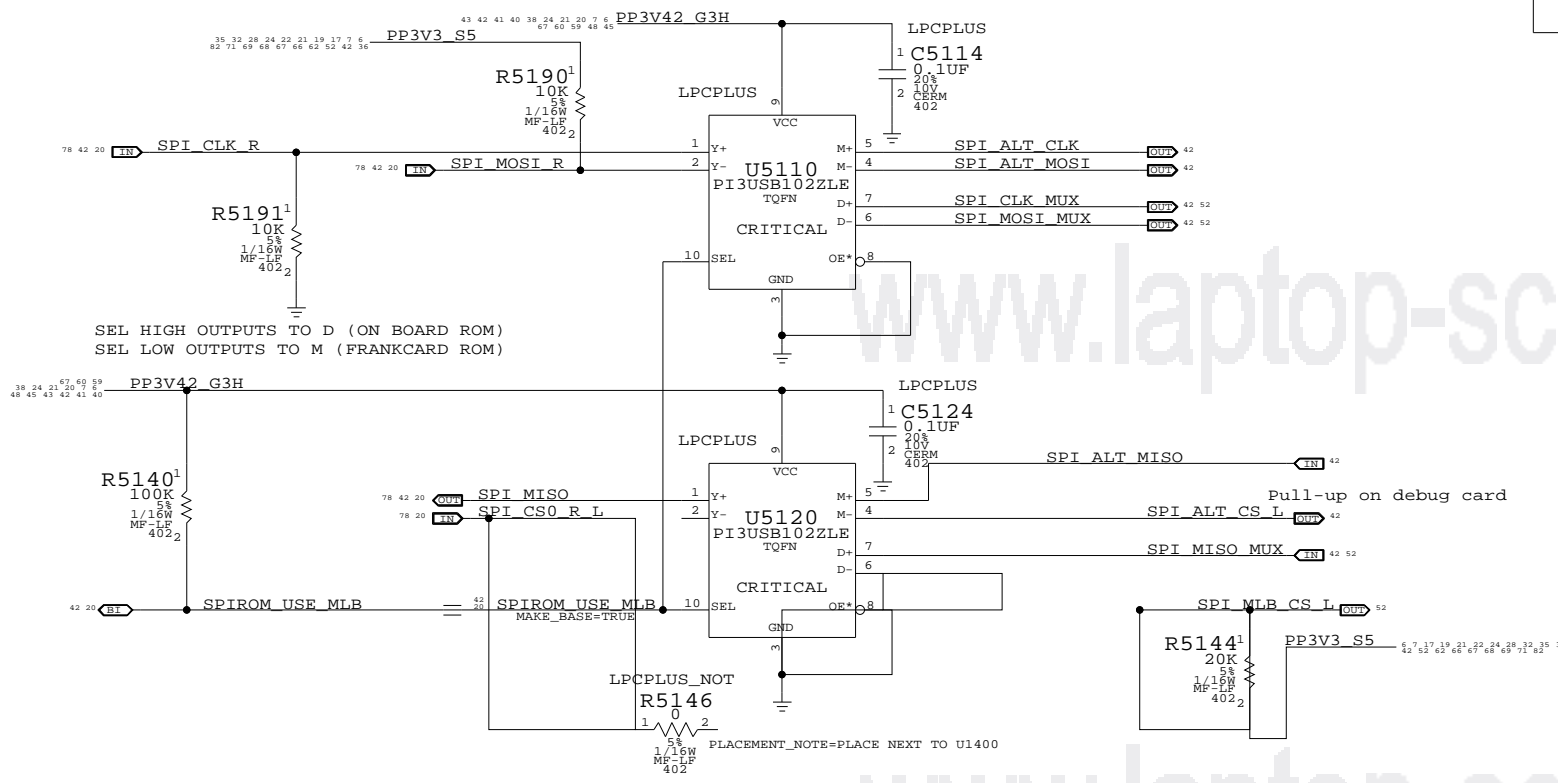

SPI MUX BYPASS

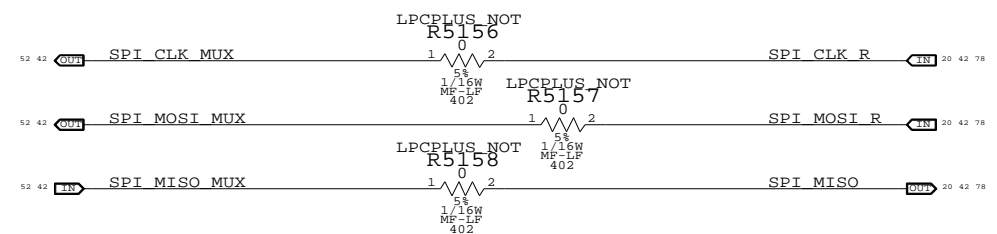

LPC+SPI Debug Connector

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING


I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT


III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT OF		
NONE	42 OF		83


MCP79 SMBUS "0" CONNECTIONS

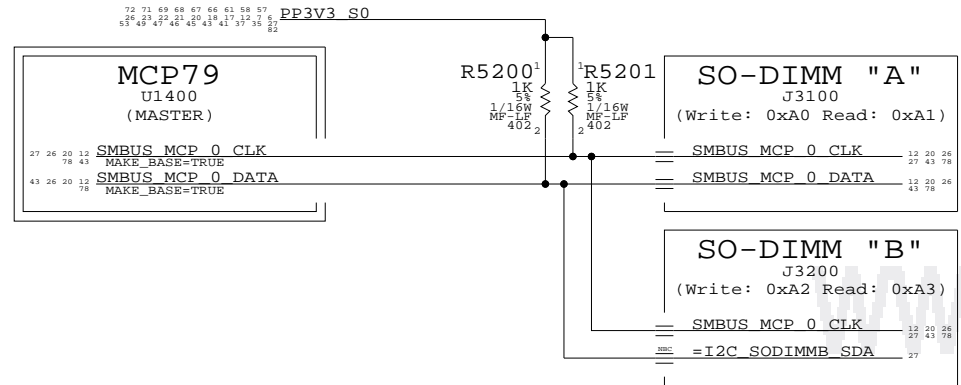


SMC "0" SMBus Connections

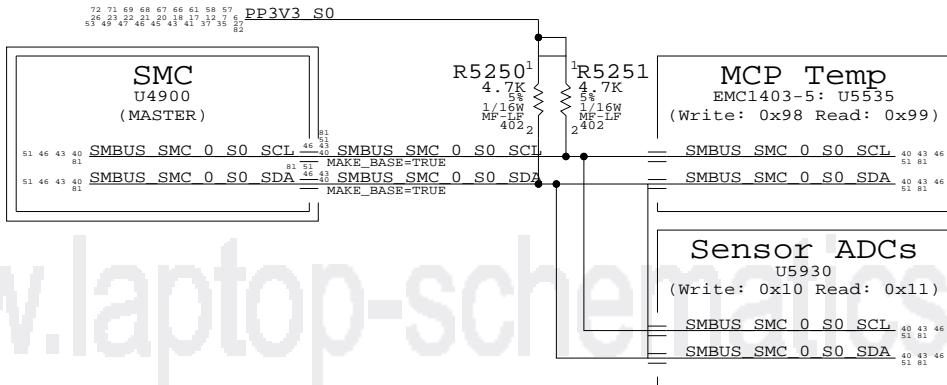


SMC "A" SMBus Connections

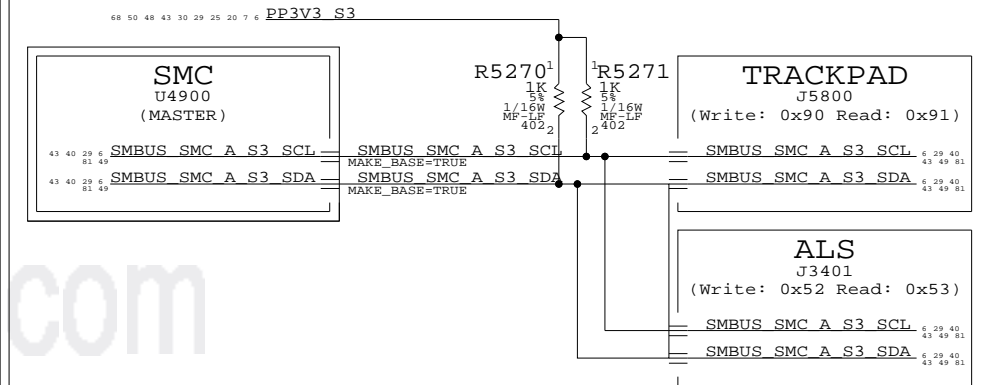


MCP79 SMBUS "1" CONNECTIONS

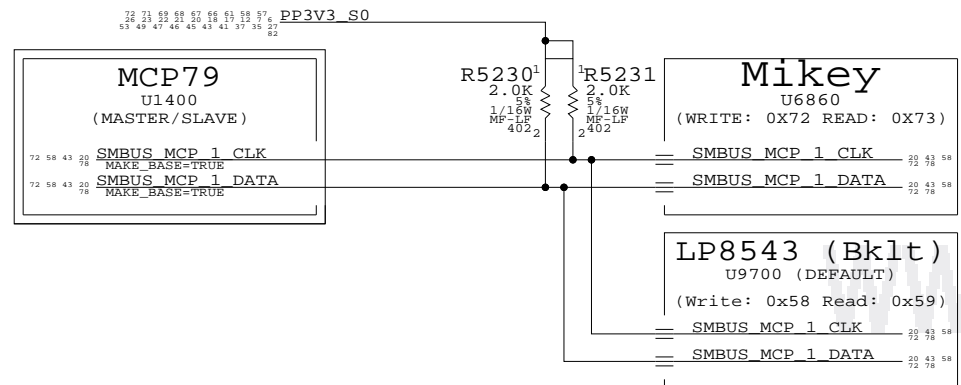


SMC "Battery A" SMBus Connections

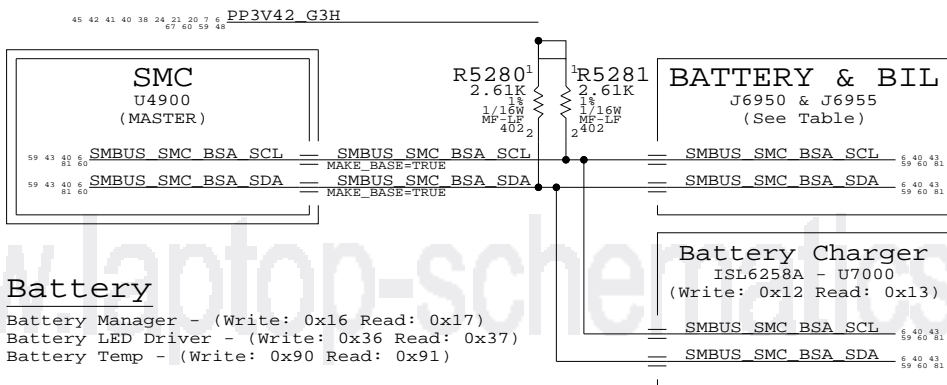

SMC "B" SMBus Connections

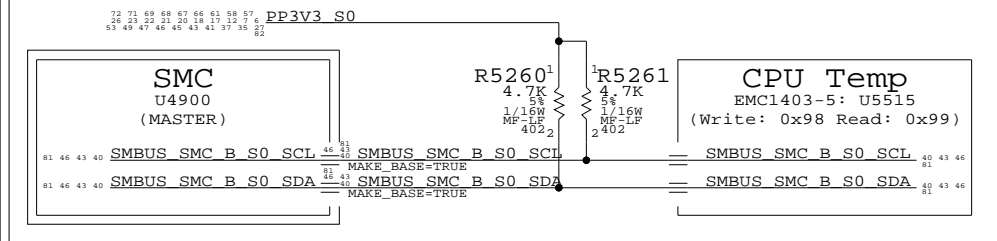

SMC "Management" SMBus Connections

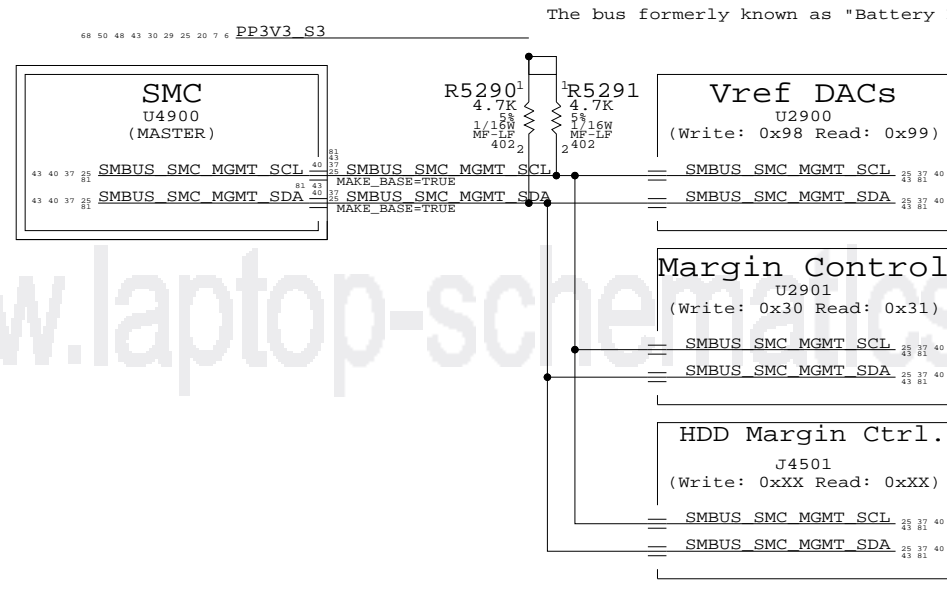


K19i SMBus Connections

SYNC_MASTER=WFERRY_K19I SYNC_DATE=12/12/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	43	83

8

7

6

5


4

3


2

1


CPU Voltage Sense / Filter

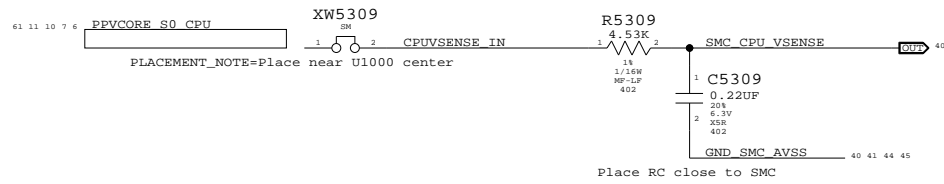

MCP Voltage Sense / Filter

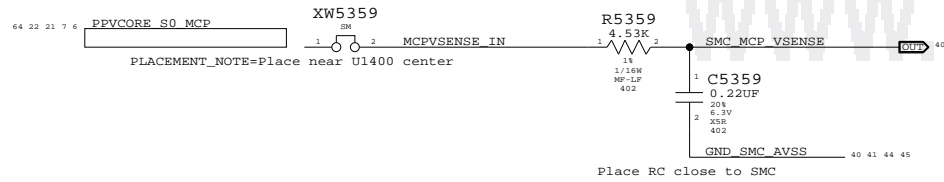

PBUS VOLTAGE SENSE ENABLE & FILTER

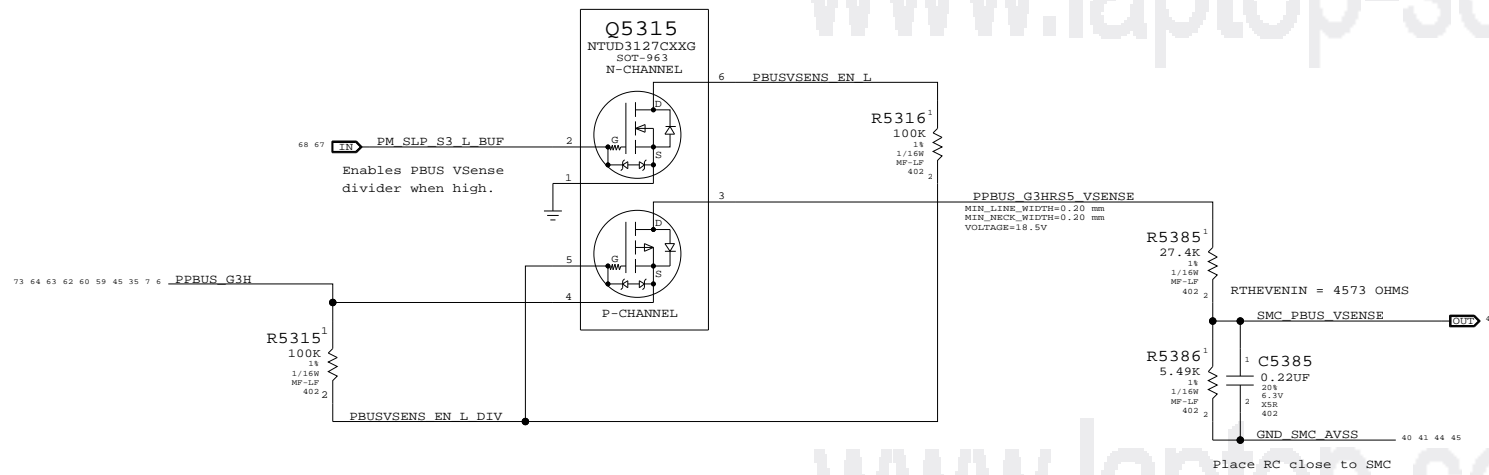

VOLTAGE SENSING

SYNC_MASTER=K24_MLB SYNC_DATE=02/05/2009


NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	44	83

8

7

6

5

4

3

2

1

D

C

B

A


D

C


B

A


MCP MEM VDD Current Sense / Filter

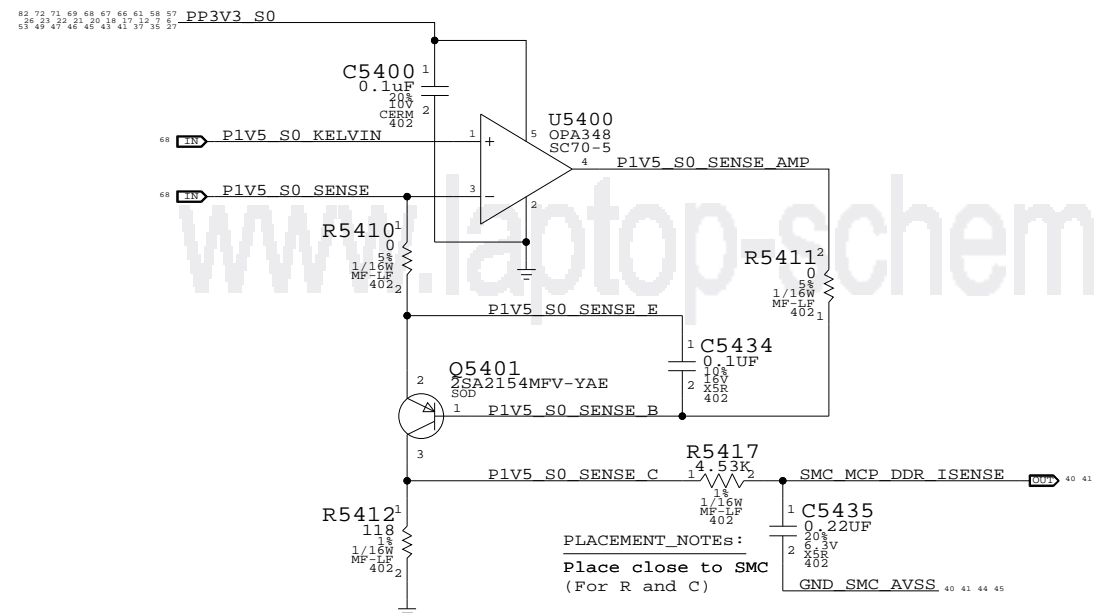


MCP VCore Current Sense Filter

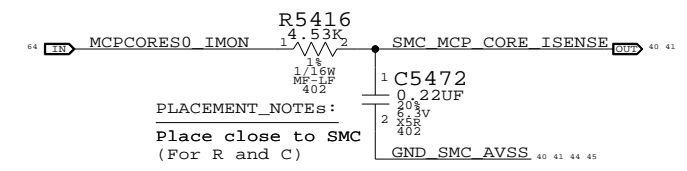


MCP/CPU 1.05V AND CPU VCore High-Side Current Sense / Filter

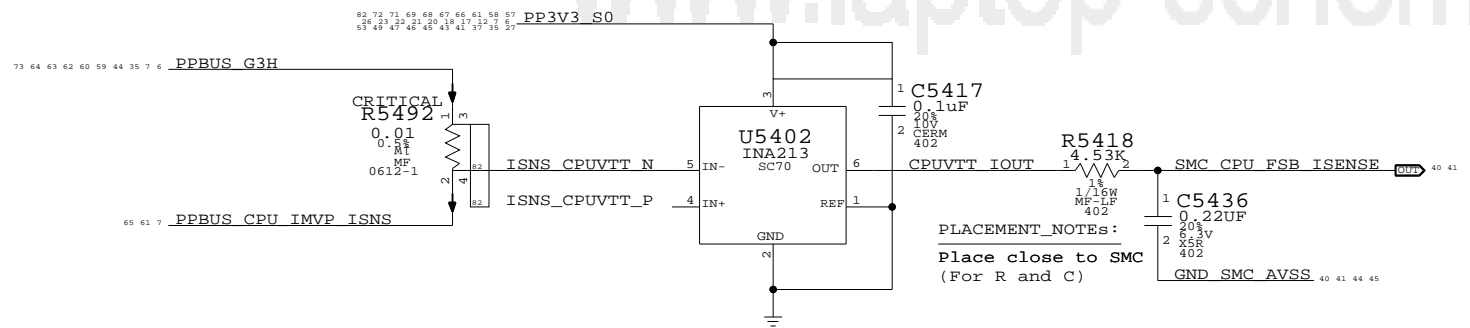


CPU VCore Load Side Current Sense / Filter

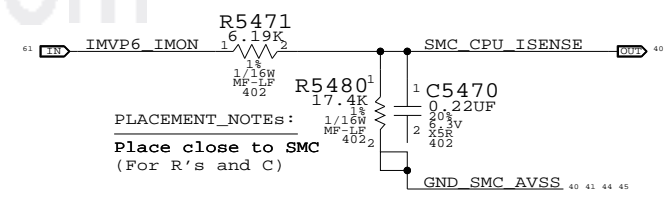

Battery (BMON) Current Sense, MUX & Filter

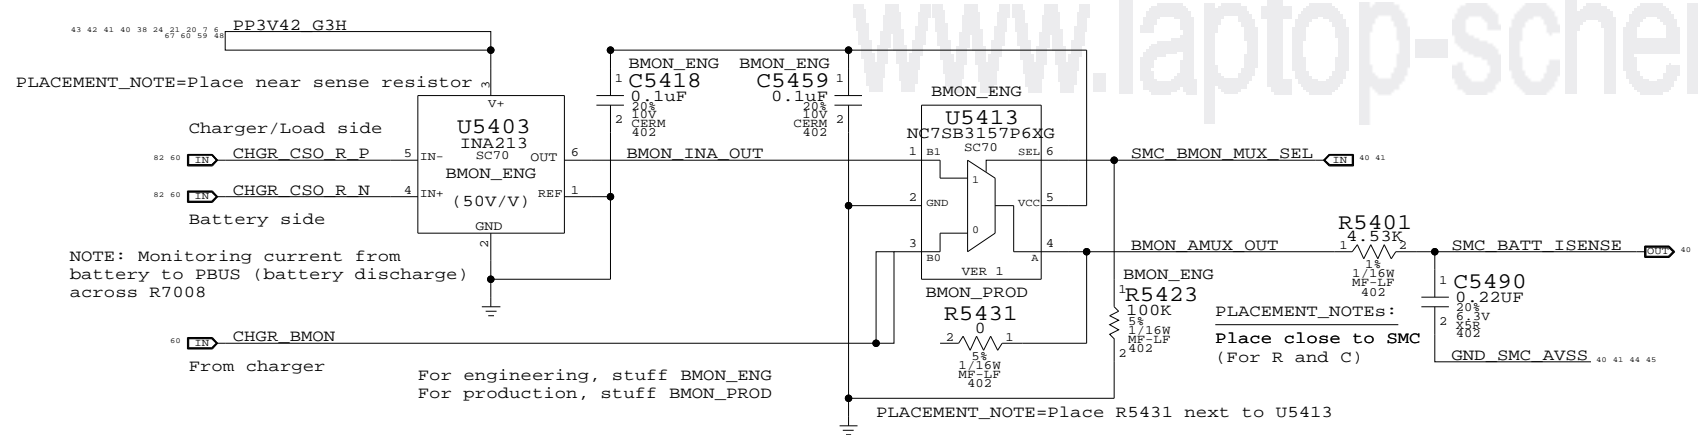


DC-IN (AMON) Current Sense Filter

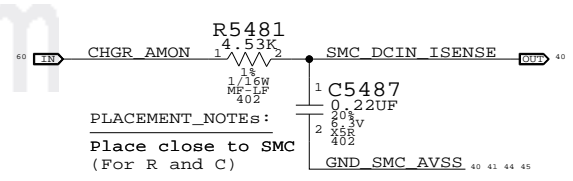


Current Sensing
 SYNC_MASTER=WFERRY_K19I SYNC_DATE=12/16/2008
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	83
NONE	45		

CPU T-Diode Thermal Sensor

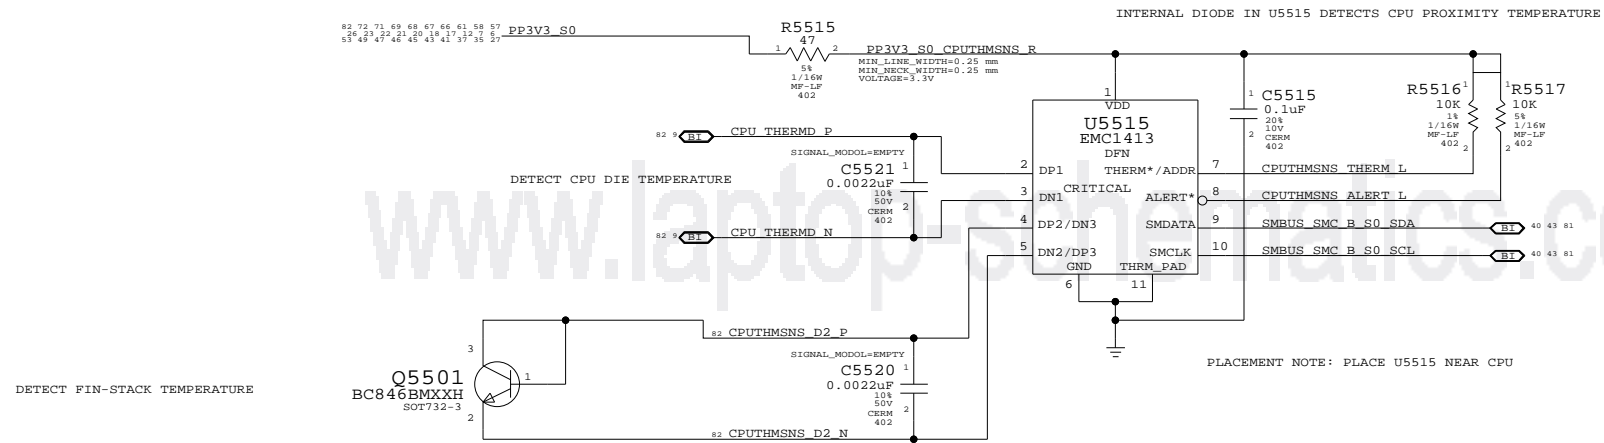

MCP T-Diode Thermal Sensor

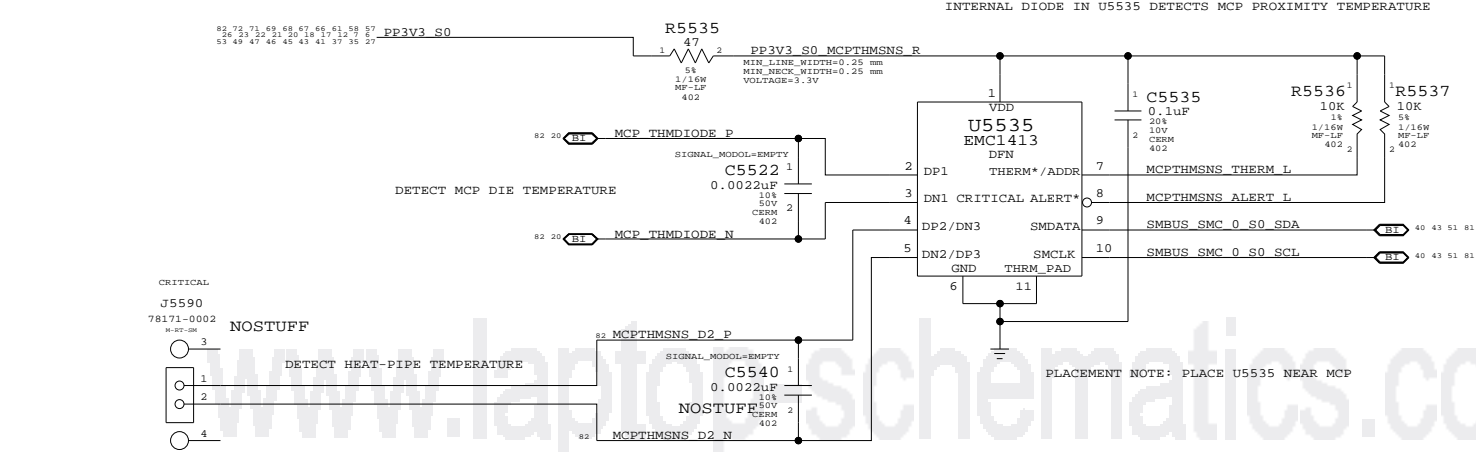

REPLACED 518S0521 WITH 518S0519

Thermal Sensors

SYNC_MASTER=K24_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART




SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	46	83

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com

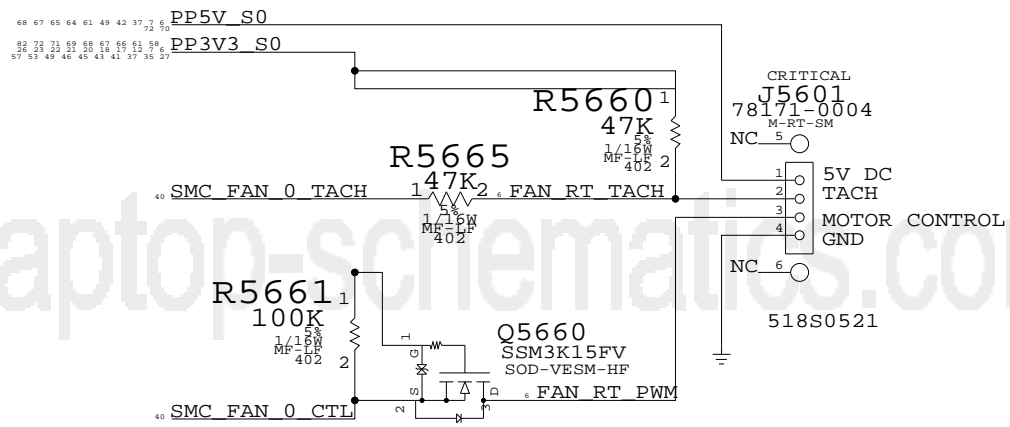

Fan

SYNC_MASTER=K24_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART




SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	47	83


BOOSTER +18.5VDC FOR SENSORS

BOOSTER DESIGN CONSIDERATION:


- POWER CONSUMPTION
- DROOP LINE REGULATION
- RIPPLE TO MEET ERS
- 100-300 KHZ CLEAN SPECTRUM
- STARTUP TIME LESS THAN 2MS
- R5812, R5813, C5818 MODIFIED

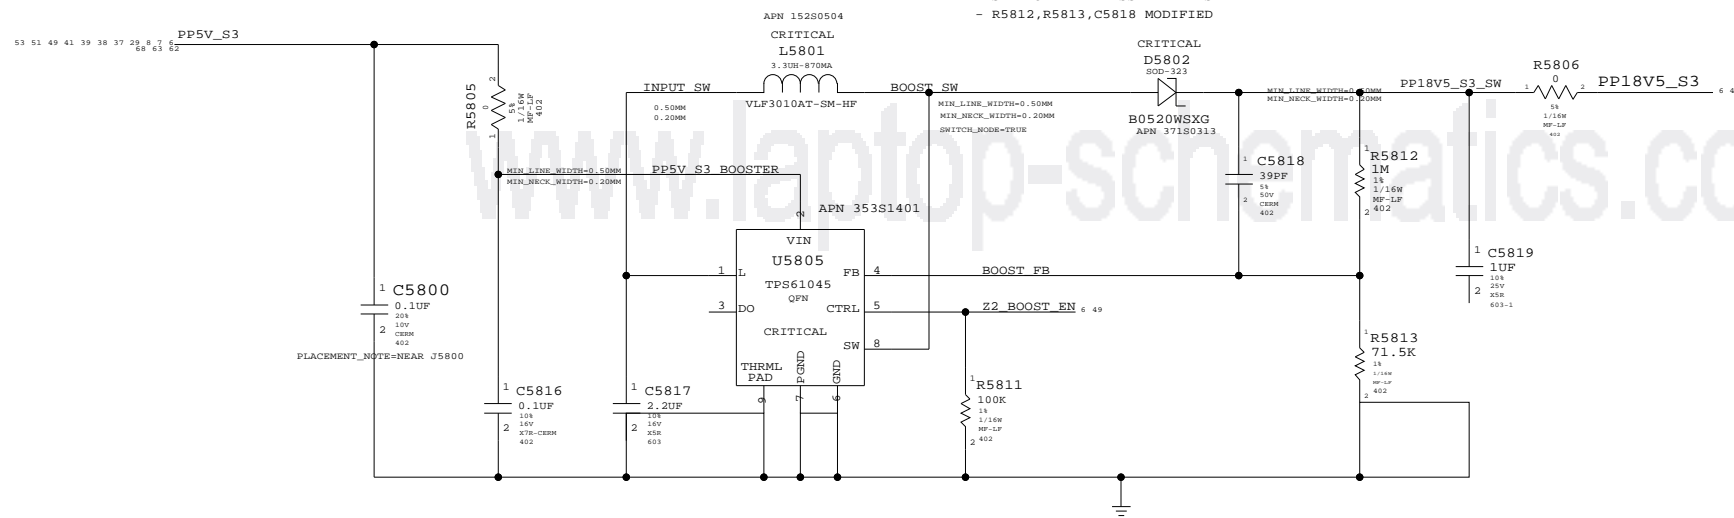

IPD FLEX CONNECTOR

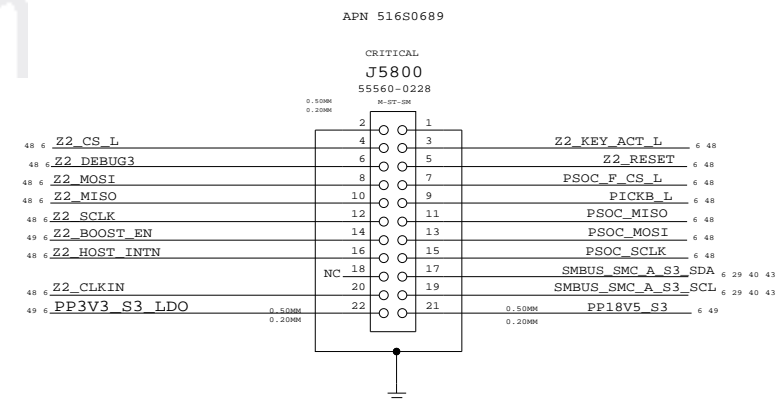


3V3 LDO FOR IPD

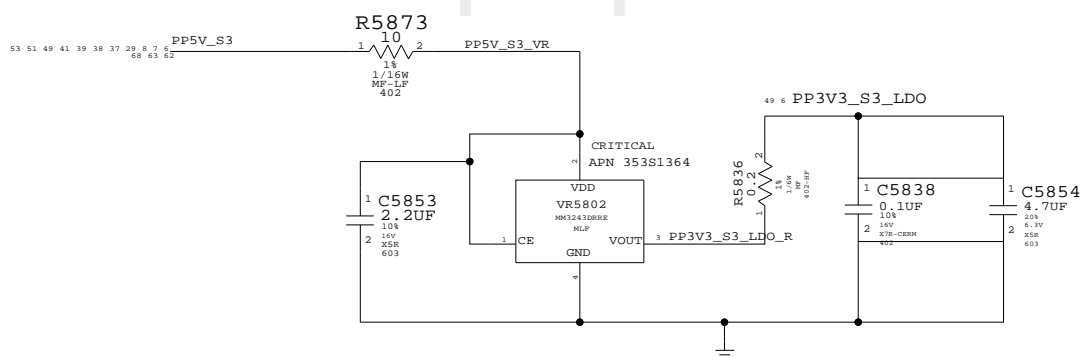

KEYBOARD BACKLIGHT DRIVING AND DETECTION

To detect Keyboard backlight, SMC will tristate SMC_SYS_KBDLED:
 LOW = keyboard backlight present
 HIGH = keyboard backlight not present
 BOM OPTION: KBDLED_YES
 TURNED ON FOR BEST MLB CONFIG
 R5853 ALWAYS PRESENT

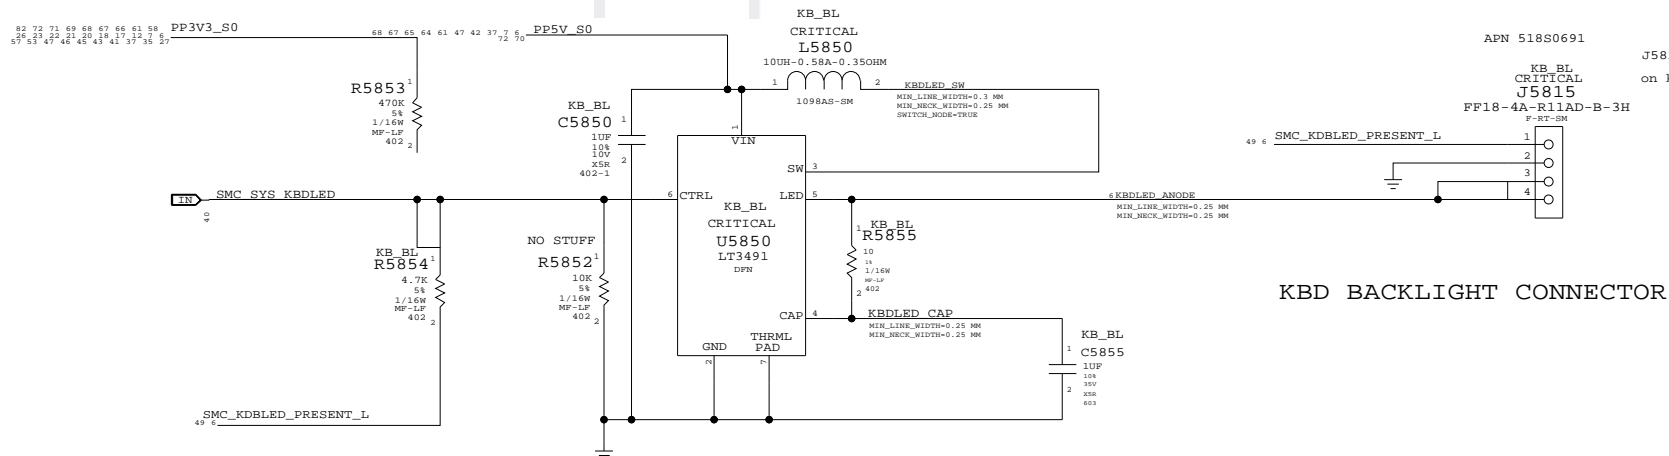

KBD BACKLIGHT CONNECTOR


J5815 pin 1 is grounded on keyboard backlight flex

WELLSPRING 2

SYNC_MASTER=K24_MLB SYNC_DATE=02/25/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE INC.


SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	49	83

www.laptop-schematics.com


www.laptop-schematics.com

Analog SMS

R5921 PULLS UP SMS_PWRDN TO TURN OFF SMS WHEN PIN IS NOT BEING DRIVEN BY SMC

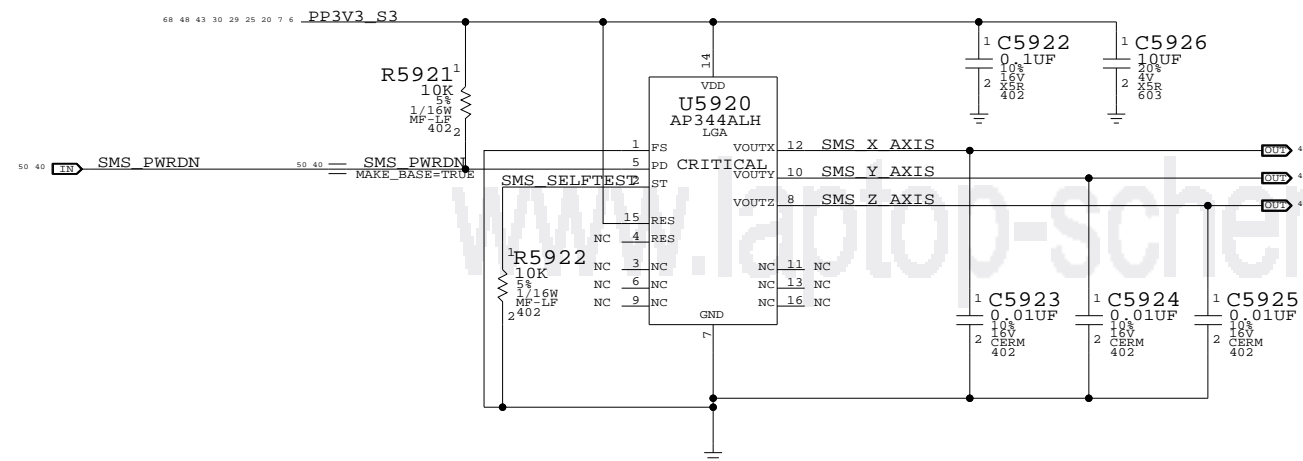

Desired orientation when placed on board top-side:

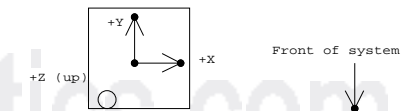

Circle indicates pin 1 location when placed in correct orientation

Sudden Motion Sensor (SMS)

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING


I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	D	DRAWING NUMBER	051-7903	REV.	A
SCALE	NONE	SHT	50	OF	83

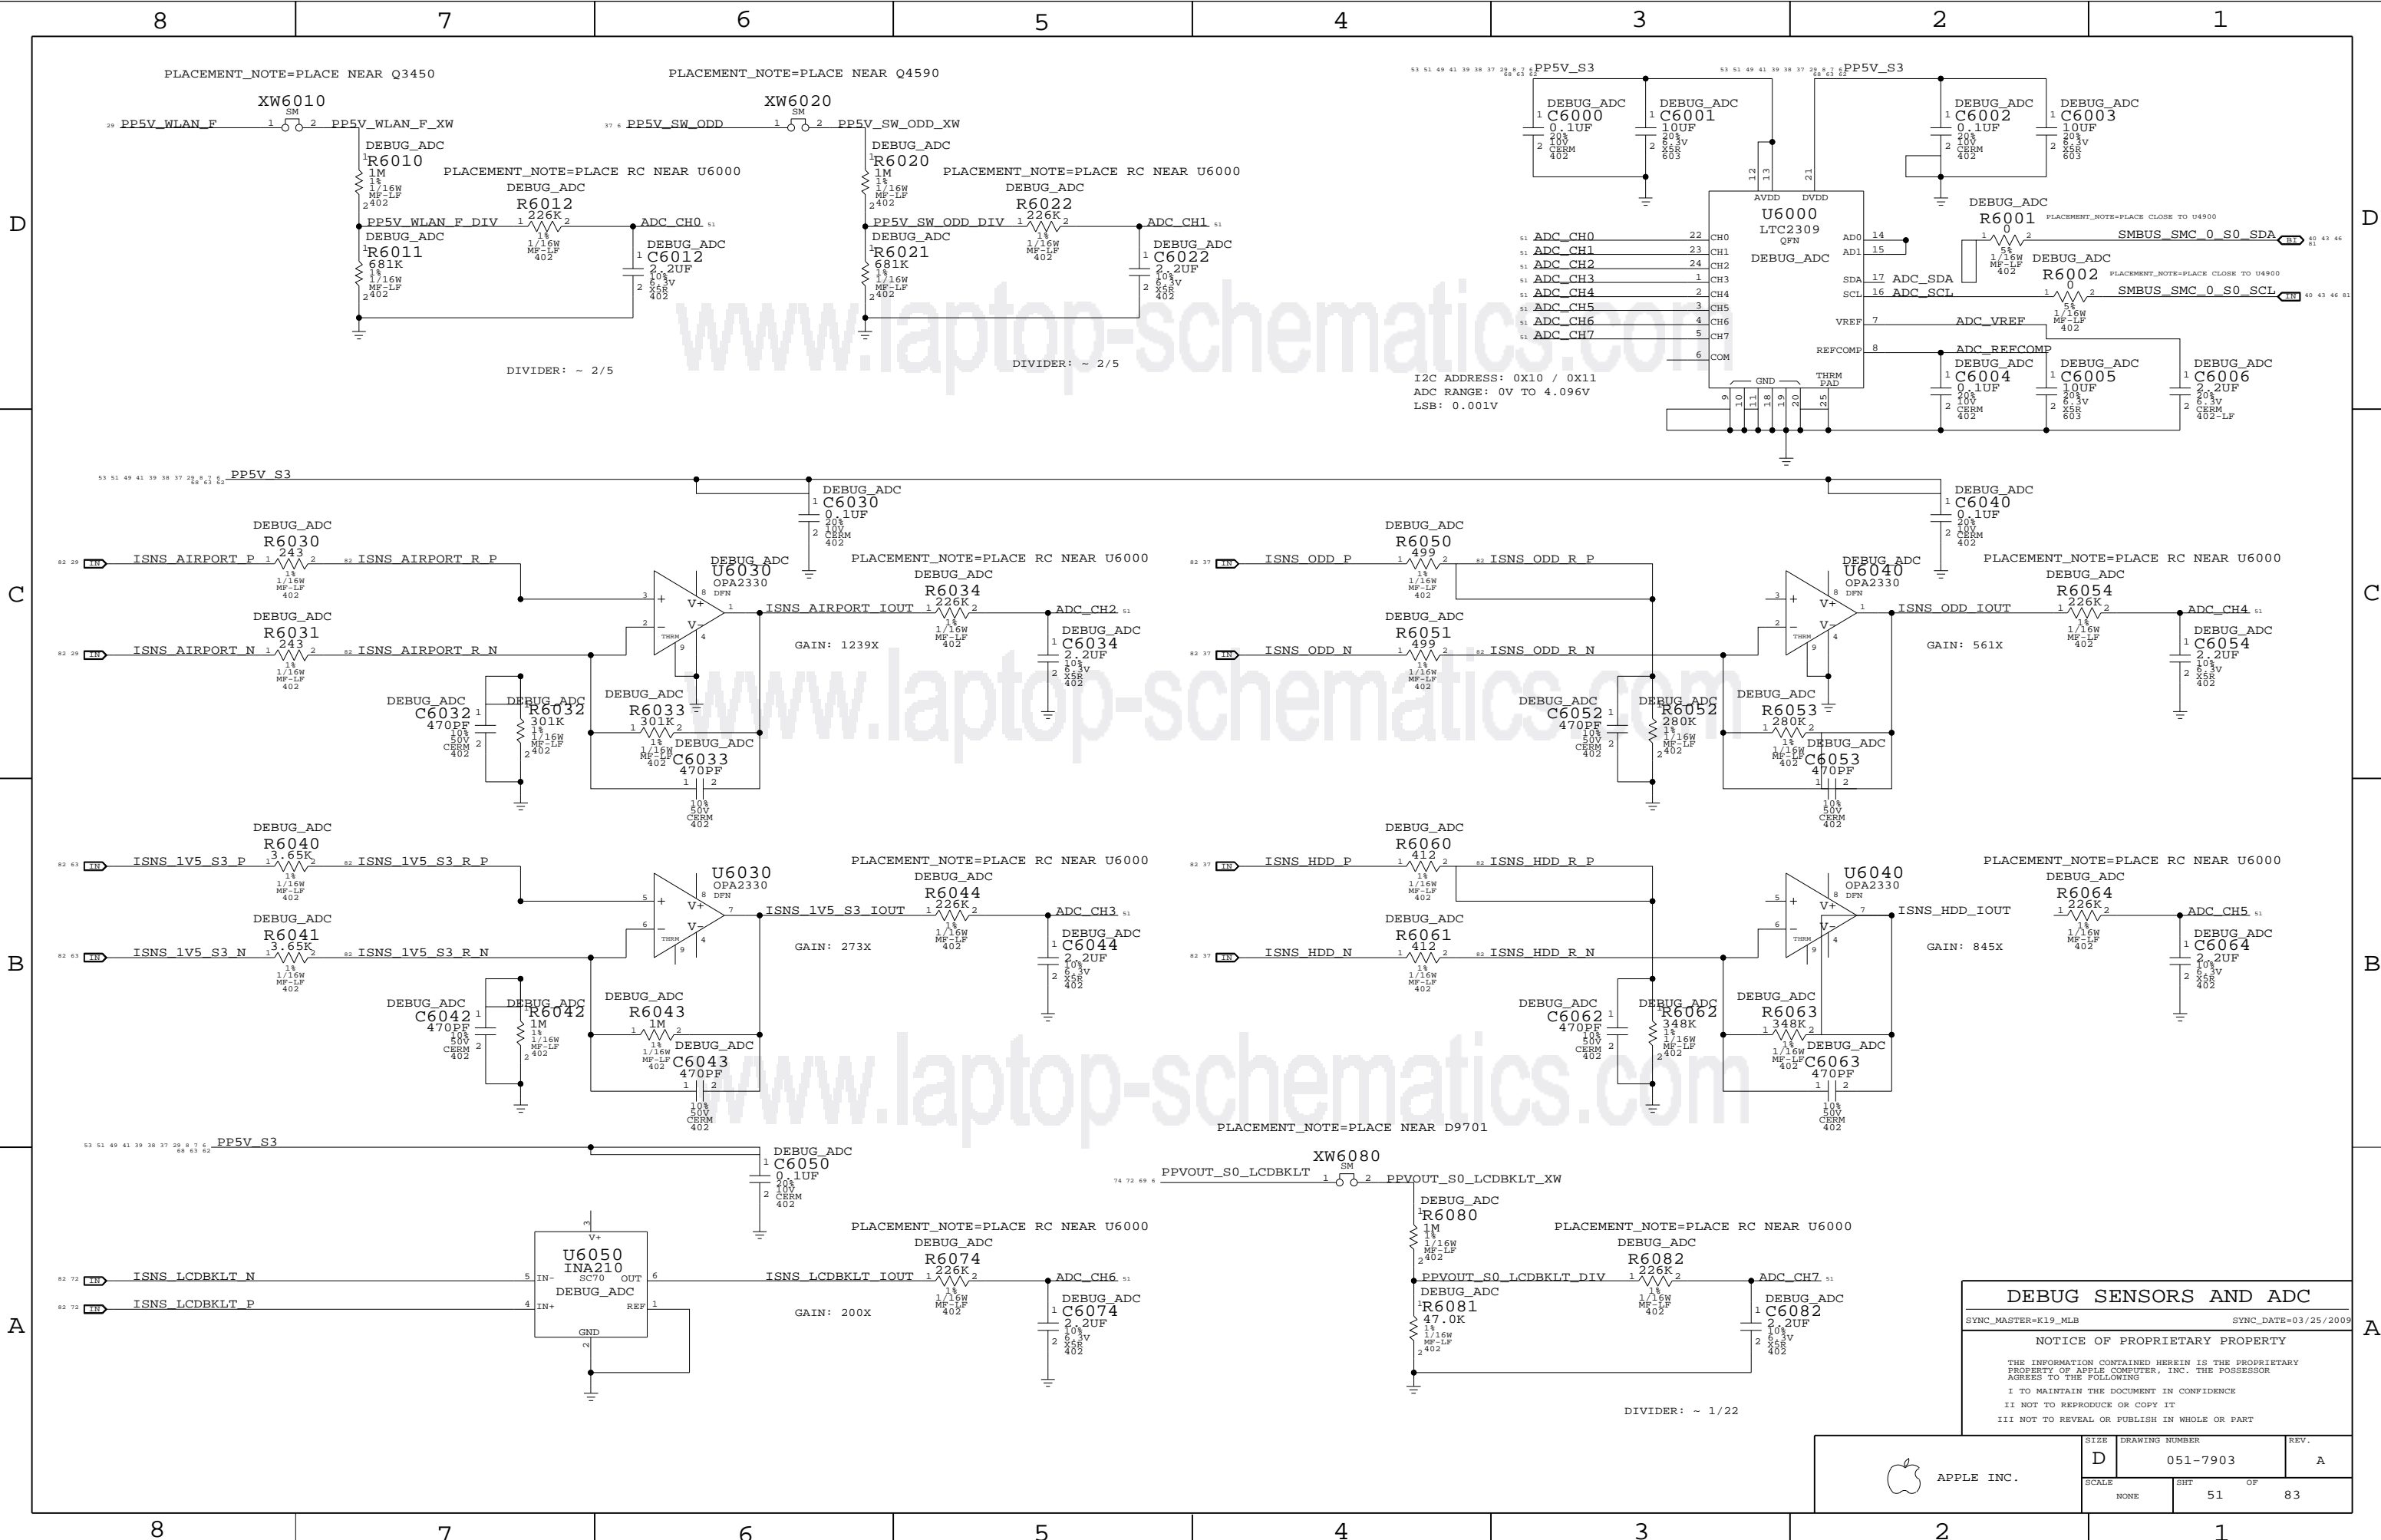


I2C ADDRESS: 0X10 / 0X11
 ADC RANGE: 0V TO 4.096V
 LSB: 0.001V

DEBUG SENSORS AND ADC
 SYNC_MASTER=K19_MLB SYNC_DATE=03/25/2009
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHEET	OF	
NONE	51	83	

www.laptop-schematics.com

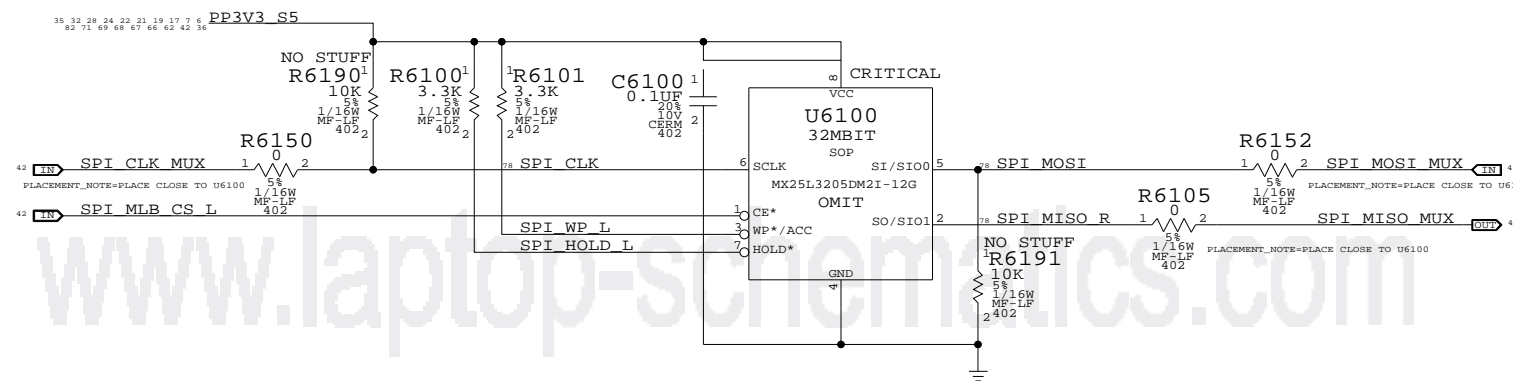

Frequency	SPI_MOSI	SPI_CLK
31 MHz	0	0
42 MHz	0	1
25 MHz	1	0
1 MHz	1	1

25MHz is selected with R5190 and R5191
 Any of the 4 frequencies can be selected
 with R6190, R6191, R5190 and R5191

SPI ROM

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009


NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING


I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT OF		
NONE	52 OF		83

AUDIO CODEC
APPLE P/N 353S2355

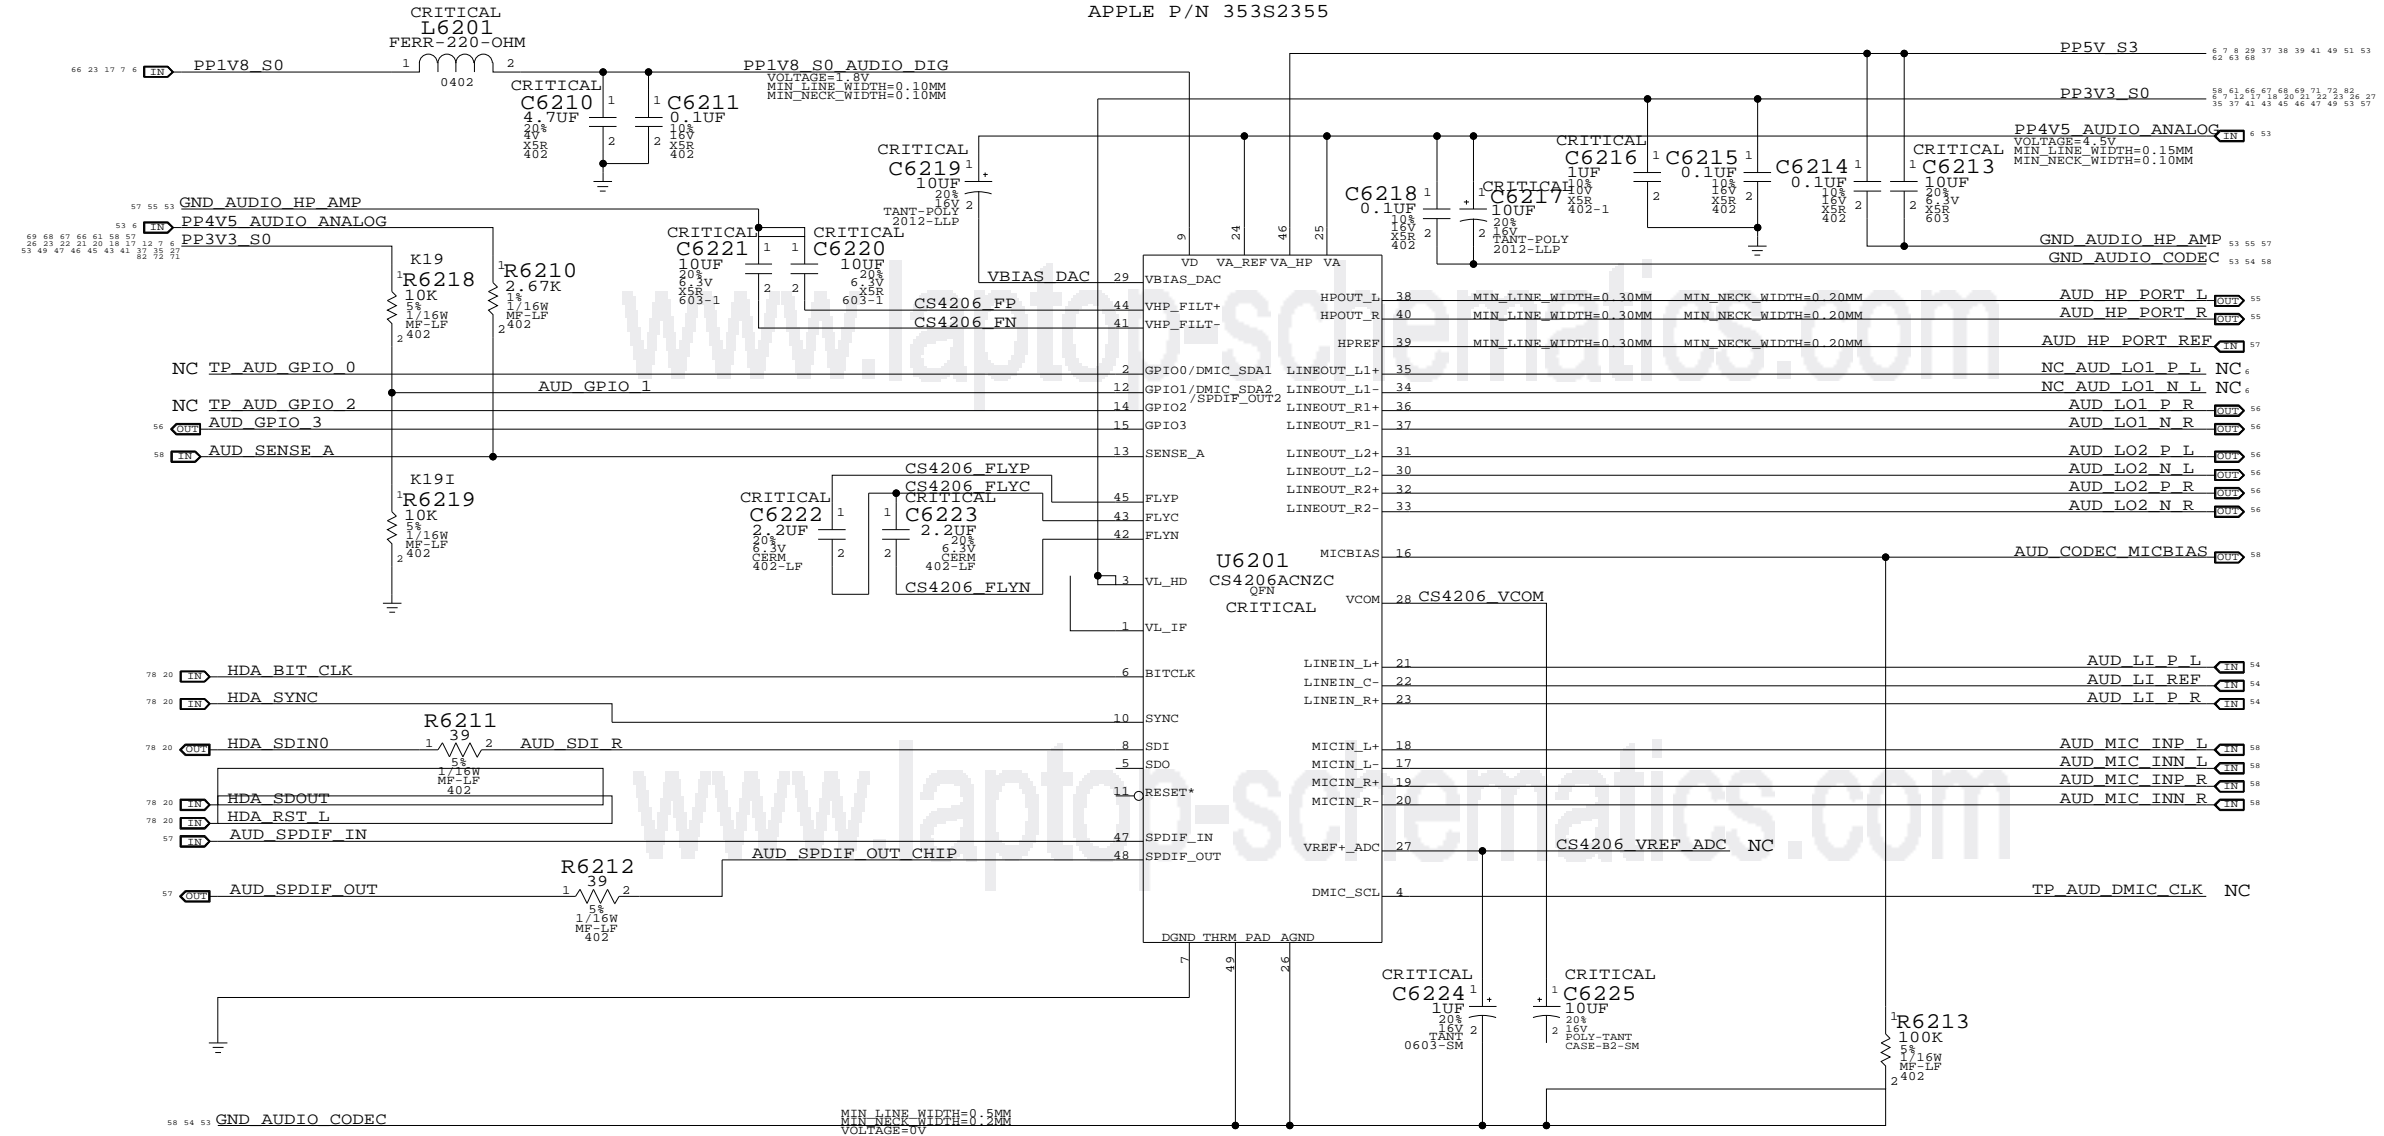

4.5V POWER SUPPLY FOR CODEC
APPLE P/N 353S2234

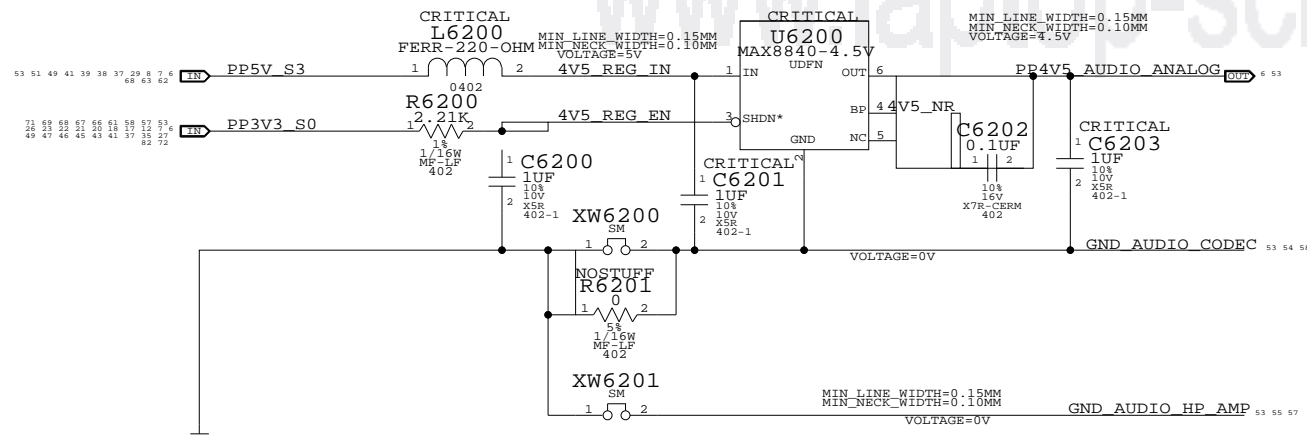

NOTES ON CODEC I/O

DIFF FSINPUT= 2.45VRMS
SE FSINPUT= 1.22VRMS
DAC1 FSOUTPUT= 1.34VRMS
DAC2/3 FSOUTPUTDIFF= 2.67VRMS
DAC2/3 FSOUTPUTSE= 1.34VRMS

AUDIO: CODEC/REGULATOR

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	NONE	SHT	OF
		53	83

8

7

6

5

4

3

2

1

D

D

C

C

B

B

A

A


LINE INPUT VOLTAGE DIVIDER

CODEC RIN = 20K OHMS
 NET RIN = 20K OHMS
 FC = 8 HZ
 VIN = 2VRMS, CODEC VIN = 1.21 VRMS

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com

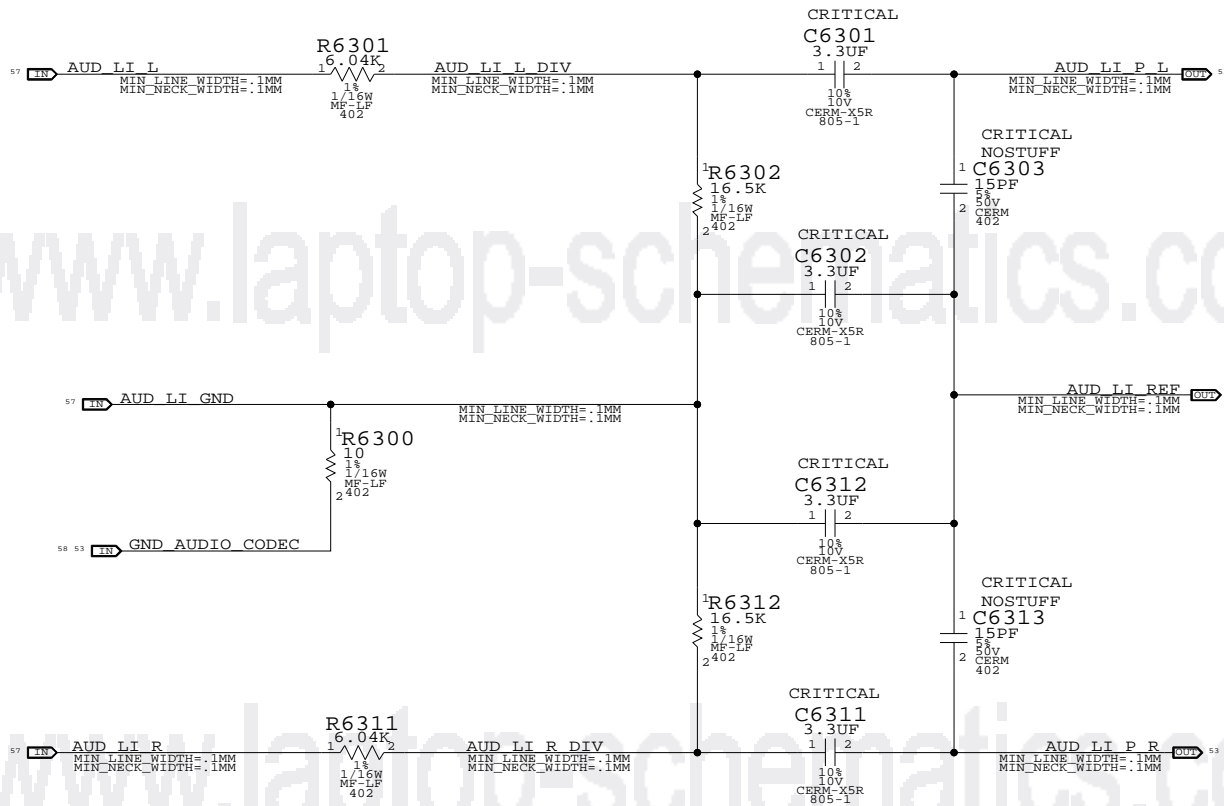

AUDIO: LINE INPUT FILTER

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

- I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
- II NOT TO REPRODUCE OR COPY IT
- III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	54	83

8

7

6

5

4


3

2

1

www.laptop-schematics.com


ZOBEL NETWORK & 1ST ORDER DAC FILTER PLACEHOLDER

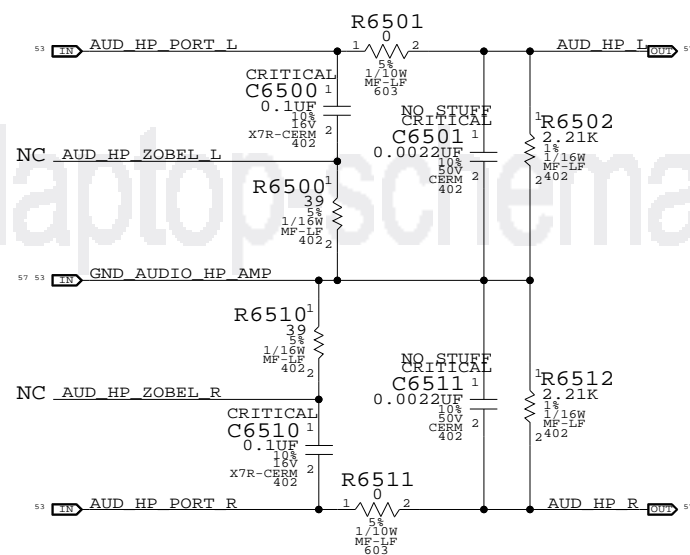


AUDIO: HEADPHONE FILTER
SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009
NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	55	83	

3X MONO SPEAKER AMPLIFIERS (SSM2315)
 APN: 353S2500
 GAIN = 6DB
 1ST ORDER FC (L&R) = 120 HZ +/- 30%
 1ST ORDER FC (SUB) = 58HZ +/- 30%

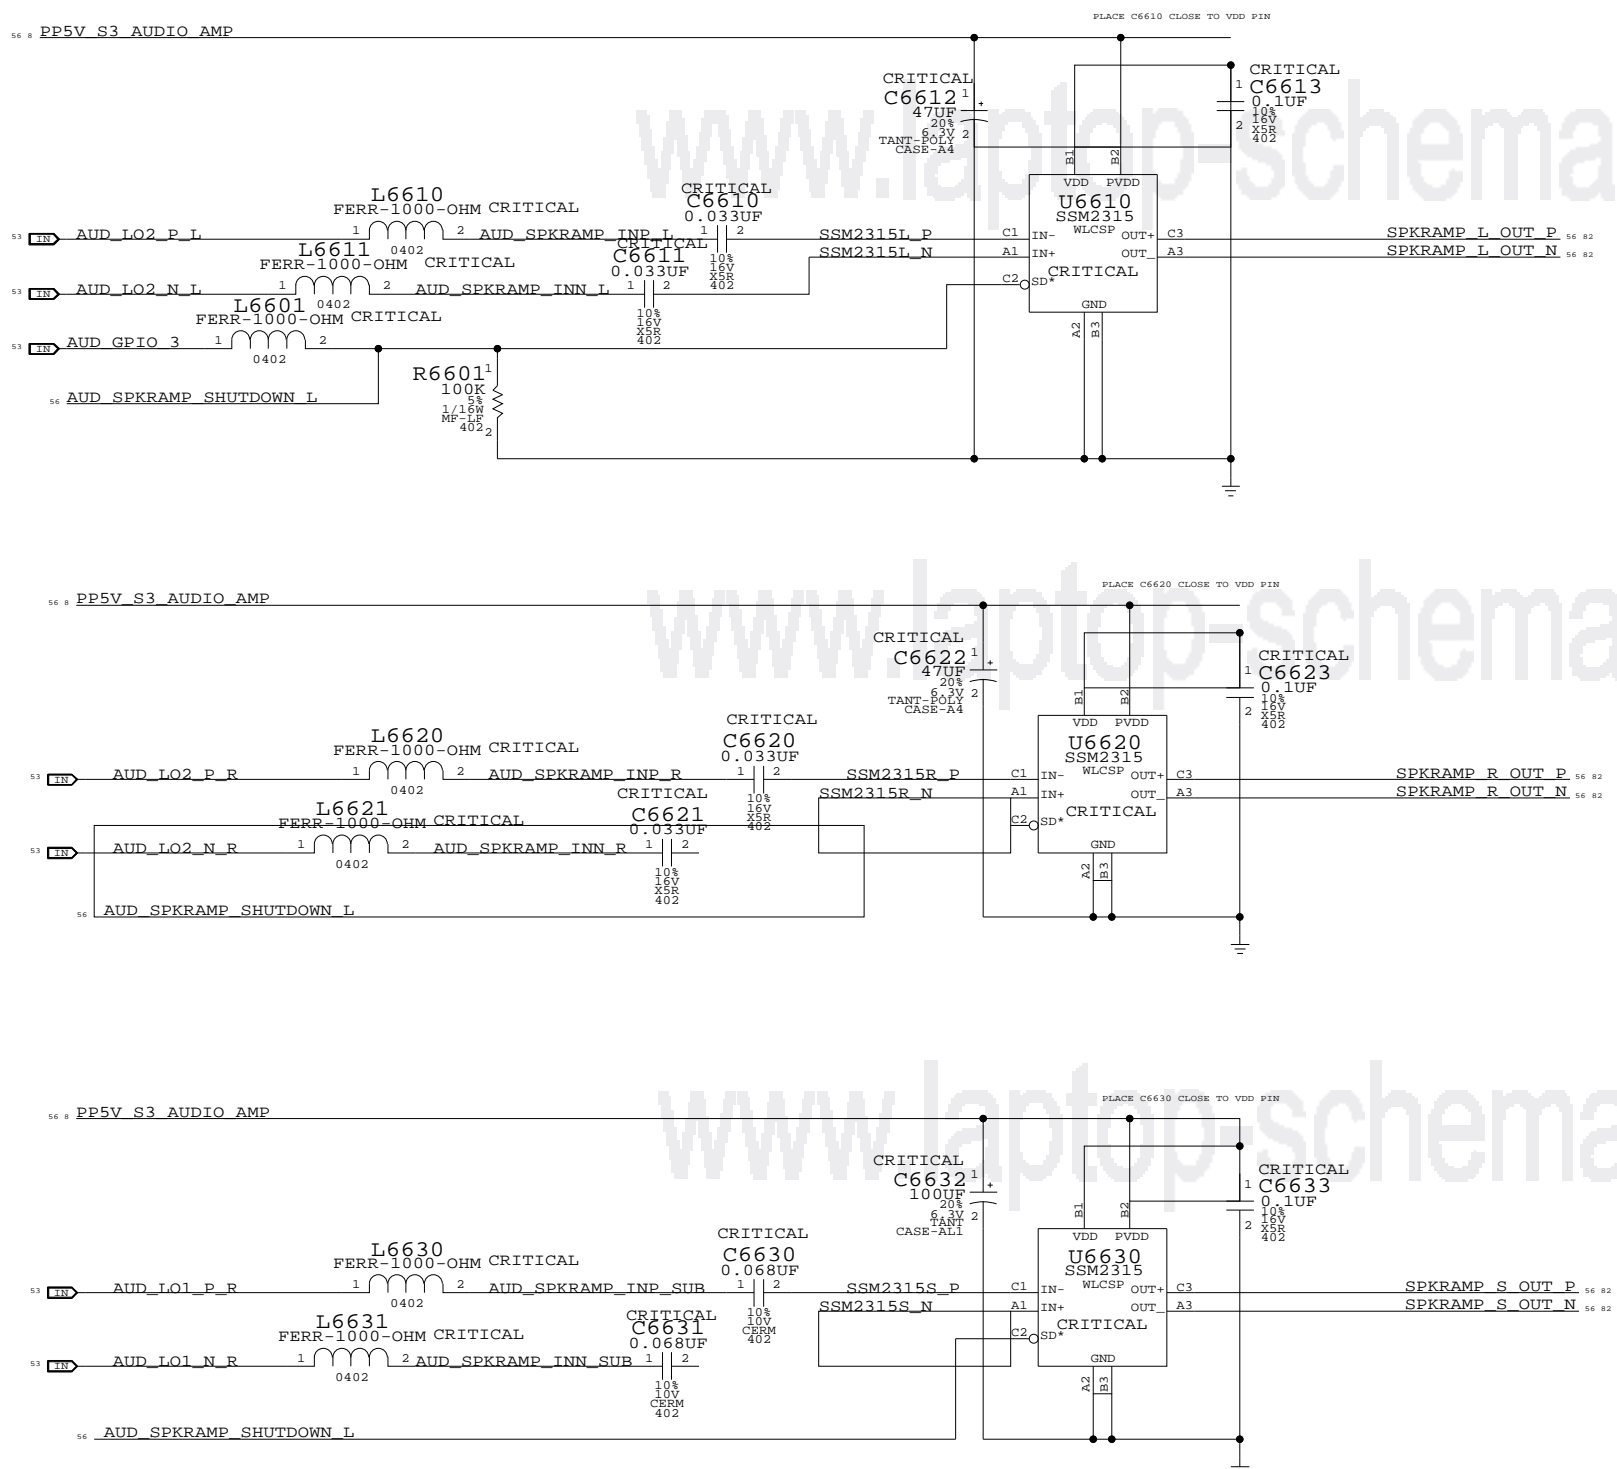


SPEAKER CHECKPOINTS

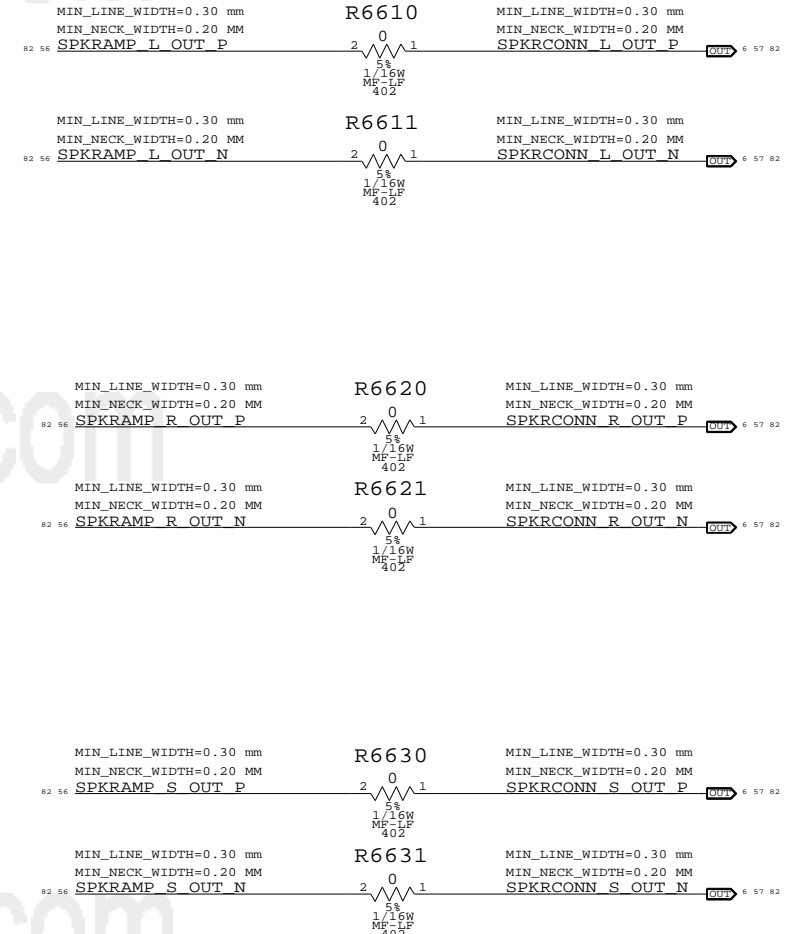

AUDIO: SPEAKER AMP
 SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009
NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	NONE	SHT	OF
		56	83

AUDIO JACK 1 LO/HP JACK, SPDIF TX

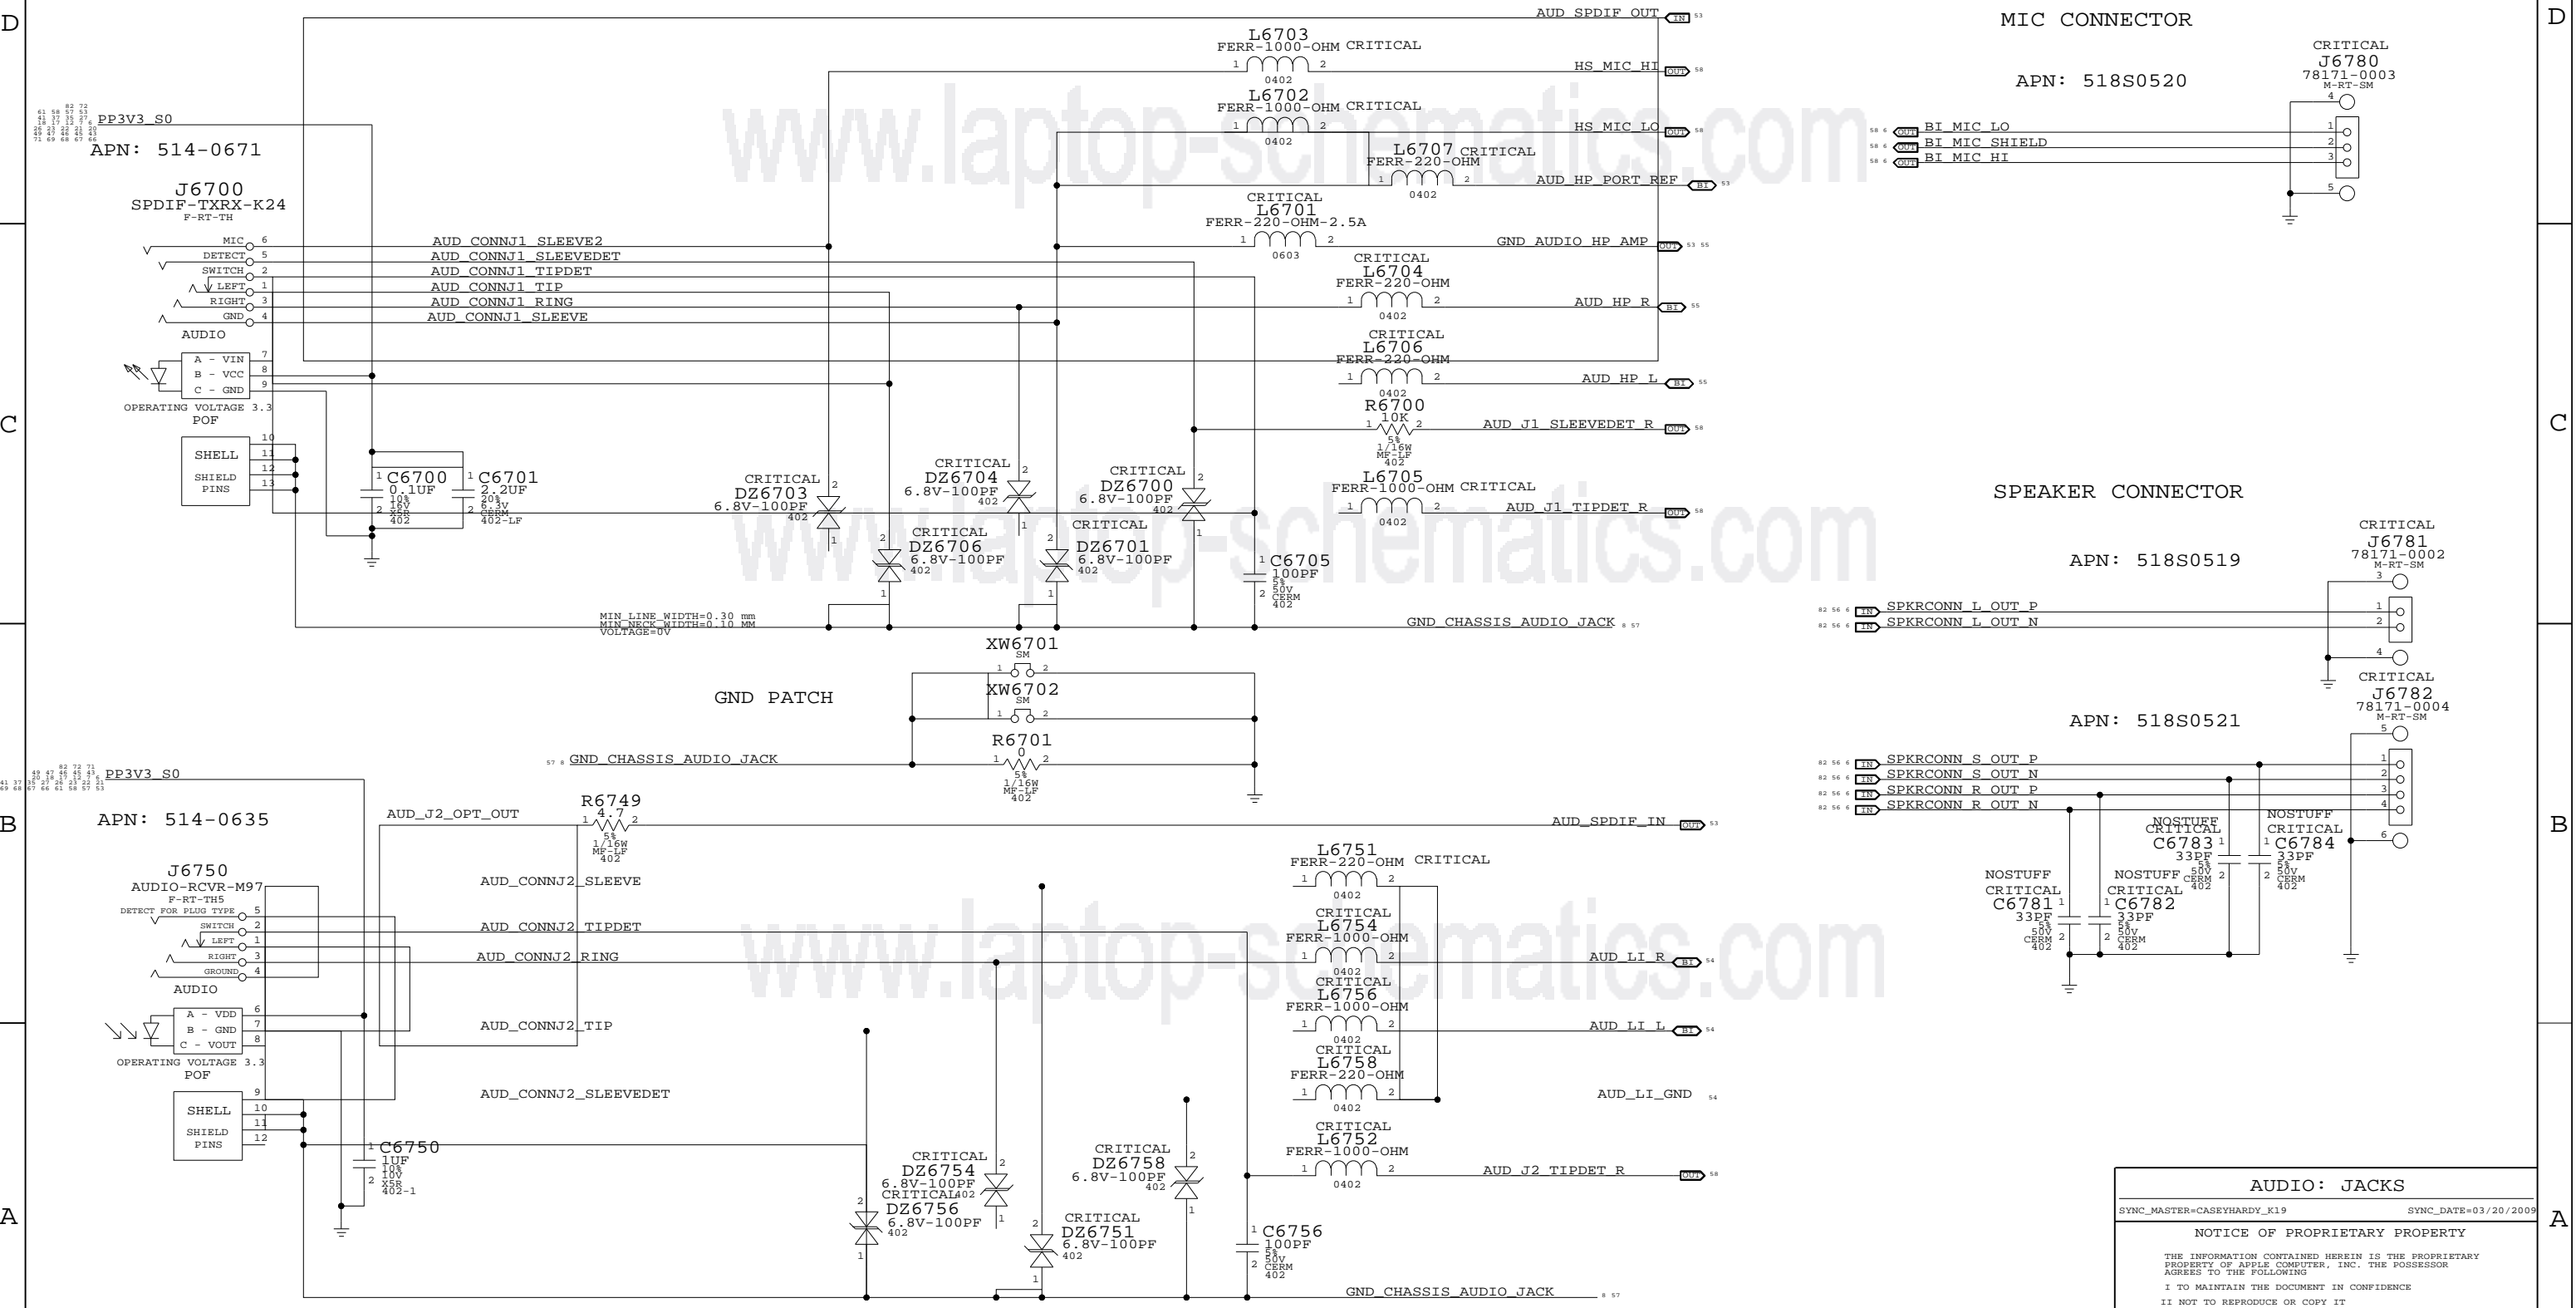

AUDIO JACK 2 LINE IN JACK, SPDIF RX

AUDIO: JACKS
 SYNC_MASTER=CASEYHARDY_K19 SYNC_DATE=03/20/2009

NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	REV.
NONE	57	83	




CODEC OUTPUT SIGNAL PATHS

FUNCTION	VOLUME	CONVERTER	PIN COMPLEX	MUTE CONTROL	DET ASSIGNMENT
HP/LINE OUT	0X02 (2)	0X02 (2)	0X09 (9,A)	N/A	0X09 (A)
SATELLITES	0X04 (4)	0X04 (4)	0X0B (11)	GPIO_3	N/A
SUB	0X03 (3)	0X03 (03)	0X0A (10)	GPIO_3	N/A
SPDIF OUT	N/A	0X08 (8)	0X10 (16)	N/A	0X0C (B)

CODEC INPUT SIGNAL PATHS


FUNCTION	CONVERTER	PIN COMPLEX	VREF	DET ASSIGNMENT
LINE IN	0X05 (5)	0X0C (12,C)	N/A	0X0C (12,C)
SPDIF IN	0X07 (7)	0X0F (15)	N/A	N/A
BUILT-IN MIC	0X06 (6)	0X0D (13,B,RIGHT)	MIC_BIAS (80%)	N/A
HEADSET MIC	0X06 (6)	0X0D (13,V22,B,LEFT)	MIKEY	MIKEY

PORT A DETECT (HEADPHONES) PORT B DETECT (SPDIF DELEGATE)

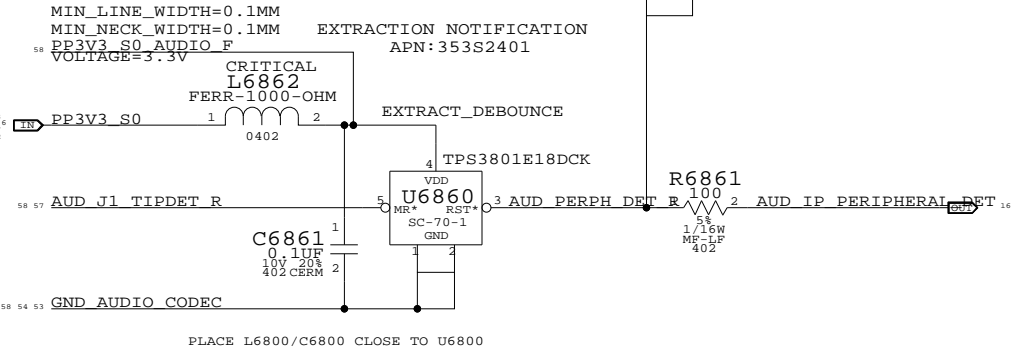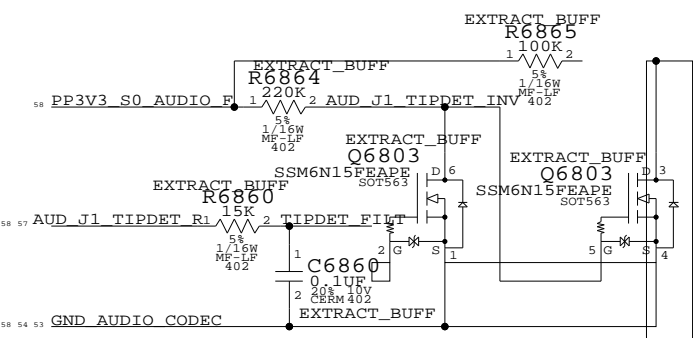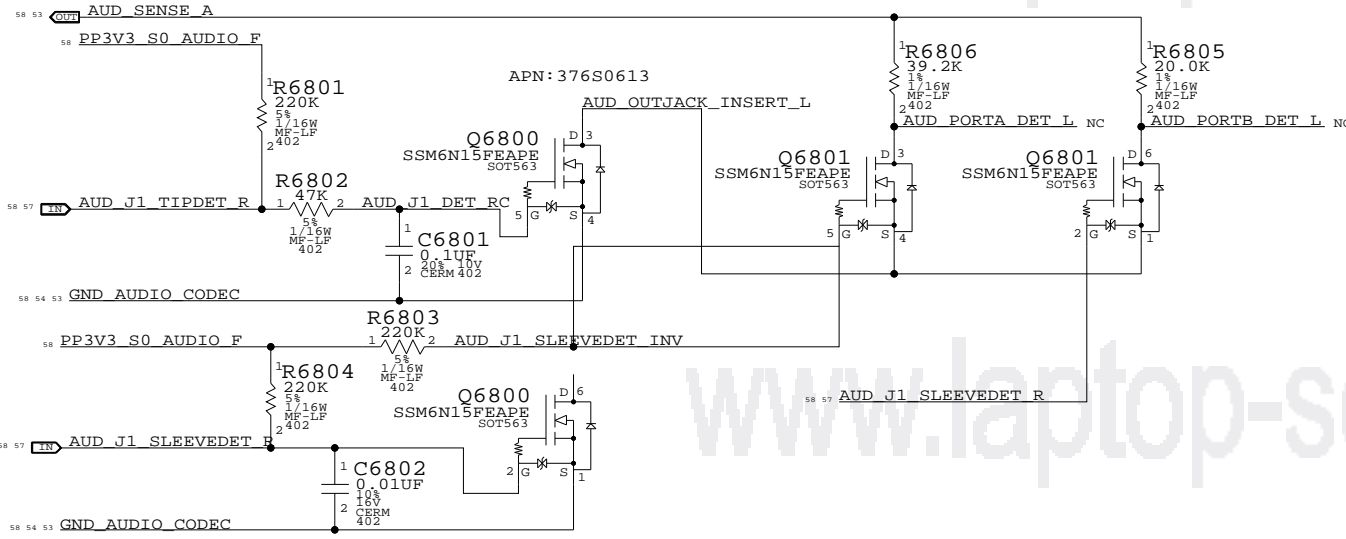


PLACE L6800/C6800 CLOSE TO U6800


PORT B LEFT(HEADSET MIC)
CRITICAL HP=80HZ, LP=8.82KHZ
MIKEY MIN_LINE_WIDTH=0.1MM
L6880 MIN_NECK_WIDTH=0.1MM
FERR-1000-OHM VOLTAGE=3.3V

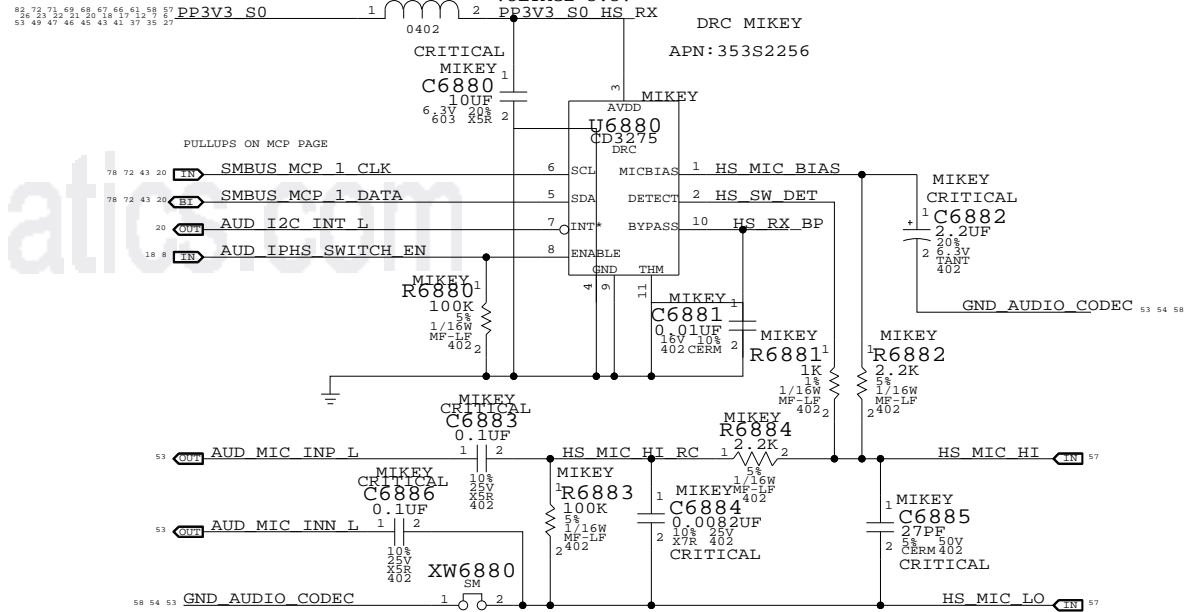

PORT B RIGHT (BUILT-IN MIC)

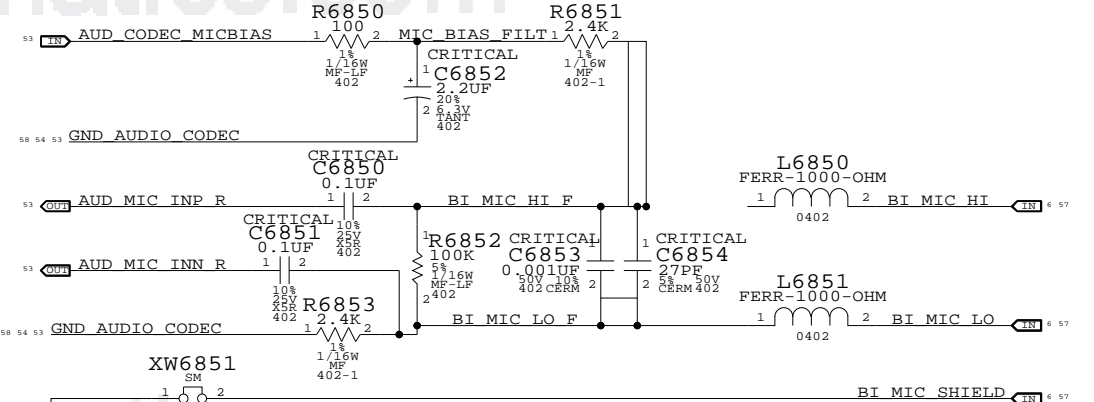


PORT C DETECT (LINE-IN)

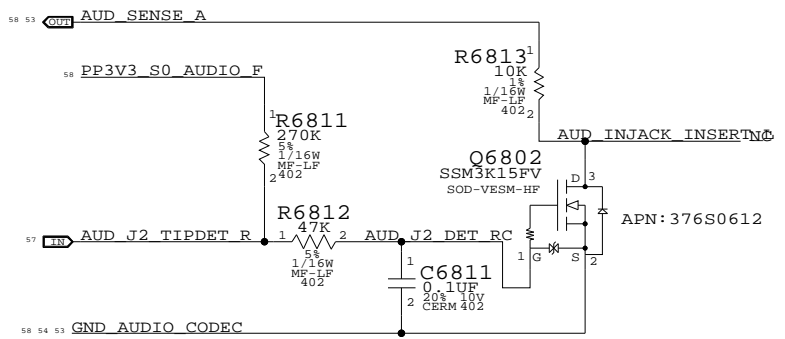


AUDIO: JACK TRANSLATORS
SYNC_MASTER=K19_MLB SYNC_DATE=03/17/2009
NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	58	83	

MagSafe DC Power Jack


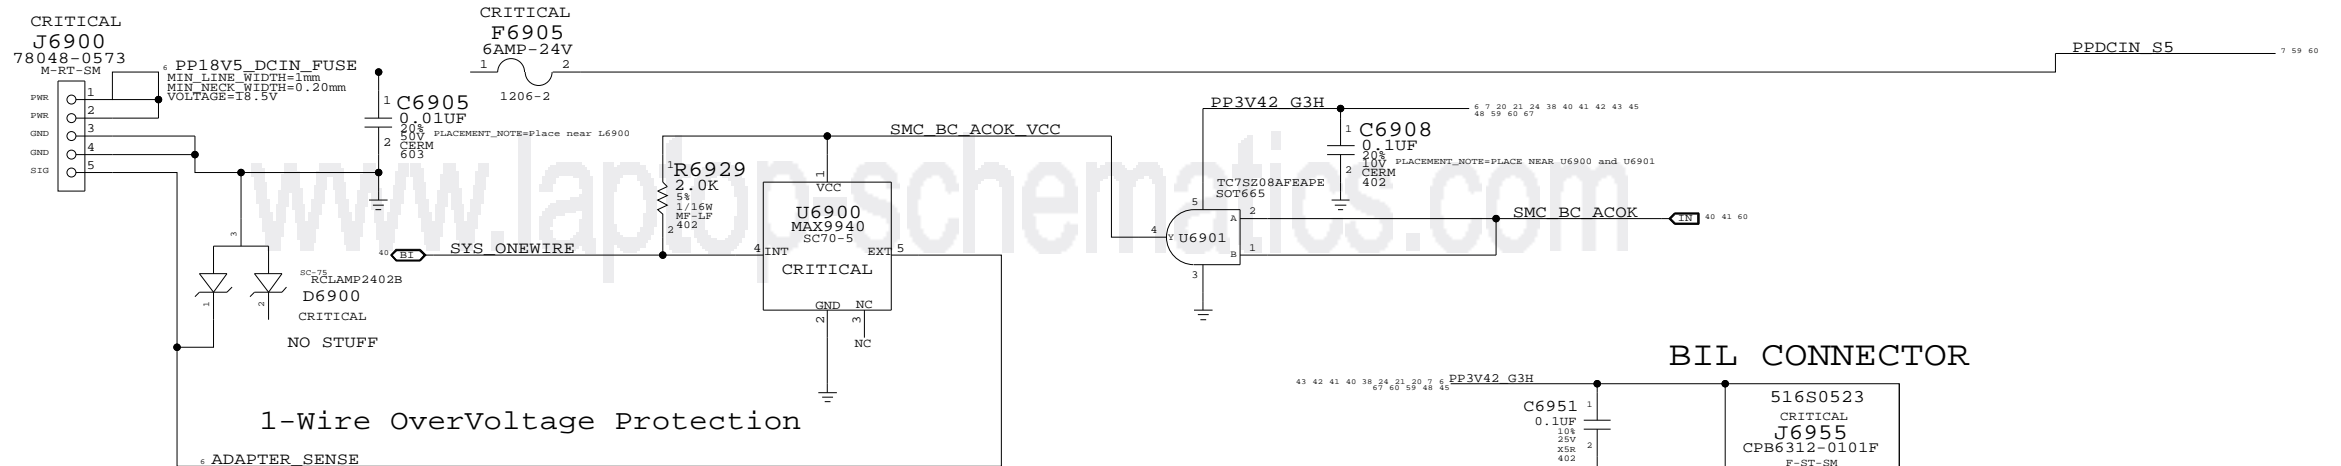


The chassis ground will otherwise float and can send transients onto ADAPTER_SENSE when AC is connected.

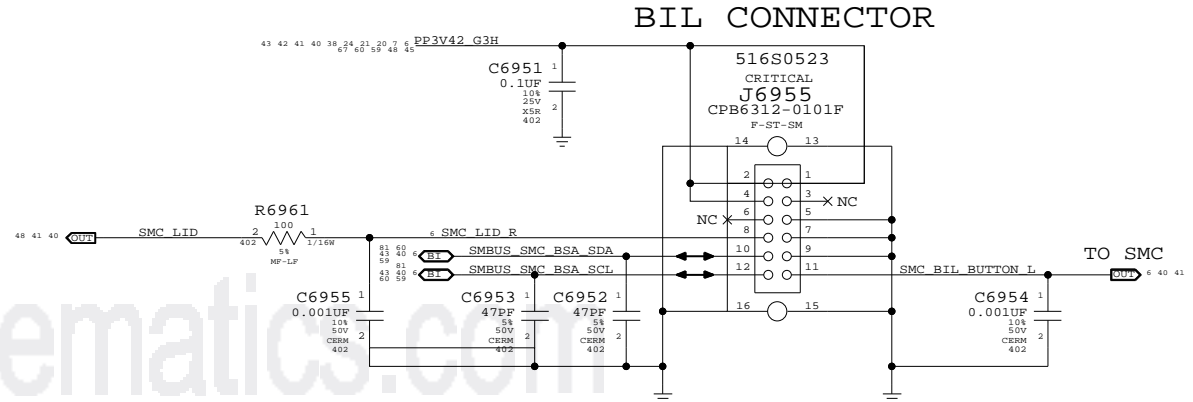

3.425V "G3Hot" Supply

Supply needs to guarantee 3.31V delivered to SMC VRef generator

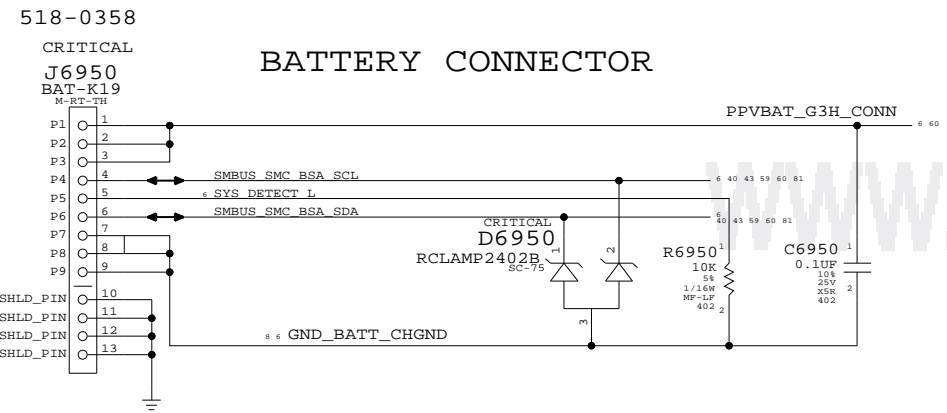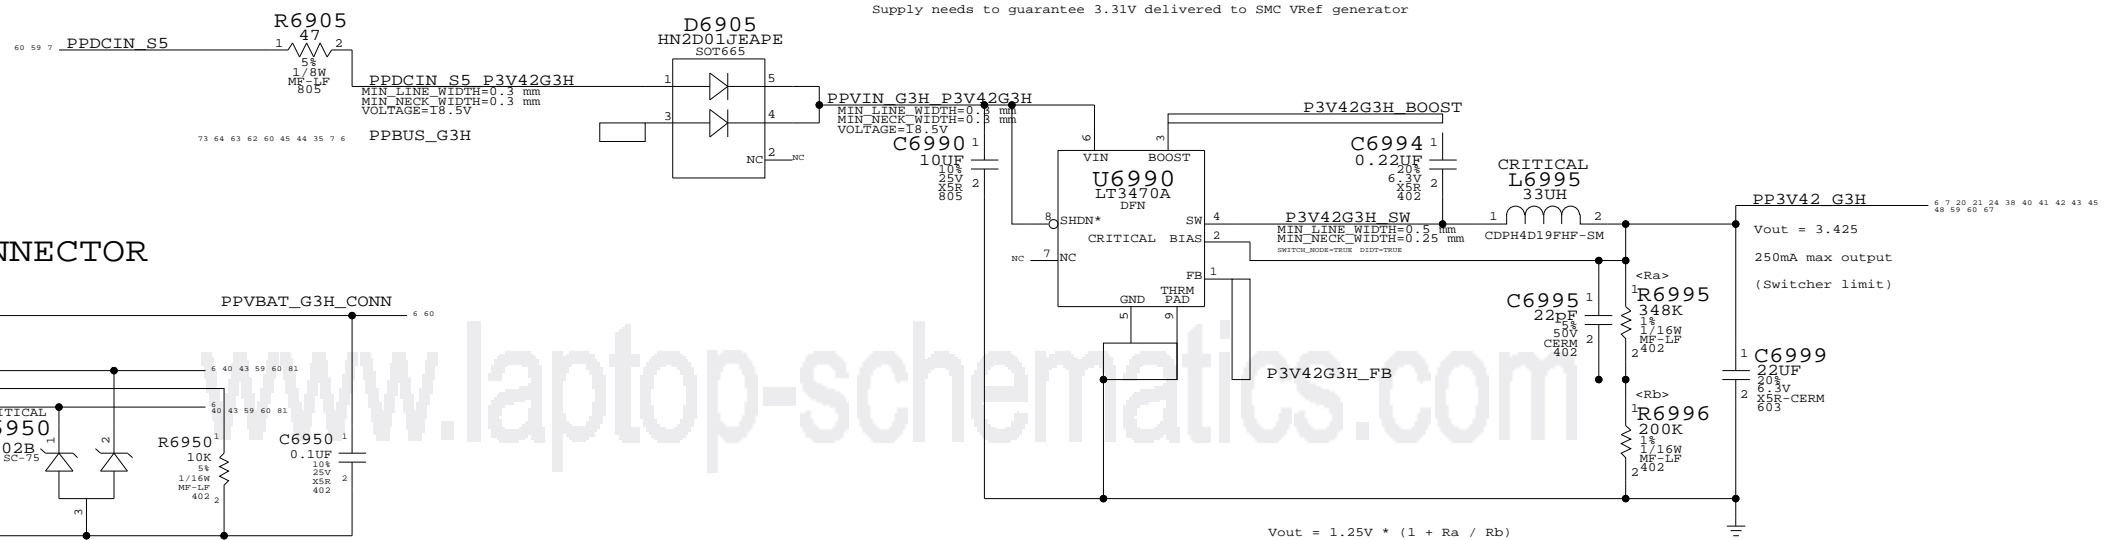

DC-In & Battery Connectors

SYNC_MASTER=K19_MLB SYNC_DATE=03/18/2009

NOTICE OF PROPRIETARY PROPERTY


THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	83
NONE	59		

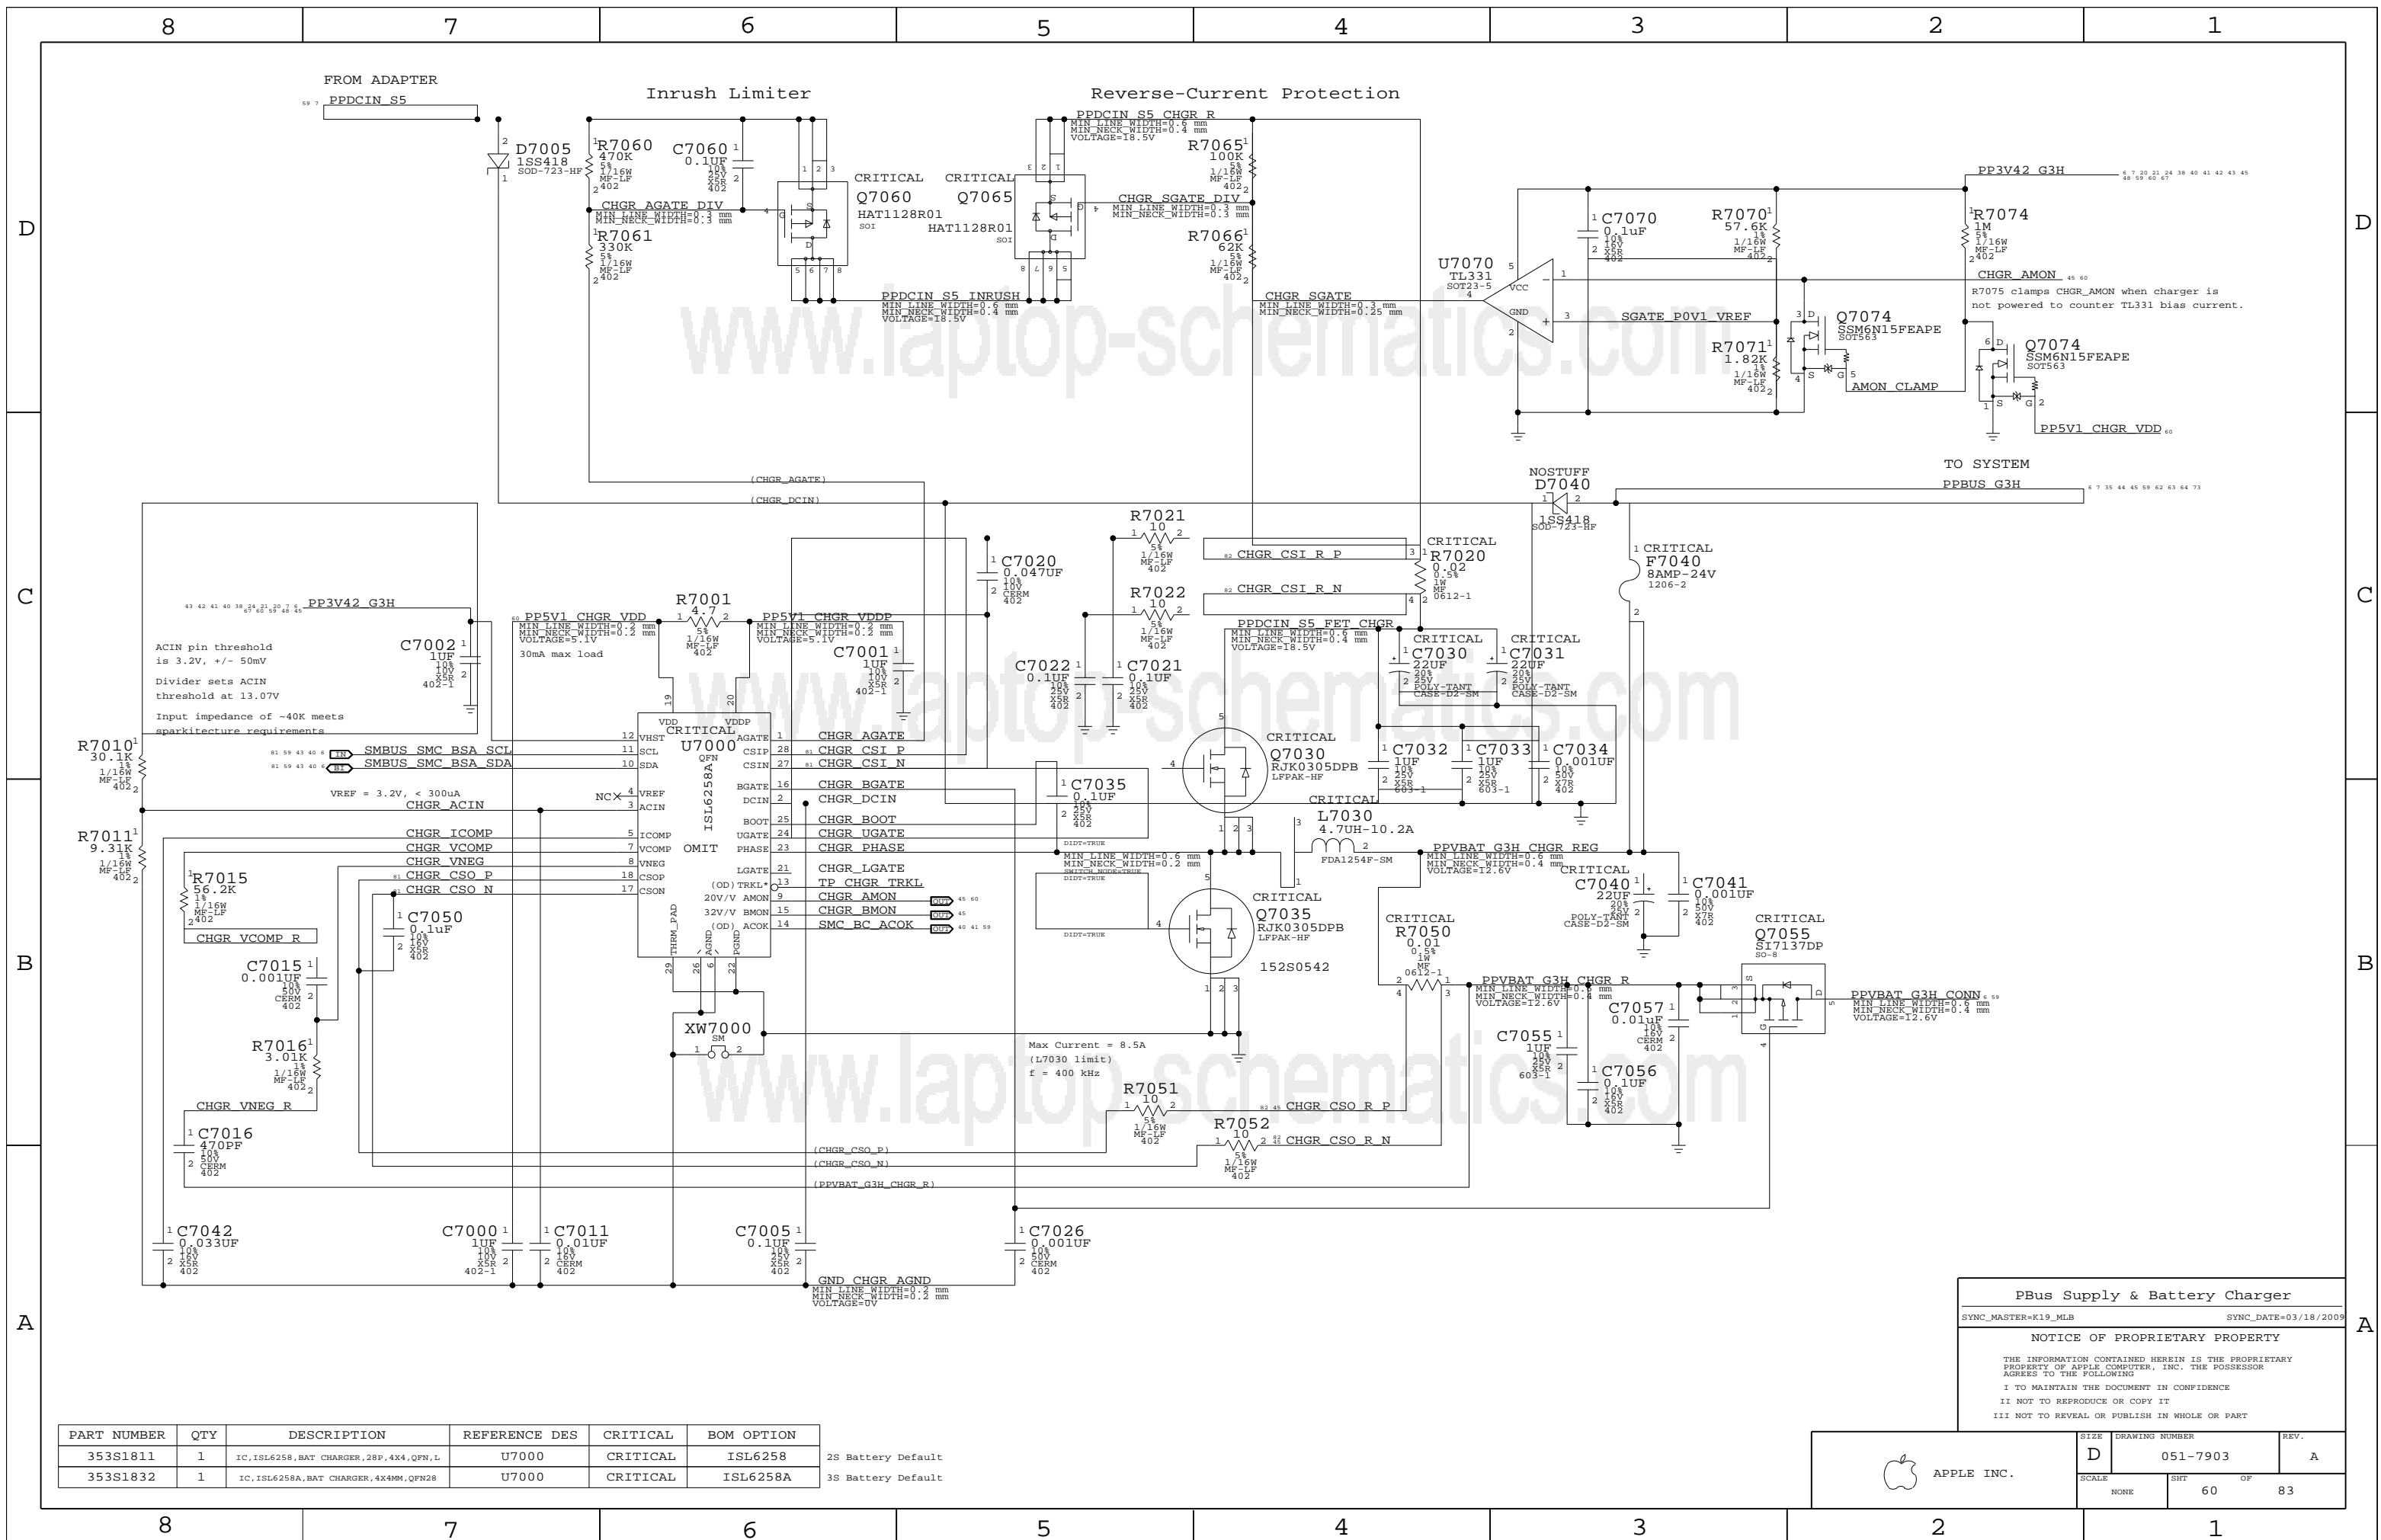


www.laptop-schematics.com

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
353S1811	1	IC, ISL6258, BAT CHARGER, 28P, 4X4, QFN, L	U7000	CRITICAL	ISL6258 2S Battery Default
353S1832	1	IC, ISL6258A, BAT CHARGER, 4X4MM, QFN28	U7000	CRITICAL	ISL6258A 3S Battery Default

PBus Supply & Battery Charger
 SYNC_MASTER=K19_MLB SYNC_DATE=03/18/2009
NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SCALE	SHEET	OF	REV.
	NONE	60	83	A

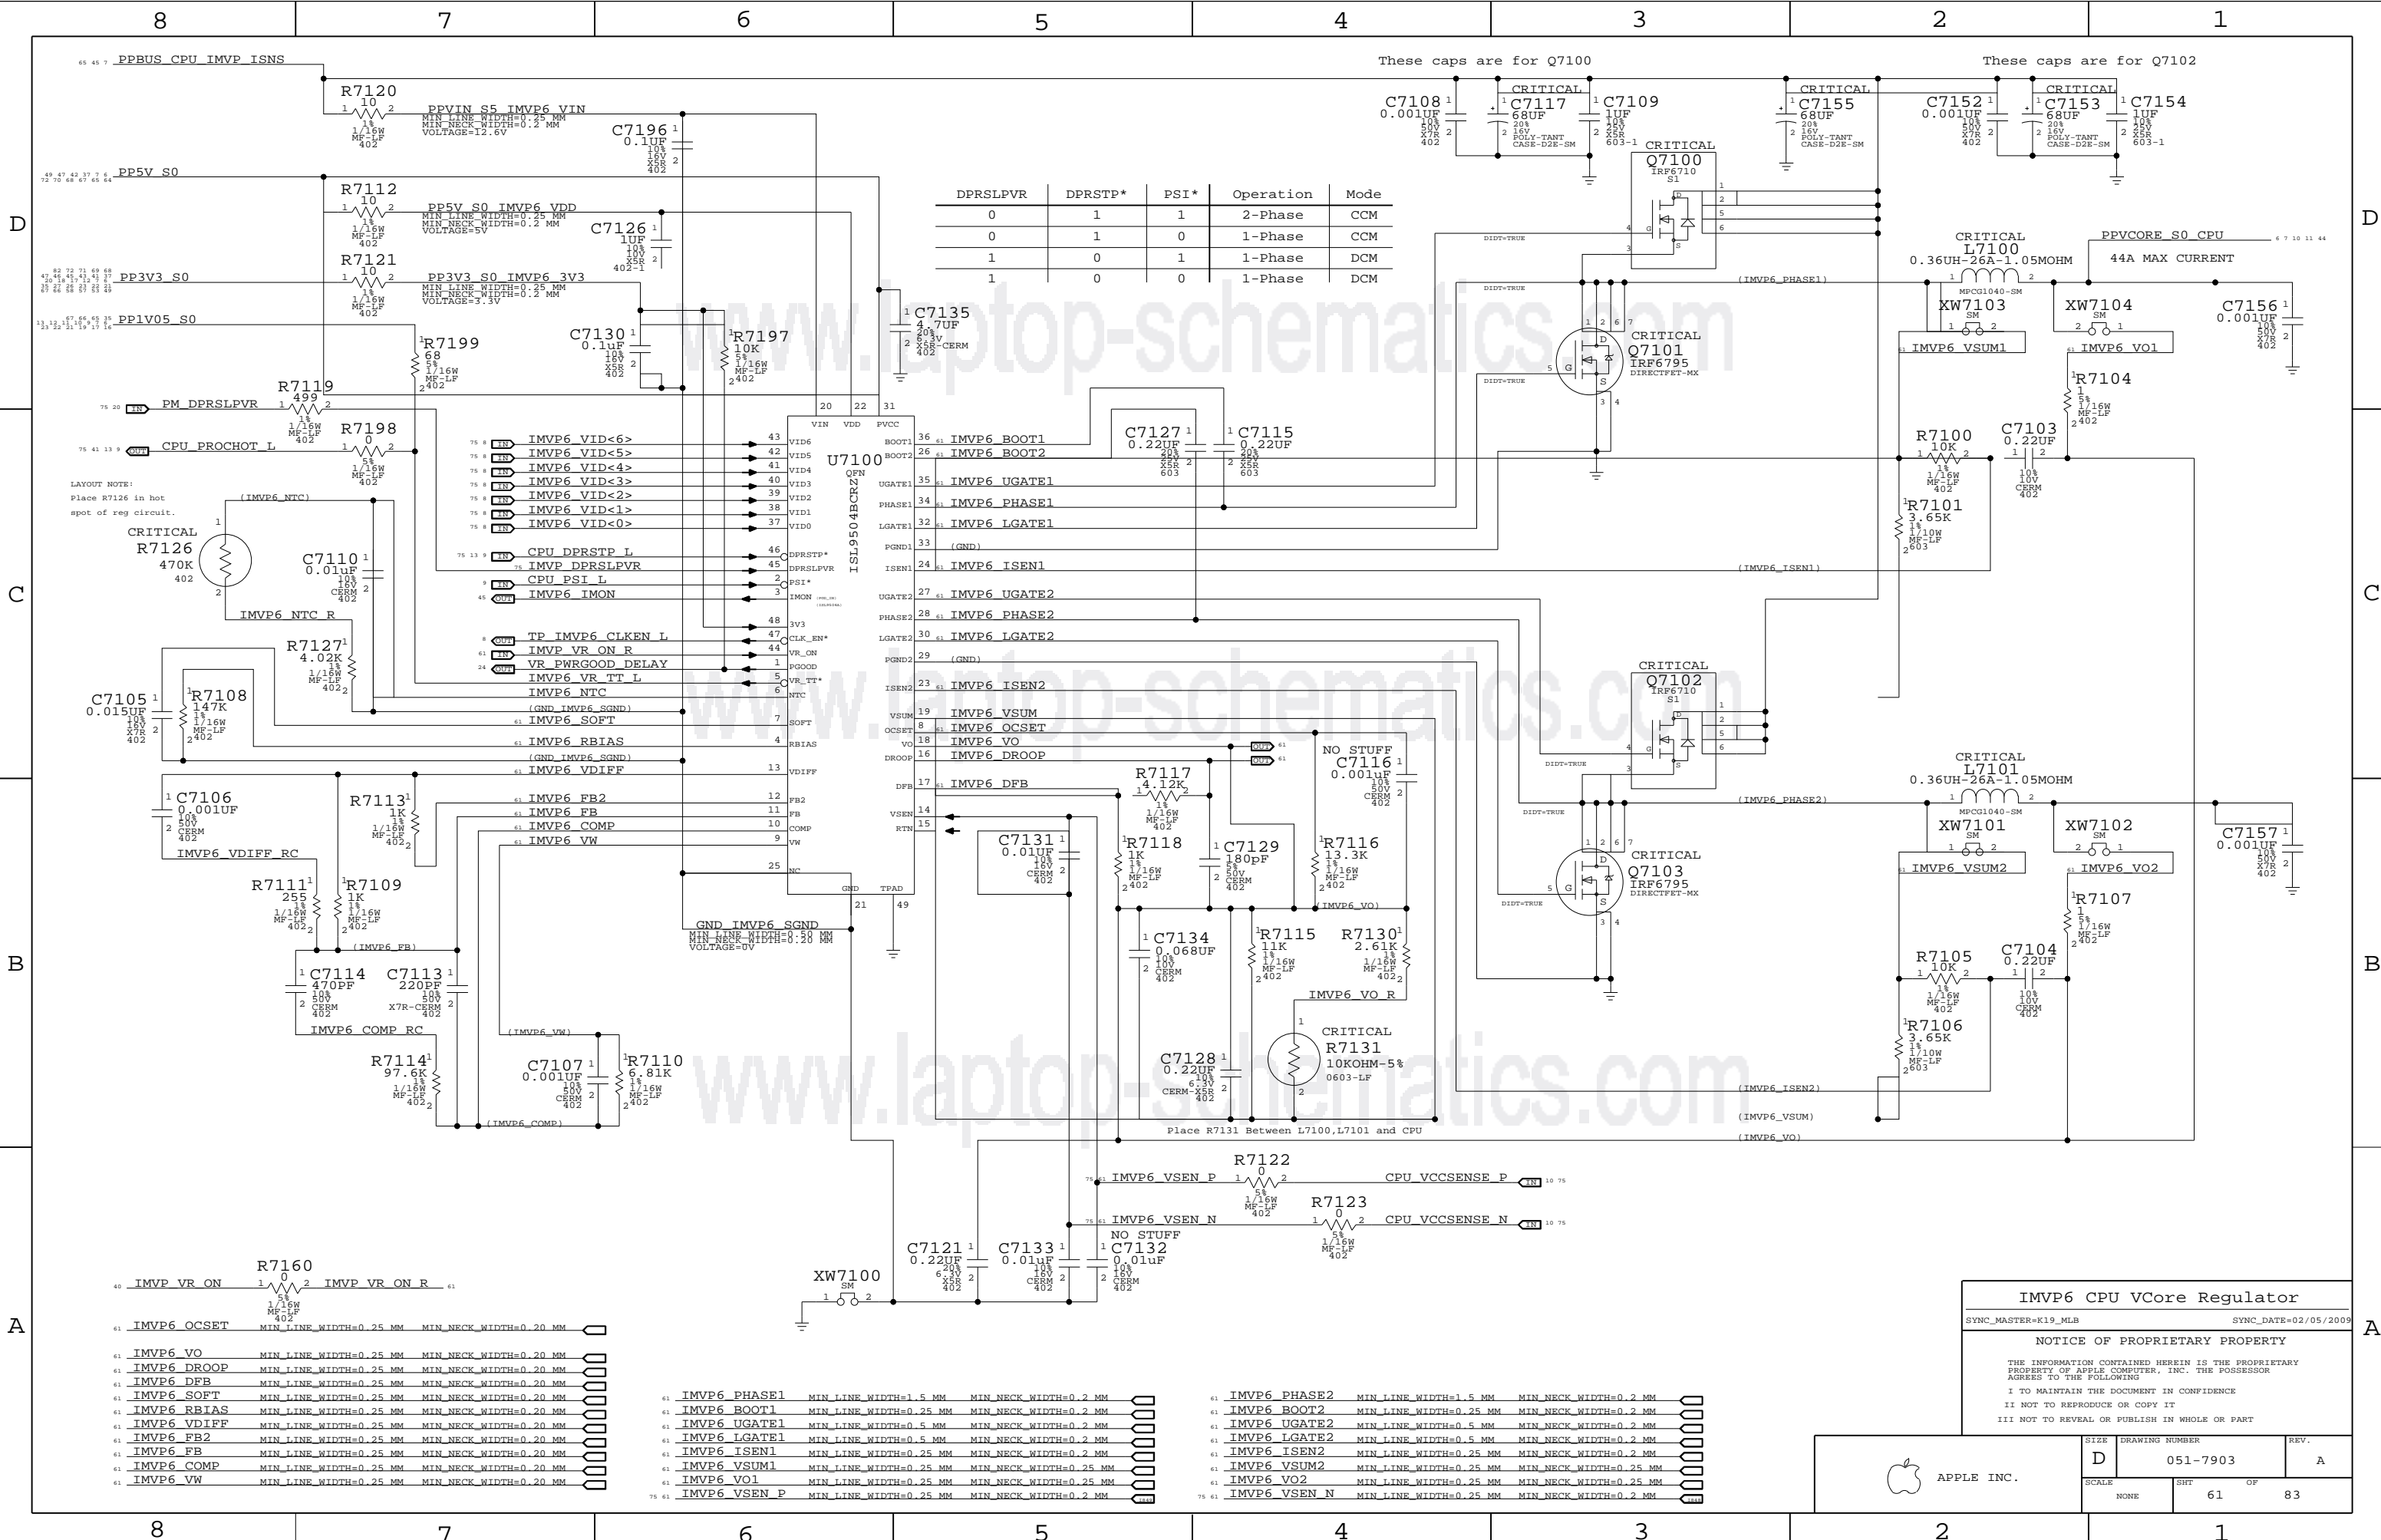


DPRSLPVR	DPRSTP*	PSI*	Operation	Mode
0	1	1	2-Phase	CCM
0	1	0	1-Phase	CCM
1	0	1	1-Phase	DCM
1	0	0	1-Phase	DCM

IMVP6 CPU VCore Regulator

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY


THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHEET	OF
NONE	61	83

www.laptop-schematics.com

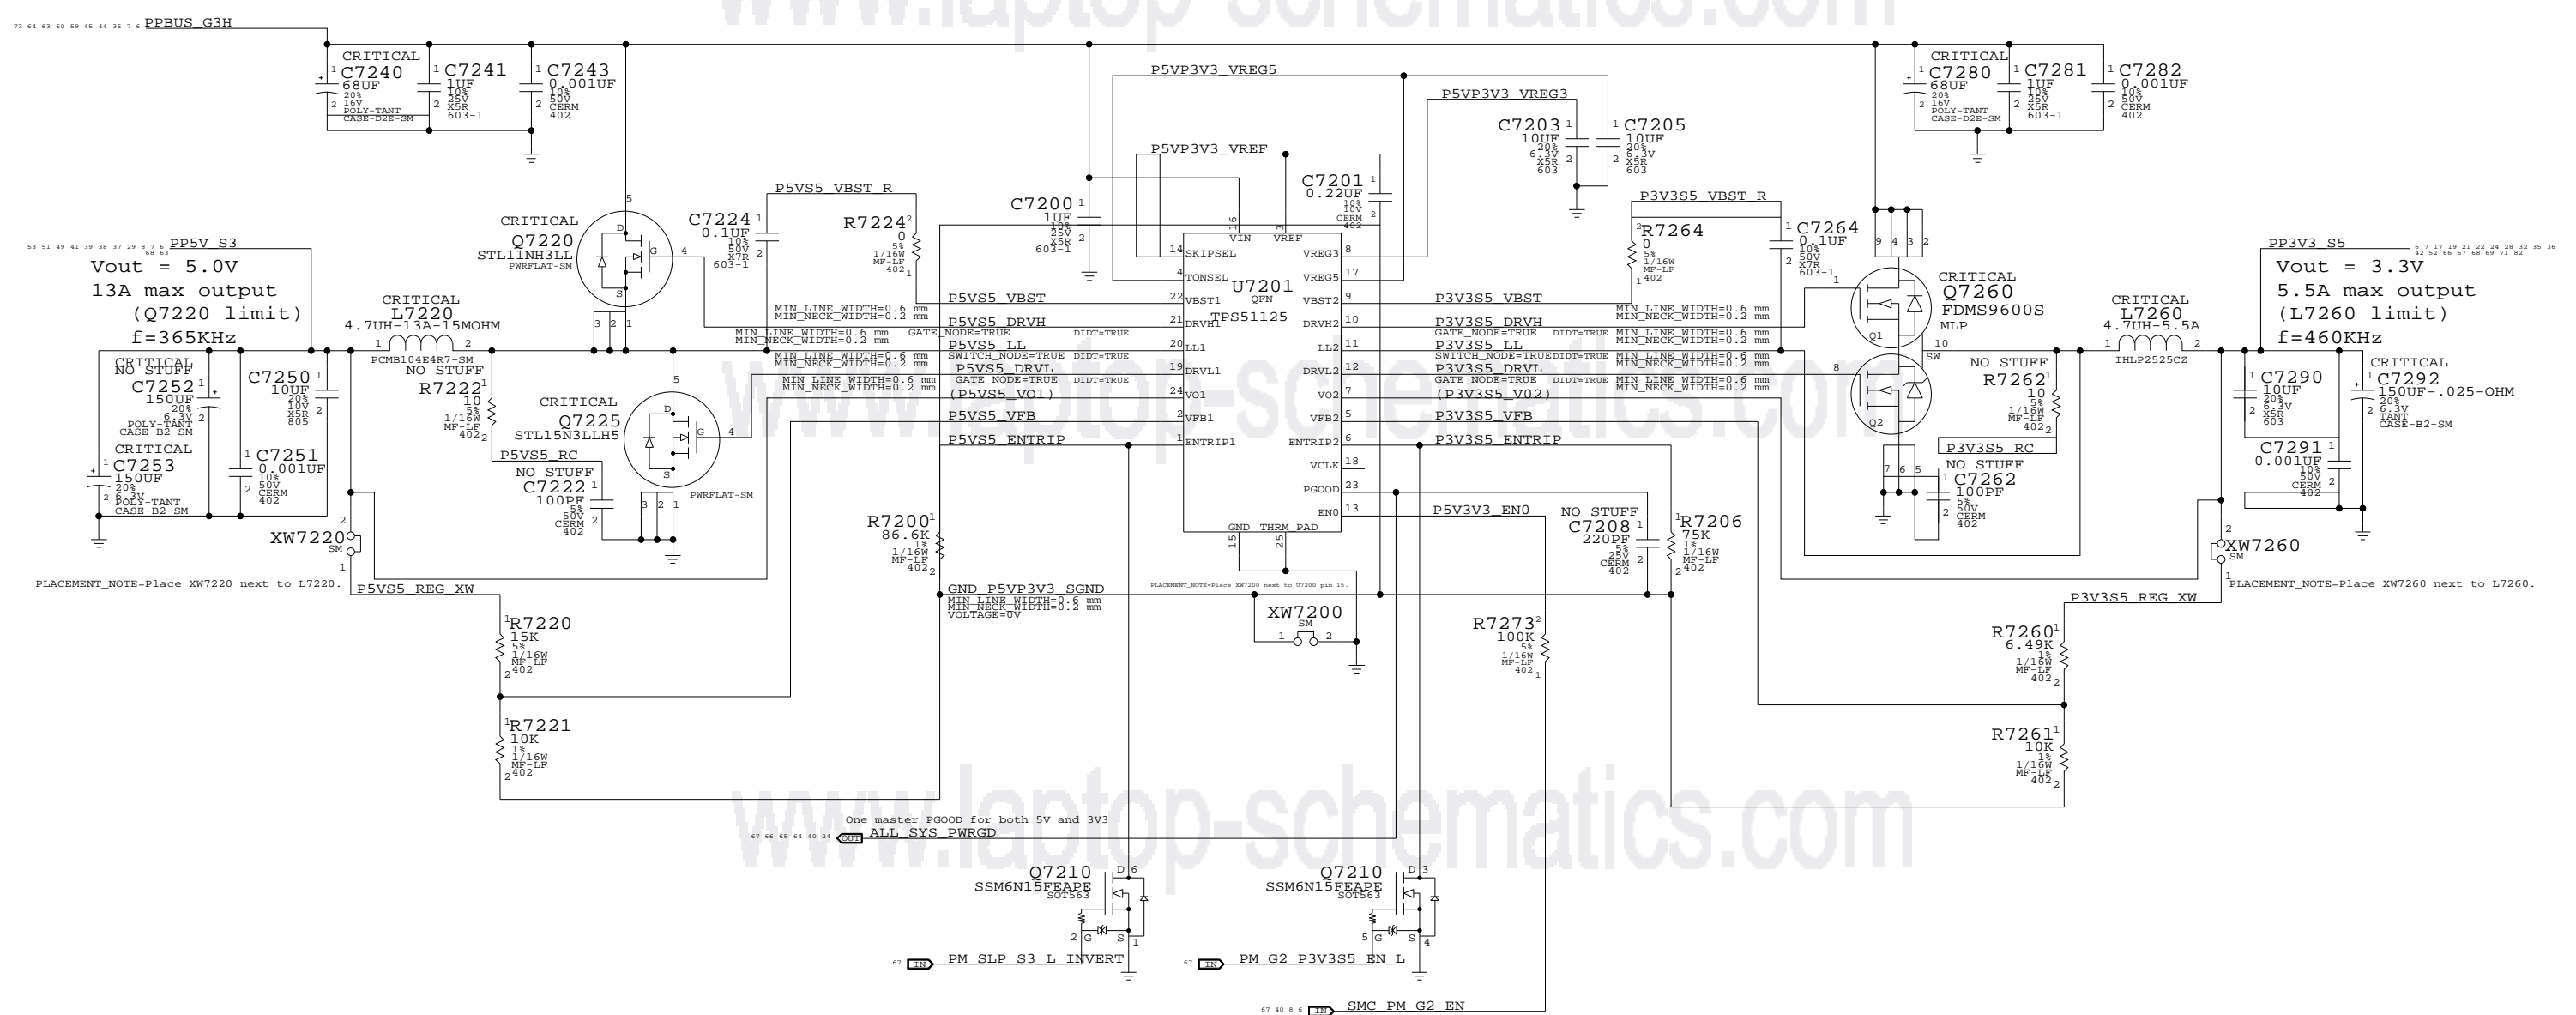

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
152S0778	152S0693		ALL	Cyano alternate to RedLayer

5V / 3.3V Power Supply

SYNC_MASTER=WFERRY_R191 SYNC_DATE=01/13/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING


I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

 APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	62	83	

www.laptop-schematics.com

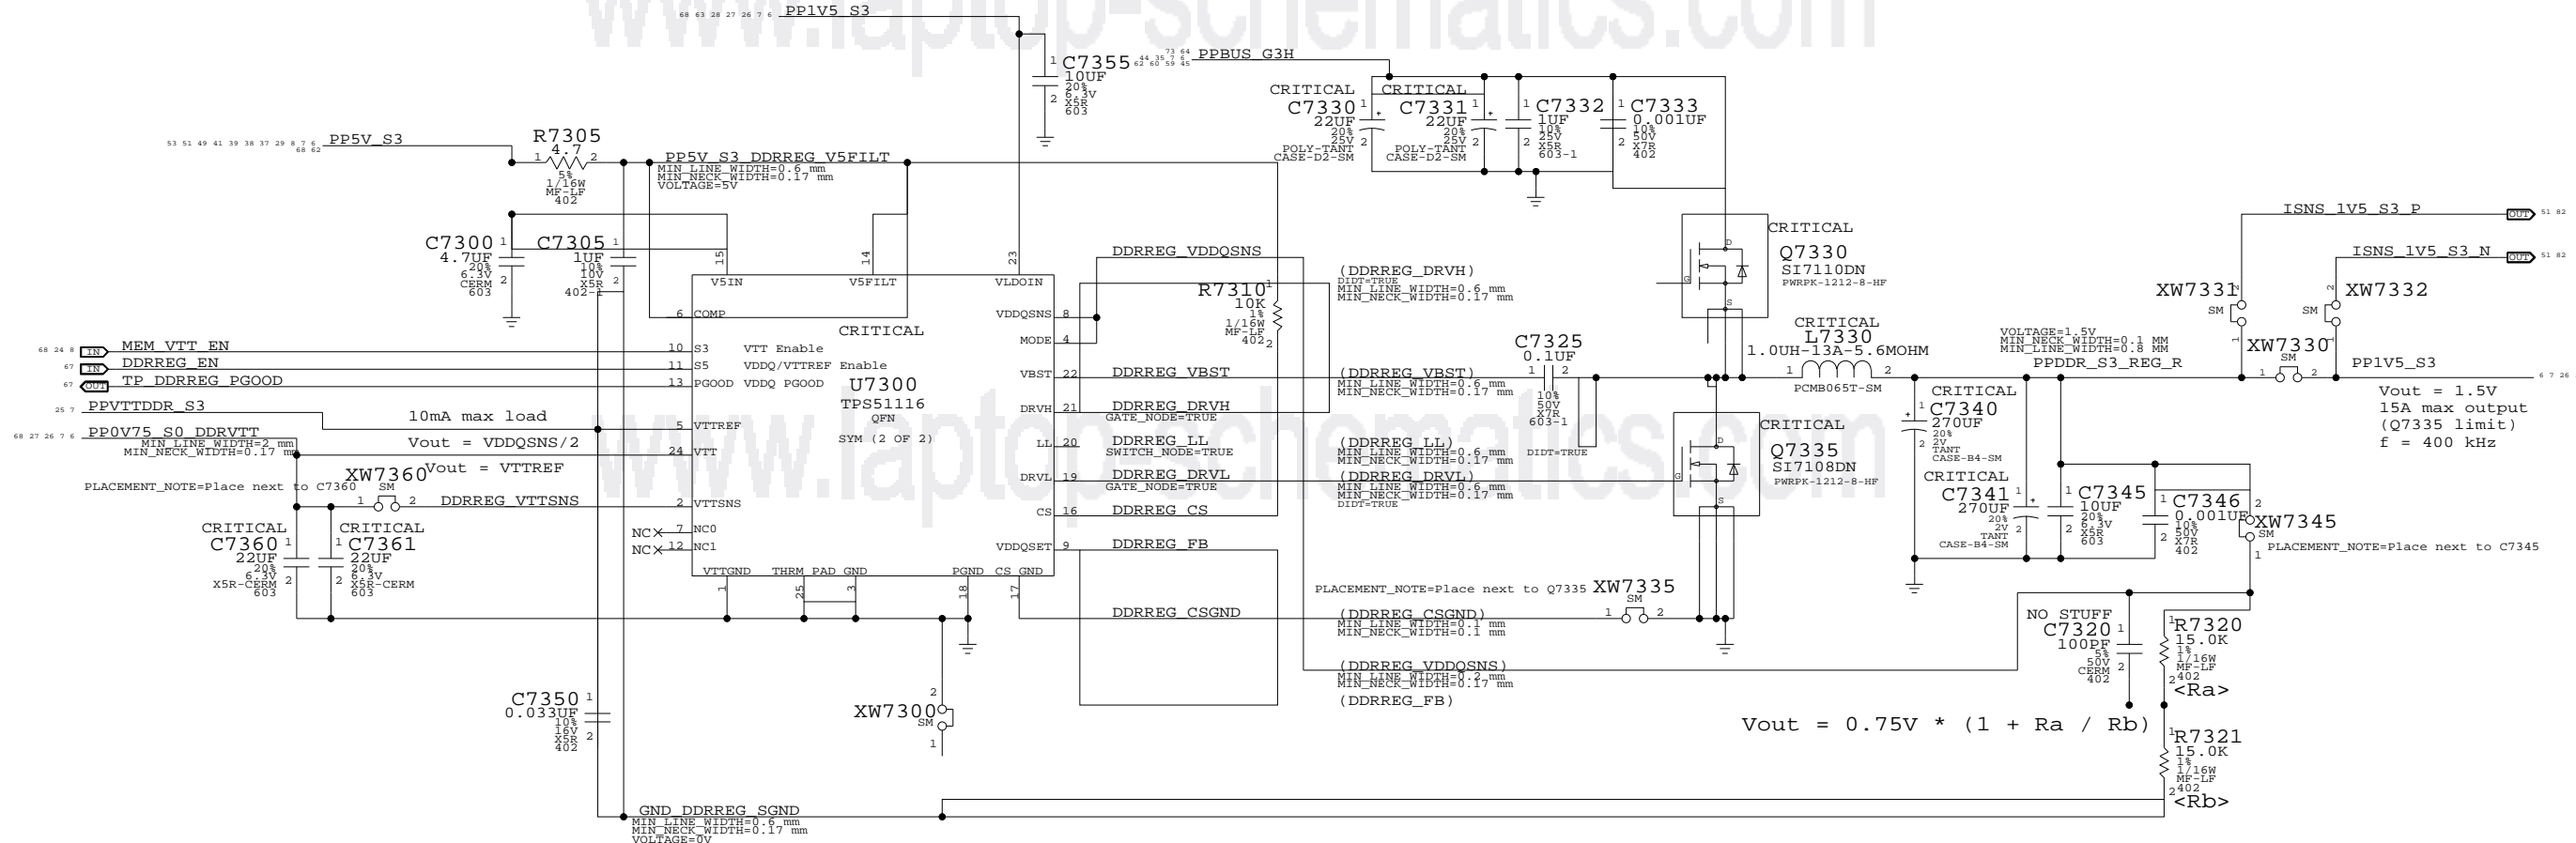

1.5V DDR3 Supply
SYNC_MASTER=K19_MLB SYNC_DATE=02/04/2009
NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	63		83

D

D

C

C

B

B

A

A

8

7

6

5

4

3

2

1

8

7

6


5

4

3

2

1

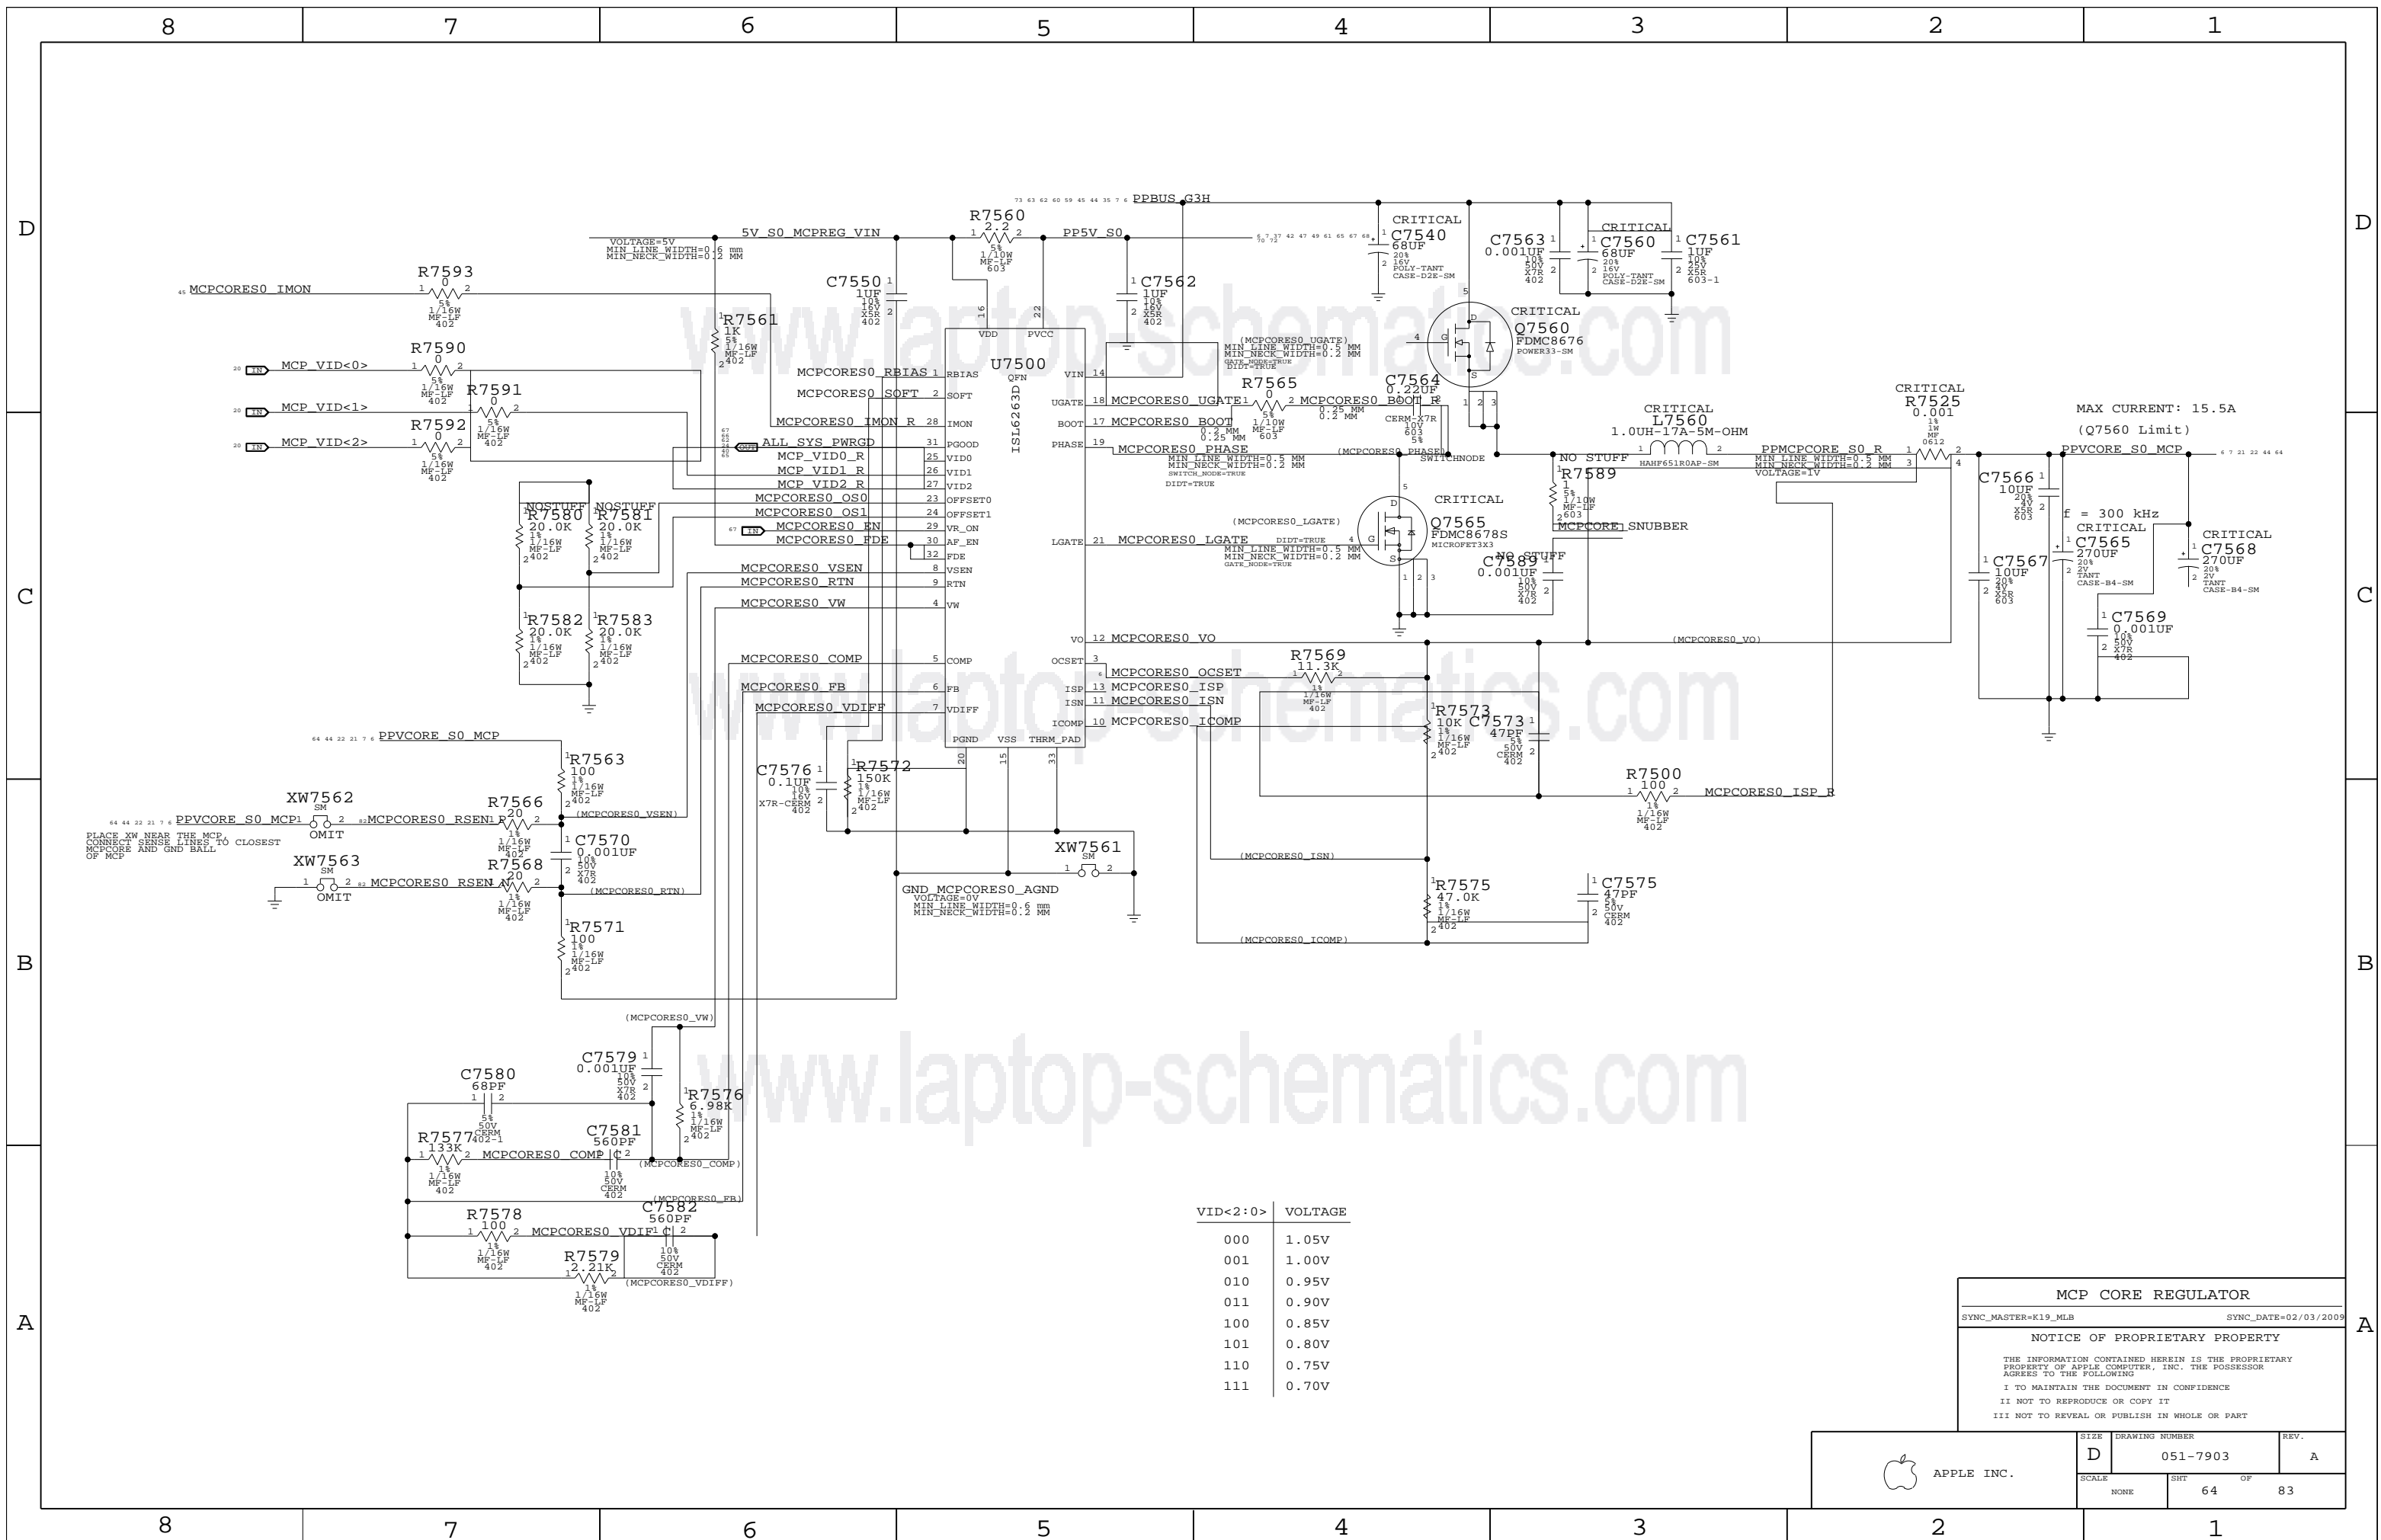

VID<2>	VOLTAGE
000	1.05V
001	1.00V
010	0.95V
011	0.90V
100	0.85V
101	0.80V
110	0.75V
111	0.70V

MCP CORE REGULATOR

SYNC_MASTER=K19_MLB SYNC_DATE=02/03/2009


NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

 APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	64	83	

www.laptop-schematics.com

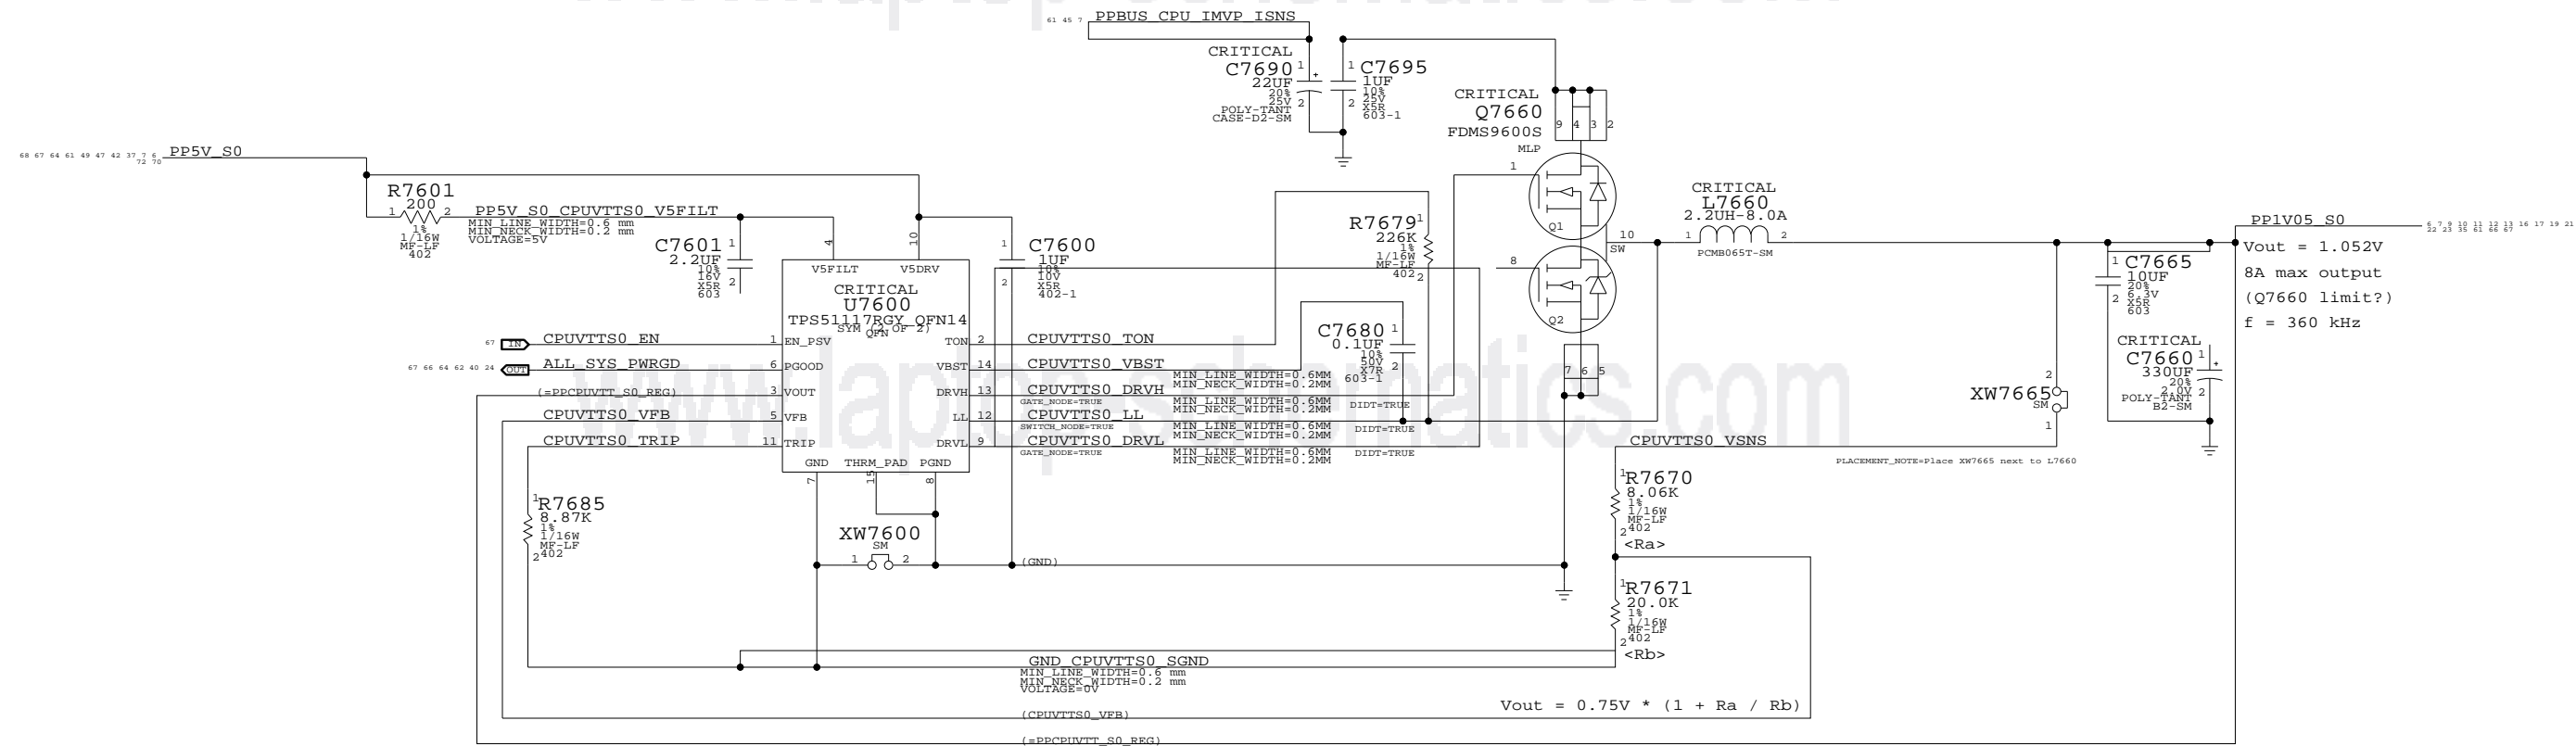


www.laptop-schematics.com

M99 differences from last sync on 12/03/07 to T18 MLB:
1. Tied THERMAL_PAD to PGND. GND and THERMAL_PAD disconnected.


CPU VTT Power Supply
SYNC_MASTER=(K19_MLB) SYNC_DATE=(12/05/2008)
NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	65	83	


1.8V S0 SWITCHER

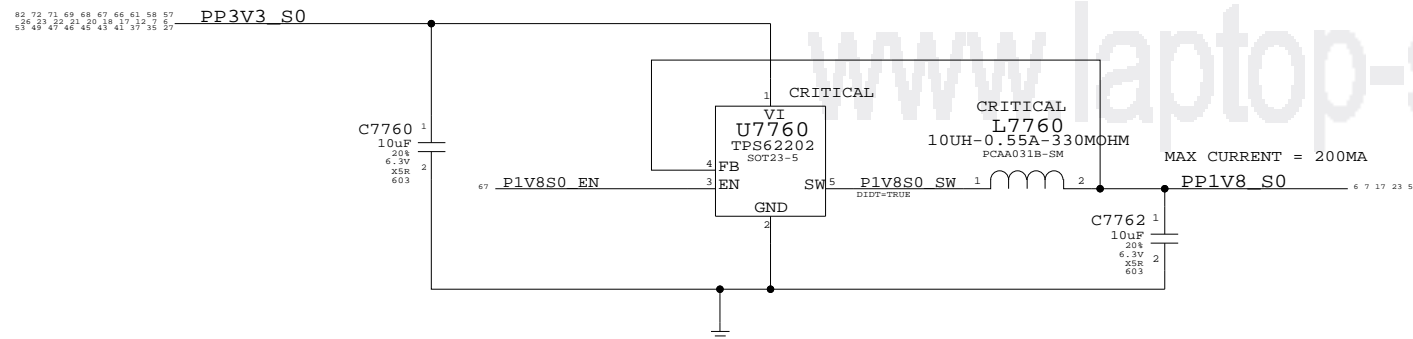

1.05V S0 PLL LDO

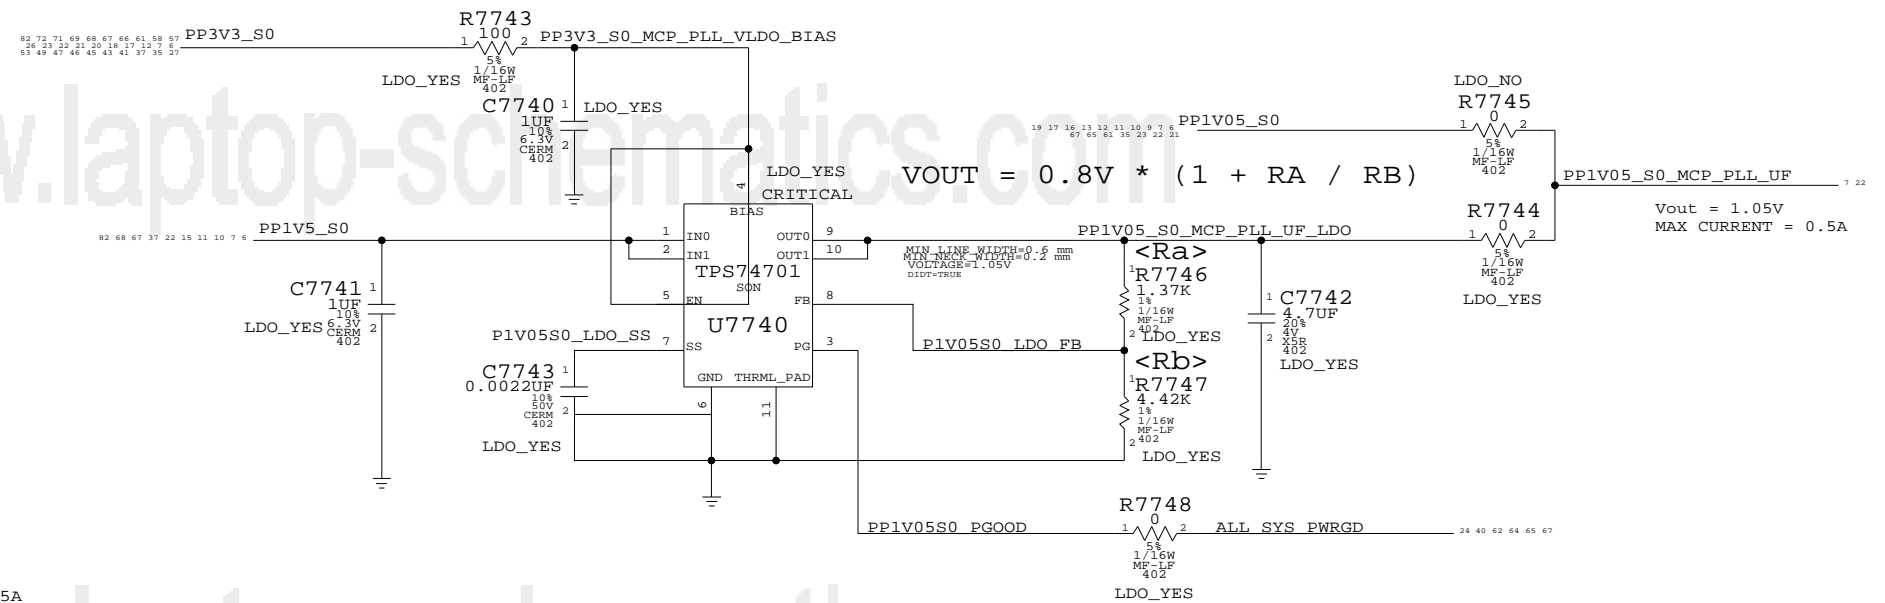

MCP 1.05V S5 (AUXC) SUPPLY

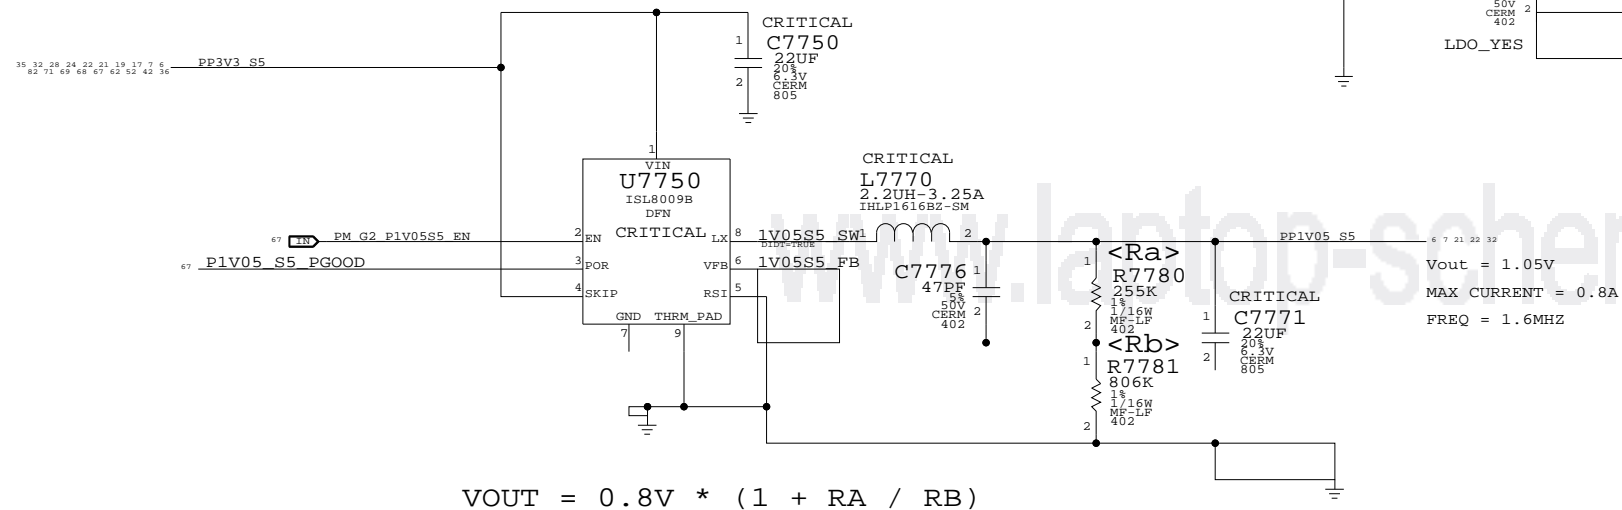


MISC POWER SUPPLIES

SYNC_MASTER=K24_MLB SYNC_DATE=02/25/2009


NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE INC.



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	66	83

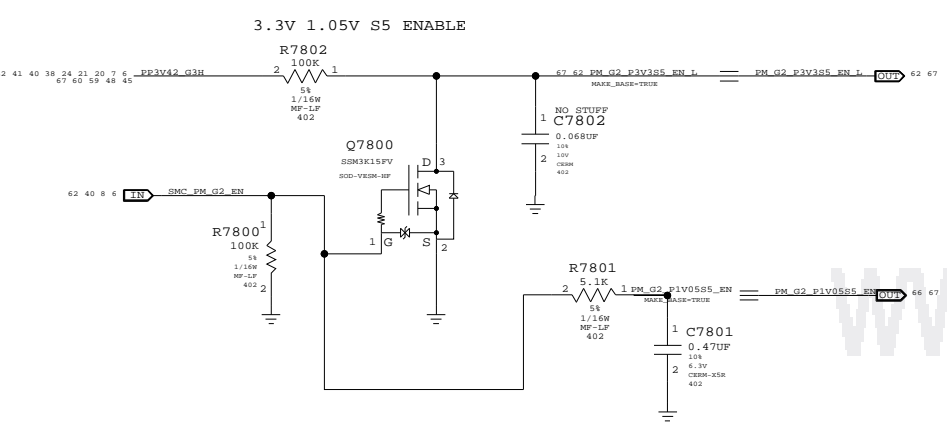


Power Control Signals

State	SMC_PM_G2_ENABLE	PM_SLP_S4_L	PM_SLP_S3_L
Run (S0)	1	1	1
Sleep (S3)	1	1	0
Soft-Off (S5)	1	0	0
Battery Off (G3Hot)	0	0	0


3.3V_S0, 1.8V_S0 ENABLE
MCPDDR, CPUVTT, MCPCORES0 ENABLE
1.5V S0 AND 1.05V S0 ENABLE

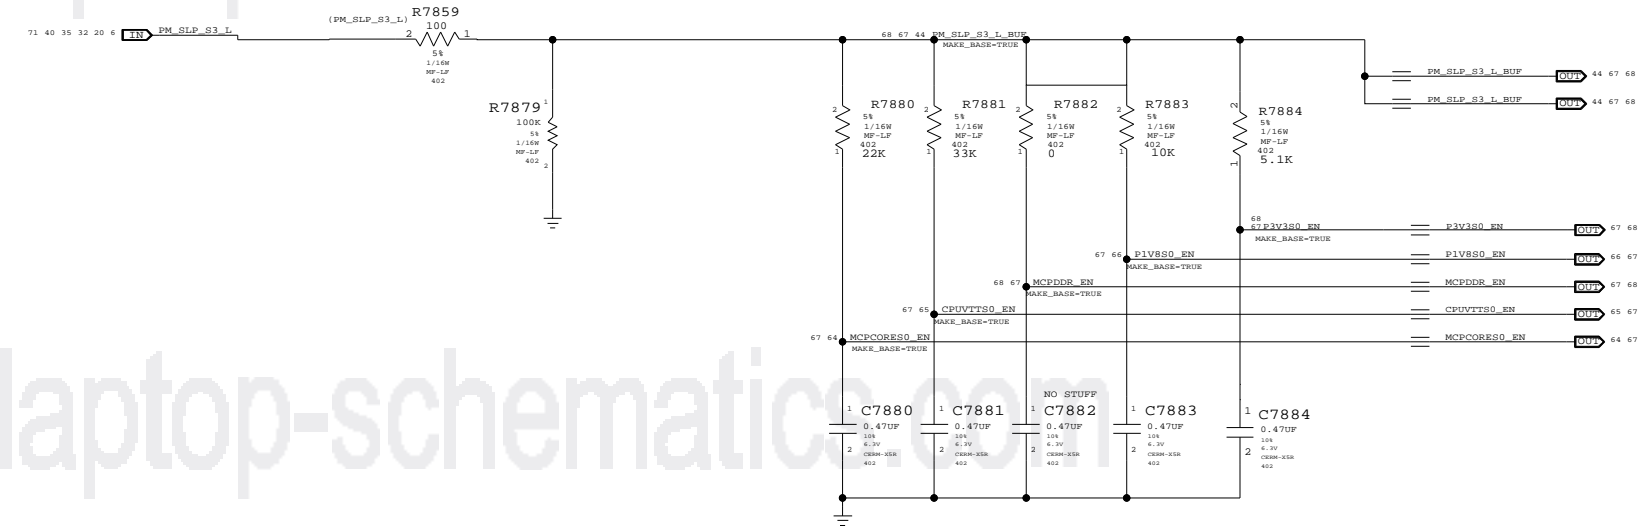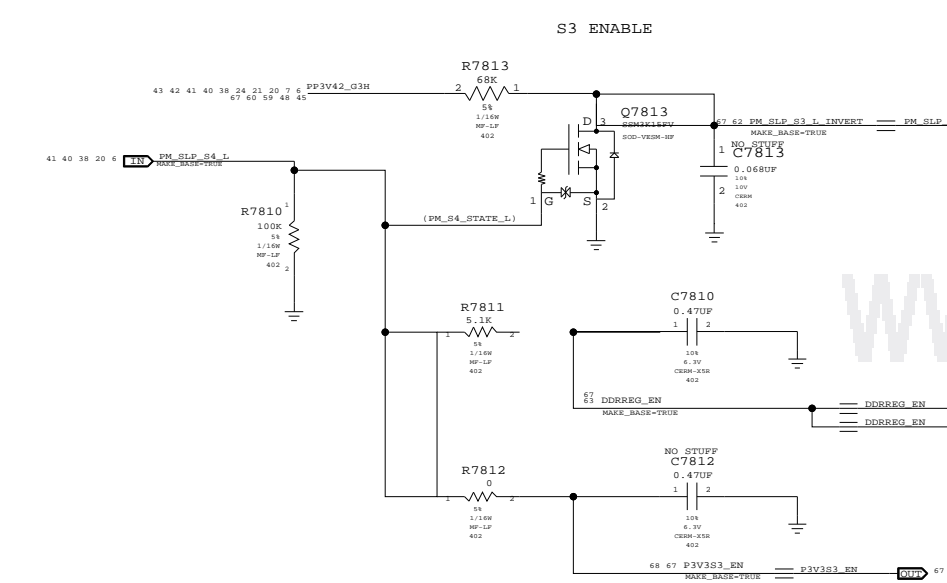


VOLTAGE MONITOR

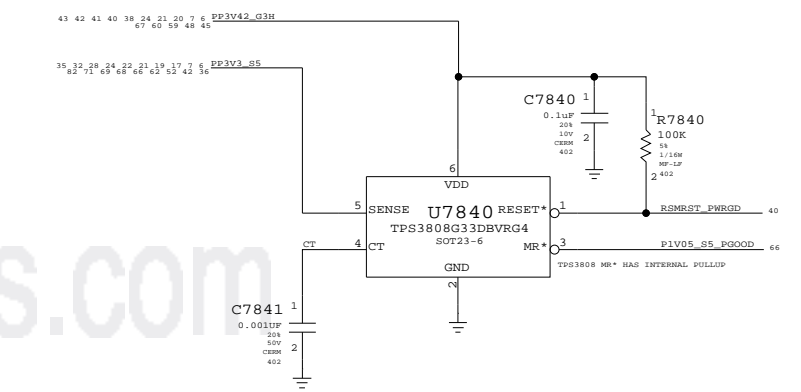

3.3V 1.05V AND 1.5V S0 RAILS MONITOR CIRCUIT

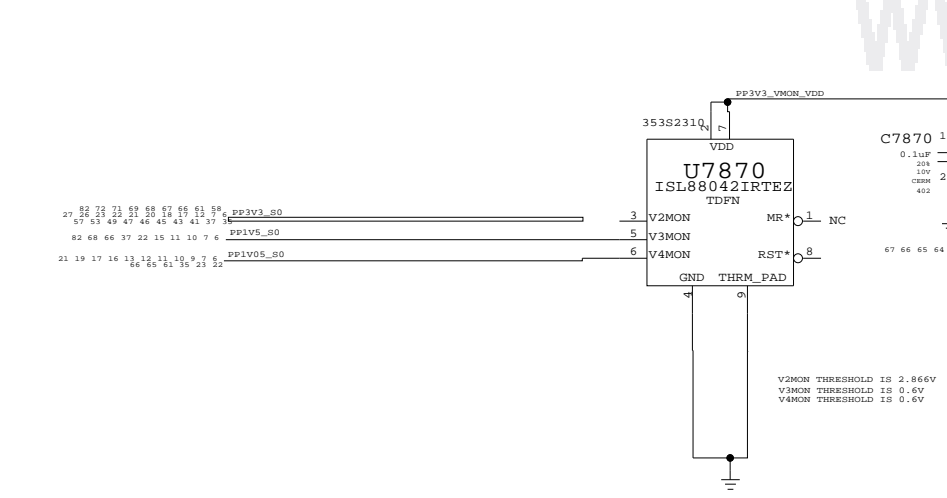


OTHER S0 RAILS PGOOD

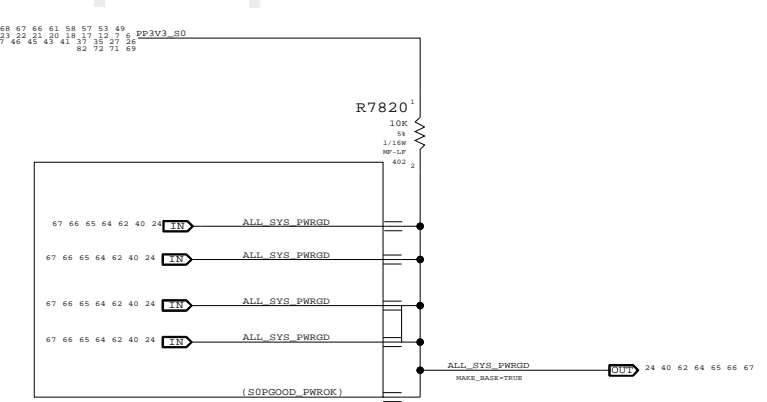

Unused PGOOD signal
TP_DDRREG_PGOOD

POWER SEQUENCING
 SYNC_MASTER=K24_MLB SYNC_DATE=02/05/2009
NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

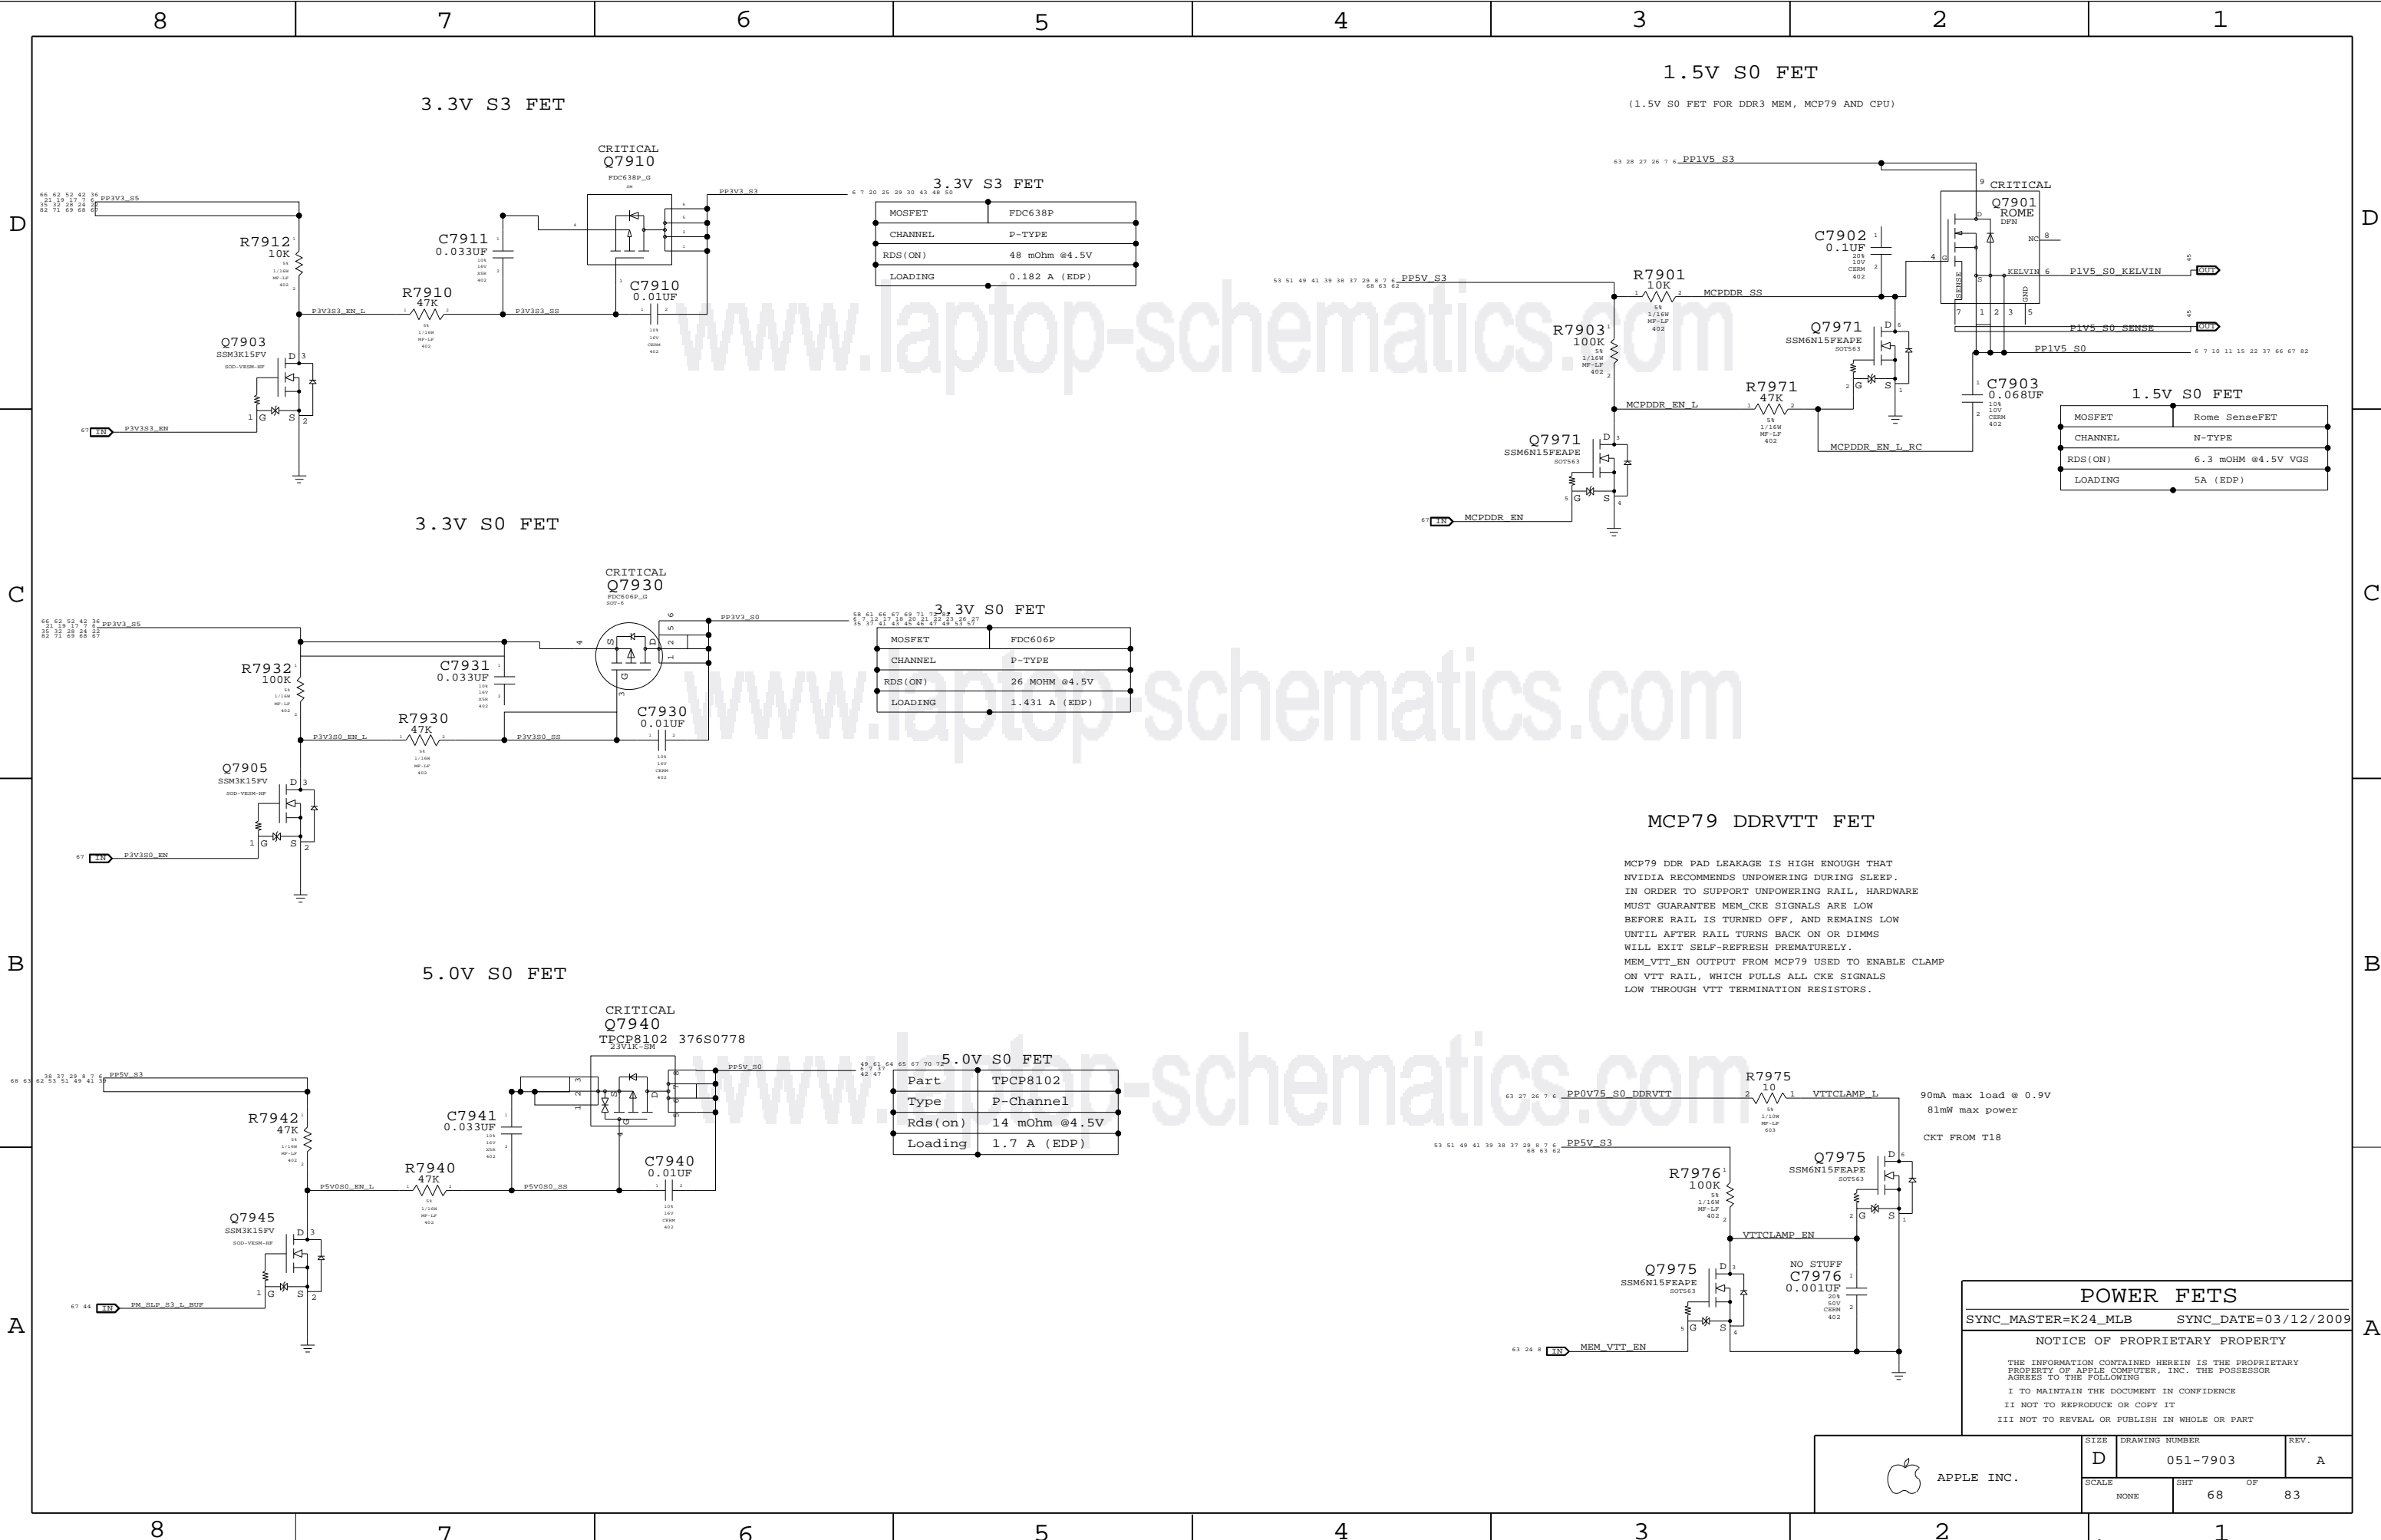

3.3V S3 FET

CRITICAL
Q7910

3.3V S3 FET

MOSFET	FDC638P
CHANNEL	P-TYPE
RDS(ON)	48 mOhm @4.5V
LOADING	0.182 A (EDP)

3.3V S0 FET

CRITICAL
Q7930

3.3V S0 FET

MOSFET	FDC606P
CHANNEL	P-TYPE
RDS(ON)	26 MOhm @4.5V
LOADING	1.431 A (EDP)

5.0V S0 FET

CRITICAL
Q7940

5.0V S0 FET

Part	TPCP8102
Type	P-Channel
Rds(on)	14 mOhm @4.5V
Loading	1.7 A (EDP)

1.5V S0 FET

(1.5V S0 FET FOR DDR3 MEM, MCP79 AND CPU)

1.5V S0 FET

MOSFET	Rome SenseFET
CHANNEL	N-TYPE
RDS(ON)	6.3 mOhm @4.5V VGS
LOADING	5A (EDP)


MCP79 DDRVTT FET

MCP79 DDR PAD LEAKAGE IS HIGH ENOUGH THAT NVIDIA RECOMMENDS UNPOWERING DURING SLEEP. IN ORDER TO SUPPORT UNPOWERING RAIL, HARDWARE MUST GUARANTEE MEM_CKE SIGNALS ARE LOW BEFORE RAIL IS TURNED OFF, AND REMAINS LOW UNTIL AFTER RAIL TURNS BACK ON OR DIMMS WILL EXIT SELF-REFRESH PREMATURELY. MEM_VTT_EN OUTPUT FROM MCP79 USED TO ENABLE CLAMP ON VTT RAIL, WHICH PULLS ALL CKE SIGNALS LOW THROUGH VTT TERMINATION RESISTORS.

90mA max load @ 0.9V
81mW max power
CKT FROM T18

POWER FETS
SYNC_MASTER=K24_MLB SYNC_DATE=03/12/2009
NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	D	DRAWING NUMBER	051-7903	REV.	A
	SCALE	NONE	SHT	68	OF	83

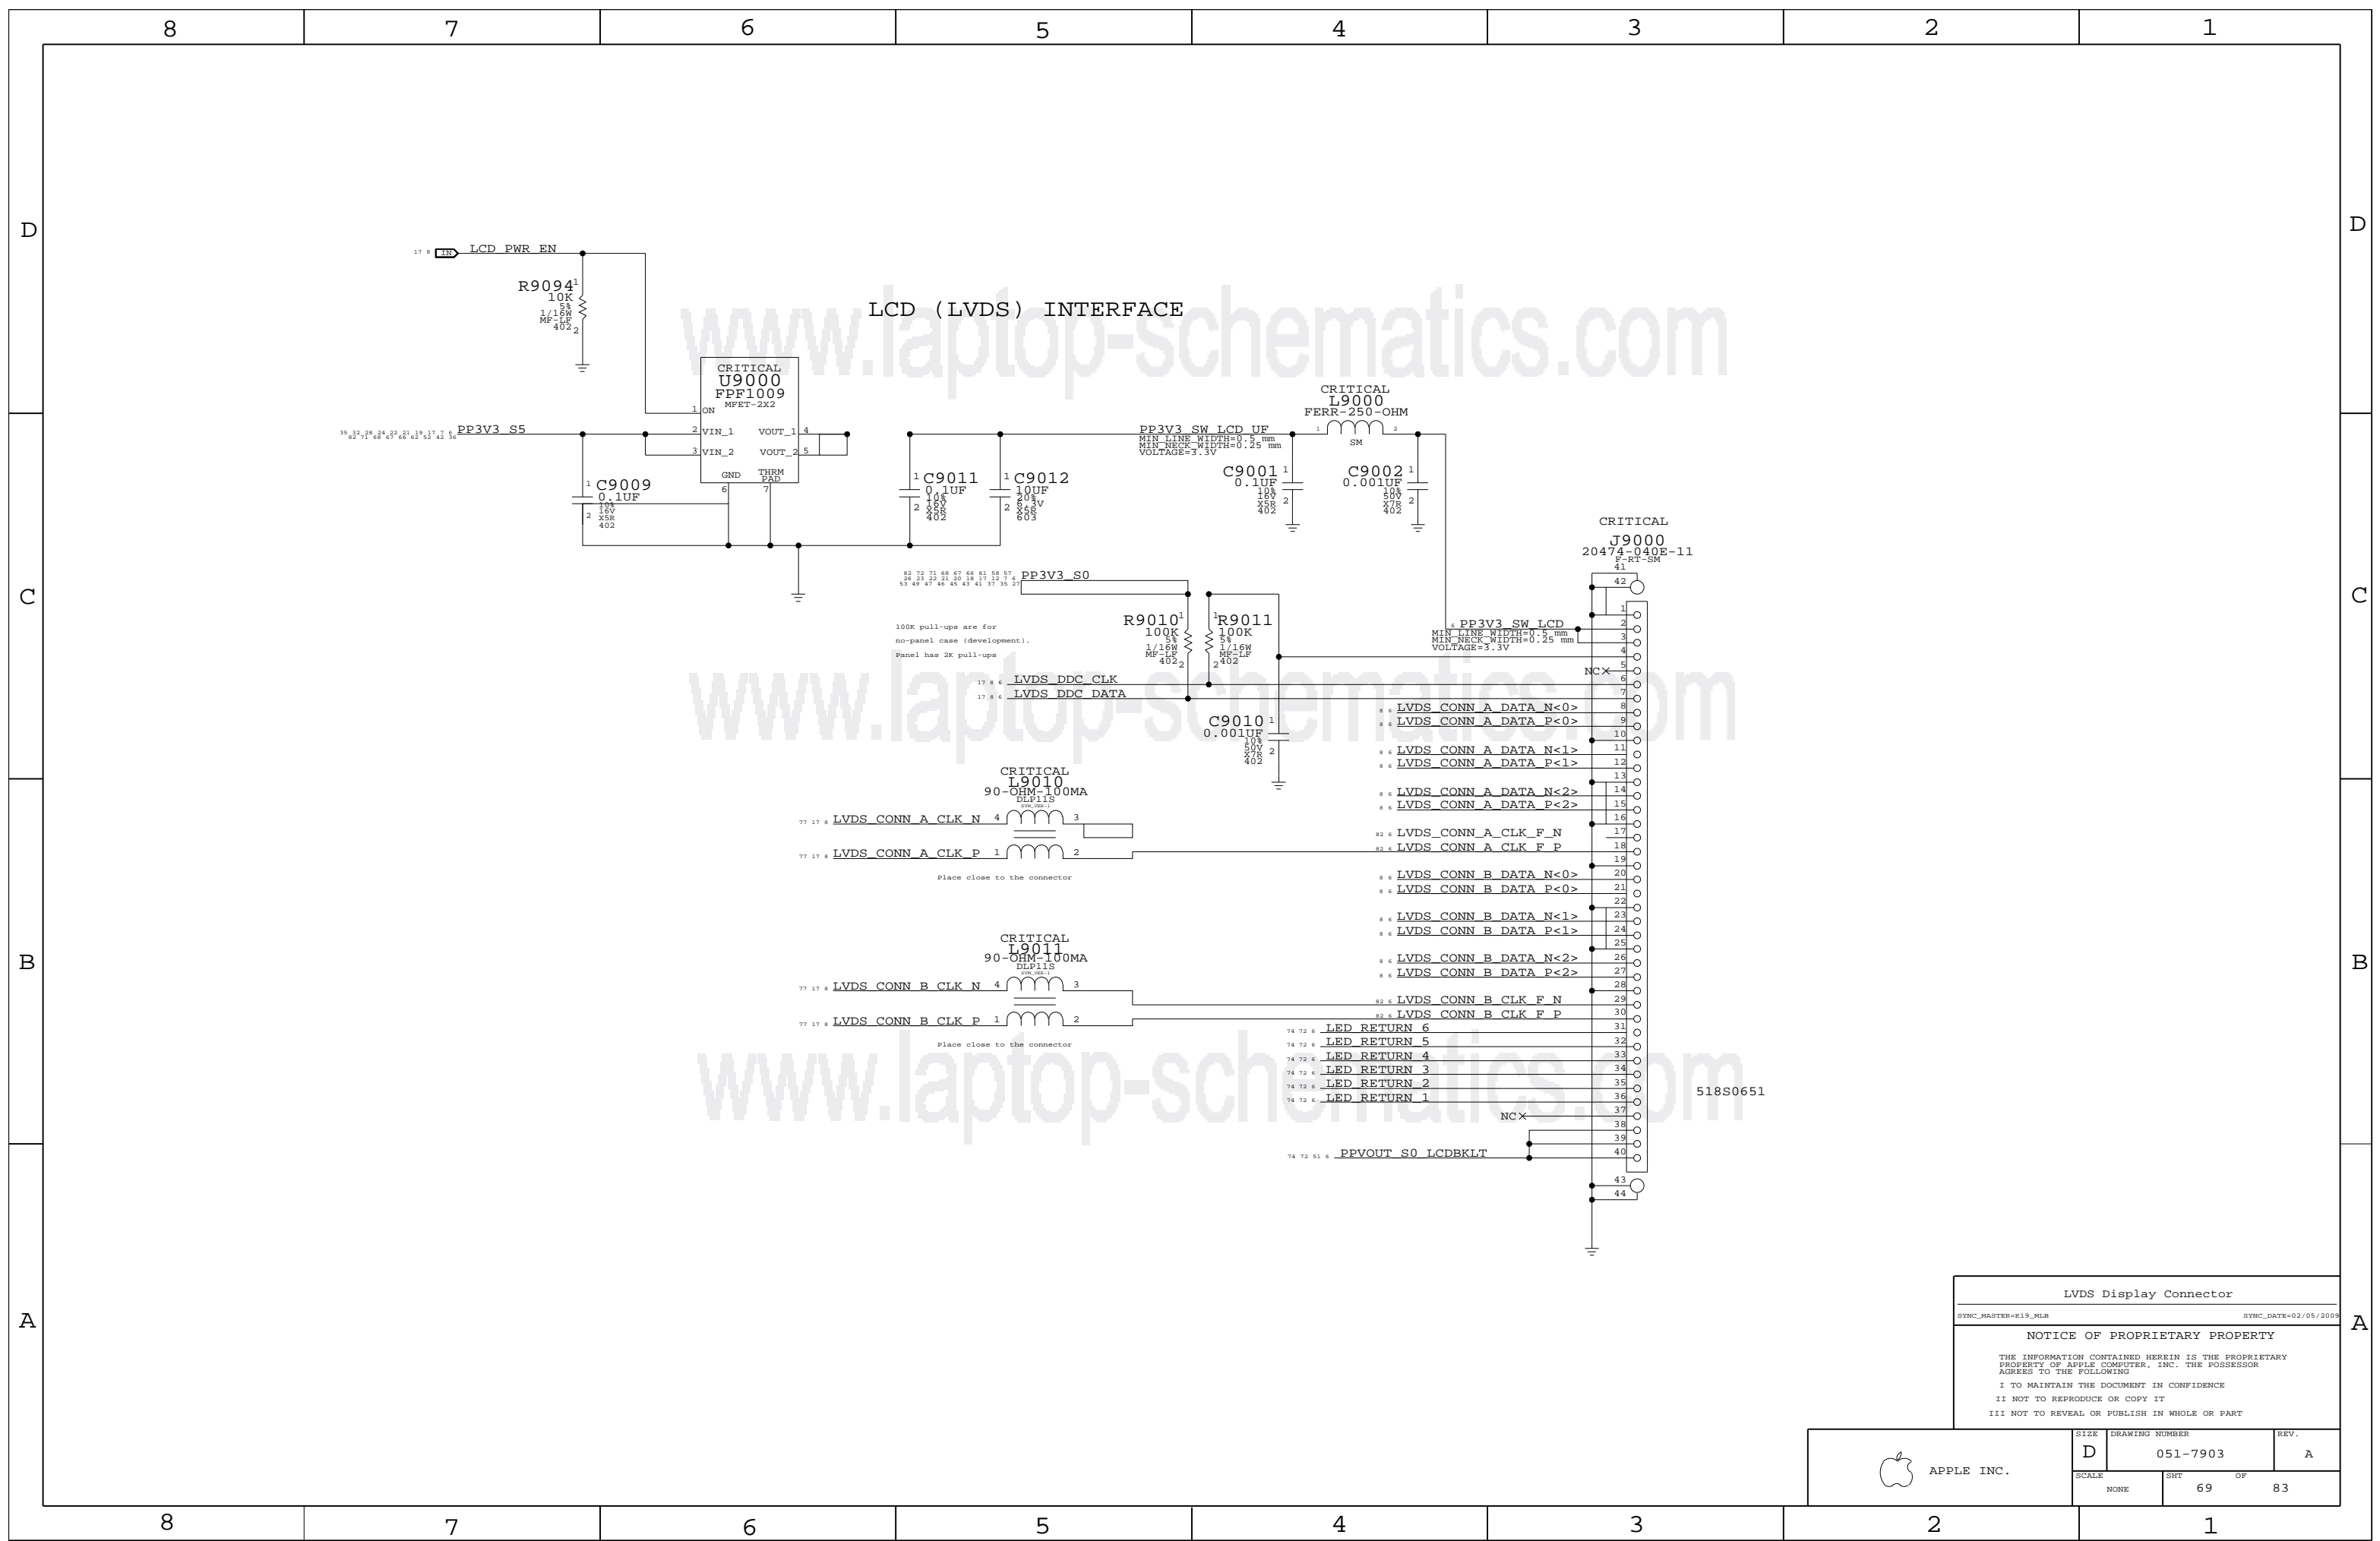

LVDS Display Connector

SYNC_MASTER=K19_MLS SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE D	DRAWING NUMBER 051-7903	REV. A
	SCALE NONE	SHT 69	OF 83


518S0651

www.laptop-schematics.com

www.laptop-schematics.com


www.laptop-schematics.com

17	=MCP_HDMI_TXC_P	DP_ML_P<3>	71 82
17	=MCP_HDMI_TXC_N	DP_ML_N<3>	71 82
17	=MCP_HDMI_TXD_P<0>	DP_ML_P<2>	71 82
17	=MCP_HDMI_TXD_N<0>	DP_ML_N<2>	71 82
17	=MCP_HDMI_TXD_P<1>	DP_ML_P<1>	71 82
17	=MCP_HDMI_TXD_N<1>	DP_ML_N<1>	71 82
82 71 70 17	DP_ML_P<0>	DP_ML_P<0>	17 70 71 82
82 71 70 17	DP_ML_N<0>	DP_ML_N<0>	17 70 71 82
71 70 17	DP_HPD	DP_HPD	17 70 71
70 17	DP_IG_DDC_CLK	DP_IG_DDC_CLK	17 70
70 17	DP_IG_DDC_DATA	DP_IG_DDC_DATA	17 70

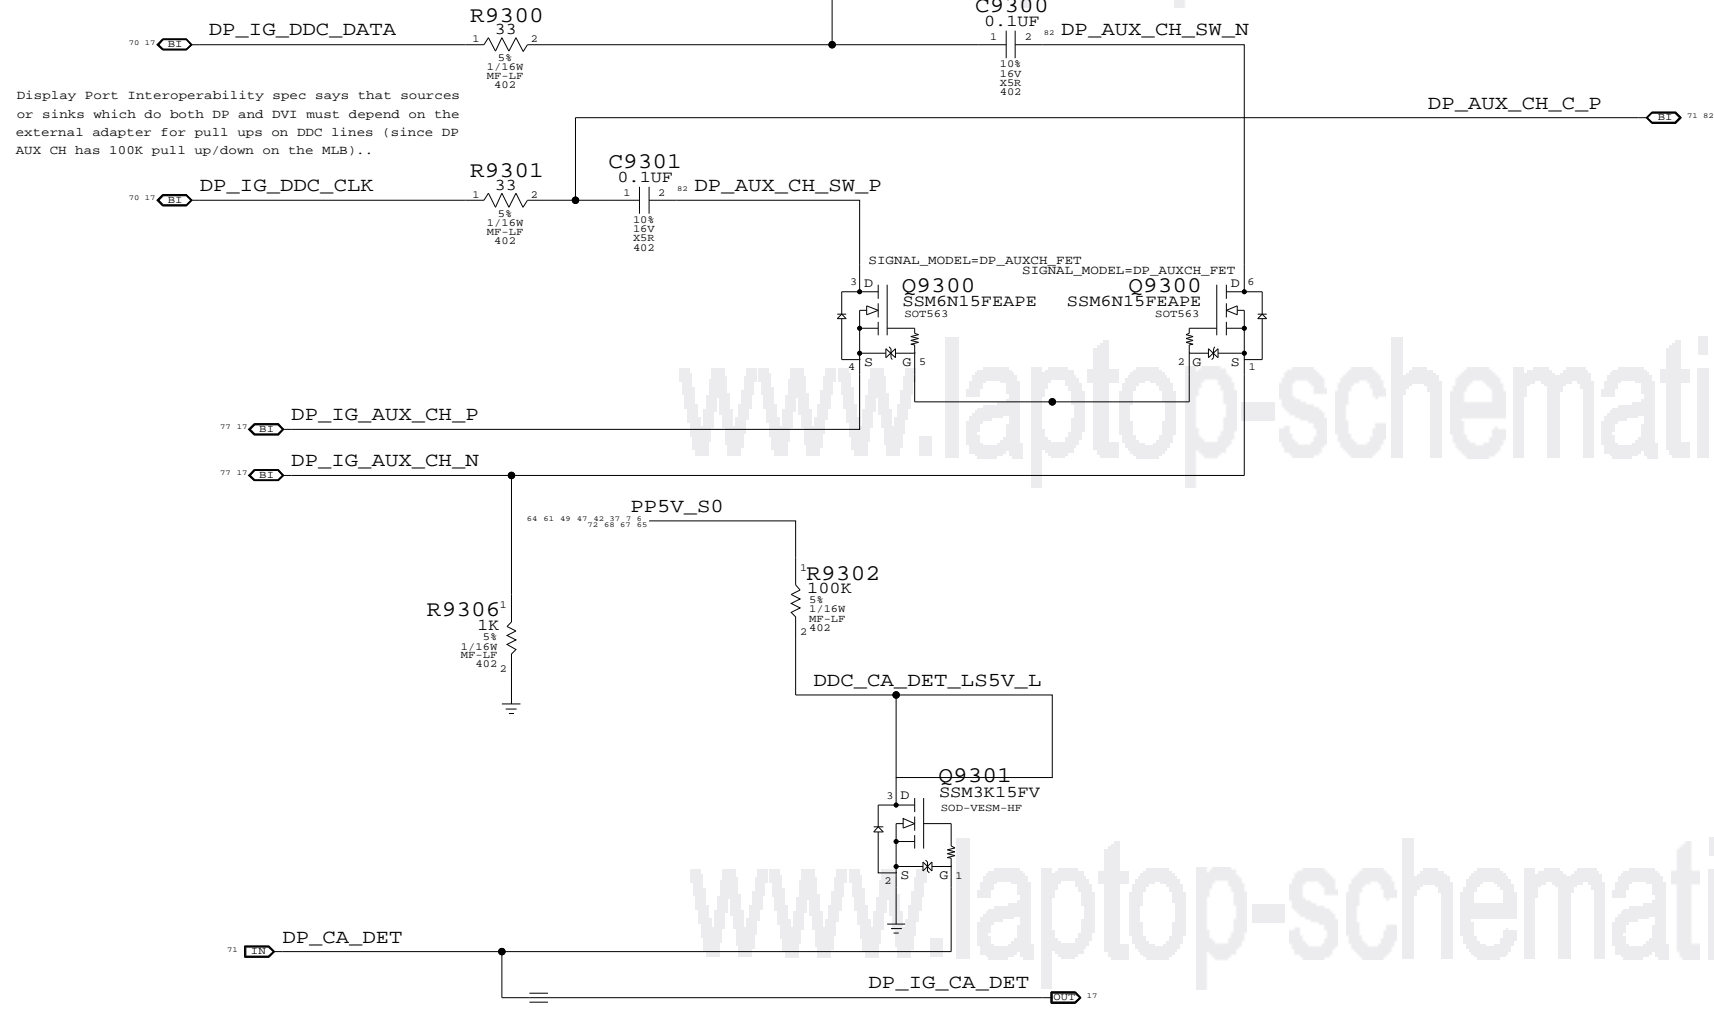

DISPLAYPORT SUPPORT
 SYNC_MASTER=K24_MLB SYNC_DATE=12/19/2008
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	70	83	

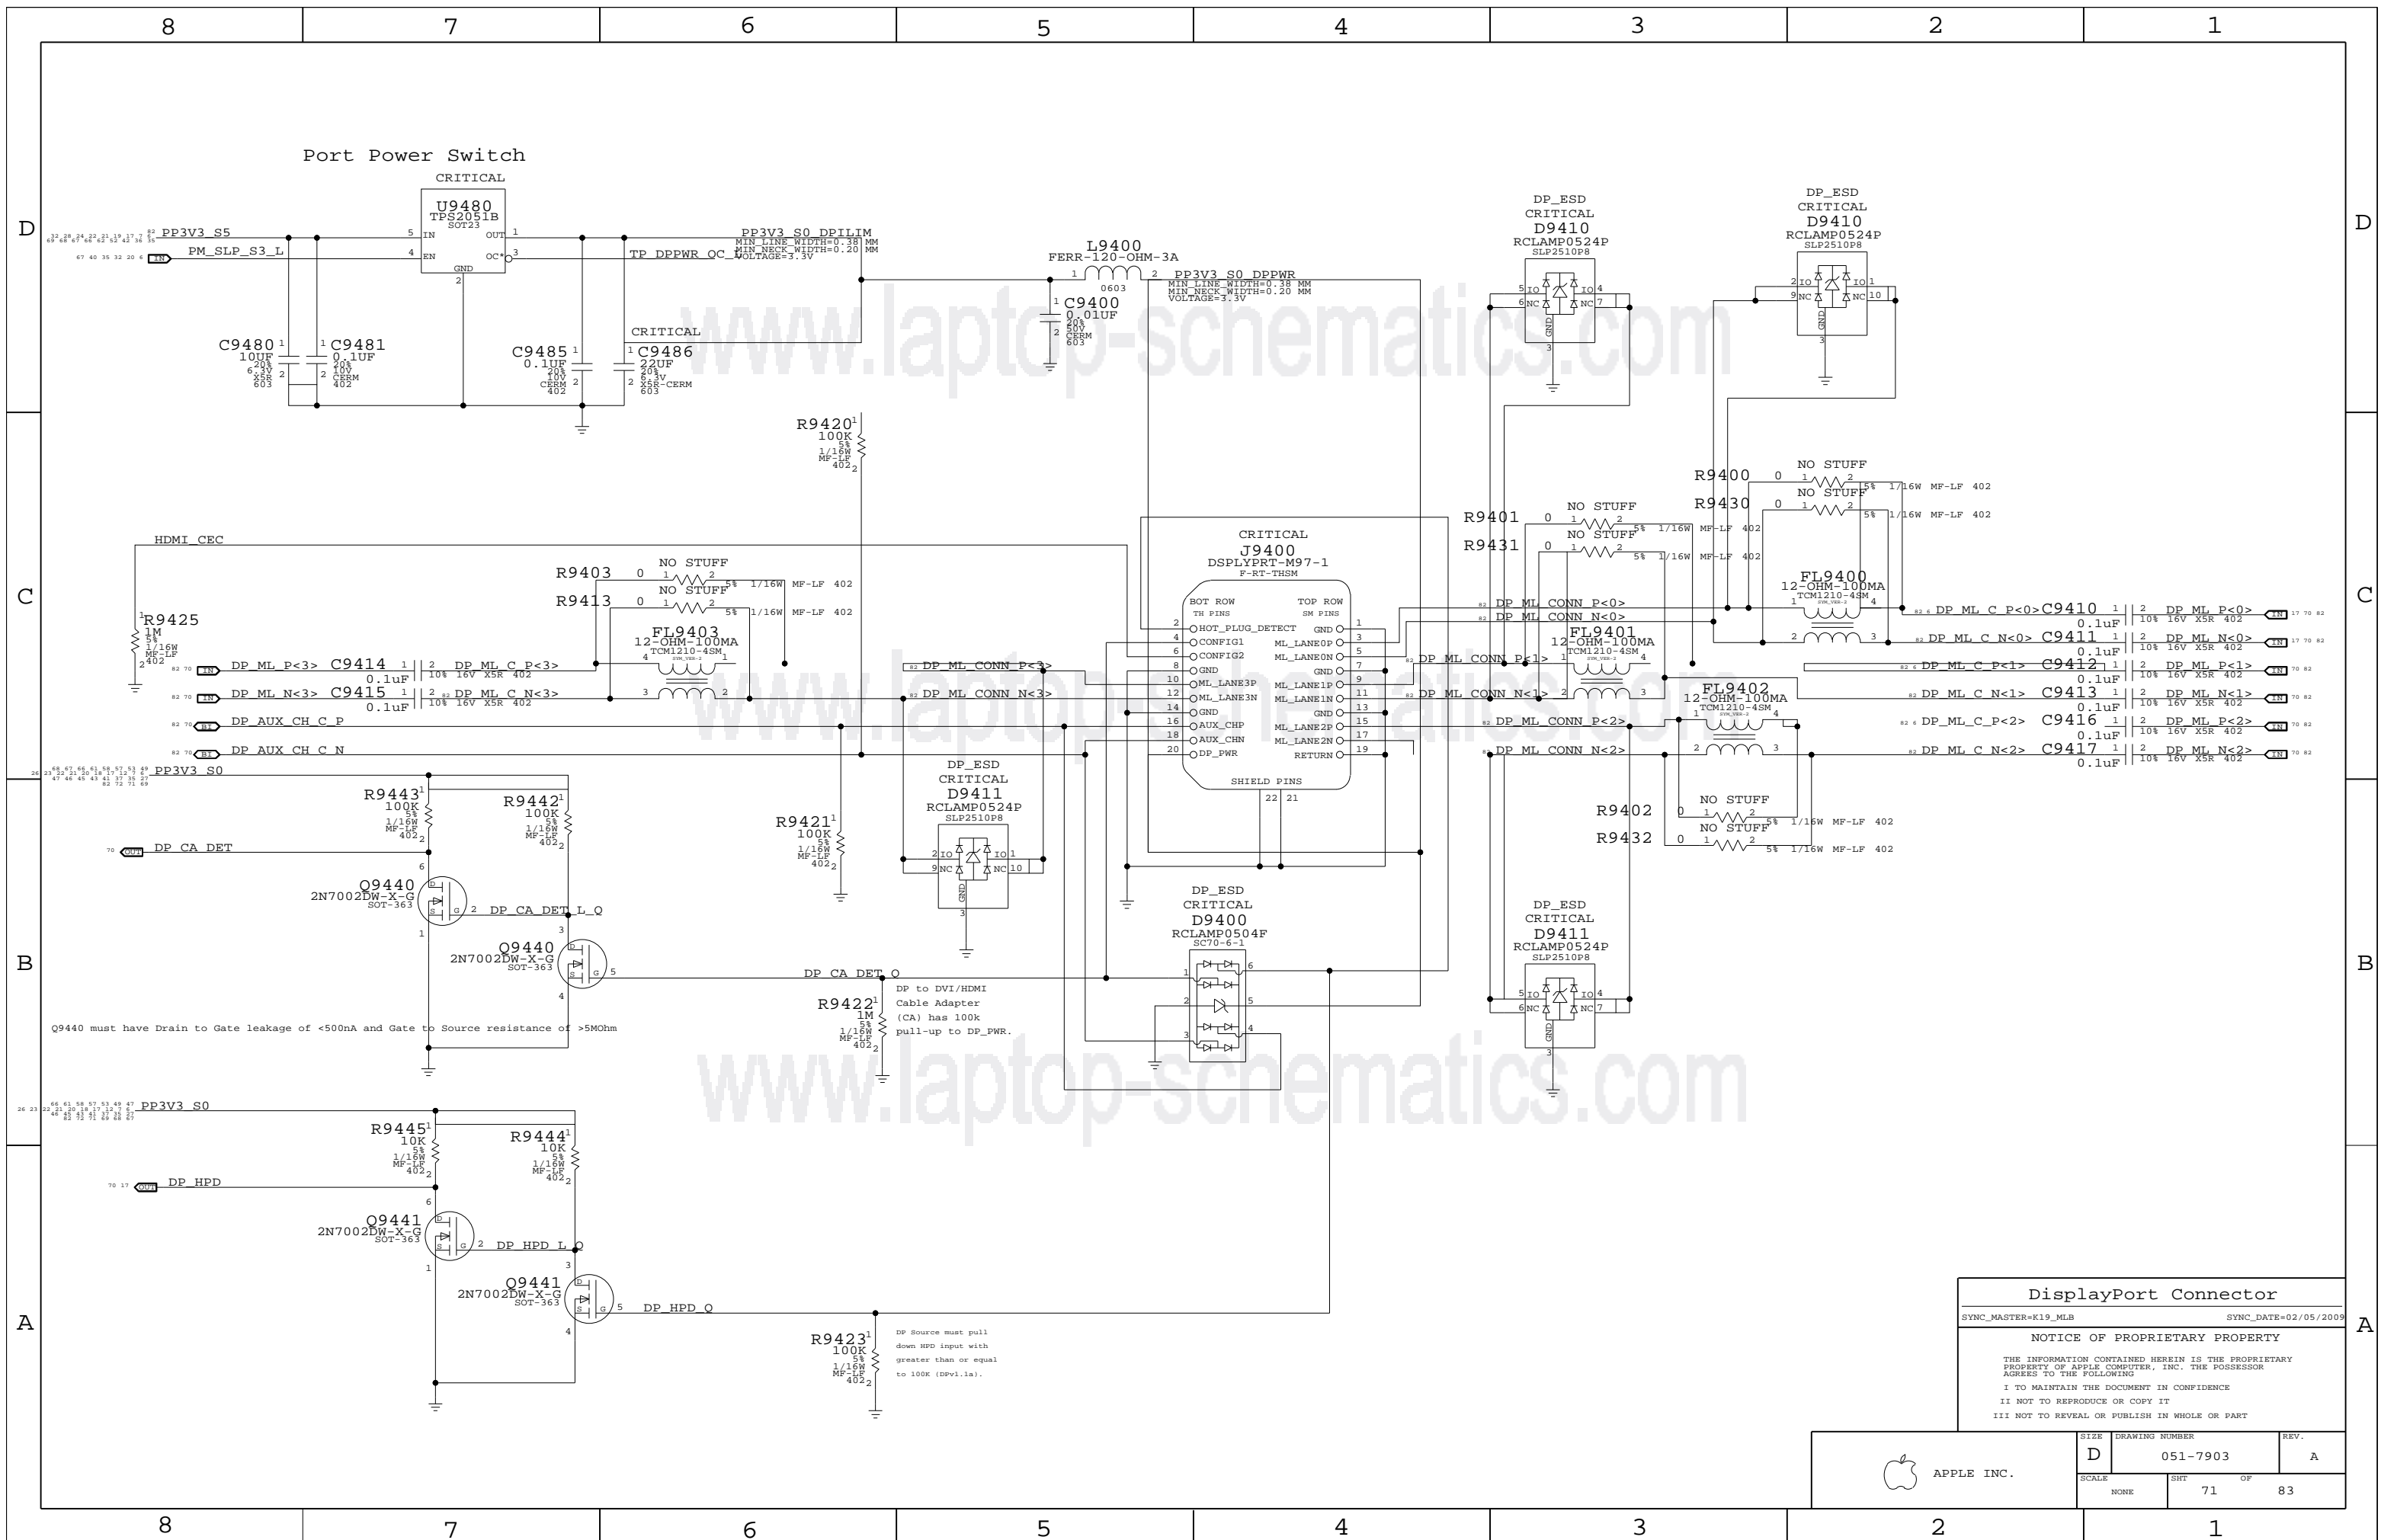

DisplayPort Connector

SYNC_MASTER=K19_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY


THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

 APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	71	83	

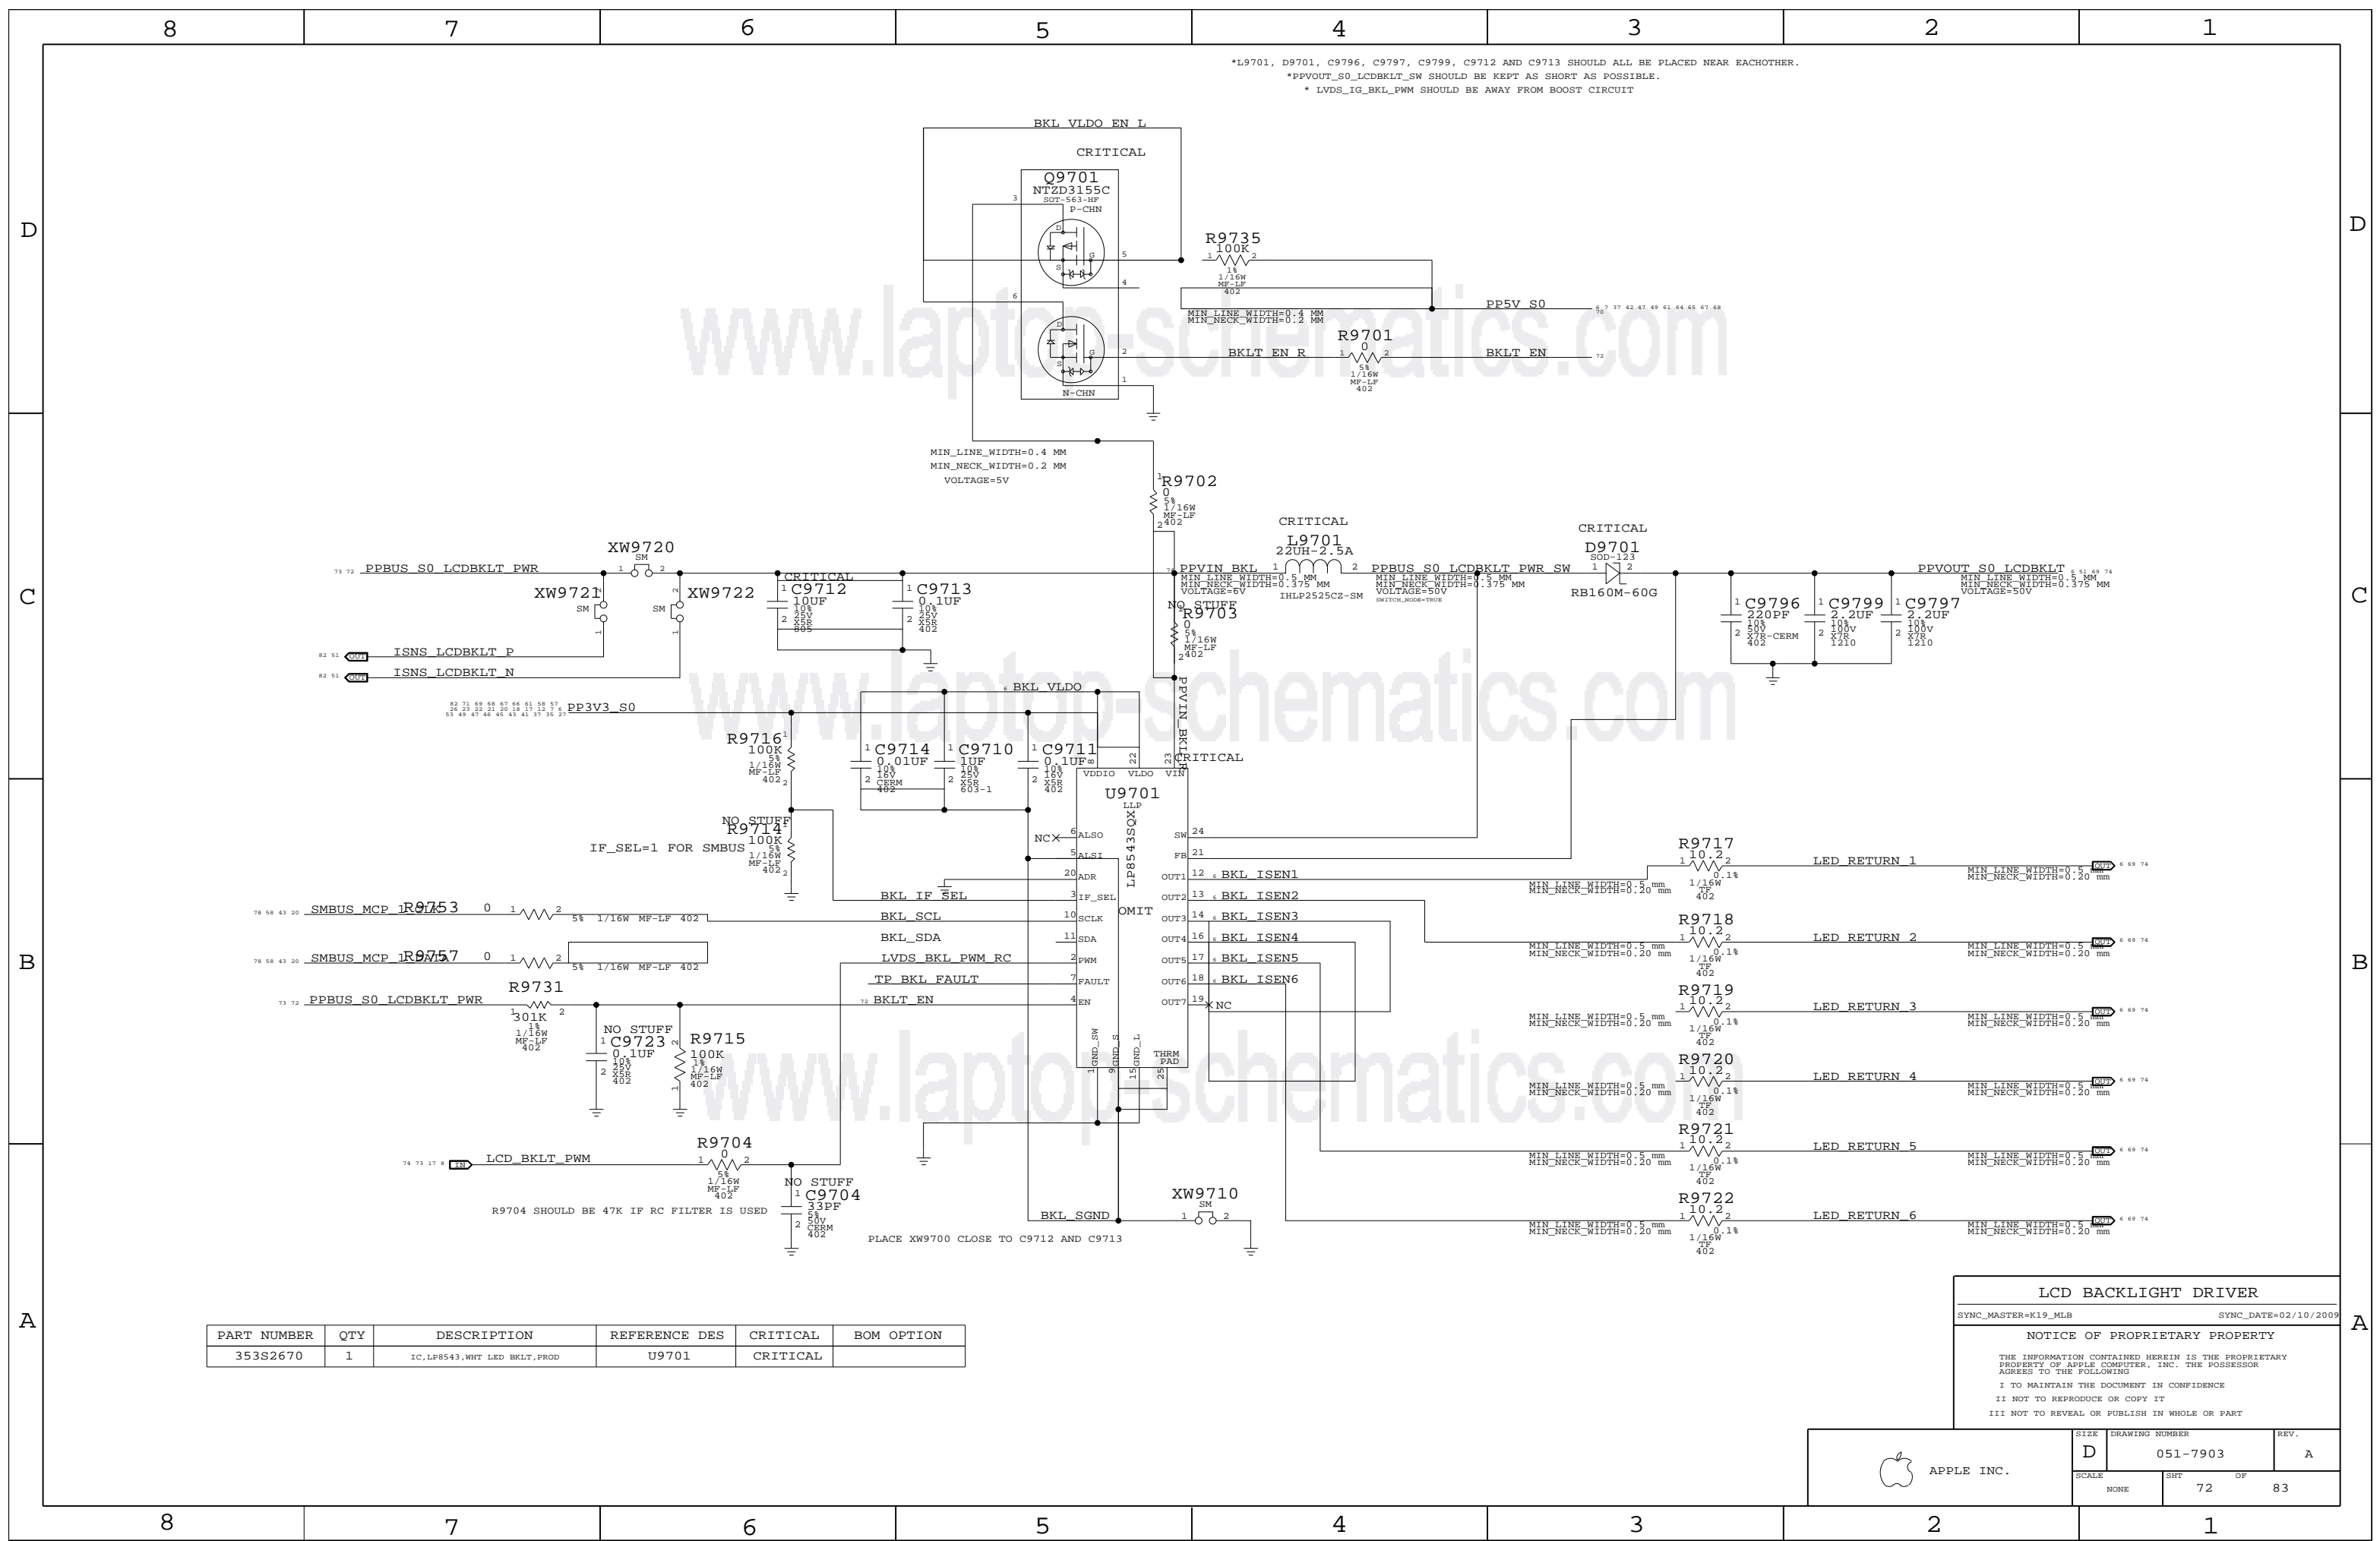

*L9701, D9701, C9796, C9797, C9799, C9712 AND C9713 SHOULD ALL BE PLACED NEAR EACHOTHER.
 *PPVOUT_S0_LCDBKLT_SW SHOULD BE KEPT AS SHORT AS POSSIBLE.
 * LVDS_IG_BKL_PWM SHOULD BE AWAY FROM BOOST CIRCUIT

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
353S2670	1	IC,LP8543,WHI LED BKLT,PROD	U9701	CRITICAL	

LCD BACKLIGHT DRIVER


SYNC_MASTER=K19_MLB SYNC_DATE=02/10/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	72		83

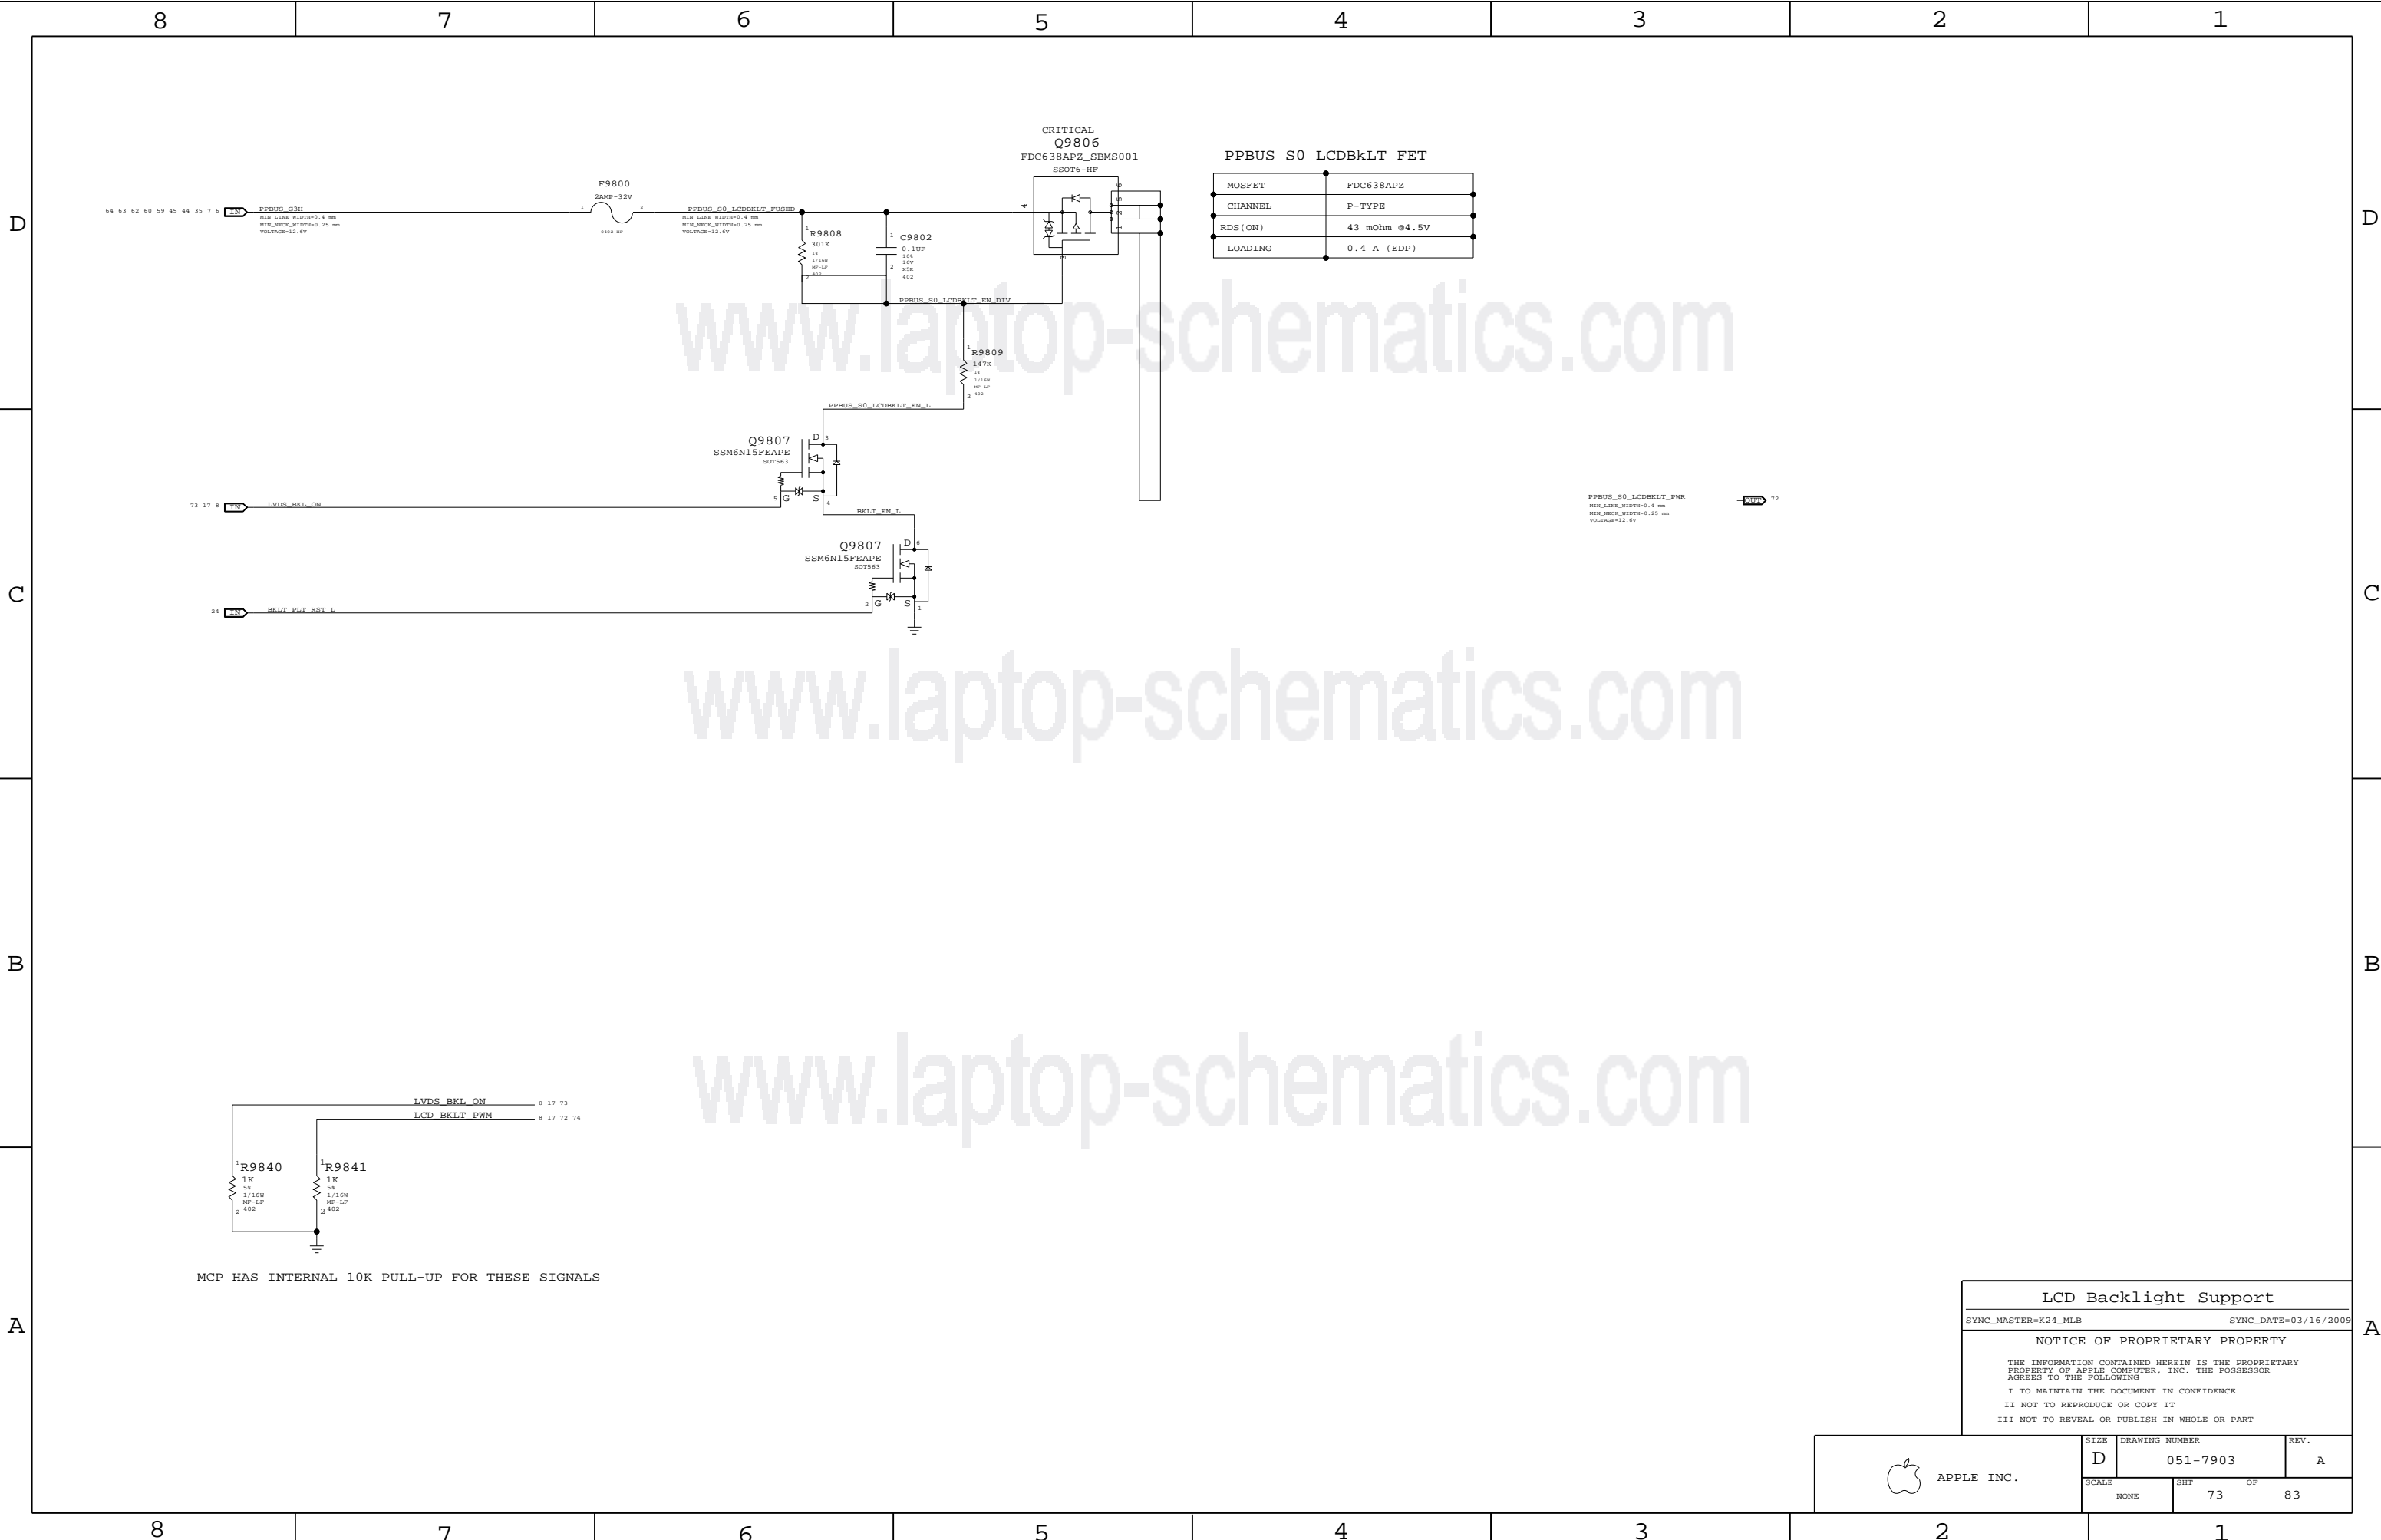

www.laptop-schematics.com


www.laptop-schematics.com

www.laptop-schematics.com

MCP HAS INTERNAL 10K PULL-UP FOR THESE SIGNALS

LCD Backlight Support
 SYNC_MASTER=K24_MLB SYNC_DATE=03/16/2009
 NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	73	83	

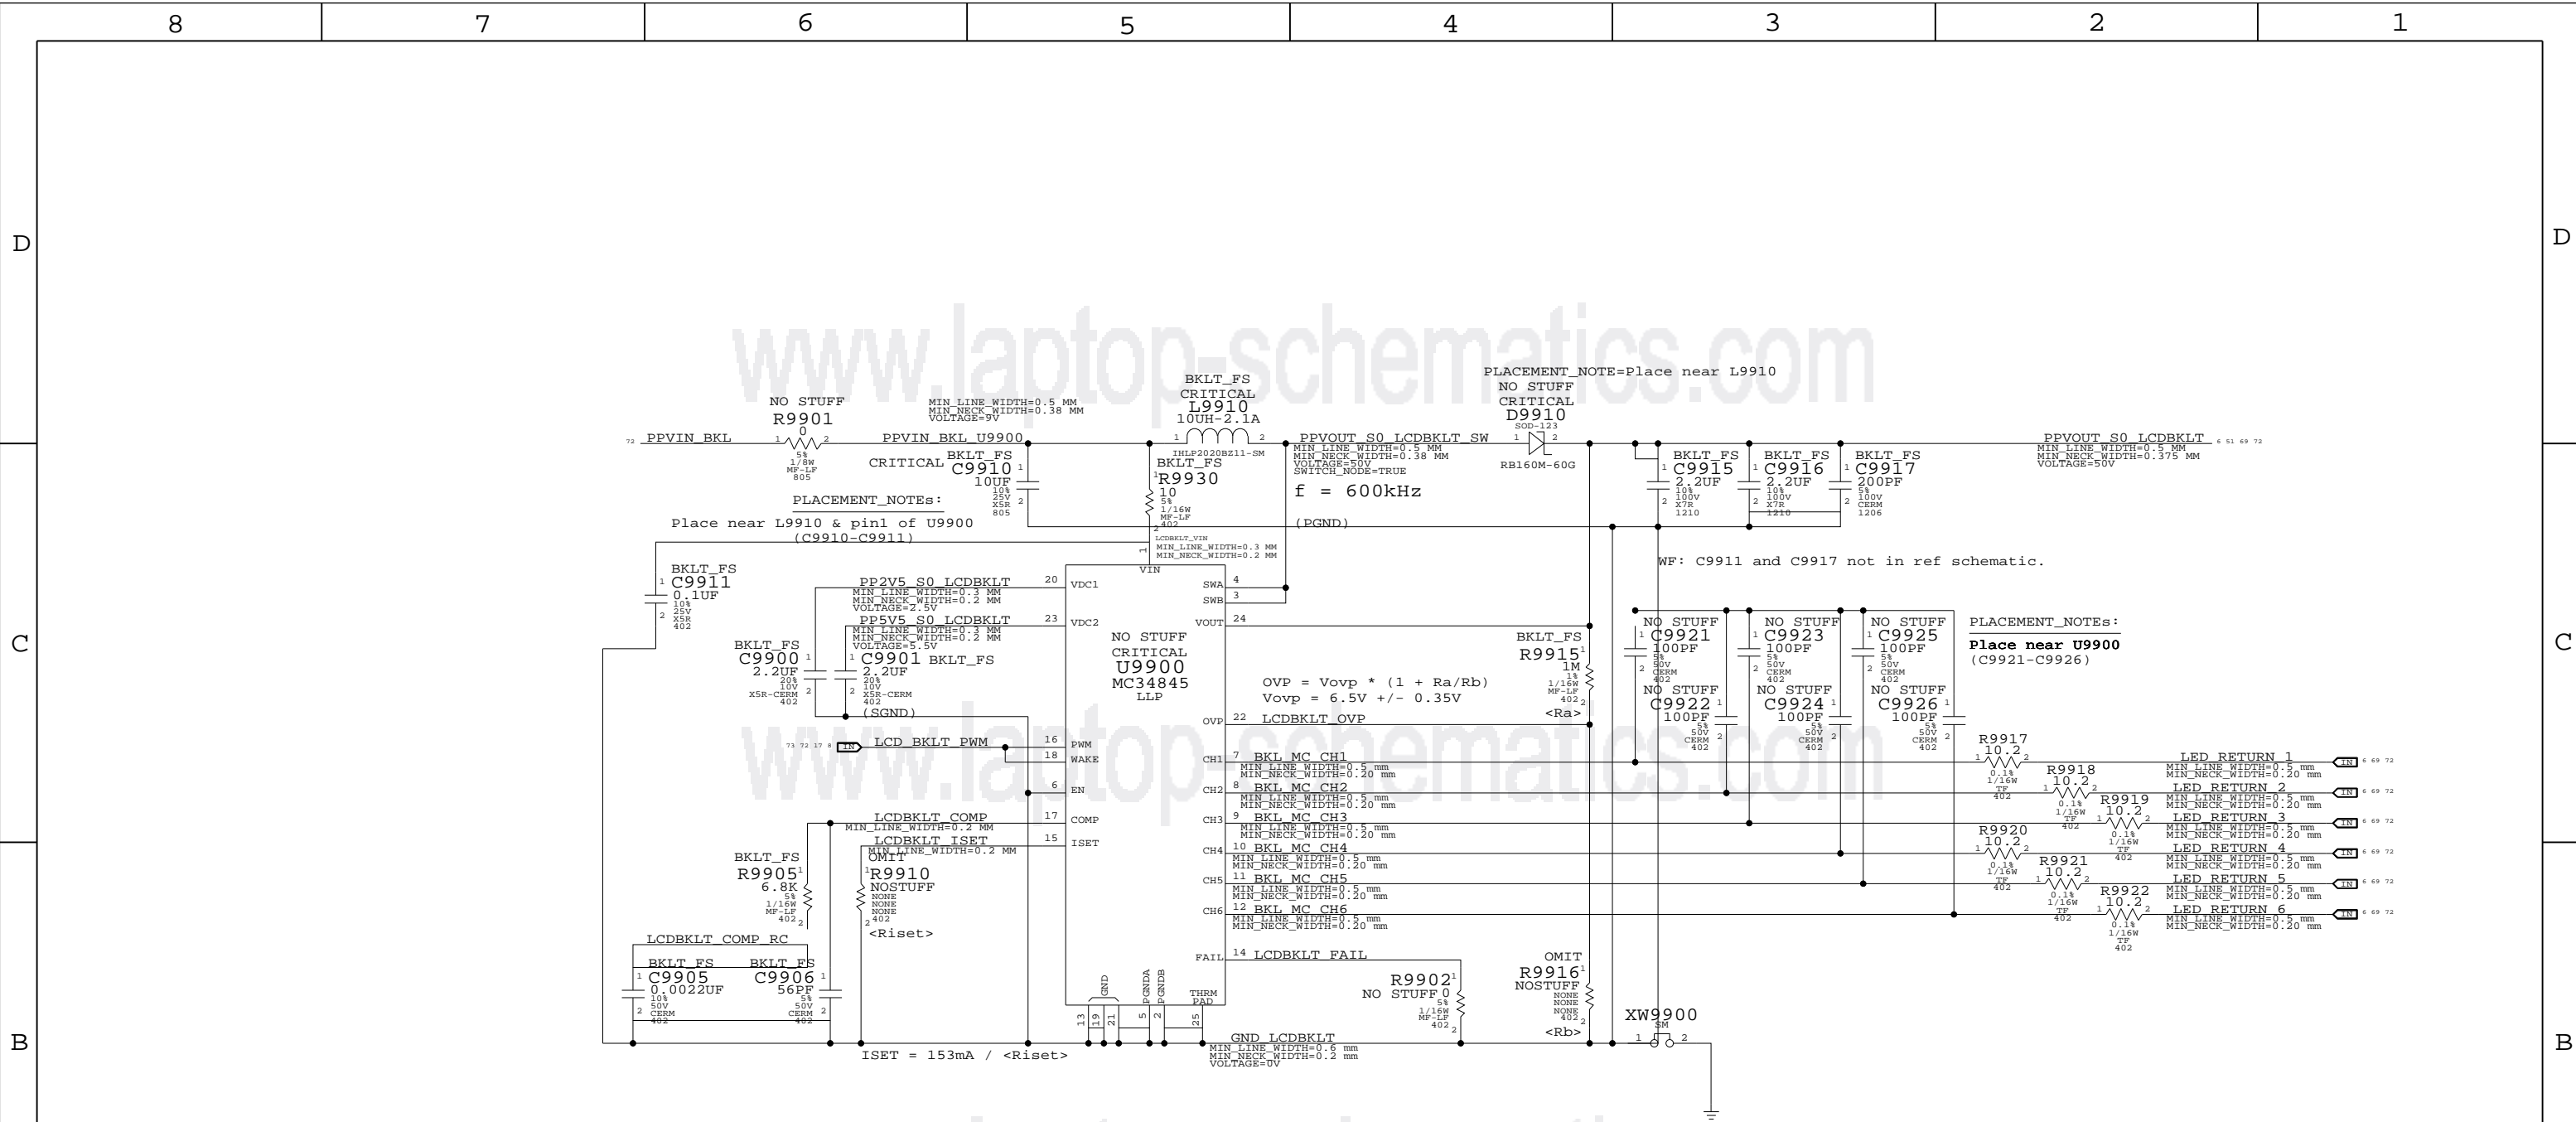

13.3 Inch Panel (9 LEDs per string)

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
114S0298	1	RES.MTL FILM,1/16W,6.65K,1,0402,SMD,LF	R9910	?	LCD_13INCH
114S0445	1	RES.MTL FILM,1/16W,226K,1,0402,SMD,LF	R9916	?	LCD_13INCH

Target: ISET = 23mA, OVP = 35V
Actual: ISET = 23mA, OVP = 35.2V

15.4 Inch Panel (10/11 LEDs per string)

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
114S0298	1	RES.MTL FILM,1/16W,6.65K,1,0402,SMD,LF	R9910	?	LCD_15INCH
114S0438	1	RES.MTL FILM,1/16W,191K,1,0402,SMD,LF	R9916	?	LCD_15INCH

Target: ISET = 23mA, OVP = 40V
Actual: ISET = 23mA, OVP = 40.5V

17 Inch Panel (14 LEDs per string)

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
114S0299	1	RES.MTL FILM,1/16W,6.81K,1,0402,SMD,LF	R9910	?	LCD_17INCH
114S0428	1	RES.MTL FILM,1/16W,150K,1,0402,SMD,LF	R9916	?	LCD_17INCH

Target: ISET = 22.5mA, OVP = 50V
Actual: ISET = 22.47mA, OVP = 49.8V

WF: Need 6.65K 0.1% resistor?

WF: Need 6.65K 0.1% resistor?

WF: Need 6.80K 0.1% resistor?

LCD Backlight Driver (MC34845)
SYNC_MASTER=VEMURI_K19I SYNC_DATE=02/09/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	83
NONE	74		

FSB (Front-Side Bus) Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
FSB_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD
FSB_DSTB_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=1:1_DIFFPAIR	=1:1_DIFFPAIR

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
FSB_DATA	*	=2x_DIELECTRIC	?	FSB_DATA	TOP,BOTTOM	=4x_DIELECTRIC	?
FSB_DSTB	*	=3x_DIELECTRIC	?	FSB_DSTB	TOP,BOTTOM	=5x_DIELECTRIC	?
FSB_ADDR	*	=STANDARD	?	FSB_ADDR	TOP,BOTTOM	=3x_DIELECTRIC	?
FSB_ADSTB	*	=2x_DIELECTRIC	?	FSB_ADSTB	TOP,BOTTOM	=4x_DIELECTRIC	?
FSB_1X	*	=STANDARD	?	FSB_1X	TOP,BOTTOM	=3x_DIELECTRIC	?

All 4x/2x/1x FSB signals with impedance requirements are 50-ohm single-ended.

FSB 4X signals / groups shown in signal table on right.

Signals within each 4x group should be matched within 5 ps of strobe.

DSTB# complementary pairs should be matched within 1 ps of each other, all DSTB#s matched to +/- 300 ps.

Spacing is 2x dielectric between DATA#, DINV# signals, with 3x dielectric spacing to the DSTB#s.

DSTB# complementary pairs are spaced normally and are NOT routed as differential pairs.

FSB 2X signals / groups shown in signal table on right.

Signals within each 2x group should be matched within 20 ps. ADTSB#s should be matched +/- 300 ps.

Spacing is 1x dielectric between ADDR#, REQ# signals, with 2x dielectric spacing to ADSTB#.

FSB 1X signals shown in signal table on right.

Signals within each 1x group should be matched to CPU clock, +0/-1000 mils.

Design Guide recommends each strobe/signal group is routed on the same layer.

Intel Design Guide recommends FSB signals be routed only on internal layers.

NOTE: Intel Design Guide allows closer spacing if signal lengths can be shortened.

SOURCE: MCP79 Interface DG (DG-03328-001_v01), Section 2.2

SOURCE: Santa Rosa Platform DG, Rev 1.5 (#22294), Sections 4.2 & 4.3

CPU Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CPU_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD
CPU_27P4S	*	=27P4_OHM_SE	=27P4_OHM_SE	=27P4_OHM_SE	=27P4_OHM_SE	7 MIL	7 MIL

NOTE: 7 mil gap is for VCCSense pair, which Intel says to route with 7 mil spacing without specifying a target impedance.

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CPU_AGTL	*	=STANDARD	?	CPU_AGTL	TOP,BOTTOM	=2x_DIELECTRIC	?
CPU_8MIL	*	8 MIL	?				
CPU_COMP	*	25 MIL	?				
CPU_GTLREF	*	25 MIL	?				
CPU_ITP	*	=2:1_SPACING	?				
CPU_VCCSENSE	*	25 MIL	?				

SR DG recommends at least 25 mils, >50 mils preferred

Most CPU signals with impedance requirements are 55-ohm single-ended.

Some signals require 27.4-ohm single-ended impedance.

SOURCE: MCP79 Interface DG (DG-03328-001_v01), Section 2.2

SOURCE: Santa Rosa Platform DG, Rev 0.9 (#20517), Sections 4.4 & 5.8.2.4

MCP FSB COMP Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MCP_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MCP_FSB_COMP	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v01), Section 2.2.4

FSB Clock Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CLK_FSB_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CLK_FSB	*	=3x_DIELECTRIC	?	CLK_FSB	TOP,BOTTOM	=4x_DIELECTRIC	?

SOURCE: MCP79 Interface DG (DG-03328-001_v01), Section 2.2.5

CPU / FSB Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE		PROPERTY	VALUE
	PHYSICAL	SPACING		
FSB_DATA_GROUP0	FSB_50S	FSB_DATA	FSB D L<15..0>	9 13
FSB_DATA_GROUP0	FSB_50S	FSB_DATA	FSB DINV L<0>	9 13
FSB_DSTB0	FSB_DSTB_50S	FSB_DSTB	FSB DSTB L P<0>	9 13
FSB_DSTB0	FSB_DSTB_50S	FSB_DSTB	FSB DSTB L N<0>	9 13
FSB_DATA_GROUP1	FSB_50S	FSB_DATA	FSB D L<31..16>	9 13
FSB_DATA_GROUP1	FSB_50S	FSB_DATA	FSB DINV L<1>	9 13
FSB_DSTB1	FSB_DSTB_50S	FSB_DSTB	FSB DSTB L P<1>	9 13
FSB_DSTB1	FSB_DSTB_50S	FSB_DSTB	FSB DSTB L N<1>	9 13
FSB_DATA_GROUP2	FSB_50S	FSB_DATA	FSB D L<47..32>	9 13
FSB_DATA_GROUP2	FSB_50S	FSB_DATA	FSB DINV L<2>	9 13
FSB_DSTB2	FSB_DSTB_50S	FSB_DSTB	FSB DSTB L P<2>	9 13
FSB_DSTB2	FSB_DSTB_50S	FSB_DSTB	FSB DSTB L N<2>	9 13
FSB_DATA_GROUP3	FSB_50S	FSB_DATA	FSB D L<63..48>	9 13
FSB_DATA_GROUP3	FSB_50S	FSB_DATA	FSB DINV L<3>	9 13
FSB_DSTB3	FSB_DSTB_50S	FSB_DSTB	FSB DSTB L P<3>	9 13
FSB_DSTB3	FSB_DSTB_50S	FSB_DSTB	FSB DSTB L N<3>	9 13
FSB_ADDR_GROUP0	FSB_50S	FSB_ADDR	FSB A L<16..3>	9 13
FSB_ADDR_GROUP0	FSB_50S	FSB_ADDR	FSB REQ L<4..0>	9 13
FSB_ADSTB0	FSB_50S	FSB_ADSTB	FSB ADSTB L<0>	9 13
FSB_ADDR_GROUP1	FSB_50S	FSB_ADDR	FSB A L<35..17>	9 13
FSB_ADSTB1	FSB_50S	FSB_ADSTB	FSB ADSTB L<1>	9 13
FSB_1X	FSB_50S	FSB_1X	FSB ADS L	9 13
FSB_BREQ0_L	FSB_50S	FSB_1X	FSB BREQ0 L	9 13
FSB_BREQ1_L	FSB_50S	FSB_1X	FSB BREQ1 L	13
FSB_1X	FSB_50S	FSB_1X	FSB BNR L	9 13
FSB_1X	FSB_50S	FSB_1X	FSB BPRI L	9 13
FSB_1X	FSB_50S	FSB_1X	FSB DBSY L	9 13
FSB_1X	FSB_50S	FSB_1X	FSB DEFER L	9 13
FSB_1X	FSB_50S	FSB_1X	FSB DRDY L	9 13
FSB_1X	FSB_50S	FSB_1X	FSB HIT L	9 13
FSB_1X	FSB_50S	FSB_1X	FSB HITM L	9 13
FSB_1X	FSB_50S	FSB_1X	FSB LOCK L	9 13
FSB_CPURST_L	FSB_50S	FSB_1X	FSB CPURST L	9 12 13
FSB_1X	FSB_50S	FSB_1X	FSB RS L<2..0>	9 13
FSB_1X	FSB_50S	FSB_1X	FSB TRDY L	9 13
CPU_ASYNC	CPU_50S	CPU_AGTL	CPU A20M L	9 13
CPU_BSEL	CPU_50S	CPU_AGTL	CPU BSEL<2..0>	9
CPU_FERR_L	CPU_50S	CPU_8MIL	CPU FERR L	9 13
CPU_ASYNC	CPU_50S	CPU_AGTL	CPU IGNE L	9 13
CPU_INIT_L	CPU_50S	CPU_AGTL	CPU INIT L	9 13
CPU_ASYNC_R	CPU_50S	CPU_AGTL	CPU INTR	9 13
CPU_ASYNC_R	CPU_50S	CPU_AGTL	CPU NMI	9 13
CPU_PROCHOT_L	CPU_50S	CPU_AGTL	CPU PROCHOT L	9 13 41 61
CPU_PWRGD	CPU_50S	CPU_AGTL	CPU PWRGD	9 12 13
CPU_ASYNC	CPU_50S	CPU_AGTL	CPU SMI L	9 13
CPU_ASYNC	CPU_50S	CPU_AGTL	CPU STPCLK L	9 13
PM_THERMTRIP_L	CPU_50S	CPU_8MIL	PM THERMTRIP L	9 13 41
FSB_CPUSLP_L	CPU_50S	CPU_AGTL	FSB CPUSLP L	9 13
CPU_PROM_SR	CPU_50S	CPU_AGTL	CPU DPSLP L	9 13
CPU_DPRSTP_L	CPU_50S	CPU_AGTL	CPU DPRSTP L	9 13 41
CPU_ASYNC	CPU_50S	CPU_AGTL	FSB DPWR L	9 13
MCP_CPU_COMP	MCP_50S	MCP_FSB_COMP	MCP BCLK VML COMP VDD	13
MCP_CPU_COMP	MCP_50S	MCP_FSB_COMP	MCP BCLK VML COMP GND	13
MCP_CPU_COMP	MCP_50S	MCP_FSB_COMP	MCP CPU COMP VCC	13
MCP_CPU_COMP	MCP_50S	MCP_FSB_COMP	MCP CPU COMP GND	13
FSB_CLK_CPU	CLK_FSB_100D	CLK_FSB	FSB CLK CPU P	9 13
FSB_CLK_CPU	CLK_FSB_100D	CLK_FSB	FSB CLK CPU N	9 13
FSB_CLK_ITP	CLK_FSB_100D	CLK_FSB	FSB CLK ITP P	12 13
FSB_CLK_ITP	CLK_FSB_100D	CLK_FSB	FSB CLK ITP N	12 13
FSB_CLK_MCP	CLK_FSB_100D	CLK_FSB	FSB CLK MCP P	13
FSB_CLK_MCP	CLK_FSB_100D	CLK_FSB	FSB CLK MCP N	13
CPU_IERR_L	CPU_50S		CPU IERR L	9
PM_DPRSLEVR	CPU_50S	CPU_AGTL	PM DPRSLEVR	20 61
(See above)	CPU_50S	CPU_AGTL	IMVP DPRSLEVR	61
CPU_GTLREF	CPU_50S	CPU_GTLREF	CPU GTLREF	9 26
CPU_COMP	CPU_50S	CPU_COMP	CPU COMP<3>	9
CPU_COMP	CPU_27P4S	CPU_COMP	CPU COMP<2>	9
CPU_COMP	CPU_50S	CPU_COMP	CPU COMP<1>	9
CPU_COMP	CPU_27P4S	CPU_COMP	CPU COMP<0>	9
XDP_TDI	CPU_50S	CPU_ITP	XDP TDI	9 12
XDP_TDO	CPU_50S	CPU_ITP	XDP TDO	9 12
XDP_TMS	CPU_50S	CPU_ITP	XDP TMS	9 12
XDP_TCK	CPU_50S	CPU_ITP	XDP TCK	9 12
XDP_TRST_L	CPU_50S	CPU_ITP	XDP TRST L	9 12
XDP_BPM_L	CPU_50S	CPU_ITP	XDP BPM L<4..0>	9 12
XDP_BPM_L5	CPU_50S	CPU_ITP	XDP BPM L<5>	9 12
(FSB_CPURST_L)	CPU_50S	CPU_ITP	XDP CPURST L	12
	CPU_50S	CPU_8MIL	CPU VID<6..0>	9 10
	CPU_50S	CPU_8MIL	IMVP6 VID<6..0>	9 61
CPU_VCCSENSE	CPU_27P4S	CPU_VCCSENSE	CPU VCCSENSE P	10 41
CPU_VCCSENSE	CPU_27P4S	CPU_VCCSENSE	CPU VCCSENSE N	10 41
(CPU_VCCSENSE)	CPU_27P4S	CPU_VCCSENSE	IMVP6 VSEN P	61
(CPU_VCCSENSE)	CPU_27P4S	CPU_VCCSENSE	IMVP6 VSEN N	61

CPU/FSB Constraints

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SCALE DRAWING NUMBER REV.

NONE D 051-7903 A

SHEET 75 OF 83

Memory Bus Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MEM_40S	*	=40_OHM_SE	=40_OHM_SE	=40_OHM_SE	=40_OHM_SE	=STANDARD	=STANDARD
MEM_40S_VDD	*	=40_OHM_SE	=40_OHM_SE	=40_OHM_SE	=40_OHM_SE	=STANDARD	=STANDARD
MEM_70D	*	=70_OHM_DIFF	=70_OHM_DIFF	=70_OHM_DIFF	=70_OHM_DIFF	=70_OHM_DIFF	=70_OHM_DIFF
MEM_70D_VDD	*	=70_OHM_DIFF	=70_OHM_DIFF	=70_OHM_DIFF	=70_OHM_DIFF	=70_OHM_DIFF	=70_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MEM_CLK2MEM	*	=4:1_SPACING	?
MEM_CTRL2CTRL	*	=2:1_SPACING	?
MEM_CTRL2MEM	*	=2.5:1_SPACING	?
MEM_CMD2CMD	*	=1.5:1_SPACING	?
MEM_CMD2MEM	*	=3:1_SPACING	?
MEM_DATA2DATA	*	=1.5:1_SPACING	?
MEM_DATA2MEM	*	=3:1_SPACING	?
MEM_DQS2MEM	*	=3:1_SPACING	?
MEM_20THER	*	25 MIL	?

Memory Bus Spacing Group Assignments

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CLK	MEM_CLK	*	MEM_CLK2MEM
MEM_CLK	MEM_CTRL	*	MEM_CLK2MEM
MEM_CLK	MEM_CMD	*	MEM_CLK2MEM
MEM_CLK	MEM_DATA	*	MEM_CLK2MEM
MEM_CLK	MEM_DQS	*	MEM_CLK2MEM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CMD	MEM_CMD	*	MEM_CMD2MEM
MEM_CMD	MEM_CTRL	*	MEM_CMD2MEM
MEM_CMD	MEM_CMD	*	MEM_CMD2CMD
MEM_CMD	MEM_DATA	*	MEM_CMD2MEM
MEM_CMD	MEM_DQS	*	MEM_CMD2MEM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CTRL	MEM_CTRL	*	MEM_CTRL2CTRL
MEM_CTRL	MEM_CTRL	*	MEM_CTRL2MEM
MEM_CTRL	MEM_CMD	*	MEM_CTRL2MEM
MEM_CTRL	MEM_DATA	*	MEM_CTRL2MEM
MEM_CTRL	MEM_DQS	*	MEM_CTRL2MEM

Need to support MEM_*-style wildcards!

DDR2:
DQ signals should be matched within 20 ps of associated DQS pair.
DQS intra-pair matching should be within 1 ps, no inter-pair matching requirement.
All DQS pairs should be matched within 100 ps of clocks.
CLK intra-pair matching should be within 1 ps, inter-pair matching should be within 140 ps.
A/BA/cmd signals should be matched within 75 ps, no CLK matching requirement.
All memory signals maximum length is 1.005 ps. CLK minimum length is 594 ps (lengths include substrate).
DQ/A/BA/cmd signal spacing is 3x dielectric, DQS/CLK is 4x dielectric.

DDR3:
DQ signals should be matched within 5 ps of associated DQS pair.
DQS intra-pair matching should be within 1 ps, inter-pair matching should be within 180 ps
No DQS to clock matching requirement.
CLK intra-pair matching should be within 1 ps, inter-pair matching should be within 2 ps.
A/BA/cmd signals should be matched within 5 ps of CLK pairs.
All memory signals maximum length is 1.005 ps. CLK minimum length is 594 ps (lengths include substrate).
DQ/A/BA/cmd signal spacing is 3x dielectric, DQS/CLK is 4x dielectric.

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.3
SOURCE: Santa Rosa Platform DG, Rev 1.0 (#21112), Section 6.2

MCP MEM COMP Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MCP_MEM_COMP	*	Y	7 MIL	7 MIL	=STANDARD	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MCP_MEM_COMP	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.3.4

Memory Net Properties

ELECTRICAL_CONSTRAINT_SET	PHYSICAL	SPACING	NET_TYPE
MEM_A_CLK	MEM_70D_VDD	MEM_CLK	MEM A CLK P<5..0>
MEM_A_CLK	MEM_70D_VDD	MEM_CLK	MEM A CLK N<5..0>
MEM_A_CNTRL	MEM_40S_VDD	MEM_CTRL	MEM A CKE<3..0>
MEM_A_CNTRL	MEM_40S_VDD	MEM_CTRL	MEM A CS L<3..0>
MEM_A_CNTRL	MEM_40S_VDD	MEM_CTRL	MEM A ODT<3..0>
MEM_A_CMD	MEM_40S_VDD	MEM_CMD	MEM A A<14..0>
MEM_A_CMD	MEM_40S_VDD	MEM_CMD	MEM A BA<2..0>
MEM_A_CMD	MEM_40S_VDD	MEM_CMD	MEM A RAS L
MEM_A_CMD	MEM_40S_VDD	MEM_CMD	MEM A CAS L
MEM_A_CMD	MEM_40S_VDD	MEM_CMD	MEM A WE L
MEM_A_DQ_BYTE0	MEM_40S	MEM_DATA	MEM A DQ<7..0>
MEM_A_DQ_BYTE1	MEM_40S	MEM_DATA	MEM A DQ<15..8>
MEM_A_DQ_BYTE2	MEM_40S	MEM_DATA	MEM A DQ<23..16>
MEM_A_DQ_BYTE3	MEM_40S	MEM_DATA	MEM A DQ<31..24>
MEM_A_DQ_BYTE4	MEM_40S	MEM_DATA	MEM A DQ<39..32>
MEM_A_DQ_BYTE5	MEM_40S	MEM_DATA	MEM A DQ<47..40>
MEM_A_DQ_BYTE6	MEM_40S	MEM_DATA	MEM A DQ<55..48>
MEM_A_DQ_BYTE7	MEM_40S	MEM_DATA	MEM A DQ<63..56>
MEM_A_DM_BYTE0	MEM_40S	MEM_DATA	MEM A DM<0>
MEM_A_DM_BYTE1	MEM_40S	MEM_DATA	MEM A DM<1>
MEM_A_DM_BYTE2	MEM_40S	MEM_DATA	MEM A DM<2>
MEM_A_DM_BYTE3	MEM_40S	MEM_DATA	MEM A DM<3>
MEM_A_DM_BYTE4	MEM_40S	MEM_DATA	MEM A DM<4>
MEM_A_DM_BYTE5	MEM_40S	MEM_DATA	MEM A DM<5>
MEM_A_DM_BYTE6	MEM_40S	MEM_DATA	MEM A DM<6>
MEM_A_DM_BYTE7	MEM_40S	MEM_DATA	MEM A DM<7>
MEM_A_DQS0	MEM_70D	MEM_DQS	MEM A DQS P<0>
MEM_A_DQS0	MEM_70D	MEM_DQS	MEM A DQS N<0>
MEM_A_DQS1	MEM_70D	MEM_DQS	MEM A DQS P<1>
MEM_A_DQS1	MEM_70D	MEM_DQS	MEM A DQS N<1>
MEM_A_DQS2	MEM_70D	MEM_DQS	MEM A DQS P<2>
MEM_A_DQS2	MEM_70D	MEM_DQS	MEM A DQS N<2>
MEM_A_DQS3	MEM_70D	MEM_DQS	MEM A DQS P<3>
MEM_A_DQS3	MEM_70D	MEM_DQS	MEM A DQS N<3>
MEM_A_DQS4	MEM_70D	MEM_DQS	MEM A DQS P<4>
MEM_A_DQS4	MEM_70D	MEM_DQS	MEM A DQS N<4>
MEM_A_DQS5	MEM_70D	MEM_DQS	MEM A DQS P<5>
MEM_A_DQS5	MEM_70D	MEM_DQS	MEM A DQS N<5>
MEM_A_DQS6	MEM_70D	MEM_DQS	MEM A DQS P<6>
MEM_A_DQS6	MEM_70D	MEM_DQS	MEM A DQS N<6>
MEM_A_DQS7	MEM_70D	MEM_DQS	MEM A DQS P<7>
MEM_A_DQS7	MEM_70D	MEM_DQS	MEM A DQS N<7>
MEM_B_CLK	MEM_70D_VDD	MEM_CLK	MEM B CLK P<5..0>
MEM_B_CLK	MEM_70D_VDD	MEM_CLK	MEM B CLK N<5..0>
MEM_B_CNTRL	MEM_40S_VDD	MEM_CTRL	MEM B CKE<3..0>
MEM_B_CNTRL	MEM_40S_VDD	MEM_CTRL	MEM B CS L<3..0>
MEM_B_CNTRL	MEM_40S_VDD	MEM_CTRL	MEM B ODT<3..0>
MEM_B_CMD	MEM_40S_VDD	MEM_CMD	MEM B A<14..0>
MEM_B_CMD	MEM_40S_VDD	MEM_CMD	MEM B BA<2..0>
MEM_B_CMD	MEM_40S_VDD	MEM_CMD	MEM B RAS L
MEM_B_CMD	MEM_40S_VDD	MEM_CMD	MEM B CAS L
MEM_B_CMD	MEM_40S_VDD	MEM_CMD	MEM B WE L
MEM_B_DQ_BYTE0	MEM_40S	MEM_DATA	MEM B DQ<7..0>
MEM_B_DQ_BYTE1	MEM_40S	MEM_DATA	MEM B DQ<15..8>
MEM_B_DQ_BYTE2	MEM_40S	MEM_DATA	MEM B DQ<23..16>
MEM_B_DQ_BYTE3	MEM_40S	MEM_DATA	MEM B DQ<31..24>
MEM_B_DQ_BYTE4	MEM_40S	MEM_DATA	MEM B DQ<39..32>
MEM_B_DQ_BYTE5	MEM_40S	MEM_DATA	MEM B DQ<47..40>
MEM_B_DQ_BYTE6	MEM_40S	MEM_DATA	MEM B DQ<55..48>
MEM_B_DQ_BYTE7	MEM_40S	MEM_DATA	MEM B DQ<63..56>
MEM_B_DM_BYTE0	MEM_40S	MEM_DATA	MEM B DM<0>
MEM_B_DM_BYTE1	MEM_40S	MEM_DATA	MEM B DM<1>
MEM_B_DM_BYTE2	MEM_40S	MEM_DATA	MEM B DM<2>
MEM_B_DM_BYTE3	MEM_40S	MEM_DATA	MEM B DM<3>
MEM_B_DM_BYTE4	MEM_40S	MEM_DATA	MEM B DM<4>
MEM_B_DM_BYTE5	MEM_40S	MEM_DATA	MEM B DM<5>
MEM_B_DM_BYTE6	MEM_40S	MEM_DATA	MEM B DM<6>
MEM_B_DM_BYTE7	MEM_40S	MEM_DATA	MEM B DM<7>
MEM_B_DQS0	MEM_70D	MEM_DQS	MEM B DQS P<0>
MEM_B_DQS0	MEM_70D	MEM_DQS	MEM B DQS N<0>
MEM_B_DQS1	MEM_70D	MEM_DQS	MEM B DQS P<1>
MEM_B_DQS1	MEM_70D	MEM_DQS	MEM B DQS N<1>
MEM_B_DQS2	MEM_70D	MEM_DQS	MEM B DQS P<2>
MEM_B_DQS2	MEM_70D	MEM_DQS	MEM B DQS N<2>
MEM_B_DQS3	MEM_70D	MEM_DQS	MEM B DQS P<3>
MEM_B_DQS3	MEM_70D	MEM_DQS	MEM B DQS N<3>
MEM_B_DQS4	MEM_70D	MEM_DQS	MEM B DQS P<4>
MEM_B_DQS4	MEM_70D	MEM_DQS	MEM B DQS N<4>
MEM_B_DQS5	MEM_70D	MEM_DQS	MEM B DQS P<5>
MEM_B_DQS5	MEM_70D	MEM_DQS	MEM B DQS N<5>
MEM_B_DQS6	MEM_70D	MEM_DQS	MEM B DQS P<6>
MEM_B_DQS6	MEM_70D	MEM_DQS	MEM B DQS N<6>
MEM_B_DQS7	MEM_70D	MEM_DQS	MEM B DQS P<7>
MEM_B_DQS7	MEM_70D	MEM_DQS	MEM B DQS N<7>
MCP_MEM_COMP	MCP_MEM_COMP	MCP_MEM_COMP	MCP MEM COMP VDD
MCP_MEM_COMP	MCP_MEM_COMP	MCP_MEM_COMP	MCP MEM COMP GND

Memory Constraints

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	76	83

PCI-Express

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
PCIE_90D	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF
CLK_PCIE_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
PCIE	*	=3X_DIELECTRIC	?
CLK_PCIE	*	20 MIL	?
MCP_PEX_COMP	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.4

Analog Video Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CRT_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CRT	*	=4:1_SPACING	?
CRT_2CRT	*	=STANDARD	?
CRT_2CLK	*	50 MIL	?
CRT_2SWITCHER	*	250 MIL	?
CRT_SYNC	*	16 MIL	?
MCP_DAC_COMP	*	=2:1_SPACING	?

CRT signal single-ended impedance varies by location:
 - 37.5-ohm from MCP to first termination resistor.
 - 50-ohm from first to second termination resistor.
 - 75-ohm from output of three-pole filter to connector (if possible).
 R/G/B signals should be matched as close as possible and < 10 inches.
 SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Sections 2.5.1 & 2.5.2.

Digital Video Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
DP_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF
LVDS_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF
MCP_DV_COMP	*	Y	20 MIL	20 MIL	=STANDARD	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
DISPLAYPORT	*	=3X_DIELECTRIC	?
LVDS	*	=3X_DIELECTRIC	?

LVDS intra-pair matching should be 5 mils. Pairs should be within 100 mils of clock length. DisplayPort/TMDS intra-pair matching should be 5 ps. Inter-pair matching should be within 150 ps. DisplayPort AUX CH intra-pair matching should be 5 ps. No relationship to other signals. Max length of LVDS/DisplayPort/TMDS traces: 12 inches.
 SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Sections 2.5.3 & 2.5.4.

SATA Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SATA_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SATA	*	=4X_DIELECTRIC	?
SATA_TERM	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.7.1.

ELECTRICAL_CONSTRAINT_SET	NET_TYPE		
	PHYSICAL	SPACING	
PEG_R2D	PCIE_90D	PCIE	PEG R2D P<15..0>
PEG_R2D	PCIE_90D	PCIE	PEG R2D N<15..0>
PEG_R2D	PCIE_90D	PCIE	PEG R2D C P<15..0>
PEG_R2D	PCIE_90D	PCIE	PEG R2D C N<15..0>
PEG_D2R	PCIE_90D	PCIE	PEG D2R P<15..0>
PEG_D2R	PCIE_90D	PCIE	PEG D2R N<15..0>
PEG_D2R	PCIE_90D	PCIE	PEG D2R C P<15..0>
PEG_D2R	PCIE_90D	PCIE	PEG D2R C N<15..0>
PCIE_MINI_R2D_P	PCIE_90D	PCIE	PCIE MINI R2D P 6 29 82
PCIE_MINI_R2D_N	PCIE_90D	PCIE	PCIE MINI R2D N 6 29 82
PCIE_MINI_R2D_C_P	PCIE_90D	PCIE	PCIE MINI R2D C P 16 29
PCIE_MINI_R2D_C_N	PCIE_90D	PCIE	PCIE MINI R2D C N 16 29
PCIE_MINI_D2R_P	PCIE_90D	PCIE	PCIE MINI D2R P 6 16 29
PCIE_MINI_D2R_N	PCIE_90D	PCIE	PCIE MINI D2R N 6 16 29
PCIE_FW_R2D_P	PCIE_90D	PCIE	PCIE FW R2D P 34
PCIE_FW_R2D_N	PCIE_90D	PCIE	PCIE FW R2D N 34
PCIE_FW_R2D_C_P	PCIE_90D	PCIE	PCIE FW R2D C P 16 34
PCIE_FW_R2D_C_N	PCIE_90D	PCIE	PCIE FW R2D C N 16 34
PCIE_FW_D2R_P	PCIE_90D	PCIE	PCIE FW D2R P 16 34
PCIE_FW_D2R_N	PCIE_90D	PCIE	PCIE FW D2R N 16 34
PCIE_FW_D2R_C_P	PCIE_90D	PCIE	PCIE FW D2R C P 34
PCIE_FW_D2R_C_N	PCIE_90D	PCIE	PCIE FW D2R C N 34
PCIE_EXCARD_R2D_P	PCIE_90D	PCIE	PCIE EXCARD R2D P
PCIE_EXCARD_R2D_N	PCIE_90D	PCIE	PCIE EXCARD R2D N
NC_PCIE_EXCARD_R2DCP	PCIE_90D	PCIE	NC PCIE EXCARD R2DCP 8 16
NC_PCIE_EXCARD_R2DCN	PCIE_90D	PCIE	NC PCIE EXCARD R2DCN 8 16
NC_PCIE_EXCARD_D2RP	PCIE_90D	PCIE	NC PCIE EXCARD D2RP 8 16
NC_PCIE_EXCARD_D2RN	PCIE_90D	PCIE	NC PCIE EXCARD D2RN 8 16
NC_PCIE_CLK100MP	CLK_PCIE_100D	CLK_PCIE	NC PEG CLK100MP 8 16
NC_PCIE_CLK100MN	CLK_PCIE_100D	CLK_PCIE	NC PEG CLK100MN 8 16
PCIE_CLK100M_MINI_P	CLK_PCIE_100D	CLK_PCIE	PCIE CLK100M MINI P 16 29
PCIE_CLK100M_MINI_N	CLK_PCIE_100D	CLK_PCIE	PCIE CLK100M MINI N 16 29
PCIE_CLK100M_FW_P	CLK_PCIE_100D	CLK_PCIE	PCIE CLK100M FW P 16 34
PCIE_CLK100M_FW_N	CLK_PCIE_100D	CLK_PCIE	PCIE CLK100M FW N 16 34
NC_PCIE_CLK100M_EXCARDP	CLK_PCIE_100D	CLK_PCIE	NC PCIE CLK100M EXCARDP 8 16
NC_PCIE_CLK100M_EXCARDN	CLK_PCIE_100D	CLK_PCIE	NC PCIE CLK100M EXCARDN 8 16
MCP_PEX_CLK_COMP	MCP_PEX_COMP	MCP_PEX_COMP	MCP PEX CLK COMP 16
NC_CRT_IG_R_C_PR	CRT_50S	CRT	NC CRT IG R C PR 17 23
NC_CRT_IG_G_Y_Y	CRT_50S	CRT	NC CRT IG G Y Y 17 23
NC_CRT_IG_B_COMP_PB	CRT_50S	CRT	NC CRT IG B COMP PB 17 23
NC_CRT_IG_HSYNC	CRT_50S	CRT_SYNC	NC CRT IG HSYNC 17 23
NC_CRT_IG_VSYNC	CRT_50S	CRT_SYNC	NC CRT IG VSYNC 17 23
NC_MCP_TV_DAC_RSET	MCP_DAC_COMP	MCP_DAC_COMP	NC MCP TV DAC RSET 17 23
NC_MCP_TV_DAC_VREF	MCP_DAC_COMP	MCP_DAC_COMP	NC MCP TV DAC VREF 17 23
TMDS_IG_TXC_P	DP_100D	DISPLAYPORT	TMDS IG TXC P
TMDS_IG_TXC_N	DP_100D	DISPLAYPORT	TMDS IG TXC N
TMDS_IG_TXD_P<2..0>	DP_100D	DISPLAYPORT	TMDS IG TXD P<2..0>
TMDS_IG_TXD_N<2..0>	DP_100D	DISPLAYPORT	TMDS IG TXD N<2..0>
DP_IG_ML_P<3..0>	DP_100D	DISPLAYPORT	DP IG ML P<3..0>
DP_IG_ML_N<3..0>	DP_100D	DISPLAYPORT	DP IG ML N<3..0>
DP_IG_AUX_CH_P	DP_100D	DISPLAYPORT	DP IG AUX CH P 17 70
DP_IG_AUX_CH_N	DP_100D	DISPLAYPORT	DP IG AUX CH N 17 70
MCP_HDMI_RSET	MCP_DV_COMP	MCP_DV_COMP	MCP HDMI RSET 17 23
MCP_HDMI_VPROBE	MCP_DV_COMP	MCP_DV_COMP	MCP HDMI VPROBE 17 23
LVDS_CONN_A_CLK_P	LVDS_100D	LVDS	LVDS CONN A CLK P 8 17 69
LVDS_CONN_A_CLK_N	LVDS_100D	LVDS	LVDS CONN A CLK N 8 17 69
LVDS_IG_A_DATA_P<2..0>	LVDS_100D	LVDS	LVDS IG A DATA P<2..0> 8 17
LVDS_IG_A_DATA_N<2..0>	LVDS_100D	LVDS	LVDS IG A DATA N<2..0> 8 17
NC_LVDS_IG_A_DATAP<3>	LVDS_100D	LVDS	NC LVDS IG A DATAP<3> 8 17
NC_LVDS_IG_A_DATAN<3>	LVDS_100D	LVDS	NC LVDS IG A DATAN<3> 8 17
LVDS_CONN_B_CLK_P	LVDS_100D	LVDS	LVDS CONN B CLK P 8 17 69
LVDS_CONN_B_CLK_N	LVDS_100D	LVDS	LVDS CONN B CLK N 8 17 69
LVDS_IG_B_DATA_P<2..0>	LVDS_100D	LVDS	LVDS IG B DATA P<2..0> 8 17
LVDS_IG_B_DATA_N<2..0>	LVDS_100D	LVDS	LVDS IG B DATA N<2..0> 8 17
NC_LVDS_IG_B_DATAP<3>	LVDS_100D	LVDS	NC LVDS IG B DATAP<3> 8 17
NC_LVDS_IG_B_DATAN<3>	LVDS_100D	LVDS	NC LVDS IG B DATAN<3> 8 17
MCP_IFPAB_RSET	MCP_DV_COMP	MCP_DV_COMP	MCP IFPAB RSET 17 23
MCP_IFPAB_VPROBE	MCP_DV_COMP	MCP_DV_COMP	MCP IFPAB VPROBE 17 23
SATA_HDD_R2D_C_P	SATA_100D	SATA	SATA HDD R2D C P 19 37
SATA_HDD_R2D_C_N	SATA_100D	SATA	SATA HDD R2D C N 19 37
SATA_HDD_R2D_P	SATA_100D	SATA	SATA HDD R2D P 6 37
SATA_HDD_R2D_N	SATA_100D	SATA	SATA HDD R2D N 6 37
SATA_HDD_D2R_P	SATA_100D	SATA	SATA HDD D2R P 19 37
SATA_HDD_D2R_N	SATA_100D	SATA	SATA HDD D2R N 19 37
SATA_HDD_D2R_C_P	SATA_100D	SATA	SATA HDD D2R C P 6 37
SATA_HDD_D2R_C_N	SATA_100D	SATA	SATA HDD D2R C N 6 37
SATA_ODD_R2D_C_P	SATA_100D	SATA	SATA ODD R2D C P 19 37
SATA_ODD_R2D_C_N	SATA_100D	SATA	SATA ODD R2D C N 19 37
SATA_ODD_R2D_P	SATA_100D	SATA	SATA ODD R2D P 6 37
SATA_ODD_R2D_N	SATA_100D	SATA	SATA ODD R2D N 6 37
SATA_ODD_D2R_P	SATA_100D	SATA	SATA ODD D2R P 19 37
SATA_ODD_D2R_N	SATA_100D	SATA	SATA ODD D2R N 19 37
SATA_ODD_D2R_C_P	SATA_100D	SATA	SATA ODD D2R C P 6 37
SATA_ODD_D2R_C_N	SATA_100D	SATA	SATA ODD D2R C N 6 37
MCP_SATA_TERM	SATA_TERM	SATA_TERM	MCP SATA TERM 19

MCP Constraints 1
 SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	77	83

PCI Bus Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
PCI_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD
CLK_PCI_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
PCI	*	=STANDARD	?
CLK_PCI	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.8.

LPC Bus Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
LPC_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD
CLK_LPC_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
LPC	*	6 MIL	?
CLK_LPC	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.9.1.

USB 2.0 Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MCP_USB_RBIAIS	*	=STANDARD	8 MIL	8 MIL	=STANDARD	=STANDARD	=STANDARD
USB_90D	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
USB	*	=2x_DIELECTRIC	?	USB	TOP,BOTTOM	=4x_DIELECTRIC	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.10.1.

SMBus Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SMB_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SMB	*	=2x_DIELECTRIC	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.11.1.

HD Audio Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
HDA_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
HDA	*	=2x_DIELECTRIC	?
MCP_HDA_COMP	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.12.1.

SIO Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CLK_SLOW_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CLK_SLOW	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.13.

SPI Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SPI_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SPI	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.14.

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
MCP_DEBUG	PCI_55S	PCI	MCP_DEBUG<7..0>	12 18
PCI_AD	PCI_55S	PCI	PCI_AD<23..8>	
PCI_AD24	PCI_55S	PCI	PCI_AD<24>	
PCI_AD	PCI_55S	PCI	PCI_AD<31..25>	
PCI_AD	PCI_55S	PCI	PCI_PAR	
PCI_C_BE_L	PCI_55S	PCI	PCI_C_BE_L<3..0>	
PCI_CNTRL	PCI_55S	PCI	PCI_IRDY_L	
PCI_CNTRL	PCI_55S	PCI	PCI_DEVSEL_L	
PCI_CNTRL	PCI_55S	PCI	PCI_PERR_L	
PCI_CNTRL	PCI_55S	PCI	PCI_SERR_L	
PCI_CNTRL	PCI_55S	PCI	PCI_STOP_L	
PCI_CNTRL	PCI_55S	PCI	PCI_TRDY_L	
PCI_CNTRL	PCI_55S	PCI	PCI_FRAME_L	
PCI_REQ0_L	PCI_55S	PCI	PCI_REQ0_L	18
PCI_GNT0_L	PCI_55S	PCI	PCI_GNT0_L	18
PCI_REQ1_L	PCI_55S	PCI	PCI_REQ1_L	18
PCI_GNT1_L	PCI_55S	PCI	PCI_GNT1_L	
PCI_INTW_L	PCI_55S	PCI	PCI_INTW_L	
PCI_INTX_L	PCI_55S	PCI	PCI_INTX_L	
PCI_INTY_L	PCI_55S	PCI	PCI_INTY_L	
PCI_INTZ_L	PCI_55S	PCI	PCI_INTZ_L	
MCP_PCI_CLK2	CLK_PCI_55S	CLK_PCI	PCI_CLK33M MCP_R	18
CLK_PCI_55S	CLK_PCI_55S	CLK_PCI	PCI_CLK33M MCP	18
LPC_AD	LPC_55S	LPC	LPC_AD<3..0>	18 40 42
LPC_FRAME_L	LPC_55S	LPC	LPC_FRAME_L	18 40 42
LPC_RESET_L	LPC_55S	LPC	LPC_RESET_L	18 24
MCP_LPC_CLK0	CLK_LPC_55S	CLK_LPC	LPC_CLK33M SMC_R	18 24
CLK_LPC_55S	CLK_LPC_55S	CLK_LPC	LPC_CLK33M SMC	24 40
CLK_LPC_55S	CLK_LPC_55S	CLK_LPC	LPC_CLK33M LPCPLUS	24 42
USB_EXTA	USB_90D	USB	USB_EXTA_P	19 38
USB_90D	USB_90D	USB	USB_EXTA_N	19 38
USB_90D	USB_90D	USB	USB_EXTA_MUXED_P	
USB_90D	USB_90D	USB	USB_EXTA_MUXED_N	
USB_MINI	USB_90D	USB	NC_USB_MINIP	8 19
USB_90D	USB_90D	USB	NC_USB_MININ	8 19
USB_EXTD	USB_90D	USB	NC_USB_EXTDP	8 19
USB_90D	USB_90D	USB	NC_USB_EXTDN	8 19
USB_CAMERA	USB_90D	USB	USB_CAMERA_P	6 19 29
USB_90D	USB_90D	USB	USB_CAMERA_N	6 19 29
USB_BT	USB_90D	USB	USB_BT_P	6 19 29
USB_90D	USB_90D	USB	USB_BT_N	6 19 29
USB_TPAD	USB_90D	USB	USB_TPAD_P	19 48
USB_90D	USB_90D	USB	USB_TPAD_N	19 48
USB_IR	USB_90D	USB	USB_IR_P	19 39
USB_90D	USB_90D	USB	USB_IR_N	19 39
USB_EXTB	USB_90D	USB	USB_EXTB_P	19 38
USB_90D	USB_90D	USB	USB_EXTB_N	19 38
USB_EXCARD	USB_90D	USB	NC_USB_EXCARDP	8 19
USB_90D	USB_90D	USB	NC_USB_EXCARDN	8 19
USB_EXTC	USB_90D	USB	NC_USB_EXTCP	8 19
USB_90D	USB_90D	USB	NC_USB_EXTCN	8 19
USB_CARDREADER	USB_90D	USB	USB_CARDREADER_P	19 30
USB_90D	USB_90D	USB	USB_CARDREADER_N	19 30
MCP_USB_RBIAIS	MCP_USB_RBIAIS		MCP_USB_RBIAIS_GND	19
SMBUS_MCP_0_CLK	SMB_55S	SMB	SMBUS_MCP_0_CLK	12 20 26 27 43
SMBUS_MCP_0_DATA	SMB_55S	SMB	SMBUS_MCP_0_DATA	12 20 26 43
SMBUS_MCP_1_CLK	SMB_55S	SMB	SMBUS_MCP_1_CLK	20 43 58 72
SMBUS_MCP_1_DATA	SMB_55S	SMB	SMBUS_MCP_1_DATA	20 43 58 72
HDA_BIT_CLK	HDA_55S	HDA	HDA_BIT_CLK	20 53
HDA_55S	HDA_55S	HDA	HDA_BIT_CLK_R	20
HDA_SYNC	HDA_55S	HDA	HDA_SYNC	20 53
HDA_55S	HDA_55S	HDA	HDA_SYNC_R	20
HDA_RST_L	HDA_55S	HDA	HDA_RST_R_L	20
HDA_55S	HDA_55S	HDA	HDA_RST_L	20 53
HDA_SDIN0	HDA_55S	HDA	HDA_SDIN0	20 53
HDA_55S	HDA_55S	HDA	HDA_SDIN_CODEC	20
HDA_SDOUT	HDA_55S	HDA	HDA_SDOUT	20 53
HDA_55S	HDA_55S	HDA	HDA_SDOUT_R	20
MCP_HDA_PULLDN_COMP	MCP_HDA_COMP		MCP_HDA_PULLDN_COMP	20
MCP_SUS_CLK	CLK_SLOW_55S	CLK_SLOW	PM_CLK32K_SUSCLK_R	20 24
CLK_SLOW_55S	CLK_SLOW_55S	CLK_SLOW	PM_CLK32K_SUSCLK	24 40
SPI_CLK	SPI_55S	SPI	SPI_CLK_R	20 42
SPI_55S	SPI_55S	SPI	SPI_CLK	52
SPI_MOST	SPI_55S	SPI	SPI_MOST_R	20 42
SPI_55S	SPI_55S	SPI	SPI_MOST	52
SPI_MISO	SPI_55S	SPI	SPI_MISO	20 42
SPI_55S	SPI_55S	SPI	SPI_MISO_R	52
SPI_CS0	SPI_55S	SPI	SPI_CS0_R_L	20 42
SPI_55S	SPI_55S	SPI	SPI_CS0_L	

MCP Constraints 2

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	78		83

MCP RGMII (Ethernet) Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MCP_MII_COMP	*	=STANDARD	7.5 MIL	7.5 MIL	=STANDARD	=STANDARD	=STANDARD
ENET_MII_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MCP_BUF0_CLK	*	=3:1_SPACING	?
ENET_MII	*	12 MIL	?

SOURCE: MCP73 Interface DG (DG-02974-001_v01), Sections 2.7.2 & 2.7.4

88E1116R (Ethernet PHY) Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
ENET_MDI_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
ENET_MDI	*	25 MIL	?

SOURCE: MCP73 Interface DG (DG-02974-001_v01), Section 2.7.4

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
MCP_MII_COMP	MCP_MII_COMP		MCP MII COMP VDD	17
MCP_MII_COMP	MCP_MII_COMP		MCP MII COMP GND	17
MCP_CLK25M_BUF0	ENET_MII_55S	MCP_BUF0_CLK	MCP CLK25M BUF0 R	17 32
	ENET_MII_55S	MCP_BUF0_CLK	RTL8211 CLK25M CKXTAL1	31 32
ENET_INTR_L	ENET_MII_55S	ENET_MII	ENET INTR L	
ENET_MDIO	ENET_MII_55S	ENET_MII	ENET MDIO	17 31
ENET_MDC	ENET_MII_55S	ENET_MII	ENET MDC	17 31
ENET_PWRDWN_L	ENET_MII_55S	ENET_MII	ENET PWRDWN L	
	ENET_MII_55S	ENET_MII	ENET CLK125M RXCLK R	31
ENET_RXCLK	ENET_MII_55S	ENET_MII	ENET CLK125M RXCLK	17 31
	ENET_MII_55S	ENET_MII	ENET RXD R<3..0>	31
ENET_RXD	ENET_MII_55S	ENET_MII	ENET RXD<0>	17 31
ENET_RXD_STRAP	ENET_MII_55S	ENET_MII	ENET RXD<3..1>	17 31
ENET_RXD	ENET_MII_55S	ENET_MII	ENET RX CTRL	17 31
ENET_TXCLK	ENET_MII_55S	ENET_MII	ENET CLK125M TXCLK	17 31
ENET_TXD0	ENET_MII_55S	ENET_MII	ENET TXD<0>	17 31
ENET_TXD	ENET_MII_55S	ENET_MII	ENET TXD<3..1>	17 31
ENET_TXD	ENET_MII_55S	ENET_MII	ENET TX CTRL	17 31
	ENET_MII_55S	ENET_MII	ENET RESET L	17 31
ENET_MDI	ENET_MDI_100D	ENET_MDI	ENET MDI P<3..0>	31 33
	ENET_MDI_100D	ENET_MDI	ENET MDI N<3..0>	31 33

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com


Ethernet Constraints

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

- I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
- II NOT TO REPRODUCE OR COPY IT
- III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

 APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7903	A
SCALE	SHT	OF	
NONE	79	83	

8

7

6

5

4

3

2

1

FireWire Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
FW_110D	*	=110_OHM_DIFF	=110_OHM_DIFF	=110_OHM_DIFF	=110_OHM_DIFF	=110_OHM_DIFF	=110_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
FW_TP	*	=3:1_SPACING	?

FireWire Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE		SPACING	
	PHYSICAL			
EW_P0_TPA	EW_110D	FW_TP	NC FW0 TPAP	34 36
EW_P0_TPA	EW_110D	FW_TP	NC FW0 TPAN	34 36
EW_P0_TPB	EW_110D	FW_TP	NC FW0 TPBP	34 36
EW_P0_TPB	EW_110D	FW_TP	NC FW0 TPBN	34 36
EW_P1_TPA	EW_110D	FW_TP	FW PORT1 TPA P	34 36
EW_P1_TPA	EW_110D	FW_TP	FW PORT1 TPA N	34 36
EW_P1_TPB	EW_110D	FW_TP	FW PORT1 TPB P	34 36
EW_P1_TPB	EW_110D	FW_TP	FW PORT1 TPB N	34 36

Port 2 Not Used

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com

FireWire Constraints

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	80	83

8

7

6

5

4

3

2

1

D

D

C

C

B

B

A

A

8

7

6

5

4

3

2

1

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
IT01_DIFFPAIR	*	=STANDARD	=STANDARD	=STANDARD	=STANDARD	0.1 MM	0.1 MM

SMC SMBus Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
SMBUS_SMC_A_S3_SCL	SMB_55S	SMB	SMBUS_SMC_A_S3_SCL	6 29 40 43 49
SMBUS_SMC_A_S3_SDA	SMB_55S	SMB	SMBUS_SMC_A_S3_SDA	6 29 40 43 49
SMBUS_SMC_B_S0_SCL	SMB_55S	SMB	SMBUS_SMC_B_S0_SCL	40 43 46
SMBUS_SMC_B_S0_SDA	SMB_55S	SMB	SMBUS_SMC_B_S0_SDA	40 43 46
SMBUS_SMC_0_S0_SCL	SMB_55S	SMB	SMBUS_SMC_0_S0_SCL	40 43 46 51
SMBUS_SMC_0_S0_SDA	SMB_55S	SMB	SMBUS_SMC_0_S0_SDA	40 43 46 51
SMBUS_SMC_BSA_SCL	SMB_55S	SMB	SMBUS_SMC_BSA_SCL	6 40 43 59 60
SMBUS_SMC_BSA_SDA	SMB_55S	SMB	SMBUS_SMC_BSA_SDA	6 40 43 59 60
SMBUS_SMC_MGMT_SCL	SMB_55S	SMB	SMBUS_SMC_MGMT_SCL	25 37 40 43
SMBUS_SMC_MGMT_SDA	SMB_55S	SMB	SMBUS_SMC_MGMT_SDA	25 37 40 43

SMBus Charger Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
CHGR_CSI	1T01_DIFFPAIR		CHGR_CSI_P	60
	1T01_DIFFPAIR		CHGR_CSI_N	60
CHGR_CSO	1T01_DIFFPAIR		CHGR_CSO_P	60
	1T01_DIFFPAIR		CHGR_CSO_N	60

www.laptop-schematics.com

www.laptop-schematics.com

www.laptop-schematics.com

SMC Constraints

SYNC_MASTER=T18_MLB SYNC_DATE=02/05/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

- I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
- II NOT TO REPRODUCE OR COPY IT
- III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	81	83

8

7

6

5

4

3

2

1

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SENSE_1T01_55S	*	=1:1_DIFFPAIR	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=1:1_DIFFPAIR	=1:1_DIFFPAIR
THERM_1T01_55S	*	=1:1_DIFFPAIR	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=1:1_DIFFPAIR	=1:1_DIFFPAIR
DIFFPAIR	*	=1:1_DIFFPAIR			=1:1_DIFFPAIR	=1:1_DIFFPAIR	=1:1_DIFFPAIR

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SENSE	*	=2:1_SPACING	?
THERM	*	=2:1_SPACING	?
AUDIO	*	=2:1_SPACING	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
ENETCONN	*	25 MILS	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
GND	*	=STANDARD	?
PP1V8_MEM	*	=STANDARD	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
GND_P2MM	*	0.20 MM	1000
PWR_P2MM	*	0.20 MM	1000

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CLK	GND	*	GND_P2MM
MEM_CMD	GND	*	GND_P2MM
MEM_CTRL	GND	*	GND_P2MM
MEM_DATA	GND	*	GND_P2MM
MEM_DQS	GND	*	GND_P2MM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
CLK_PCIE	GND	*	GND_P2MM
PCIE	GND	*	GND_P2MM
SATA	GND	*	GND_P2MM
USB	GND	*	GND_P2MM
CLK_PCIE	SB_POWER	*	PWR_P2MM
SATA	SB_POWER	*	PWR_P2MM
USB	SB_POWER	*	PWR_P2MM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
LVDS	GND	*	GND_P2MM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
CLK_FSB	GND	*	GND_P2MM
CPU_COMP	GND	*	GND_P2MM
CPU_GTLREF	GND	*	GND_P2MM
CPU_VCCSENSE	GND	*	GND_P2MM
FSB_DSTB	FSB_DSTB	*	GND_P2MM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
ENET_MDI	GND	*	GND_P2MM

Memory Constraint Relaxations

Allow 0.127 mm necks for >0.127 mm lines for GMCH fanout.

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MEM_70D	BOTTOM			0.127 MM	6.35 MM		

MCP Fanout Constraint Relaxations

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MEM_40S_OVERRIDE	*	VERRIDE	VERRIDE	0.09 MM_OVERRIDE	5.8 MM_OVERRIDE	VERRIDE	VERRIDE
MEM_40S_VDD_OVERRIDE	*	VERRIDE	VERRIDE	0.09 MM_OVERRIDE	5.8 MM_OVERRIDE	VERRIDE	VERRIDE
MEM_70D_OVERRIDE	*	VERRIDE	VERRIDE	0.09 MM_OVERRIDE	5.8 MM_OVERRIDE	VERRIDE	VERRIDE
MEM_70D_VDD_OVERRIDE	*	VERRIDE	VERRIDE	0.09 MM_OVERRIDE	100 MIL_OVERRIDE	VERRIDE	VERRIDE
PCIE_90D_OVERRIDE	*	VERRIDE	VERRIDE	0.09 MM_OVERRIDE	100 MIL_OVERRIDE	VERRIDE	VERRIDE
USB_90D_OVERRIDE	TOP	VERRIDE	VERRIDE	0.09 MM_OVERRIDE	500 MIL_OVERRIDE	VERRIDE	VERRIDE
MCP_DV_COMP_OVERRIDE	TOP	VERRIDE	VERRIDE	0.1 MM_OVERRIDE	500 MIL_OVERRIDE	VERRIDE	VERRIDE
MCP_MEM_COMP_OVERRIDE	TOP	VERRIDE	VERRIDE	0.1 MM_OVERRIDE	500 MIL_OVERRIDE	VERRIDE	VERRIDE
MCP_MI_I_COMP_OVERRIDE	TOP	VERRIDE	VERRIDE	0.1 MM_OVERRIDE	500 MIL_OVERRIDE	VERRIDE	VERRIDE
MCP_USB_RBIAIS_OVERRIDE	TOP	VERRIDE	VERRIDE	0.1 MM_OVERRIDE	500 MIL_OVERRIDE	VERRIDE	VERRIDE
MCP_DV_COMP_OVERRIDE	*	VERRIDE	VERRIDE	0.25 MM_OVERRIDE	250 MIL_OVERRIDE	VERRIDE	VERRIDE

K19i Specific Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
	ENET_MDI_100D	ENETCONN	ENETCONN P<3..0>	33
	ENET_MDI_100D	ENETCONN	ENETCONN N<3..0>	33
	SATA_100D	SATA	SATA ODD R2D UF P	37
	SATA_100D	SATA	SATA ODD R2D UF N	37
	SATA_100D	SATA	SATA ODD D2R UF P	6 37
	SATA_100D	SATA	SATA ODD D2R UF N	6 37
	SATA_100D	SATA	SATA HDD D2R UF P	37
	SATA_100D	SATA	SATA HDD D2R UF N	37
	SATA_100D	SATA	SATA HDD R2D UF P	37
	SATA_100D	SATA	SATA HDD R2D UF N	37
	CPU_THMSENS_D2	THERM	CPU_THMSENS_D2_P	46
	THERM_1T01_55S	THERM	CPU_THMSENS_D2_N	46
	CPU_THERMD	THERM	CPU_THERMD_P	9 46
	THERM_1T01_55S	THERM	CPU_THERMD_N	9 46
	MCP_THMSENS_D2	THERM	MCP_THMSENS_D2_P	46
	THERM_1T01_55S	THERM	MCP_THMSENS_D2_N	46
	MCP_THMDIODE	THERM	MCP_THMDIODE_P	20 46
	THERM_1T01_55S	THERM	MCP_THMDIODE_N	20 46
	SENSE_DIFFPAIR	SENSE	ISNS_1V5_S3_P	51 63
	SENSE_1T01_55S	SENSE	ISNS_1V5_S3_N	51 63
	SENSE_1T01_55S	SENSE	ISNS_1V5_S3_R_P	51
	SENSE_1T01_55S	SENSE	ISNS_1V5_S3_R_N	51
	SENSE_DIFFPAIR	SENSE	ISNS_AIRPORT_P	29 51
	SENSE_1T01_55S	SENSE	ISNS_AIRPORT_N	29 51
	SENSE_1T01_55S	SENSE	ISNS_AIRPORT_R_P	51
	SENSE_1T01_55S	SENSE	ISNS_AIRPORT_R_N	51
	SENSE_DIFFPAIR	SENSE	ISNS_HDD_P	51 51
	SENSE_1T01_55S	SENSE	ISNS_HDD_N	51 51
	SENSE_1T01_55S	SENSE	ISNS_HDD_R_P	51
	SENSE_1T01_55S	SENSE	ISNS_HDD_R_N	51
	SENSE_DIFFPAIR	SENSE	ISNS_LCDBKLT_P	51 72
	SENSE_1T01_55S	SENSE	ISNS_LCDBKLT_N	51 72
	SENSE_1T01_55S	SENSE	ISNS_LCDBKLT_R_P	51
	SENSE_1T01_55S	SENSE	ISNS_LCDBKLT_R_N	51
	SENSE_DIFFPAIR	SENSE	ISNS_ODD_P	37 51
	SENSE_1T01_55S	SENSE	ISNS_ODD_N	37 51
	SENSE_1T01_55S	SENSE	ISNS_ODD_R_P	51
	SENSE_1T01_55S	SENSE	ISNS_ODD_R_N	51
	SENSE_DIFFPAIR	SENSE	ISNS_CPUVTT_P	45
	SENSE_1T01_55S	SENSE	ISNS_CPUVTT_N	45
	SENSE_DIFFPAIR	SENSE	MCPCORES0_RSEN_P	64
	SENSE_1T01_55S	SENSE	MCPCORES0_RSEN_N	64
		SB_POWER	PP3V3_S5	68 69 71 81 82 83 84 85 86 87
		SB_POWER	PP3V3_S0	57 58 59 60 61 62 63 64 65 66 67
		SB_POWER	PP1V5_S0	6 7 10 11 15 22 37 66 69 87 88 89 90 91 92
		GND	GND	87 88

SD Card Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
	SD_DATA	SD_INTERFACE	SD_D<0>	6 30
	SD_DATA	SD_INTERFACE	SD_D<1>	6 30
	SD_DATA	SD_INTERFACE	SD_D<2>	6 30
	SD_DATA	SD_INTERFACE	SD_D<3>	6 30
	SD_DATA	SD_INTERFACE	SD_D<4>	6 30
	SD_DATA	SD_INTERFACE	SD_D<5>	6 30
	SD_DATA	SD_INTERFACE	SD_D<6>	6 30
	SD_DATA	SD_INTERFACE	SD_D<7>	6 30
	SD_CLK	SD_INTERFACE	SD_CLK	6 30
	SD_CMD	SD_INTERFACE	SD_CMD	6 30

SD Card Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SD_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SD_INTERFACE	*	=3X_DIELECTRIC	?

K19i Specific Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
	PCIE_90D	PCIE	PCIE_MINI_R2D_P	6 29 77
	(PCIE_MINT)	PCIE	PCIE_MINI_R2D_N	6 29 77
	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_MINI_CONN_P	6 29
	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_MINI_CONN_N	6 29
	1T01_DIFFPAIR		CHGR_CSI_R_P	60
	1T01_DIFFPAIR		CHGR_CSI_R_N	60
	1T01_DIFFPAIR		CHGR_CSO_R_P	45 60
	1T01_DIFFPAIR		CHGR_CSO_R_N	45 60
	(USB_EXT_A)	USB_90D	USB2_EXT_A_MUXED_P	38
	(USB_EXT_A)	USB_90D	USB2_EXT_A_MUXED_N	38
	(USB_EXT_A)	USB_90D	USB2_L11_P	38
	(USB_EXT_A)	USB_90D	USB2_L11_N	38
	(USB_TPAD)	USB_90D	USB_TPAD_R_P	48
	(USB_TPAD)	USB_90D	USB_TPAD_R_N	48
	(USB_CAMERA)	USB_90D	USB_CAMERA_CONN_P	6 29
	(USB_CAMERA)	USB_90D	USB_CAMERA_CONN_N	6 29
	USB_90D	USB	CONN_USB2_BT_P	6 29
	USB_90D	USB	CONN_USB2_BT_N	6 29
	USB_90D	USB	USB_LT2_P	38
	USB_90D	USB	USB_LT2_N	38
	DP_100D	DISPLAYPORT	DP_AUX_CH_SW_P	70
	DP_100D	DISPLAYPORT	DP_AUX_CH_SW_N	70
	DIFFPAIR	AUDIO	SPKRCONN_L_OUT_P	6 56 57
	DIFFPAIR	AUDIO	SPKRCONN_L_OUT_N	6 56 57
	DIFFPAIR	AUDIO	SPKRCONN_S_OUT_P	6 56 57
	DIFFPAIR	AUDIO	SPKRCONN_S_OUT_N	6 56 57
	DIFFPAIR	AUDIO	SPKRCONN_R_OUT_P	6 56 57
	DIFFPAIR	AUDIO	SPKRCONN_R_OUT_N	6 56 57
	DIFFPAIR	AUDIO	SPKRAMP_L_OUT_P	56
	DIFFPAIR	AUDIO	SPKRAMP_L_OUT_N	56
	DIFFPAIR	AUDIO	SPKRAMP_R_OUT_P	56
	DIFFPAIR	AUDIO	SPKRAMP_R_OUT_N	56
	DIFFPAIR	AUDIO	SPKRAMP_S_OUT_P	56
	DIFFPAIR	AUDIO	SPKRAMP_S_OUT_N	56

K19i Specific Graphics Net Properties


ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
	LVDS_100D	LVDS	LVDS_CONN_A_CLK_F_P	6 69
	LVDS_100D	LVDS	LVDS_CONN_A_CLK_F_N	6 69
	LVDS_100D	LVDS	LVDS_CONN_B_CLK_F_P	6 69
	LVDS_100D	LVDS	LVDS_CONN_B_CLK_F_N	6 69
	DP_ML	DP_100D	DP_ML_C_P<3..0>	6 71
	DP_ML	DP_100D	DP_ML_C_N<3..0>	71
	DP_ML	DP_100D	DP_ML_P<3..0>	17 70 71
	DP_ML	DP_100D	DP_ML_N<3..0>	17 70 71
	DP_ML	DP_100D	DP_ML_CONN_P<3..0>	71
	DP_ML	DP_100D	DP_ML_CONN_N<3..0>	71
	DP_AUX_CH	DP_100D	DP_AUX_CH_C_P	70 71
	DP_AUX_CH	DP_100D	DP_AUX_CH_C_N	70 71

K19i Specific Constraints

SYNC_MASTER=WFERRY_K19I SYNC_DATE=01/08/2009

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	82	83

K19i Board-Specific Physical & Spacing Constraints

BOARD LAYERS			BOARD AREAS				BOARD UNITS (MIL OR MM)	ALLEGRO VERSION
TOP, ISL2, ISL3, ISL4, ISL5, ISL6, ISL7, ISL8, ISL9, ISL10, ISL11, BOTTOM			NO_TYPE, BGA				MM	15.2

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
DEFAULT	*	Y	=50_OHM_SE	0.080 MM	12.7 MM	0 MM	0 MM
STANDARD	*	Y	=DEFAULT	=DEFAULT	12.7 MM	=DEFAULT	=DEFAULT

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
55_OHM_SE	TOP, BOTTOM	Y	0.090 MM	0.090 MM			
55_OHM_SE	*	Y	0.076 MM	0.076 MM	=STANDARD	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
50_OHM_SE	TOP, BOTTOM	Y	0.115 MM	0.115 MM			
50_OHM_SE	*	Y	0.076 MM	0.076 MM	=STANDARD	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
40_OHM_SE	TOP, BOTTOM	Y	0.165 MM	0.100 MM			
40_OHM_SE	*	Y	0.126 MM	0.100 MM	=STANDARD	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
27P4_OHM_SE	TOP, BOTTOM	Y	0.310 MM	0.310 MM			
27P4_OHM_SE	*	Y	0.222 MM	0.222 MM	=STANDARD	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
70_OHM_DIFF	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
70_OHM_DIFF	ISL3, ISL4, ISL9, ISL10	Y	0.151 MM	0.151 MM	=STANDARD	0.224 MM	0.224 MM
70_OHM_DIFF	TOP, BOTTOM	Y	0.185 MM	0.185 MM		0.200 MM	0.200 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
90_OHM_DIFF	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
90_OHM_DIFF	ISL3, ISL4, ISL9, ISL10	Y	0.095 MM	0.095 MM		0.234 MM	0.234 MM
90_OHM_DIFF	TOP, BOTTOM	Y	0.112 MM	0.112 MM		0.220 MM	0.220 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
100_OHM_DIFF	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
100_OHM_DIFF	ISL3, ISL4, ISL9, ISL10	Y	0.075 MM	0.075 MM		0.244 MM	0.244 MM
100_OHM_DIFF	TOP, BOTTOM	Y	0.091 MM	0.091 MM		0.230 MM	0.230 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
100_OHM_DIFF_HDD	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
100_OHM_DIFF_HDD	ISL3, ISL4, ISL9, ISL10	Y	0.083 MM	0.083 MM		0.400 MM	0.400 MM
100_OHM_DIFF_HDD	TOP, BOTTOM	Y	0.095 MM	0.095 MM		0.400 MM	0.400 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
110_OHM_DIFF	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
110_OHM_DIFF	ISL3, ISL4, ISL9, ISL10	Y	0.075 MM	0.075 MM		0.330 MM	0.330 MM
110_OHM_DIFF	TOP, BOTTOM	Y	0.077 MM	0.077 MM		0.330 MM	0.330 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
1:1_DIFFPAIR	*	Y	=STANDARD	=STANDARD	=STANDARD	0.1 MM	0.1 MM

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
DEFAULT	*	0.1 MM	?
STANDARD	*	=DEFAULT	?
BGA_P1MM	*	0.1 MM	?
BGA_P2MM	*	0.2 MM	?
BGA_P3MM	*	0.3 MM	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
1.5:1_SPACING	*	0.15 MM	?
2:1_SPACING	*	0.2 MM	?
2.5:1_SPACING	*	0.25 MM	?
3:1_SPACING	*	0.3 MM	?
4:1_SPACING	*	0.4 MM	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
2X_DIELECTRIC	TOP, BOTTOM	0.140 MM	?
3X_DIELECTRIC	TOP, BOTTOM	0.210 MM	?
4X_DIELECTRIC	TOP, BOTTOM	0.280 MM	?
5X_DIELECTRIC	TOP, BOTTOM	0.350 MM	?
2X_DIELECTRIC	*	0.126 MM	?
3X_DIELECTRIC	*	0.189 MM	?
4X_DIELECTRIC	*	0.252 MM	?
5X_DIELECTRIC	*	0.315 MM	?

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
*	*	BGA	BGA_P1MM
MEM_CLK	*	BGA	BGA_P2MM
CLK_FSB	*	BGA	BGA_P2MM
CLK_LPC	*	BGA	BGA_P2MM
CLK_PCI	*	BGA	BGA_P2MM
CLK_PCIE	*	BGA	BGA_P2MM
CLK_SLOW	*	BGA	BGA_P2MM
FSB_DSTB	FSB_DSTB	BGA	BGA_P3MM

NET_PHYSICAL_TYPE	AREA_TYPE	PHYSICAL_RULE_SET
MEM_40S	BGA	STANDARD
MEM_40S_VDD	BGA	STANDARD


K19i PCB Rule Definitions

SYNC_MASTER=WFERRY_K19I SYNC_DATE=12/12/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

- I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
- II NOT TO REPRODUCE OR COPY IT
- III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



SIZE	DRAWING NUMBER	REV.
D	051-7903	A
SCALE	SHT	OF
NONE	83	83