
4. Array course control

4-1. Software Adjustments


Test Jig (GH80-03306A)



GH39-00877A
GH39-00876A
GH39-00875A
GH39-00872A



Serial Cable(CSA LL64151-A)

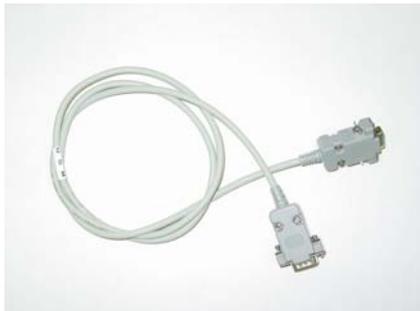

Power Supply Cable



4-2. Software Downloading


4-2-1. Pre-requisite for Downloading

- Downloader Program([Gem_Downloader_1GNAND_ARM9+ARM7 v1.0.exe](#))
- D888 Mobile Phone
- Data Cable
- Binary file, TFS file

4-2-2. S/W Downloader Program

■ Load the binary download program by executing the “[Gem_Downloader_1GNAND_ARM9+ARM7 v1.0.exe](#)”

1. Select the download mode you want.
 - if Master mode wanted, check ARM9
 - if Slave mode wanted, check ARM7
2. Select the connected serial port and the rate of speed
3. Select the check box, the mode you want to download.

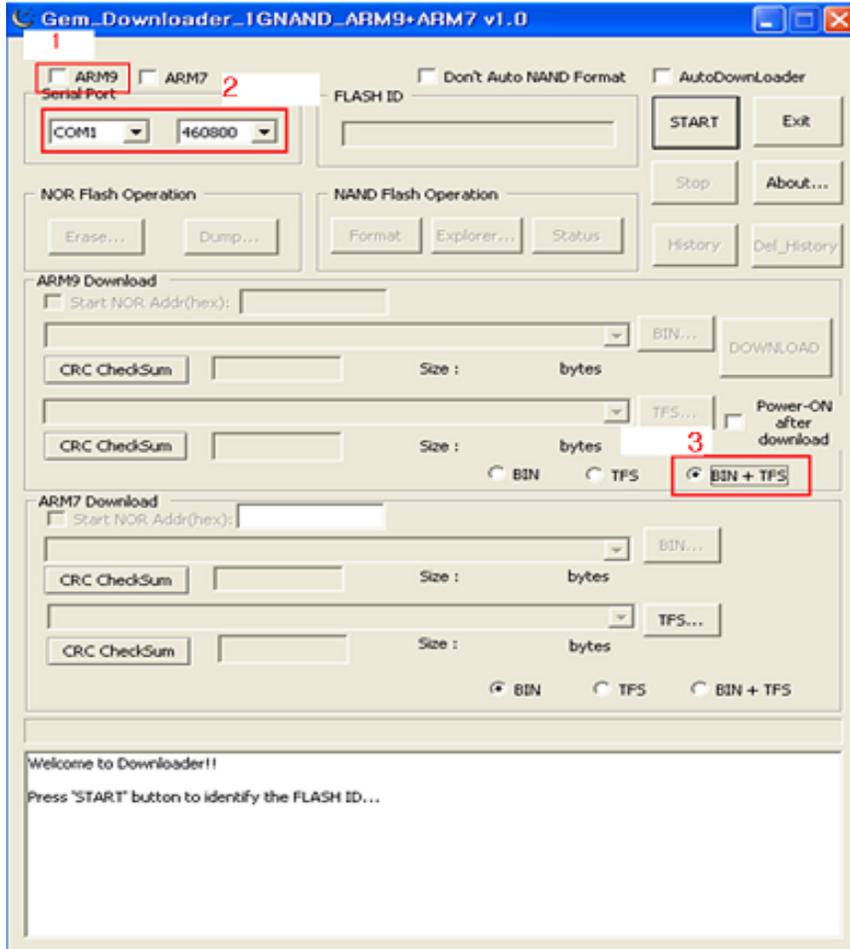

3. Select the file(s) what you want to download

-if you select ARM9, select the file "D88800000_Master.ooo"

-if you select ARM7, select the file "D88800000_Slave.ooo"

