


Project code: 91.4AV01.001
PCB P/N : 48.4AV01.
REVISION : -1



UMA			
		Wistron Corporation 21F, 88, Sec.1, Hsin Tai Wu Rd., Hsiehshih, Taipei Hsien 221, Taiwan, R.O.C.	
Title			
BLOCK DIAGRAM			
Size	Document Number		Rev
Custom		Big Bear 2	-1
Date:	Wednesday, October 22, 2008	Sheet 1	of 50

ICH9M Functional Strap Definitions

ICH9 EDS 642879 Rev.1.5 page 92

Signal	Usage/When Sampled	Comment
HDA_SDOUT	XOR Chain Entrance/ PCIE Port Config1 bit1, Rising Edge of PWROK	Allows entrance to XOR Chain testing when TP3 pulled low.When TP3 not pulled low at rising edge of PWROK,sets bit1 of RPC.PC(Config Registers: offset 224h). This signal has weak internal pull-down
HDA_SYNC	PCIE config1 bit0, Rising Edge of PWROK.	This signal has a weak internal pull-down. Sets bit0 of RPC.PC(Config Registers:Offset 224h)
GNT2#/GPIO53	PCIE config2 bit2, Rising Edge of PWROK.	This signal has a weak internal pull-up. Sets bit2 of RPC.PC2(Config Registers:Offset 0224h)
GPIO20	Reserved	This signal should not be pulled high.
GNT1#/GPIO51	ESI Strap (Server Only) Rising Edge of PWROK	ESI compatible mode is for server platforms only. This signal should not be pulled low for desttop and mobile.
GNT3#/GPIO55	Top-Block Swap Override. Rising Edge of PWROK.	Sampled low:Top-Block Swap mode(inverts A16 for all cycles targeting FWH BIOS space). Note: Software will not be able to clear the Top-Swap bit until the system is rebooted without GNT3# being pulled down.
GNT0#: SPI_CS1#/GPIO58	Boot BIOS Destination Selection 0:1. Rising Edge of PWROK.	Controllable via Boot BIOS Destination bit (Config Registers:Offset 3410h:bit 11:10). GNT0# is MSB, 01-SPI, 10-PCI, 11-LPC.
SPI_MOSI	Integrated TPM Enable, Rising Edge of CLPWROK	Sample low: the Integrated TPM will be disabled. Sample high: the MCH TPM enable strap is sampled low and the TPM Disable bit is clear, the Integrated TPM will be enable.
GPIO49	DMI Termination Voltage, Rising Edge of PWROK.	The signal is required to be low for desktop applications and required to be high for mobile applications.
SATALED#	PCI Express Lane Reversal. Rising Edge of PWROK.	Signal has weak internal pull-up. Sets bit 27 of MPC.LR(Device 28:Function 0:Offset D8)
SPKR	No Reboot. Rising Edge of PWROK.	If sampled high, the system is strapped to the "No Reboot" mode(ICH9 will disable the TCO Timer system reboot feature). The status is readable via the NO REBOOT bit.
TP3	XOR Chain Entrance. Rising Edge of PWROK.	This signal should not be pull low unless using XOR Chain testing.
GPIO33/ HDA_DOCK_EN#	Flash Descriptor Security Override Strap Rising Edge of PWROK	Sampled low:the Flash Descriptor Security will be overridden. If high,the security measures will be in effect.This should only be enabled in manufacturing environments using an external pull-up resistor.


PCIE Routing

LANE1	LAN MARVELL 88E8071
LANE2	MiniCard WLAN
LANE3	MiniCard WWAN/TV
LANE4	JMB385 Card Reader
LANE5	NewCard
LANE6	NC

USB Table

USB	
Pair	Device
0	USB1
1	USB4
2	USB2
3	USB5 (DOCK)
4	USB3
5	Bluetooth
6	FP
7	MINIC1
8	WEBCAM
9	NEW1
10	MINIC2
11	NC

SMBus

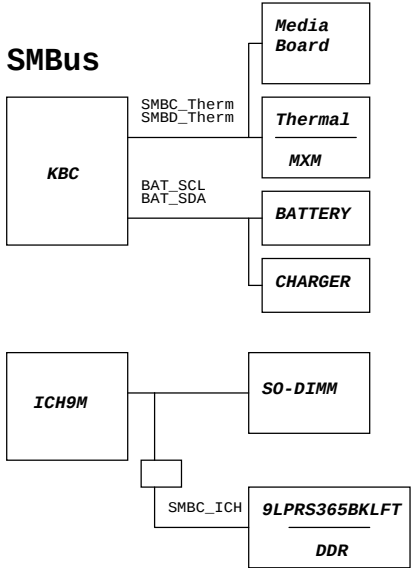

ICH9M Integrated Pull-up and Pull-down Resistors

ICH9 EDS 642879 Rev.1.5

SIGNAL	Resistor Type/Value
CL_CLK[1:0]	PULL-UP 20K
CL_DATA[1:0]	PULL-UP 20K
CL_RST0#	PULL-UP 20K
DPRSLPVR/GPIO16	PULL-DOWN 20K
ENERGY_DETECT	PULL-UP 20K
HDA_BIT_CLK	PULL-DOWN 20K
HDA_DOCK_EN#/GPIO33	PULL-UP 20K
HDA_RST#	PULL-DOWN 20K
HDA_SDIN[3:0]	PULL-DOWN 20K
HDA_SDOUT	PULL-DOWN 20K
HDA_SYNC	PULL-DOWN 20K
GLAN_DOCK#	The pull-up or pull-down active when configured for native GLAN_DOCK# functionality and determined by LAN controller
GNT[3:0]#/GPIO[55, 53, 51]	PULL-UP 20K
GPIO[20]	PULL-DOWN 20K
GPIO[49]	PULL-UP 20K
LDA[3:0]#/FWH[3:0]#	PULL-UP 20K
LAN_RXD[2:0]	PULL-UP 20K
LDRQ[0]	PULL-UP 20K
LDRQ[1]/GPIO23	PULL-UP 20K
PME#	PULL-UP 20K
PWRBTN#	PULL-UP 20K
SATALED#	PULL-UP 15K
SPI_CS1#/GPIO58/CLGPIO6	PULL-UP 20K
SPI_MOSI	PULL-DOWN 20K
SPI_MISO	PULL-UP 20K
SPKR	PULL-DOWN 20K
TACH_[3:0]	PULL-UP 20K
TP[3]	PULL-UP 20K
USB[11:0][P,N]	PULL-DOWN 15K

Cantiga chipset and ICH9M I/O controller Hub strapping configuration

Montevina Platform Design guide 22339 0.5 page 218

Pin Name	Strap Description	Configuration
CFG[2:0]	FSB Frequency Select	000 = FSB1067 011 = FSB667 010 = FSB800 others = Reserved
CFG[4:3] CFG8 CFG[15:14] CFG[18:17]	Reserved	
CFG5	DMI x2 Select	0 = DMI x2 1 = DMI x4 (Default)
CFG6	iTPM Host Interface	0= The iTPM Host Interface is enabled(Note2) 1=The iTPM Host Interface is disabled(default)
CFG7	Intel Management engine Crypto strap	0 = Transport Layer Security (TLS) cipher suite with no confidentiality 1 = TLS cipher suite with confidentiality (default)
CFG9	PCIE Graphics Lane	0 = Reverse Lanes,15->0,14->1 ect.. 1= Normal operation(Default):Lane Numbered in order
CFG10	PCIE Loopback enable	0 = Enable (Note 3) 1= Disabled (default)
CFG[13:12]	XOR/ALL	00 = Reserve 10 = XOR mode Enabled 01 = ALLZ mode Enabled (Note 3) 11 = Disabled (default)
CFG16	FSB Dynamic ODT	0 = Dynamic ODT Disabled 1 = Dynamic ODT Enabled (Default)
CFG19	DMI Lane Reversal	0 = Normal operation(Default): Lane Numbered in Order 1 = Reverse Lanes x4 mode[MCH -> ICH]:(3->0,2->1,1->2and0->3) DMI x2 mode[MCH -> ICH]:(3->0,2->1)
CFG20	Digital Display Port (SDVO/DP/iHDMI) Concurrent with PCIE	0 = Only Digital Display Port or PCIE is operational (Default) 1 = Digital display Port and PCIE are operating simultaneously via the PEG port
SDVO_CTRLDATA	SDVO Present	0 =No SDVO Card Present (Default) 1 = SDVO Card Present
L_DDC_DATA	Local Flat Panel (LFP) Present	0 = LFP Disabled (Default) 1= LFP Card Present; PCIE disabled

NOTE:


1. All strap signals are sampled with respect to the leading edge of the (G)MCH Power OK (PWROK) signal.
2. iTPM can be disabled by a 'Soft-Strap' option in the Flash-decriptor section of the Firmware. This 'Soft-Strap' is activated only after enabling iTPM via CFG6.
Only one of the CFG10/CFG12/CFG13 straps can be enabled at any time.

UMA

Title		Reference		Rev
Size A3		Document Number		-1
Date: Wednesday, October 22, 2008		Sheet 2 of 50		


緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.

Big Bear 2

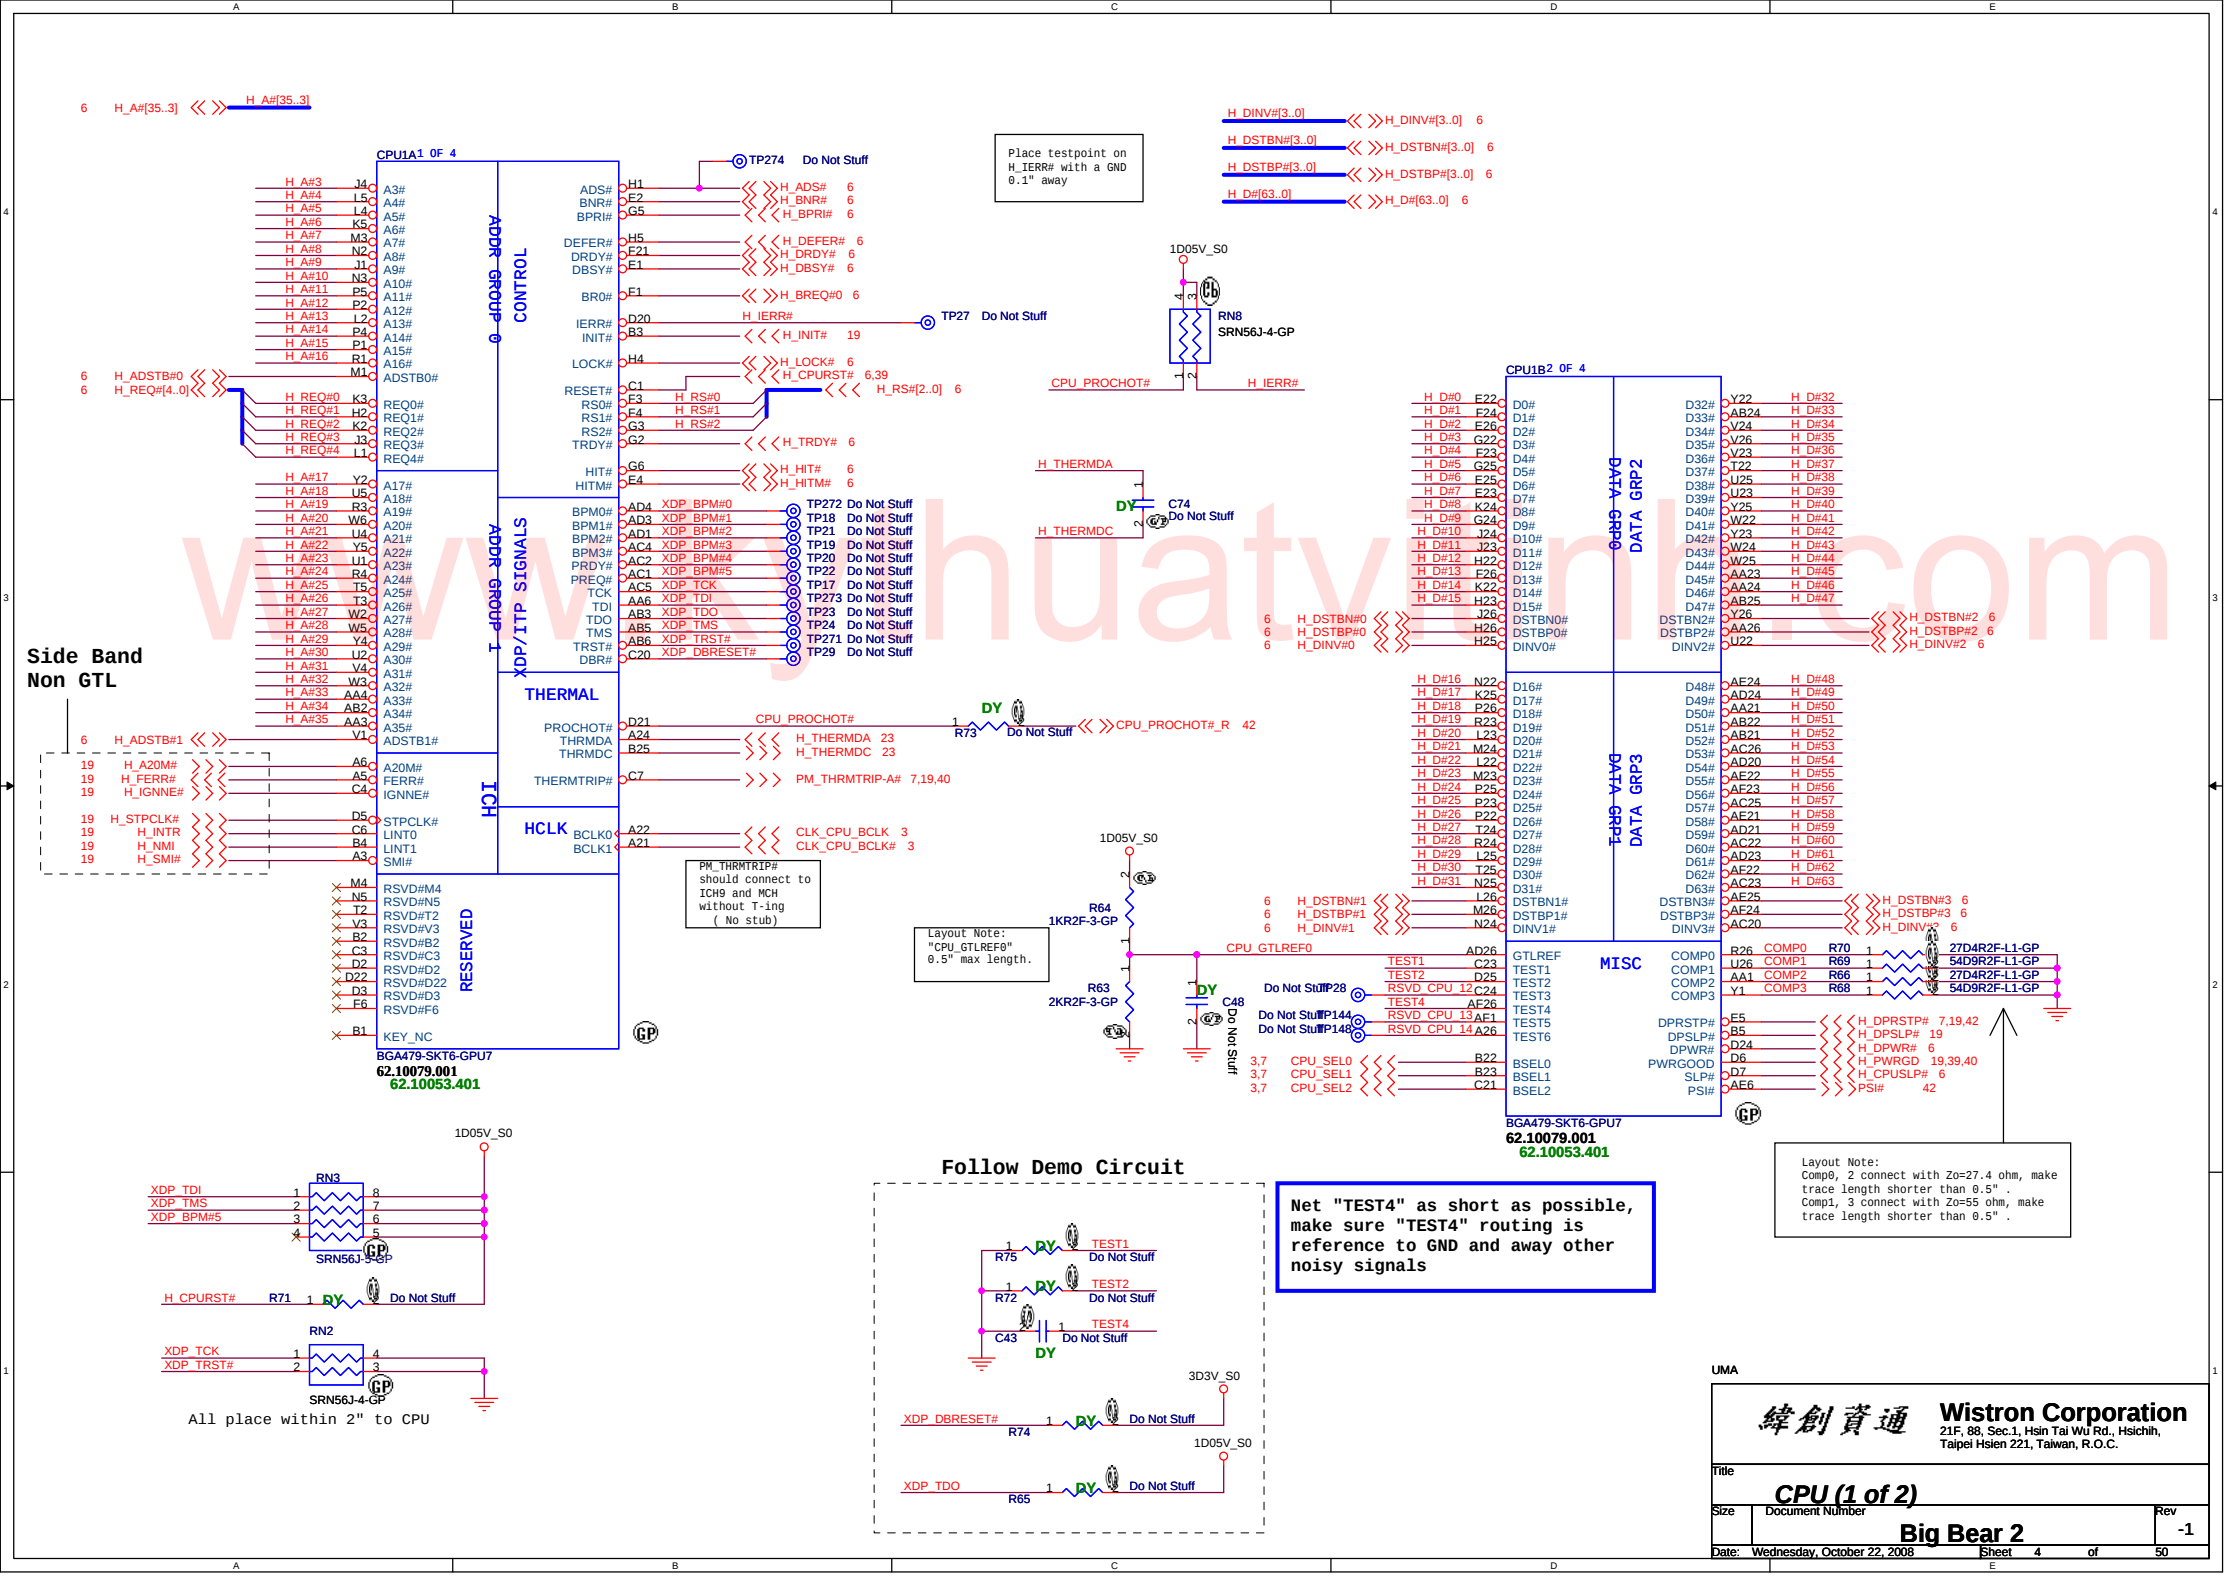

H_SWING routing Trace width and Spacing use 10 / 20 mil


H_SWING Resistors and Capacitors close MCH 500 mil (MAX)



H_RCOMP routing Trace width and Spacing use 10 / 20 mil




Place them near to the chip (< 0.5")

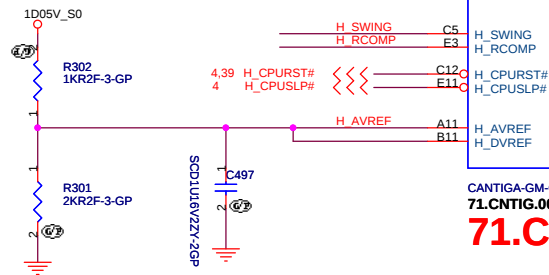

CANTIGA-GM-GP-U-NF
71.CNTIG.00U


71.CNTIG.D1U


HOST

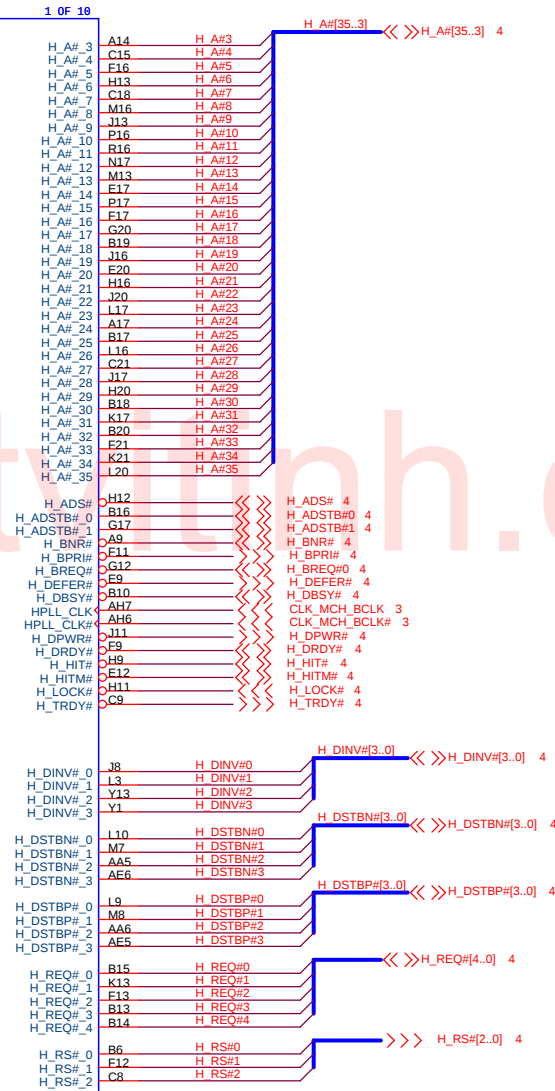


UMA

緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.



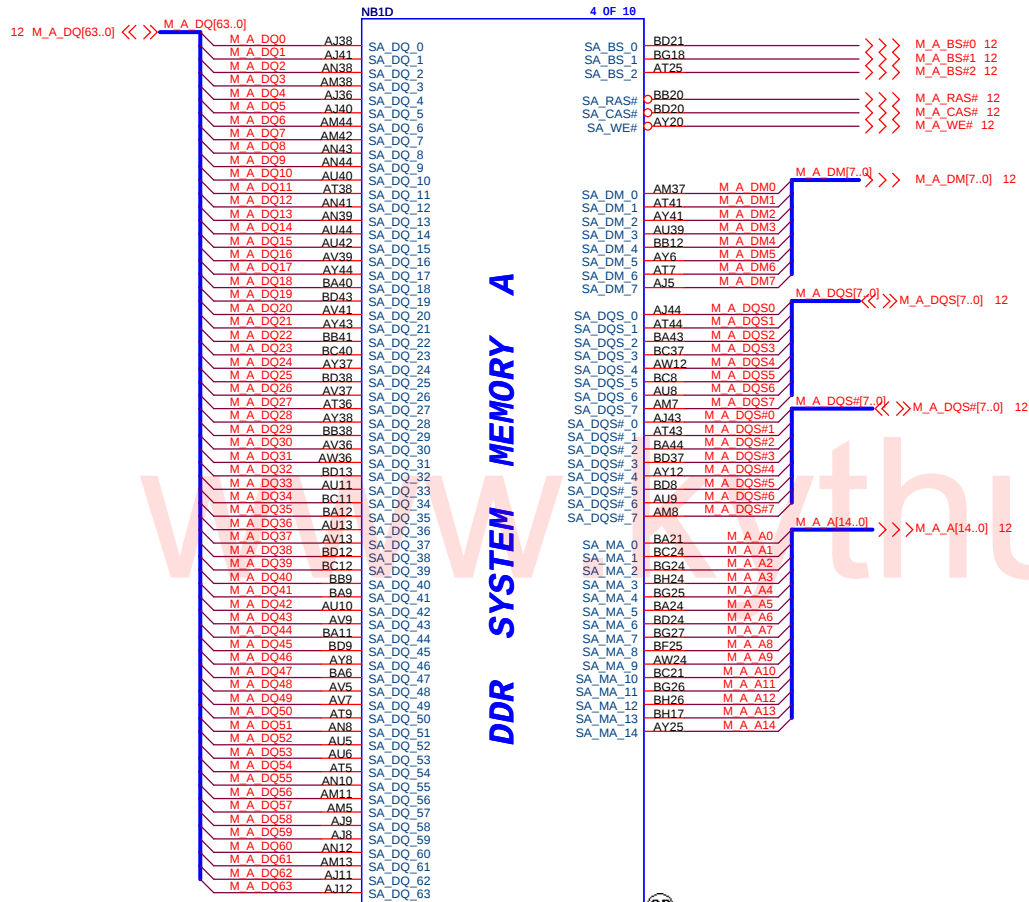


CANTIGA-GM-GP-U-NF
71.CNTIG.00U

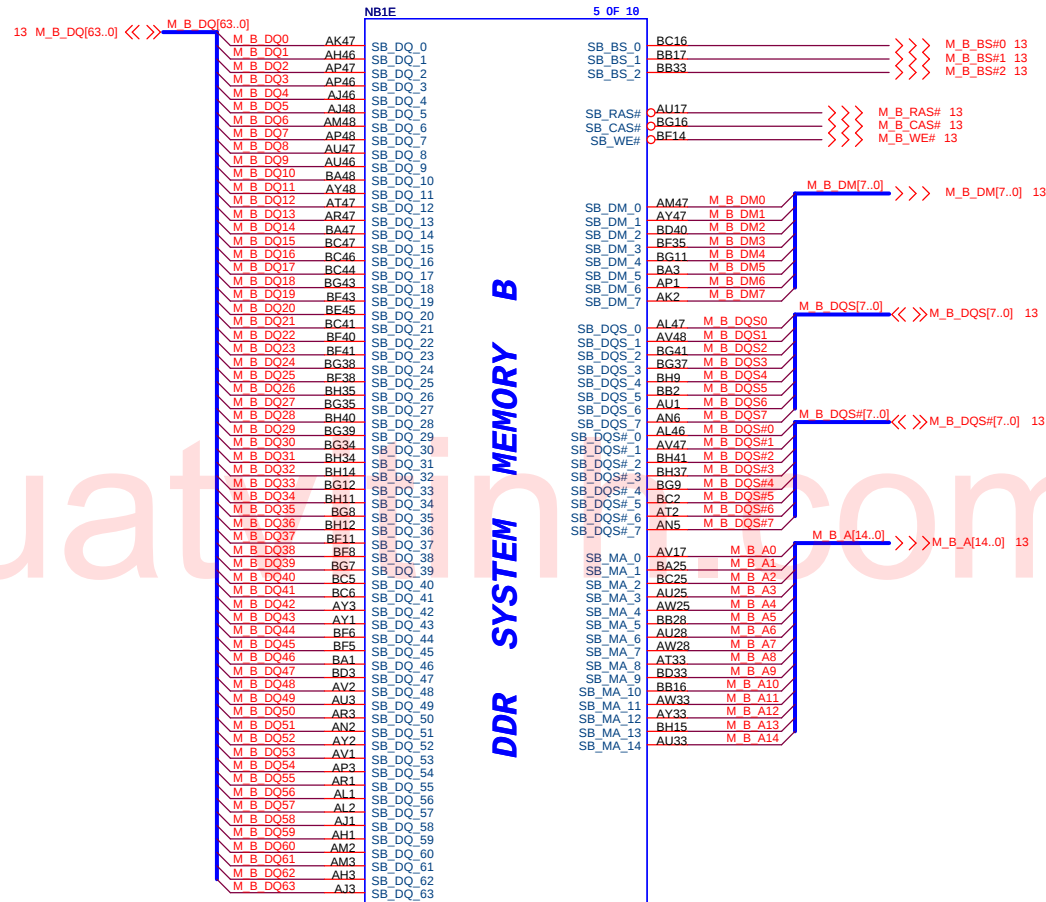


CANTIGA-GM-GP-U-NF
71.CNTIG.00U



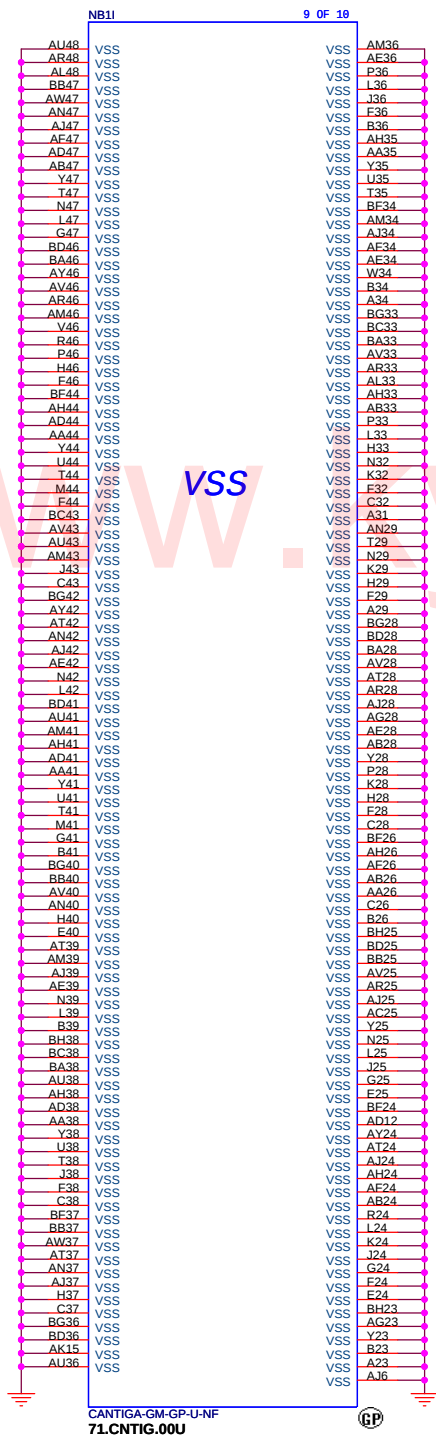

CANTIGA-GM-GP-U-NF
71.CNTIG.00U

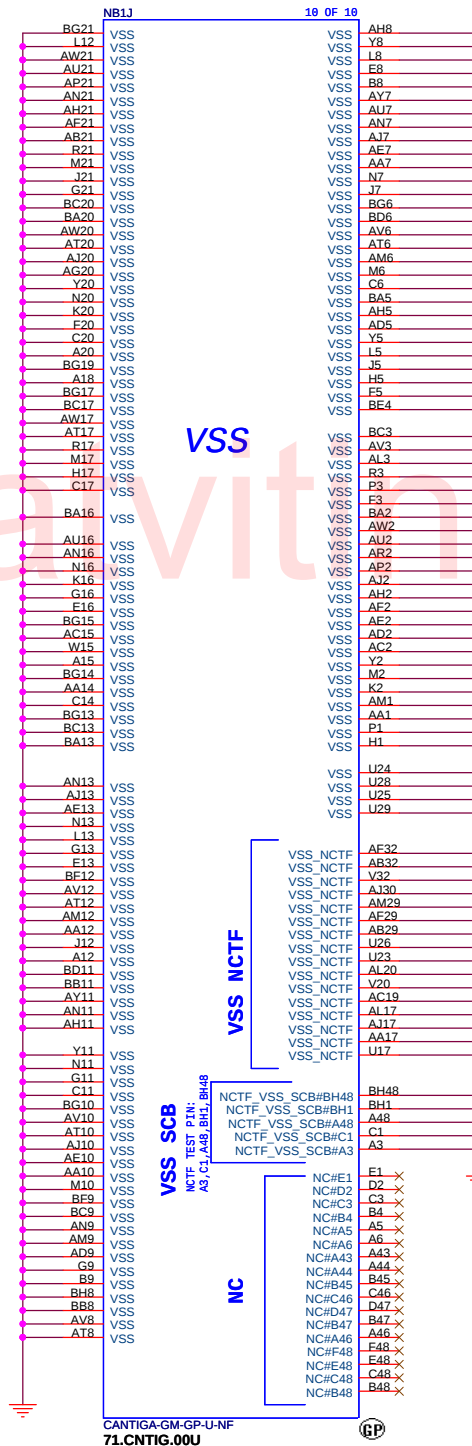

CANTIGA-GM-GP-U-NF
71.CNTIG.00U



緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichin,
Taipei Hsien 221, Taiwan, R.O.C.

Title: **Cantiga (6 of 6)**


Size: Document Number

Date: Wednesday, October 22, 2008

Sheet 11 of 50

Rev: -1


Big Bear 2

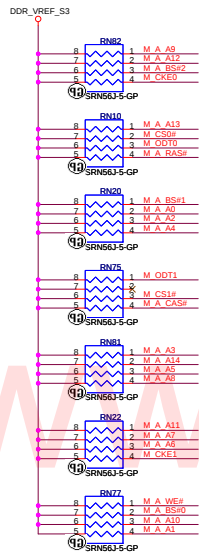


PARALLEL TERMINATION

Put decap near power(0.9V) and pull-up resistor

Decoupling Capacitor

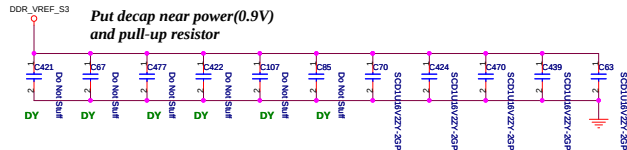



www.kything.com

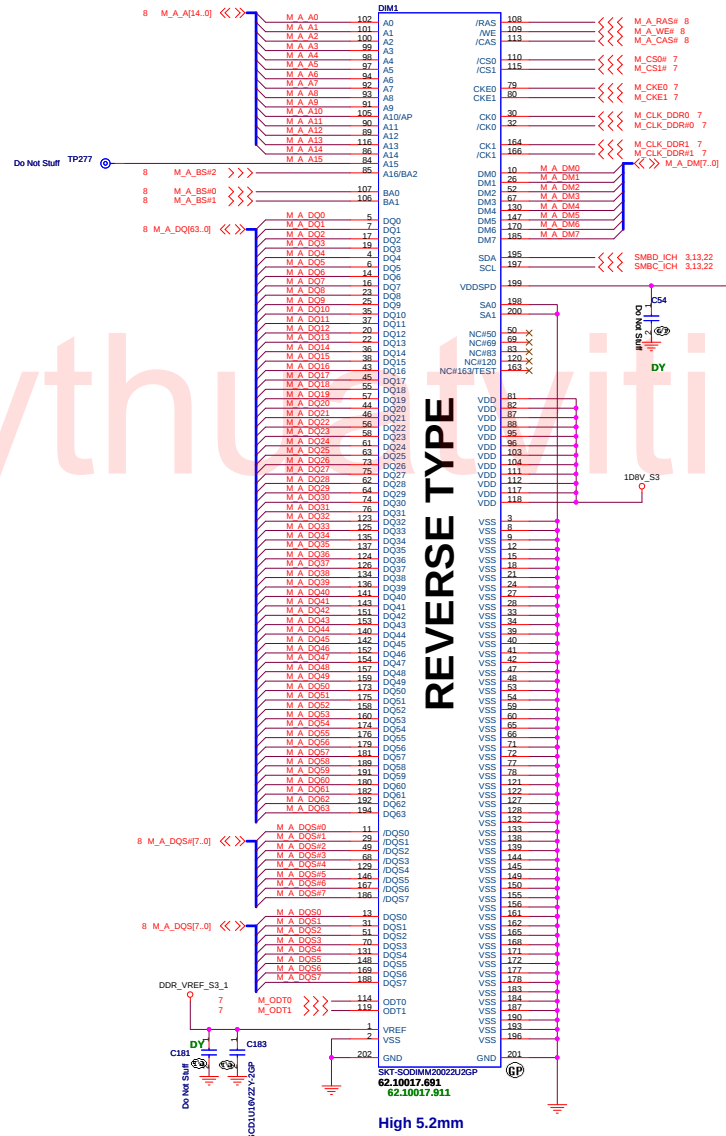

REVERSE TYPE

High 5.2mm

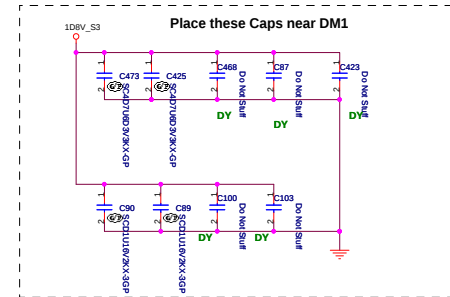


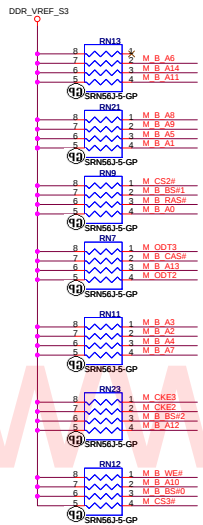


PARALLEL TERMINATION


Put decap near power(0.9V) and pull-up resistor

Decoupling Capacitor





Put decap near power(0.9V) and pull-up resistor

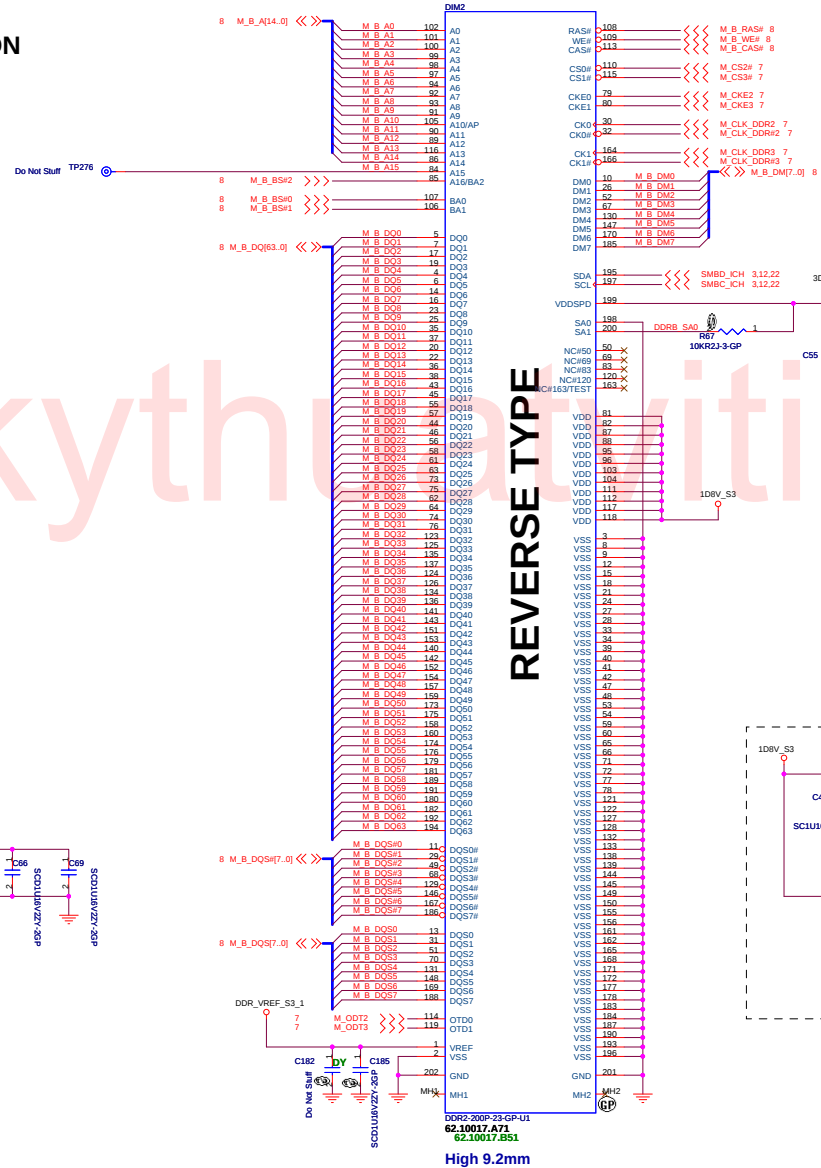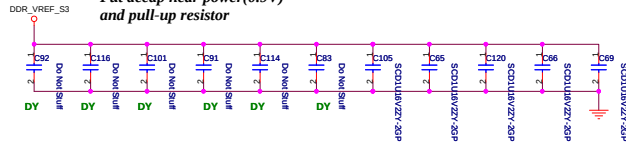

REVERSE TYPE

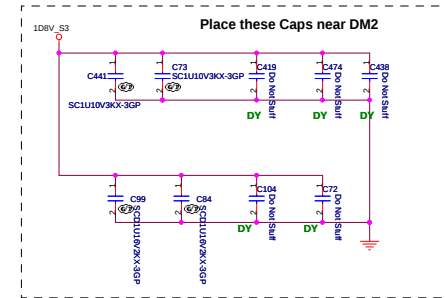

www.kythuativtin.com

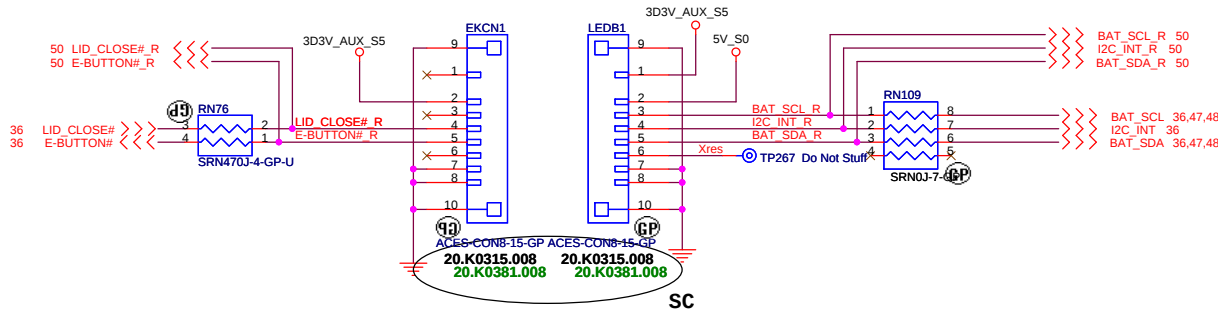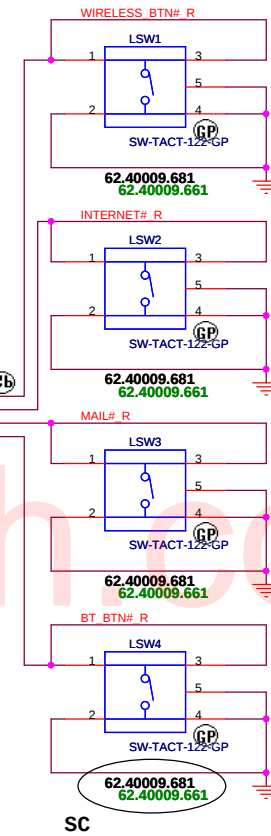



UMA

緯創資通 Wistron Corporation	
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.	
Title	
LAUNCH	
Size	Document Number
Big Bear 2	
Date: Wednesday, October 22, 2008	Sheet 14 of 50
Rev -1	

LCD/INVERTER/CCD CONN

Place close to MXM slot for BB2

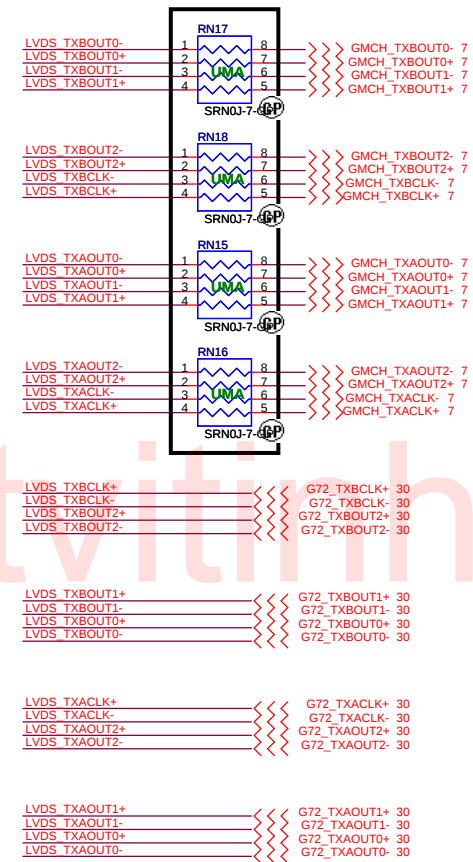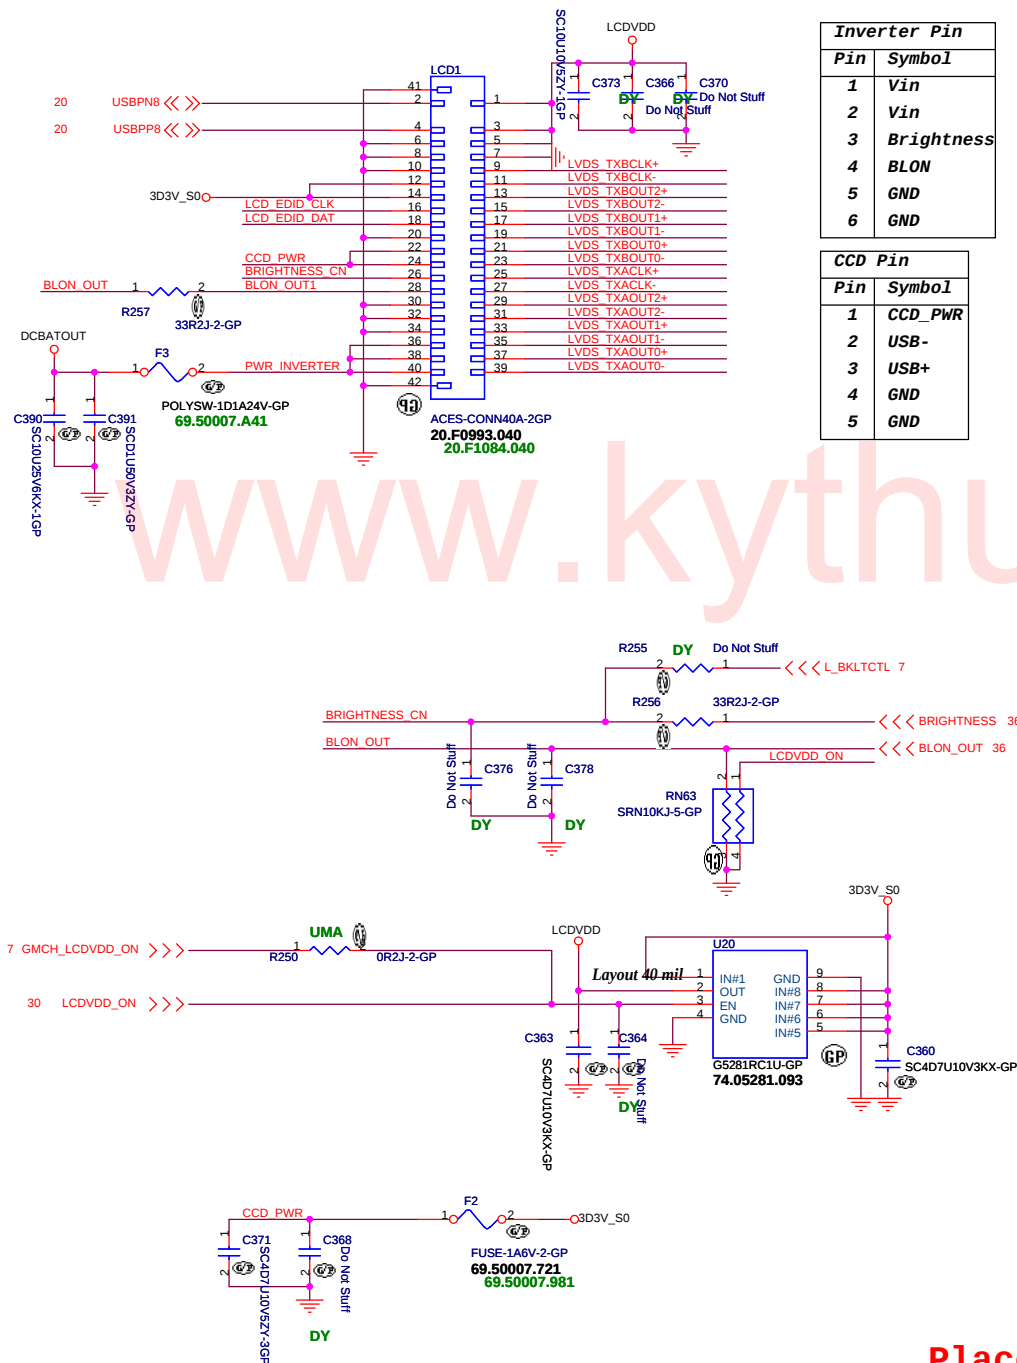

Place close to MXM slot for BB2

UMA

緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.




Title: **LCD CONN**

Size: Document Number




Date: Wednesday, October 22, 2008 Sheet 15 of 50

Rev: -1

Big Bear 2

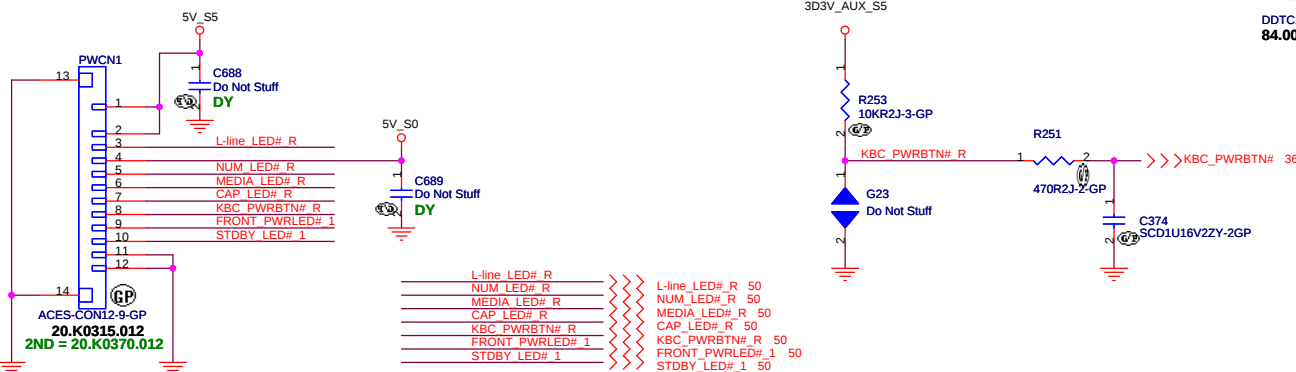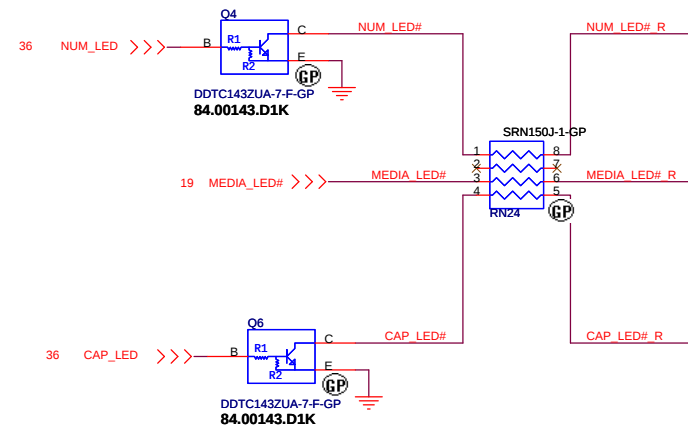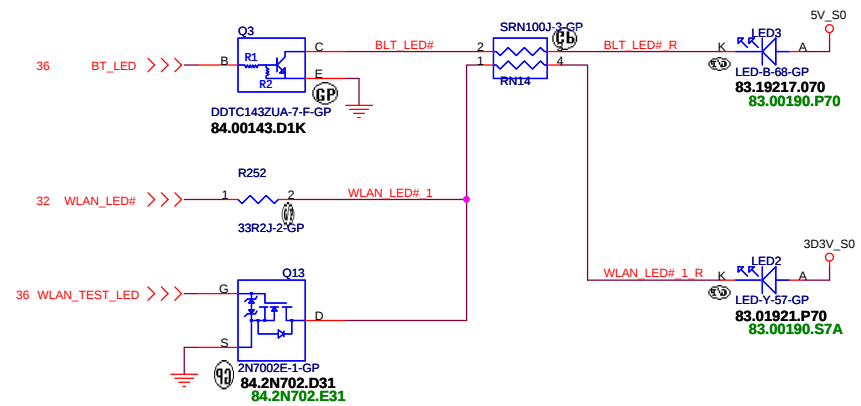


Layout Note:
Place these resistors
close to the CRT-out
connector

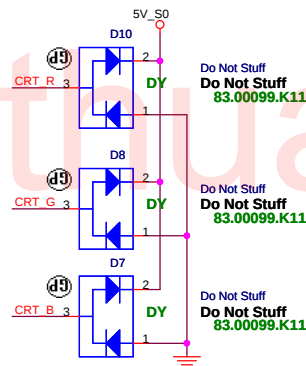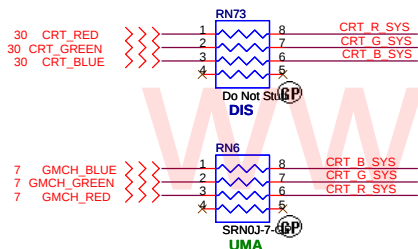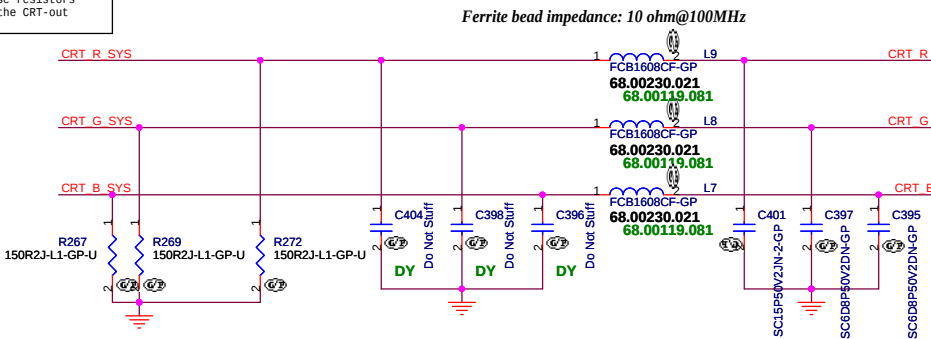


Layout Note:

* Must be a ground return path between this ground and the ground on the VGA connector.
Pi-filter & 150 Ohm pull-down resistors should be as close as to CRT CONN. RGB will hit 75 Ohm first, pi-filter, then CRT CONN.


CRT I/F & CONNECTOR

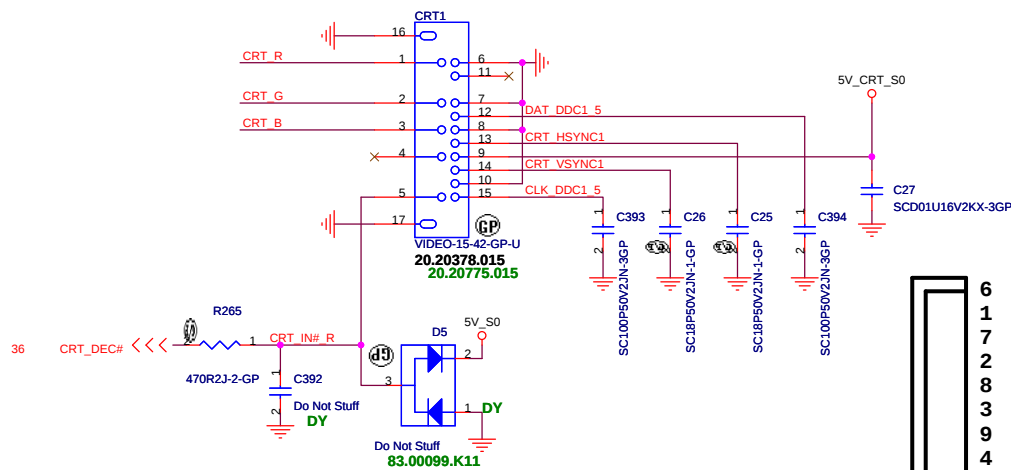


Hsync & Vsync level shift

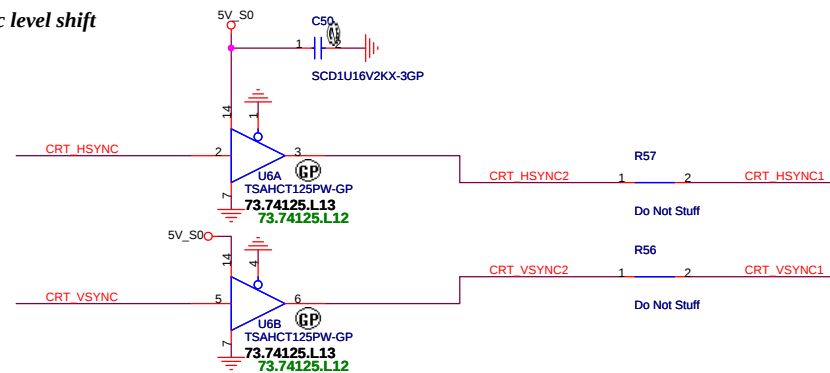


For UMA CRT



For DIS CRT





DDC_CLK & DATA level shift



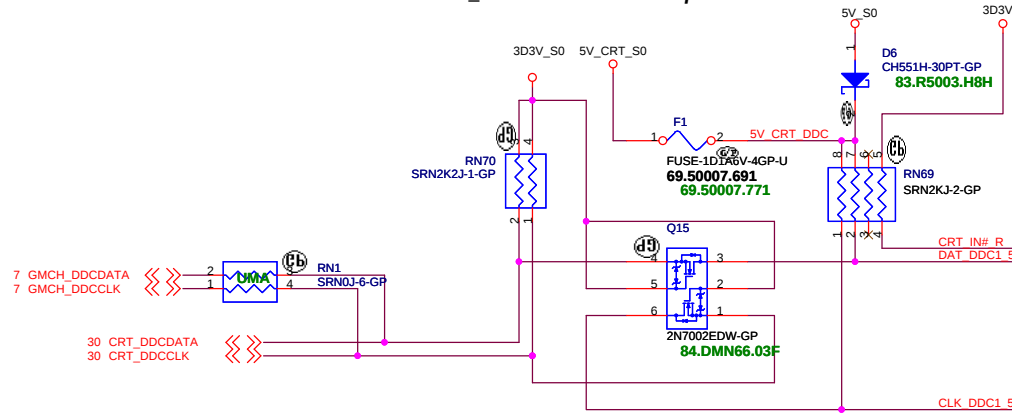



UMA

緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

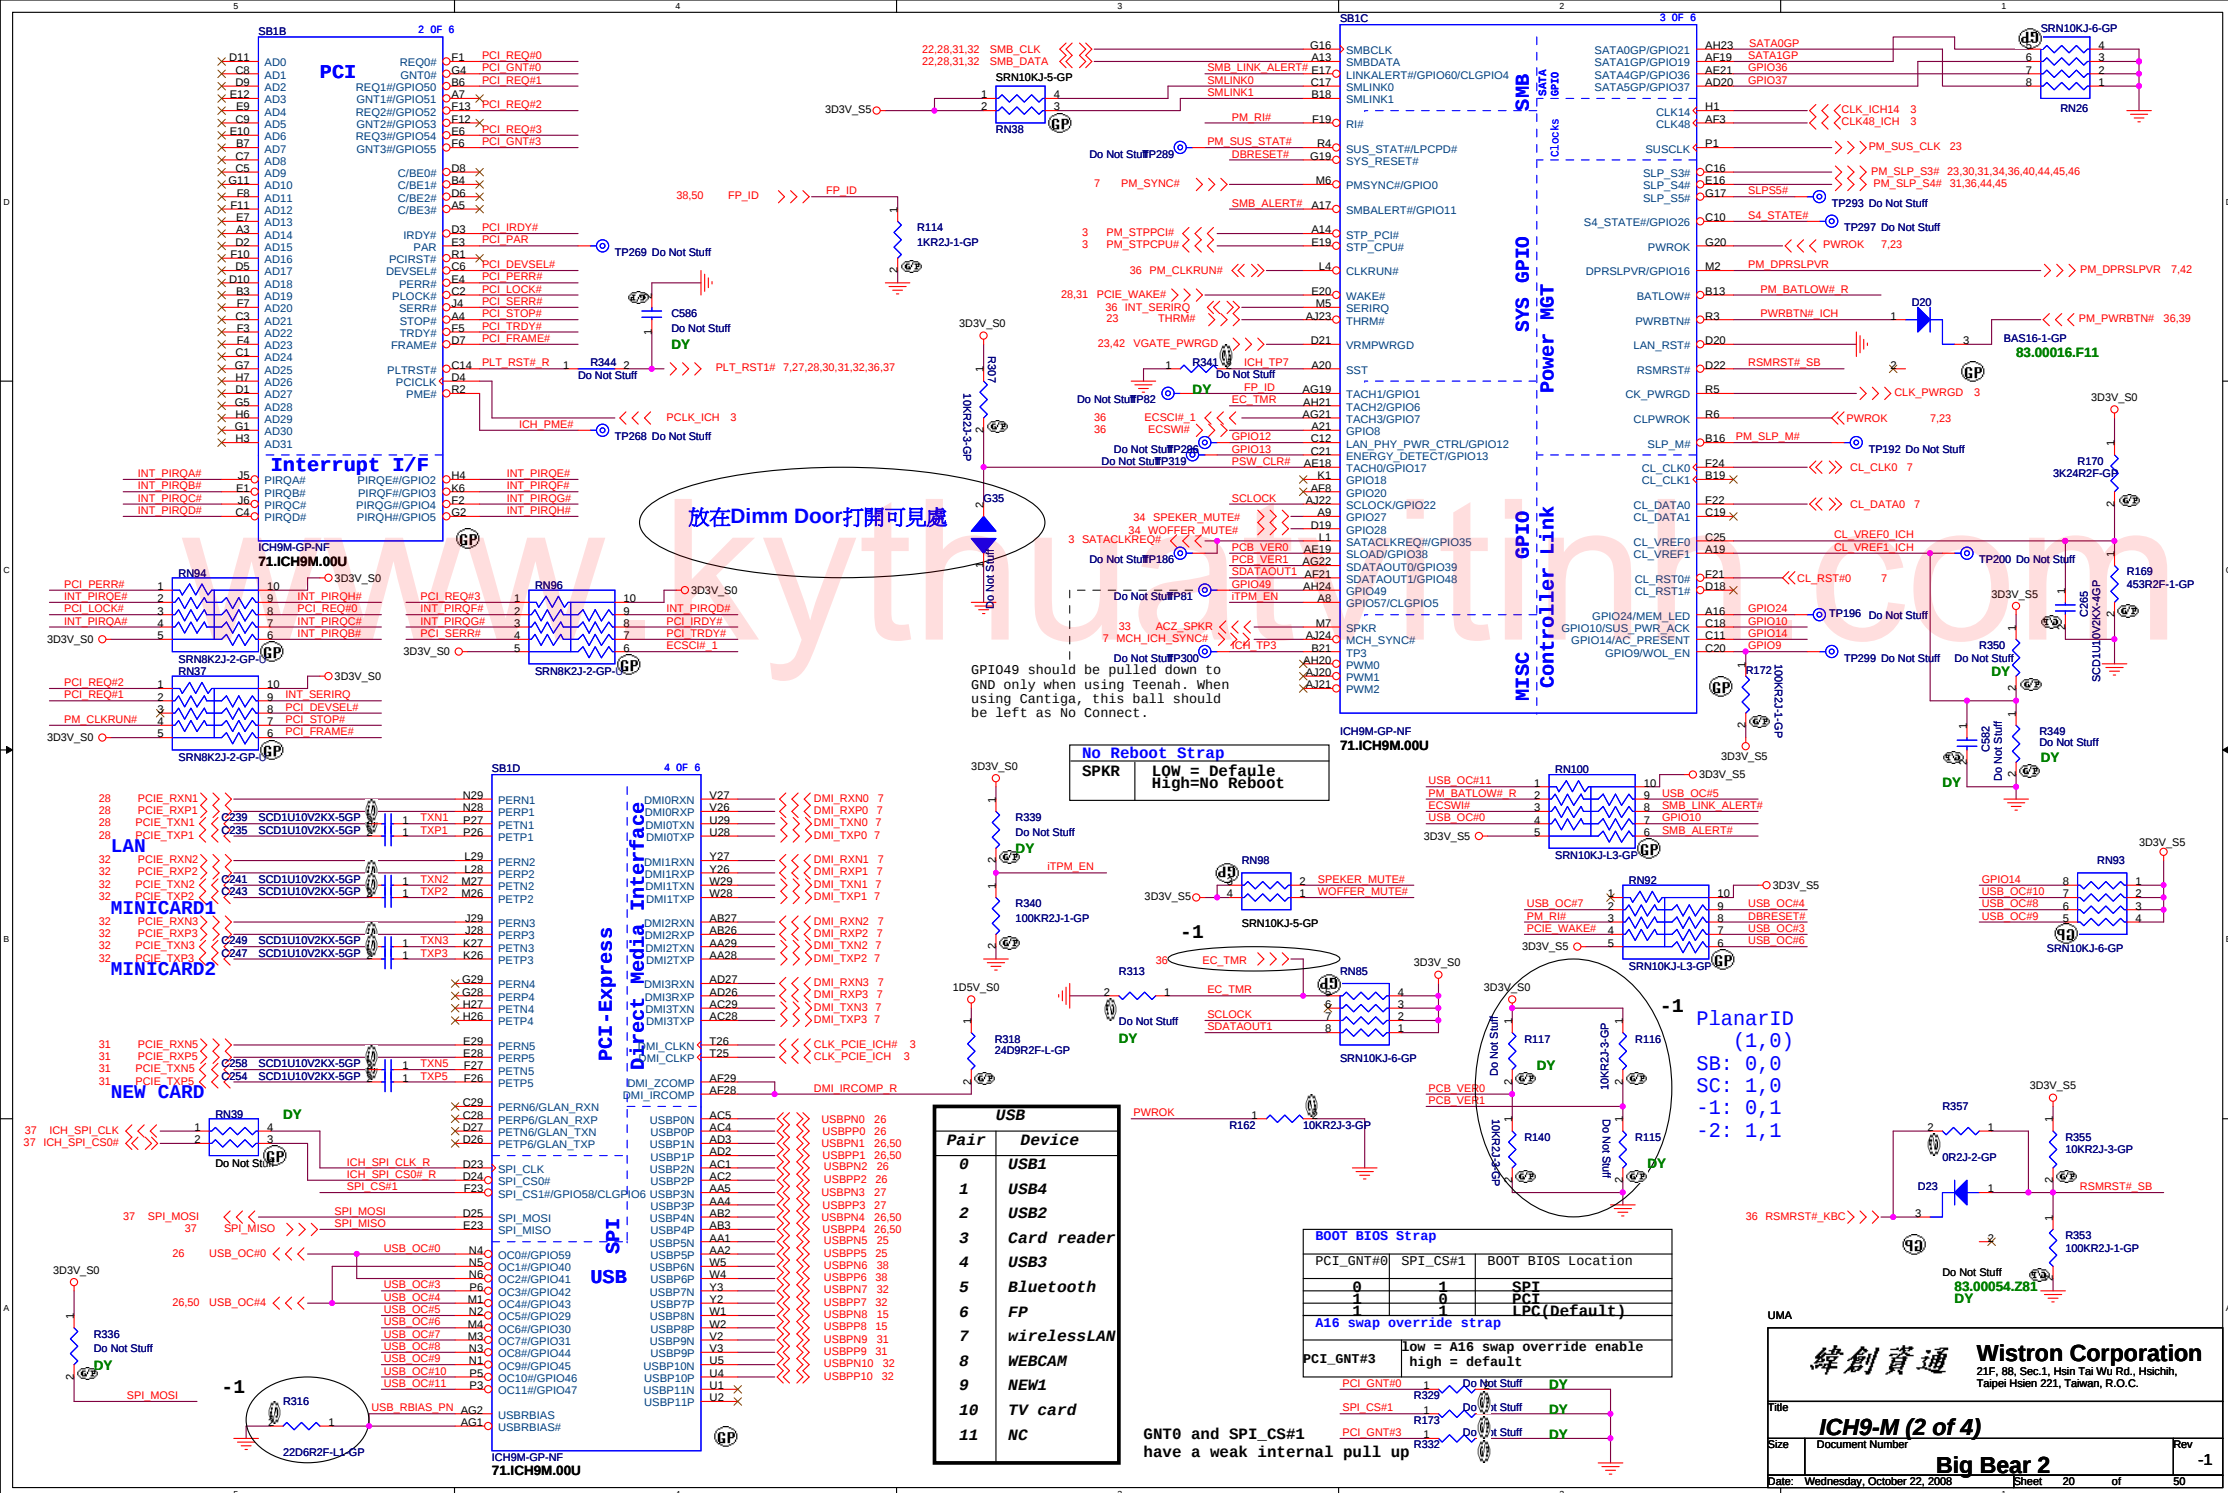

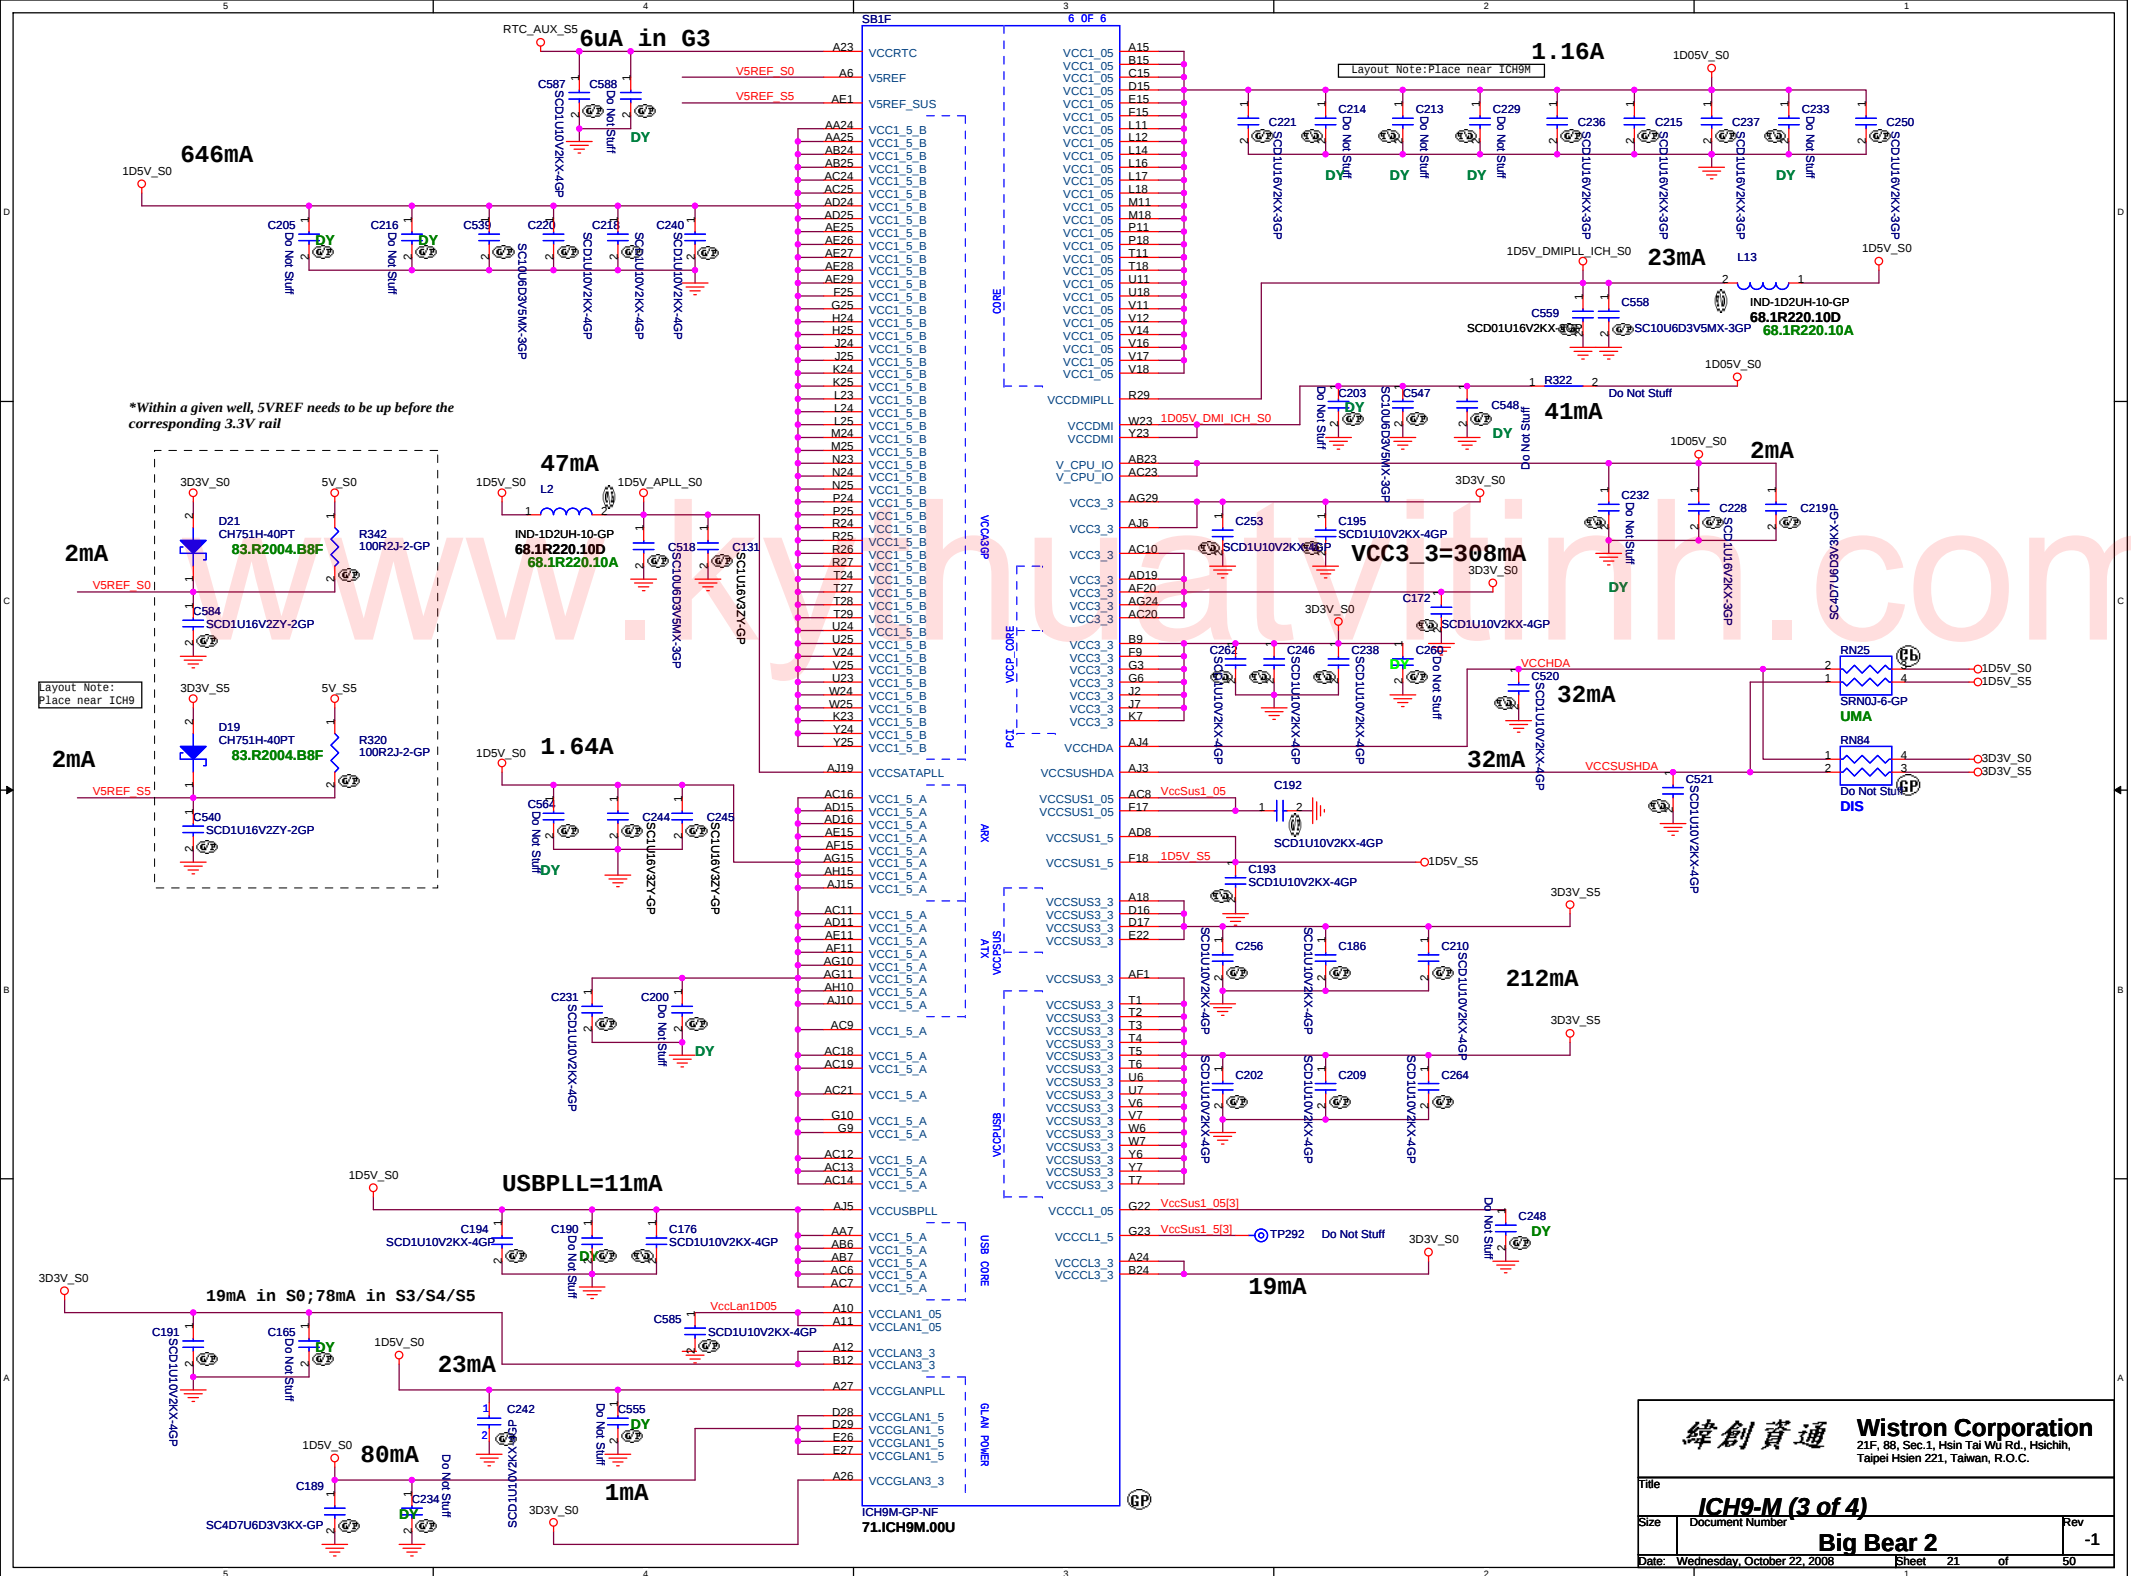


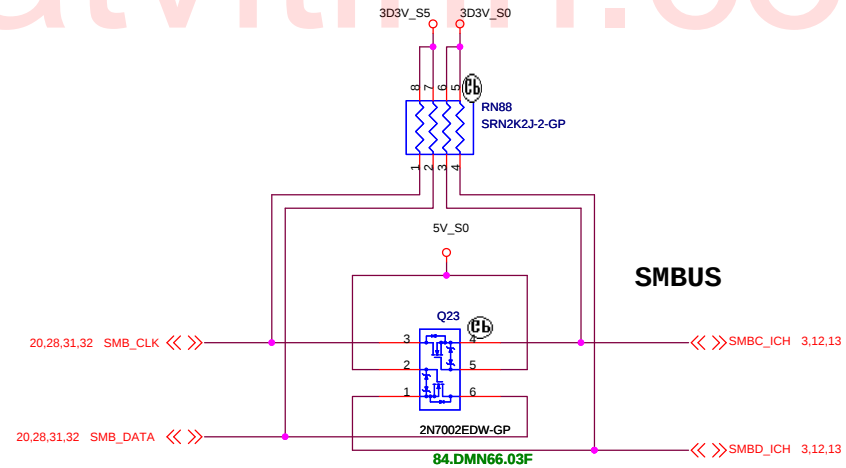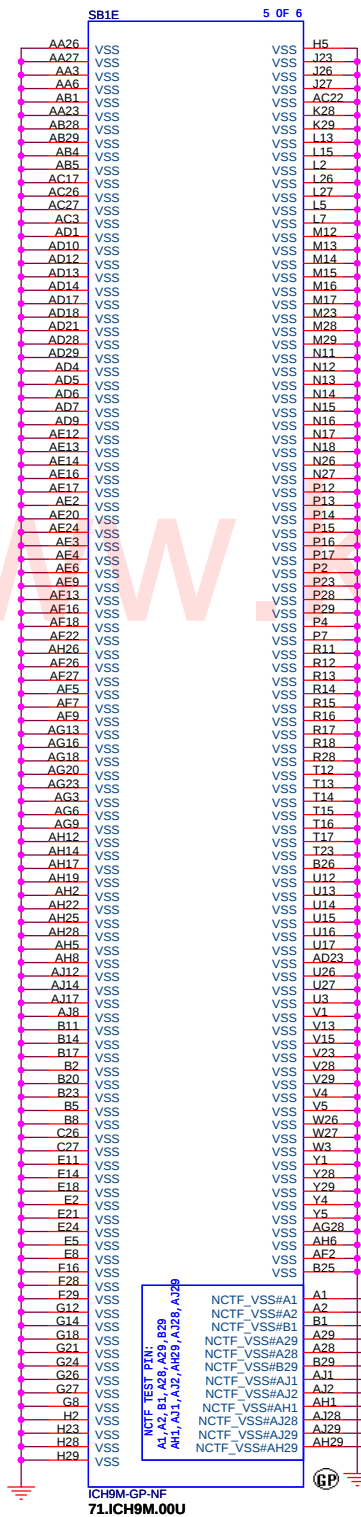


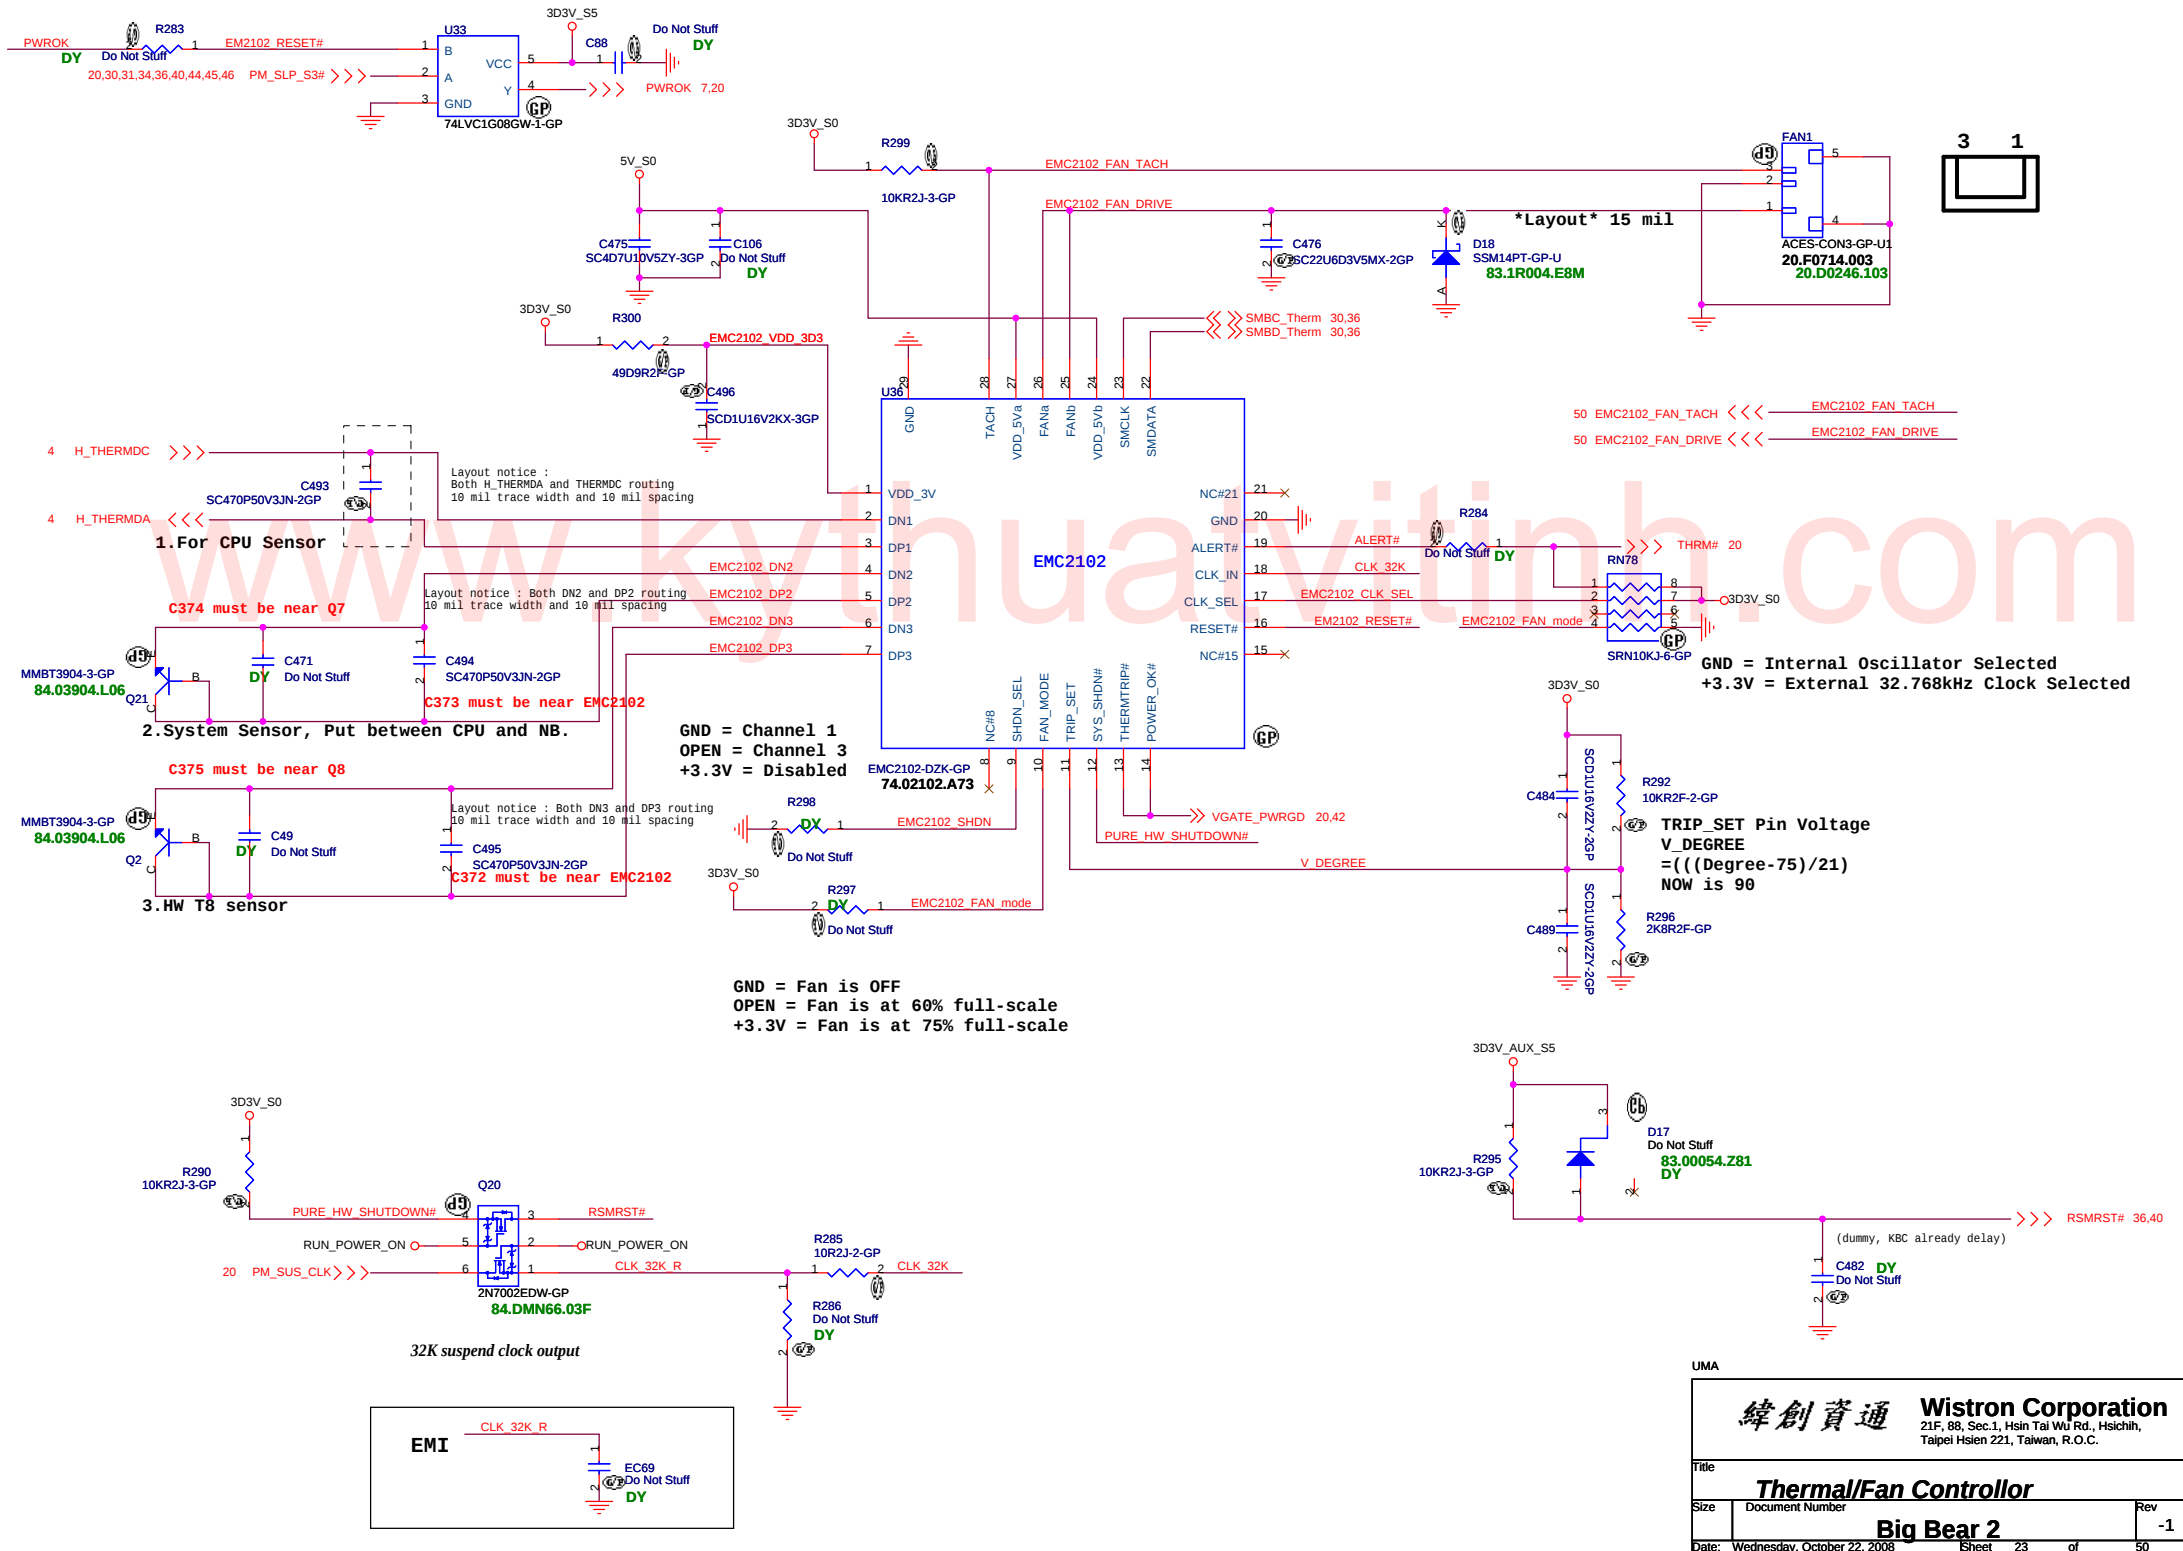


SATA ODD Connector

1st HDD SATA Connector

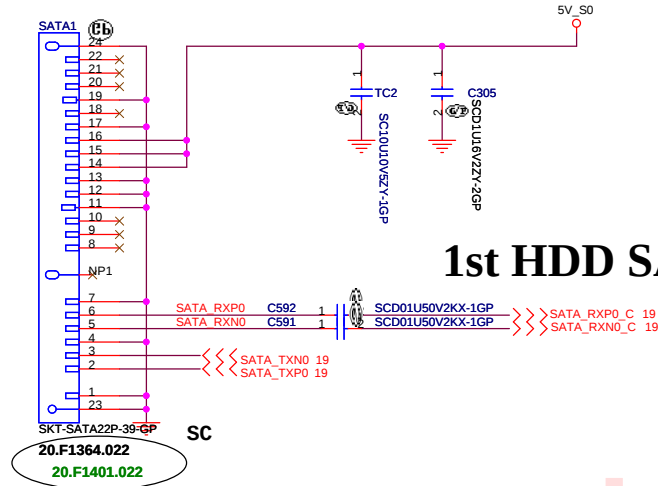

2nd HDD SATA Connector

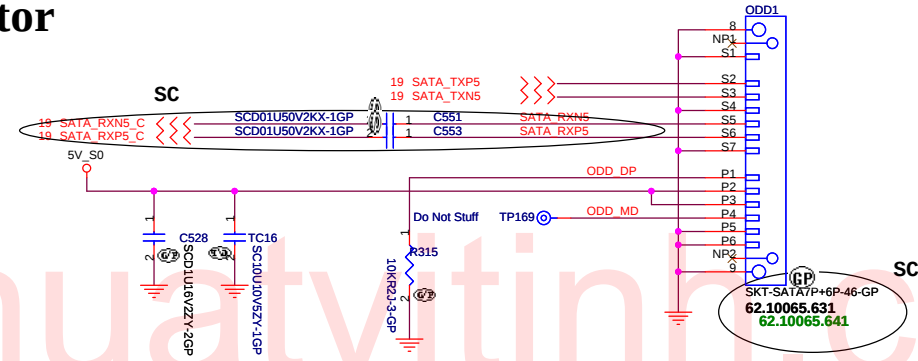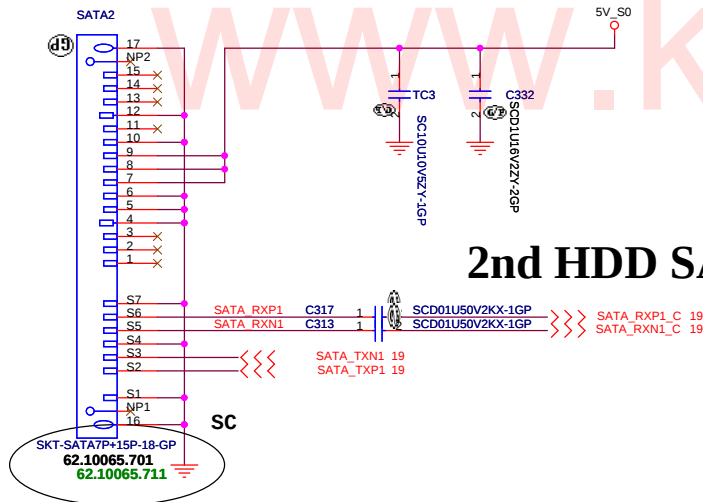




UMA

緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.



Title		HDD & ODD	
Size	Document Number	Rev	
Date: Wednesday, October 22, 2008		Sheet 24 of 50	
Big Bear 2		-1	


BLUETOOTH MODULE

1.5A / High Active Voltage 2V

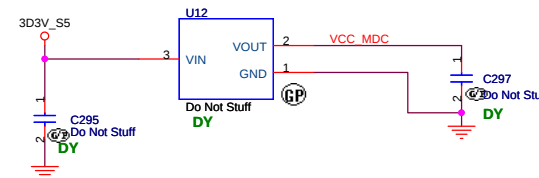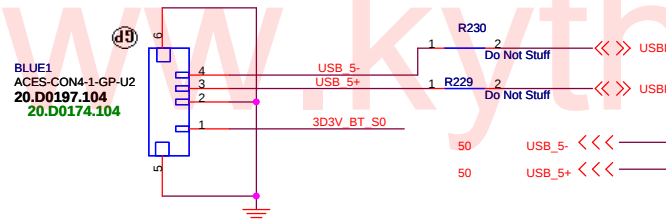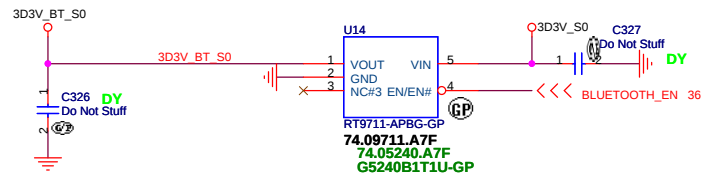


MDC 1.5 CONN





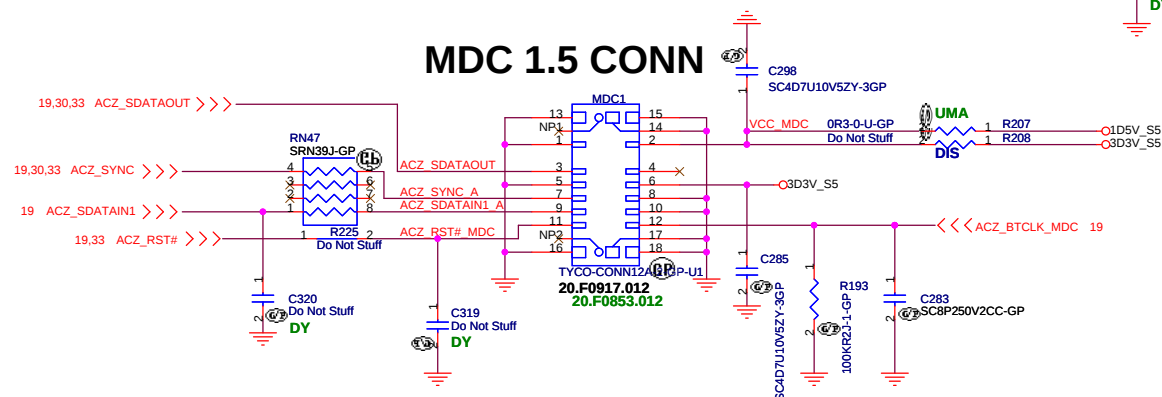




DY

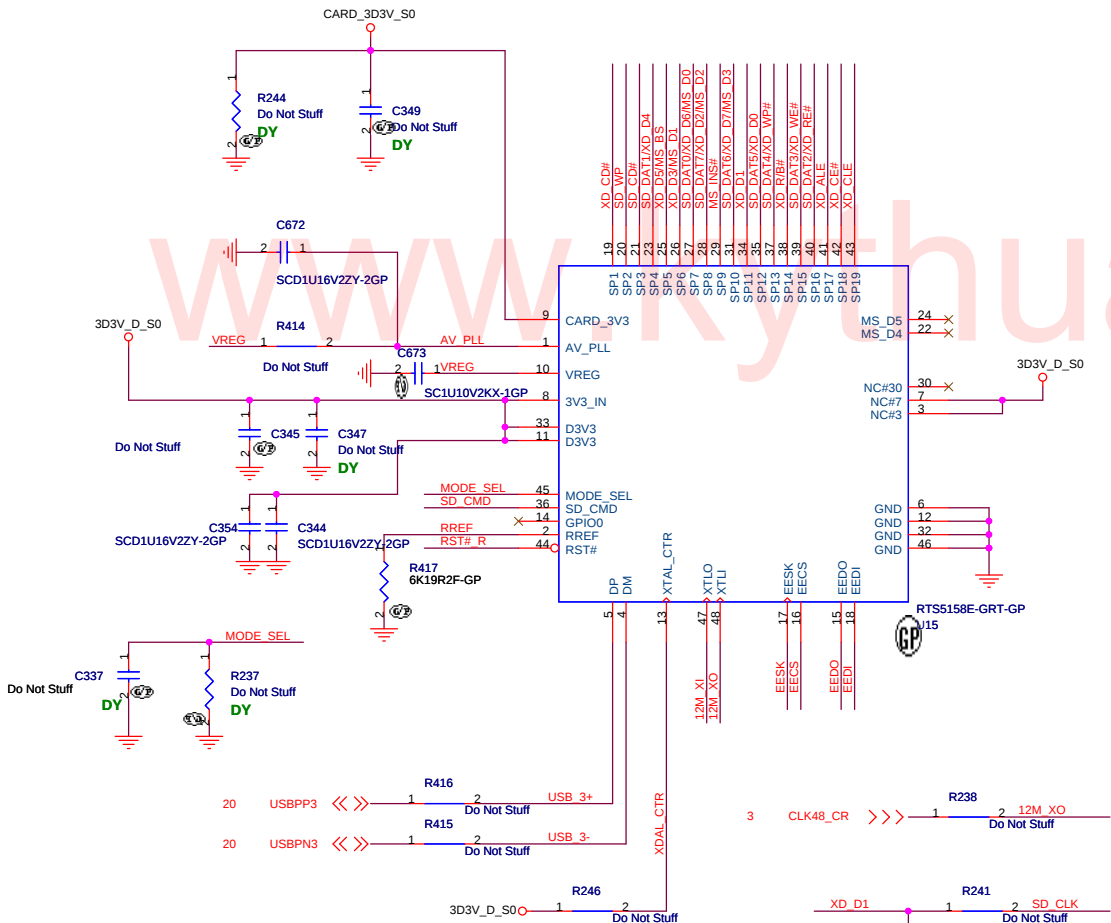


7 IN1 CARD-READER (SD/SD IO/MMC/MMC4.0/MS/MS PRO/XD)

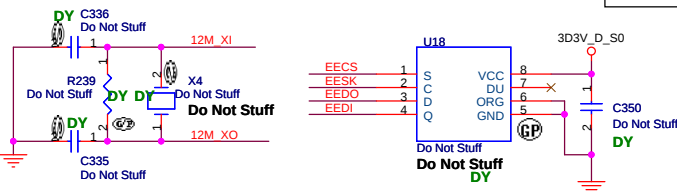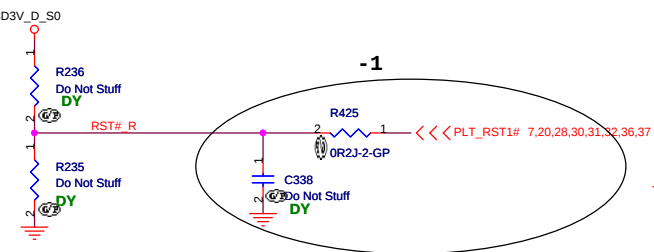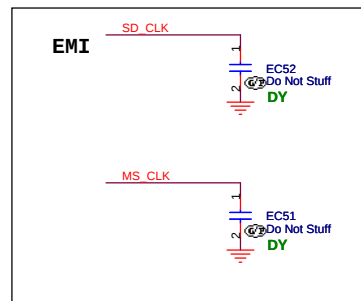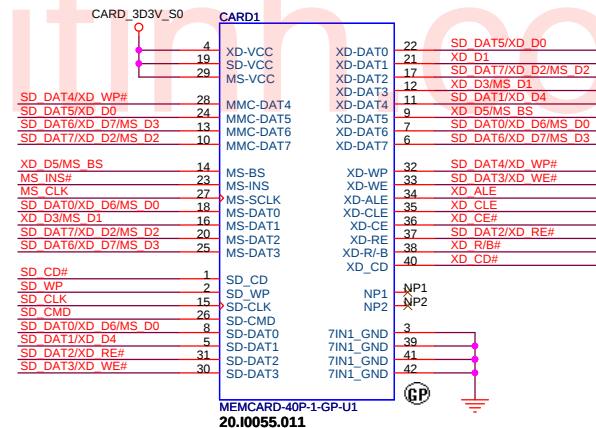

UMA




緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichin,
Taipei Hsien 221, Taiwan, R.O.C.


Title: **Realtek Card Reader**
Size: Document Number: **Big Bear 2** Rev: **-1**
Date: Wednesday, October 22, 2008 Sheet 27 of 50

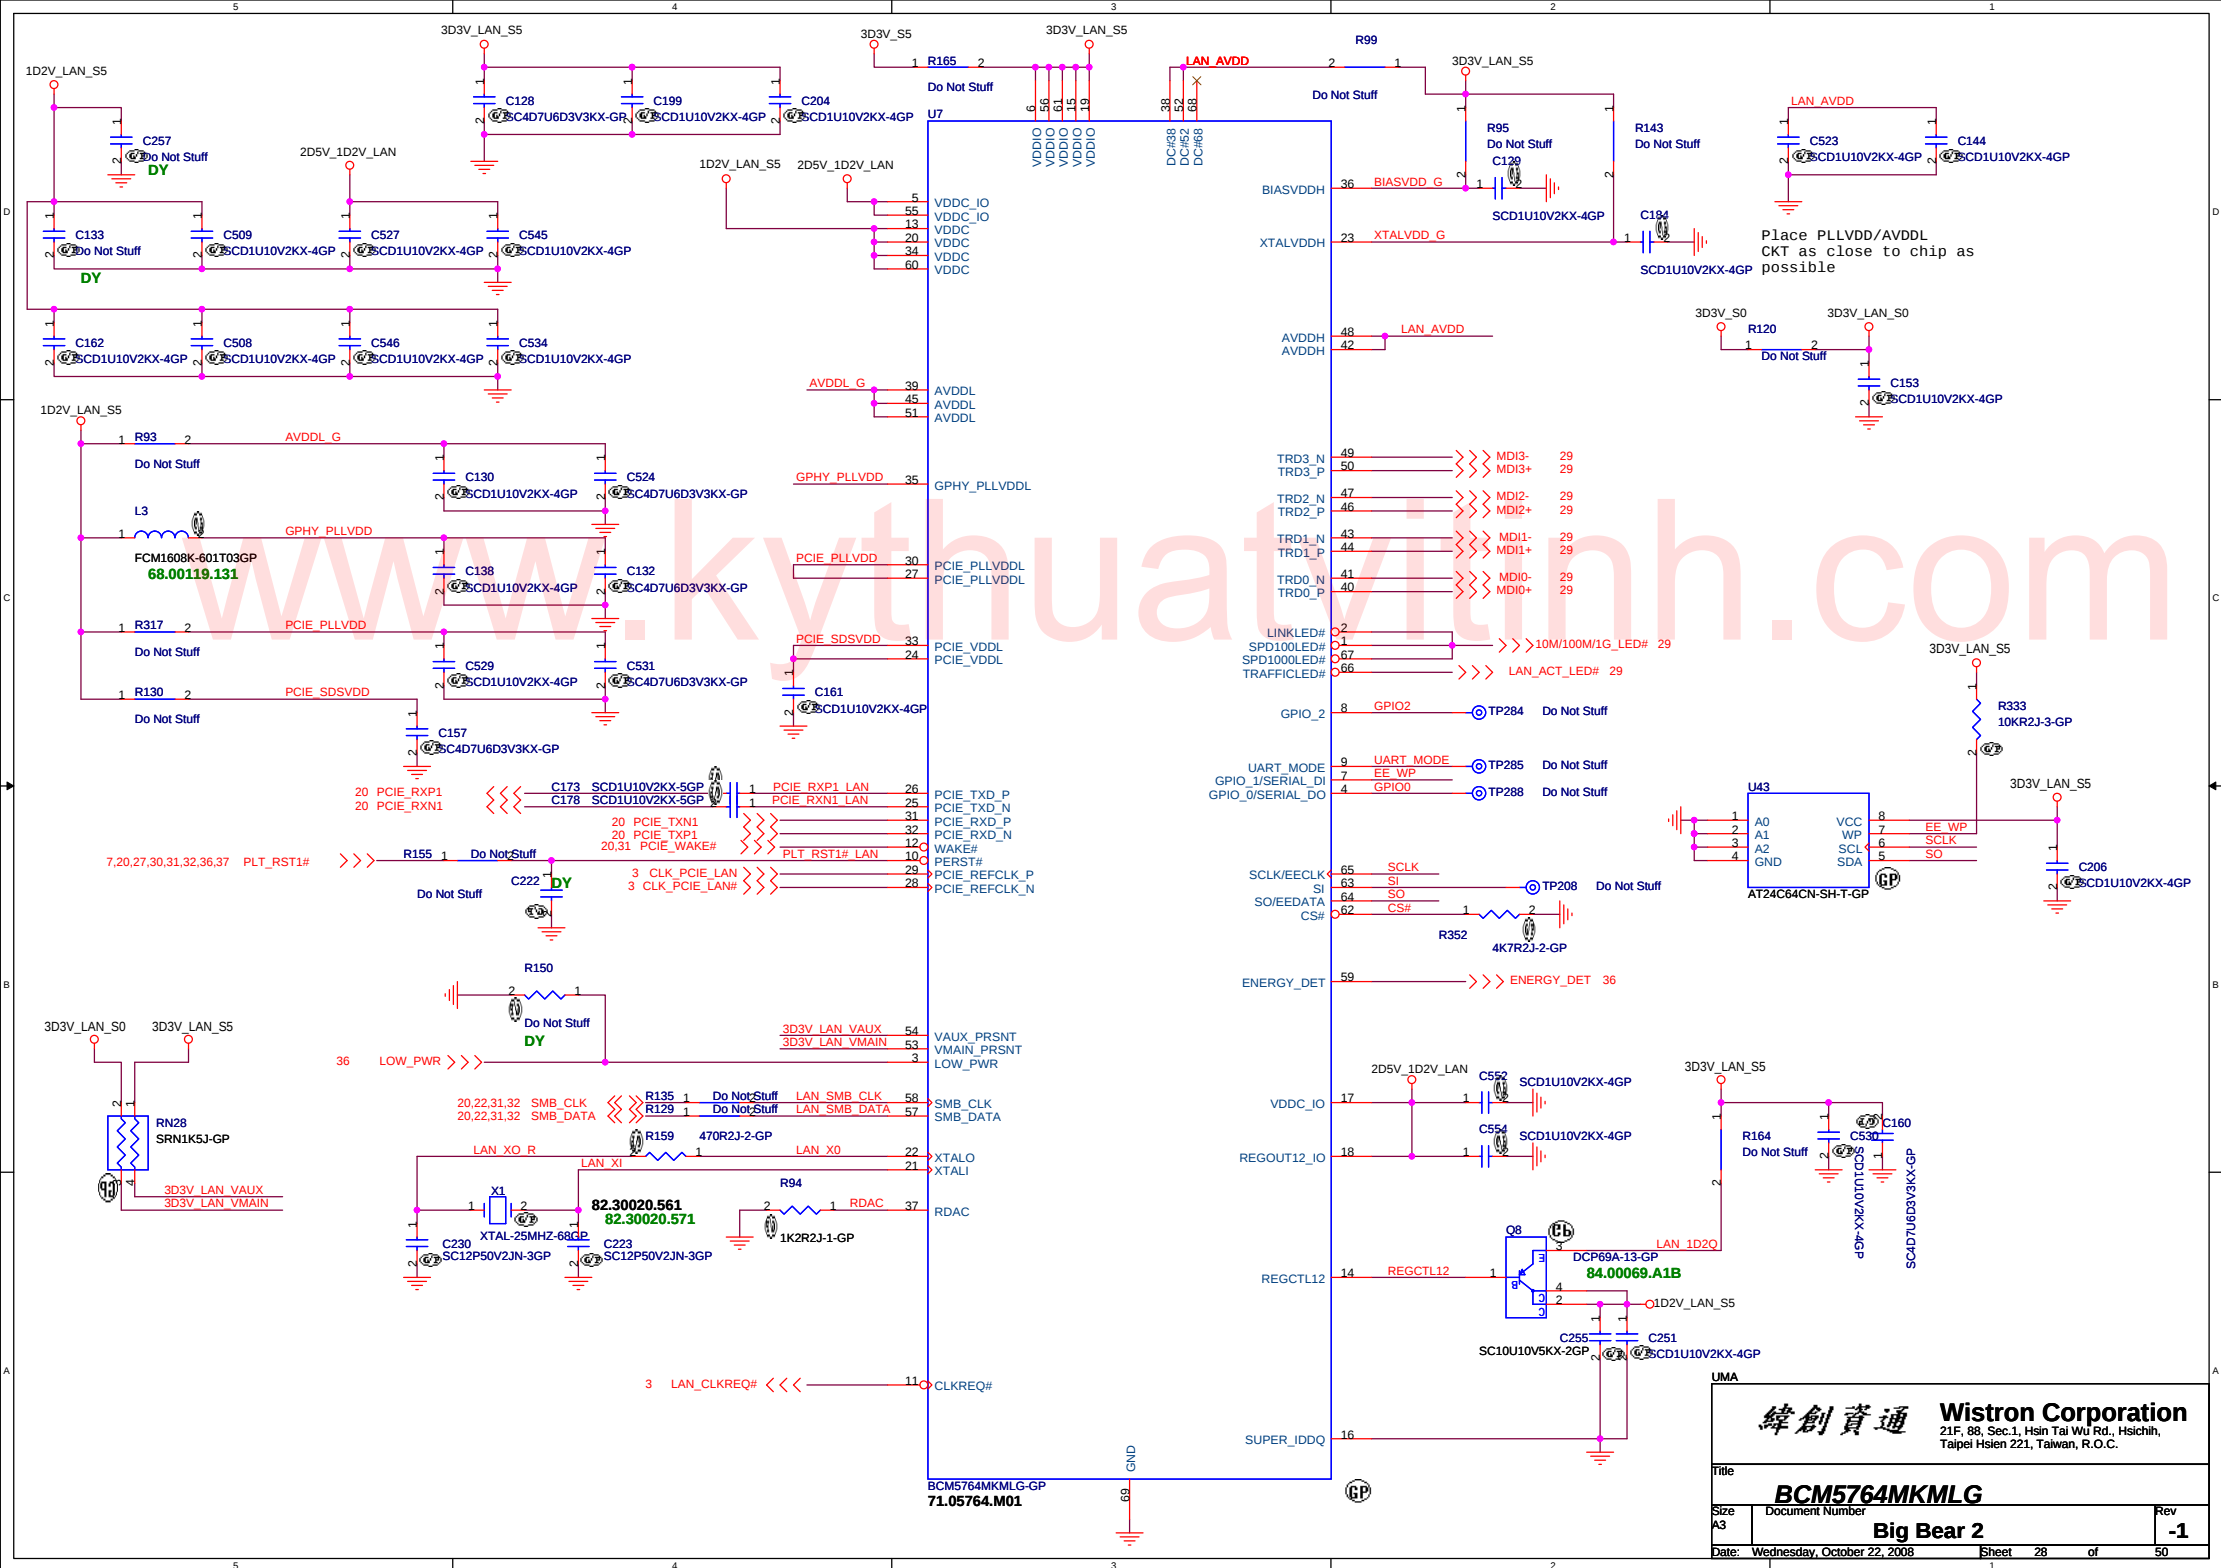

LAN Connector

- 1.route on bottom as differential pairs.
- 2.Tx+/Tx- are pairs. Rx+/Rx- are pairs.
- 3.No vias, No 90 degree bends.
- 4.pairs must be equal lengths.
- 5.6mil trace width,12mil separation.
- 6.36mil between pairs and any other trace.
- 7.Must not cross ground moat,except RJ-45 moat.

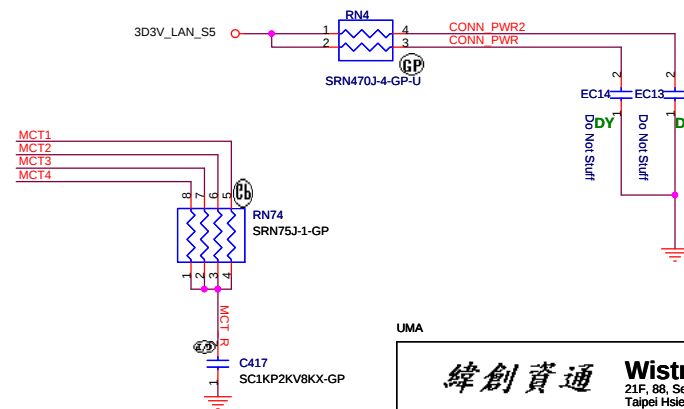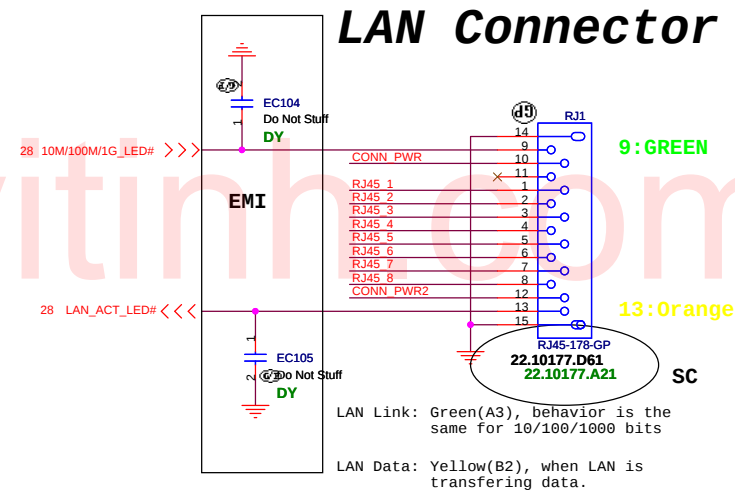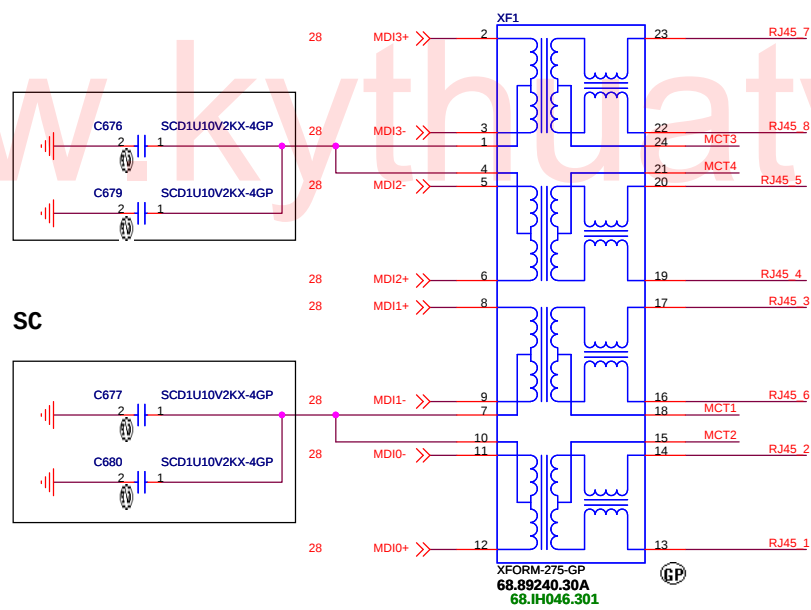


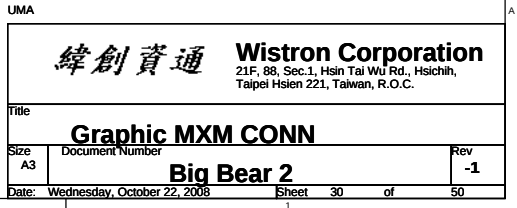


NEWCARD Connector

Reserve the symbol
for bottom side
connector


TOP VIEW

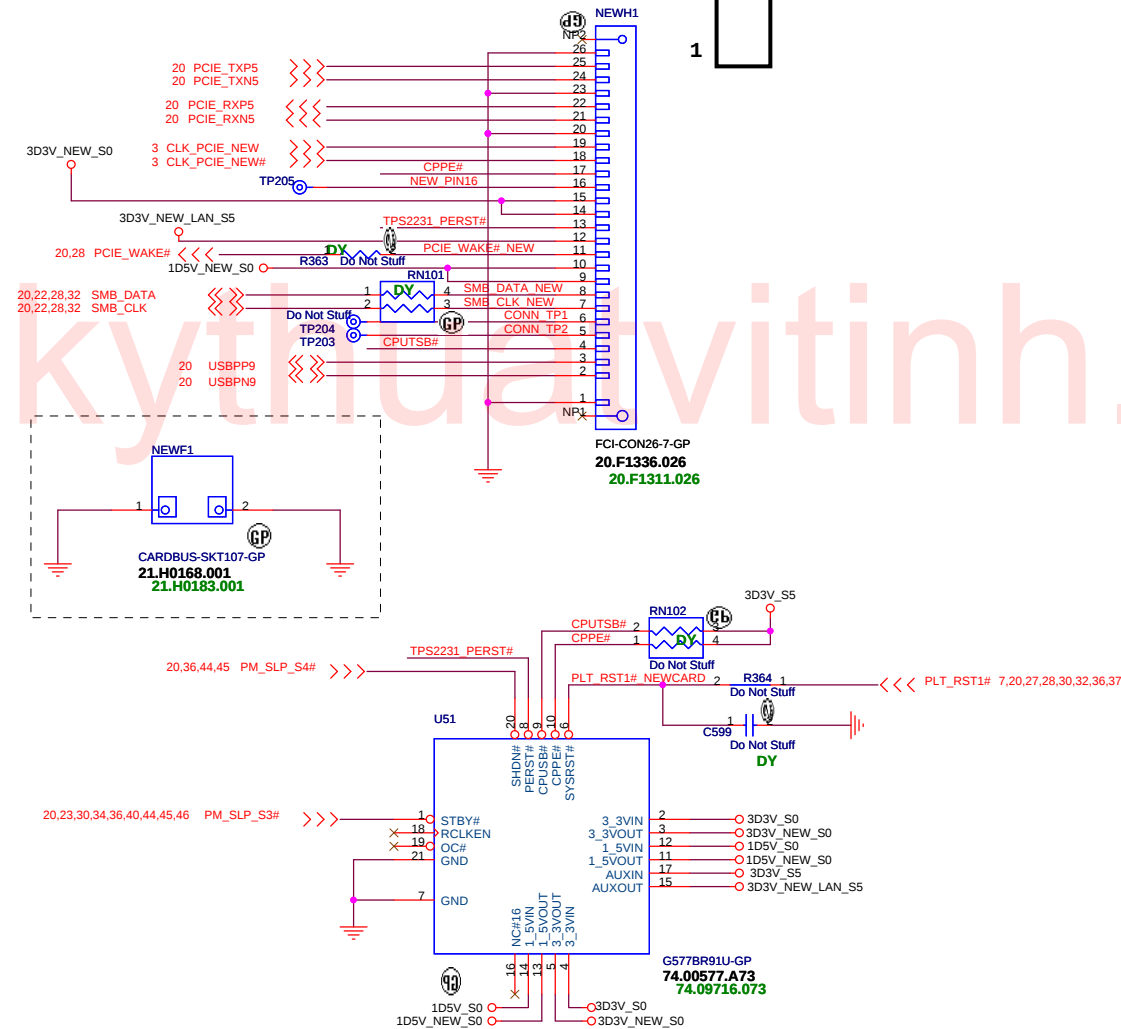

Place them Near to Chip





Place them Near to Connector

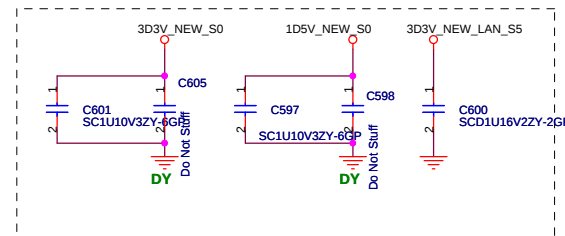


UMA


緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title NEW CARD		
Size	Document Number	Rev
Date: Wednesday, October 22, 2008		-1
Sheet 31 of 50		

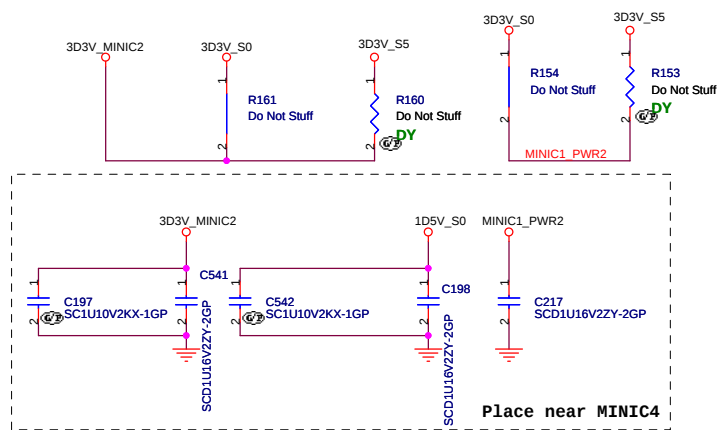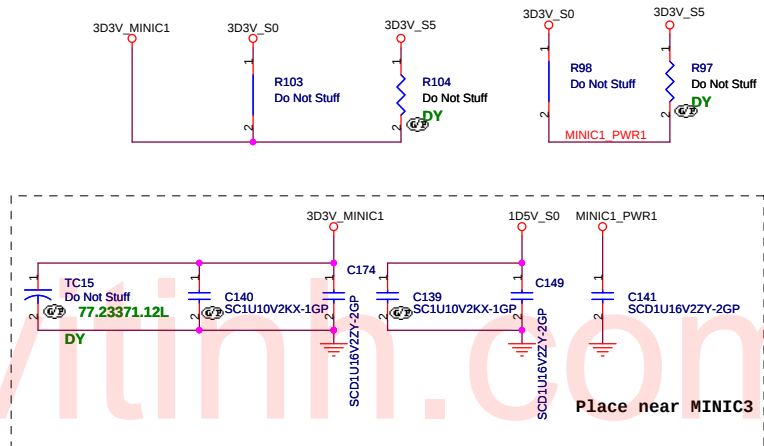


AUDIO OP AMPLIFIER


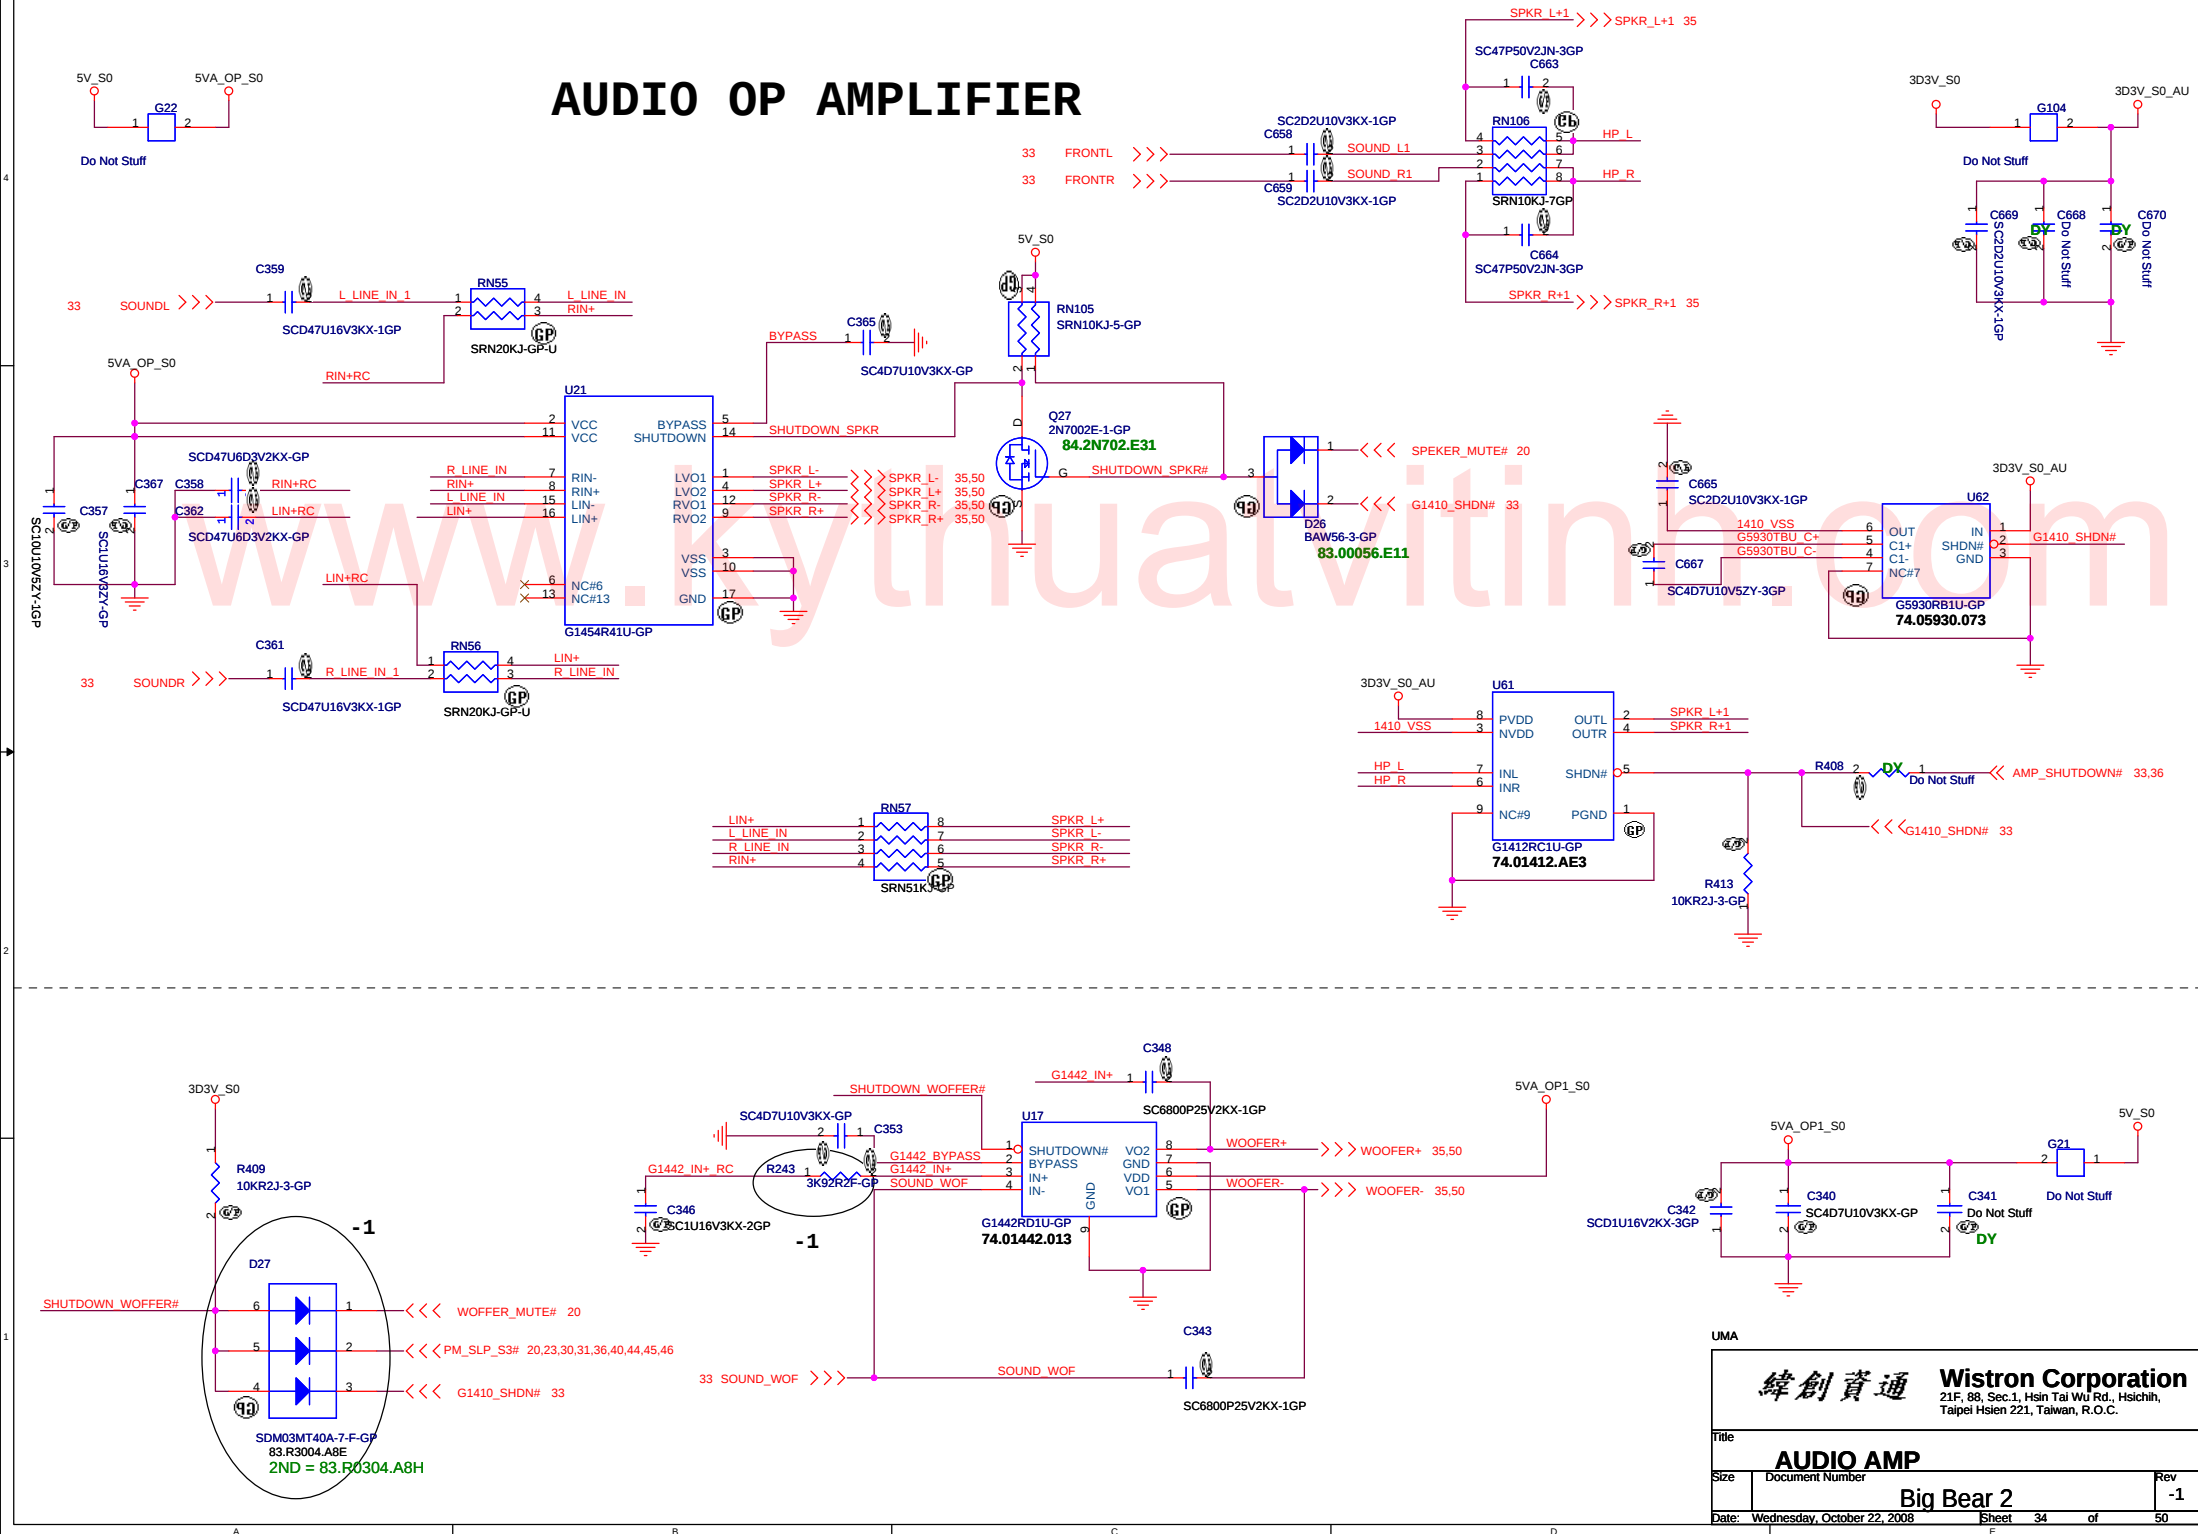


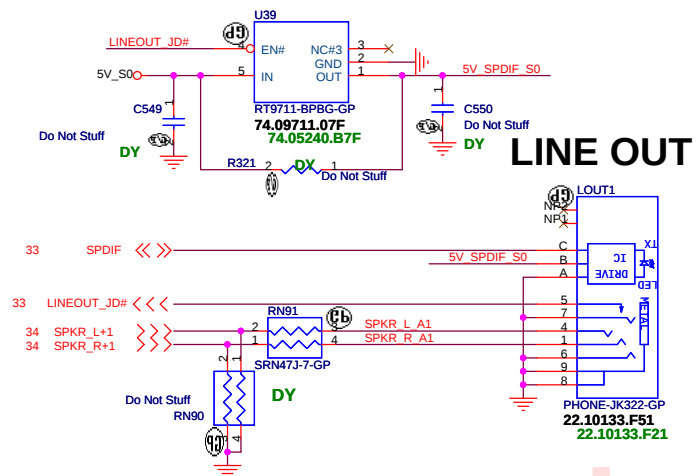


LINE OUT

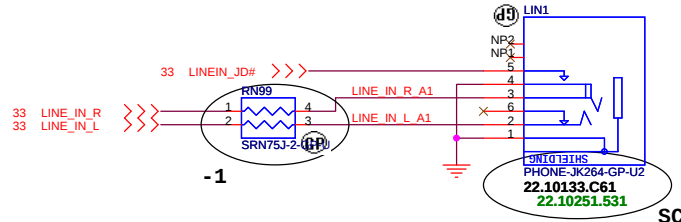

LINE IN

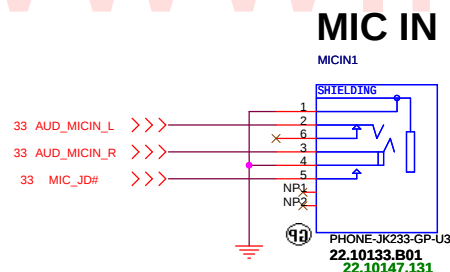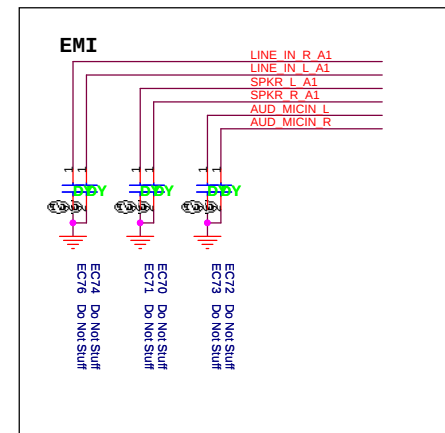


MIC IN

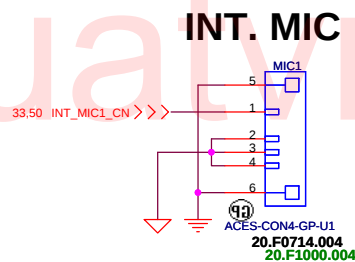


INT. MIC

SUBWOOFER

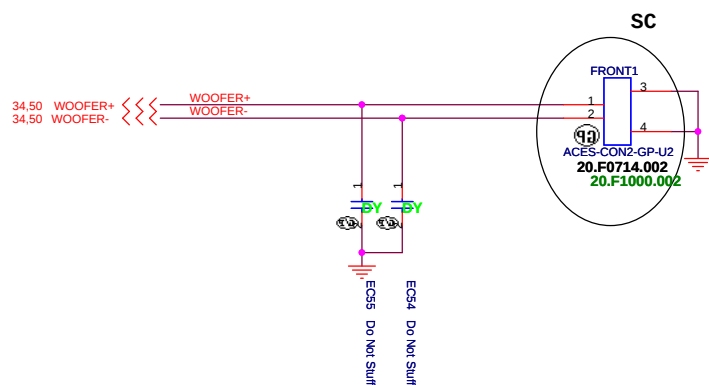

SC


REAR Speaker

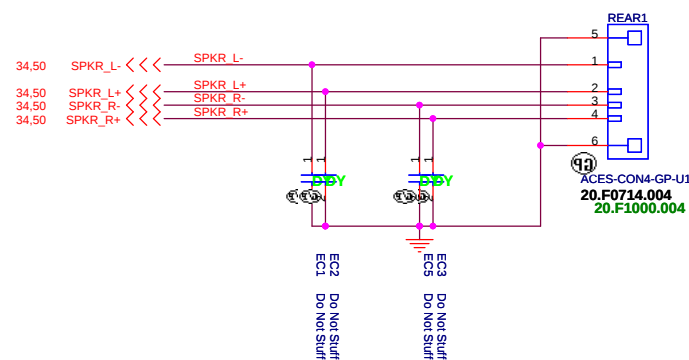

UMA

緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title
Size Document Number
Date: Wednesday, October 22, 2008 Sheet 35 of 50
Rev -1
Big Bear 2

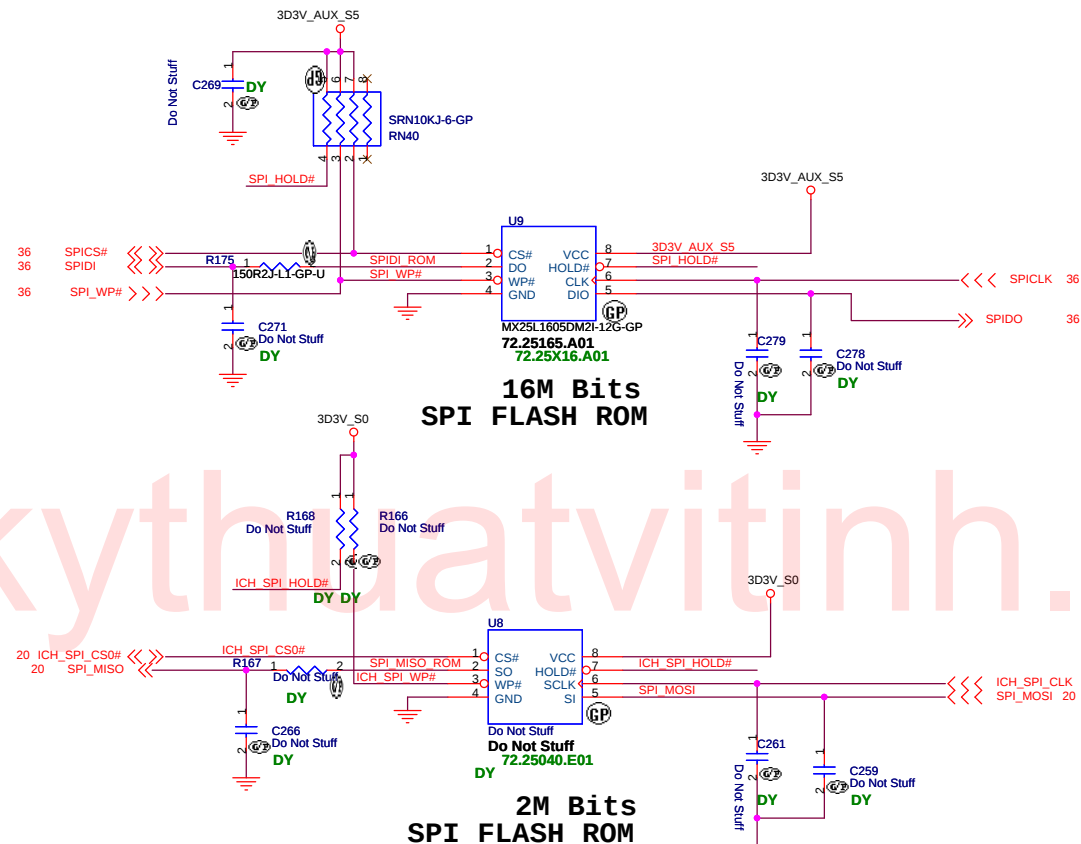


TOP VIEW

A15	(B1)
A14	(B2)
⋮	⋮
A2	(B14)
A1	(B15)


(BOTTOM VIEW)

19,36 LPC_LAD[0..3] <<< LPC_LAD[0..3]

GOLDEN FINGER FOR DEBUG BOARD

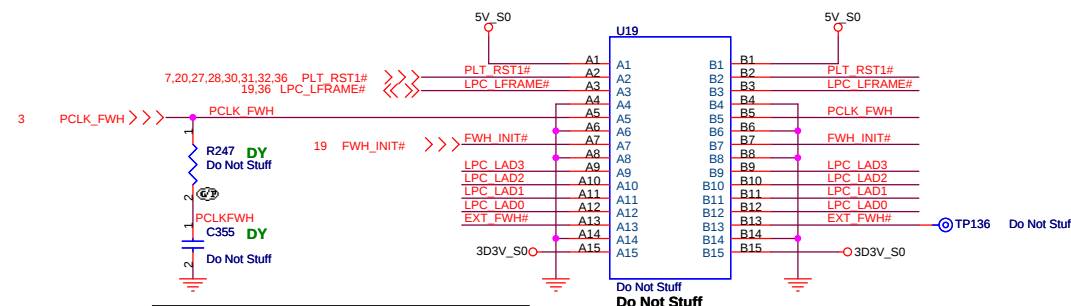

EMI



UMA

緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title

BIOS

Size Document Number


Big Bear 2

Rev


-1

Date: Wednesday, October 22, 2008

Sheet 37 of 50



CIR Module

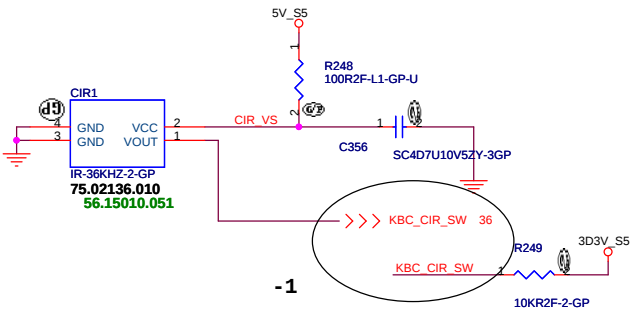



www.kythuatvitinh.com

Check test point


- 3D3V_S0 — TP202 Do Not Stuff
- 3D3V_AUX_S5 — TP141 Do Not Stuff
- 3D3V_S5 — TP120 Do Not Stuff
- 5V_S5 — TP130 Do Not Stuff
- 20,36 PM_PWRBTN# <<< — TP115 Do Not Stuff
- 4,19,40 H_PWRGD <<< — TP320 Do Not Stuff
- 36,40 S5_ENABLE <<< — TP110 Do Not Stuff
- 4,6 H_CPURST# <<< — TP278 Do Not Stuff

Test Point 放在Dimm Door 打開可量測處


Run Power

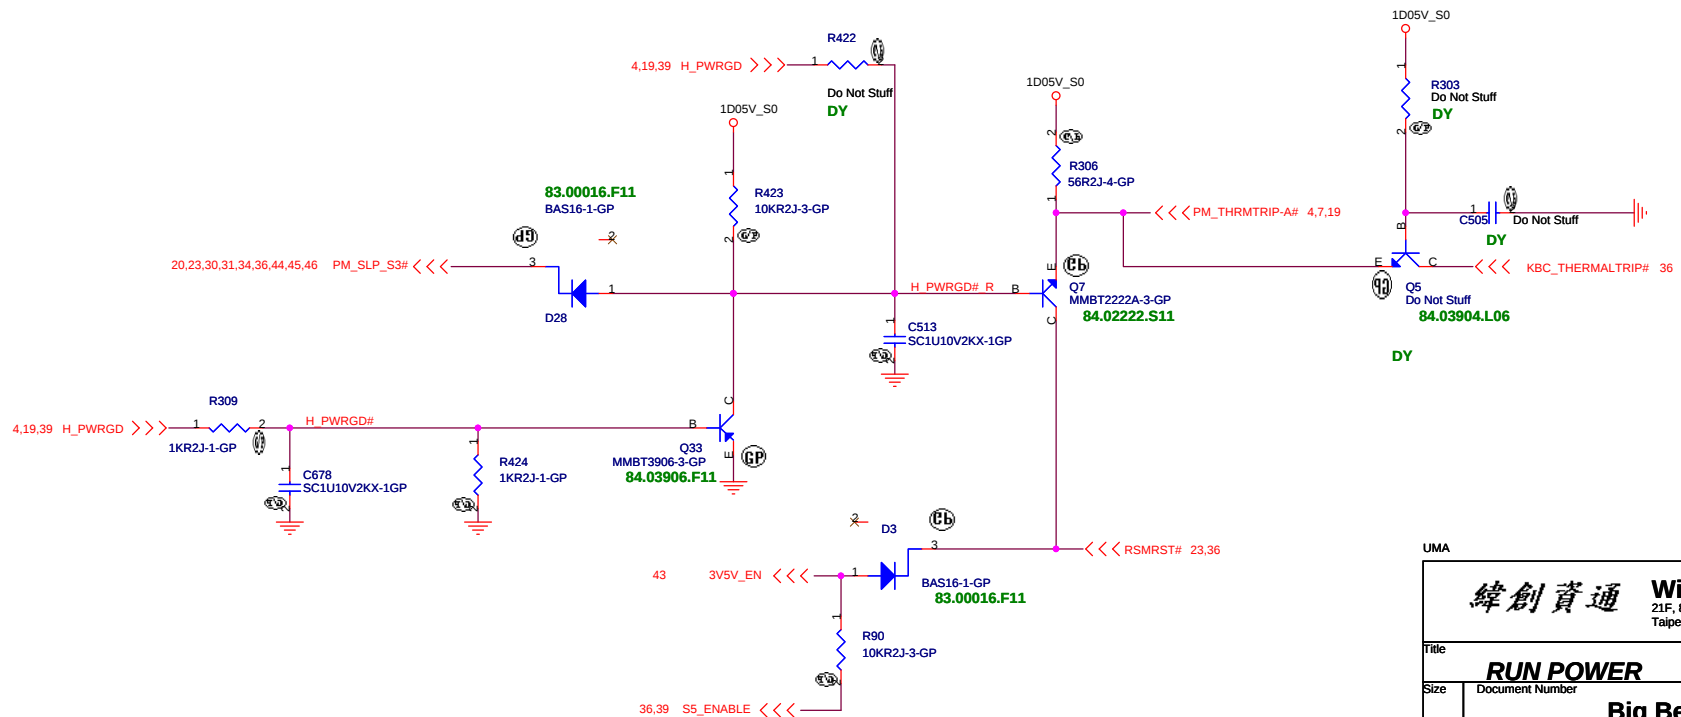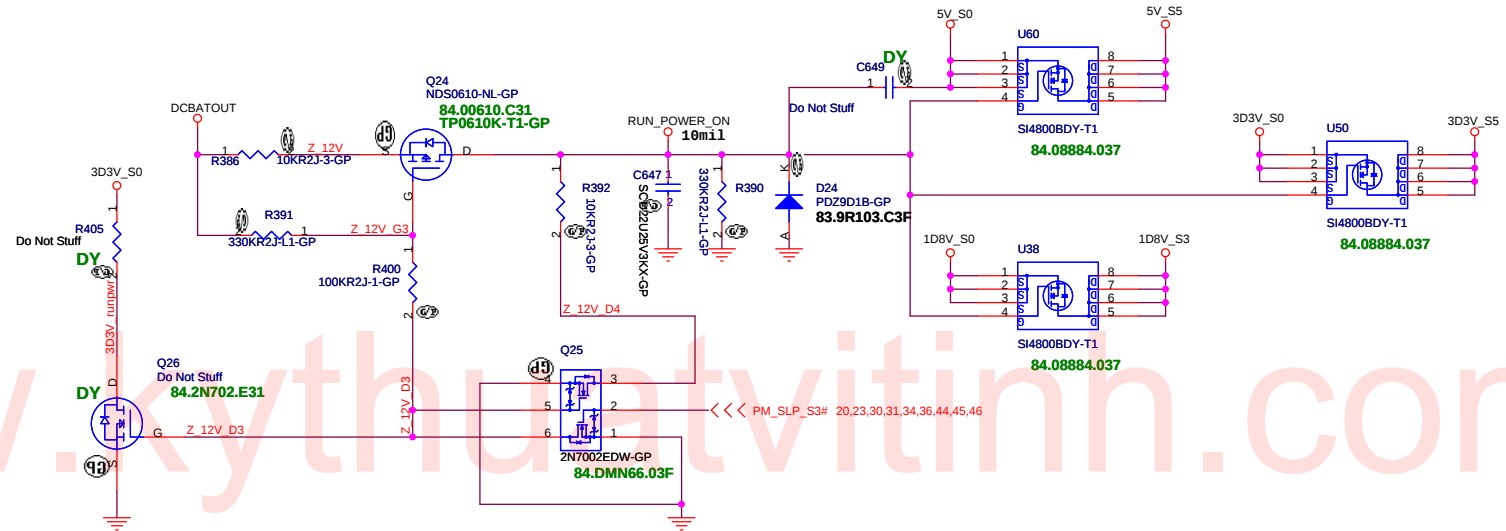


CPU_CORE
ISL6266A

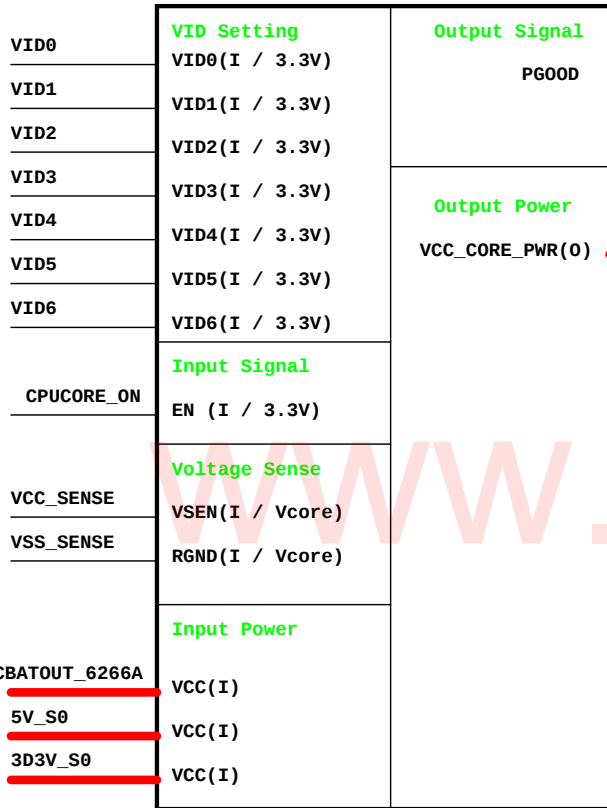


TPS51124
1D8V/1D05V

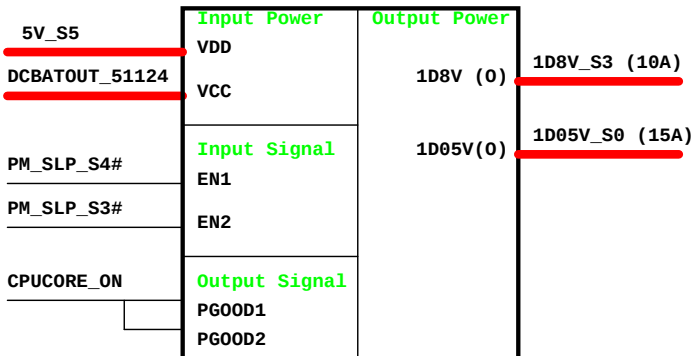


TPS51125
5V/3D3V

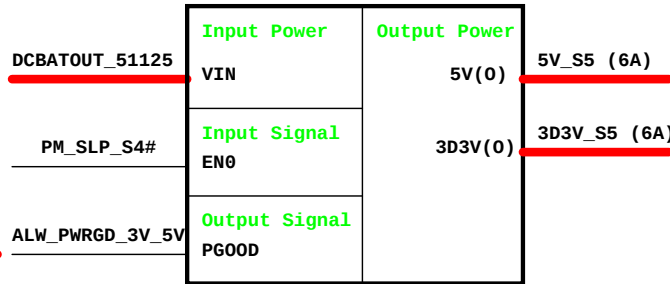


GFX_CORE
ISL6263A

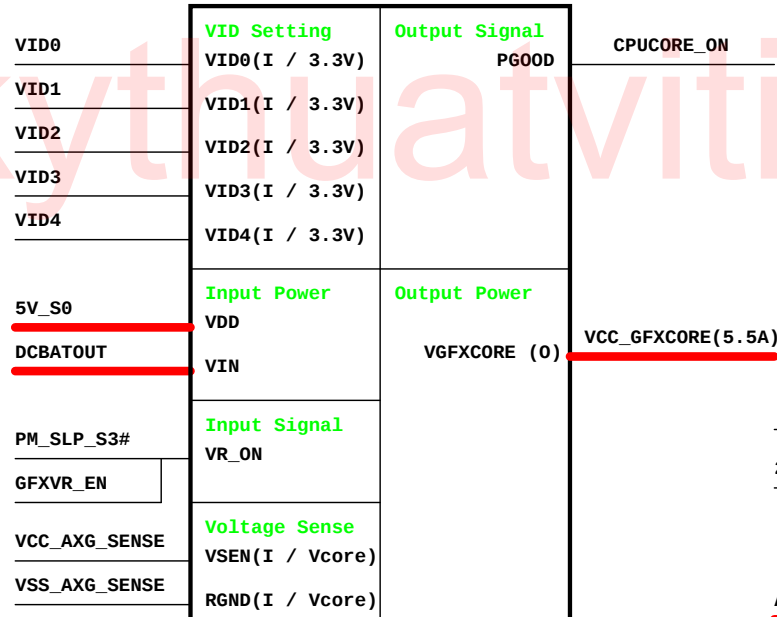


Adapter

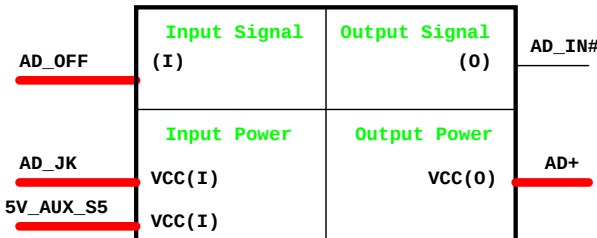

RT9018A
1D5V_S0

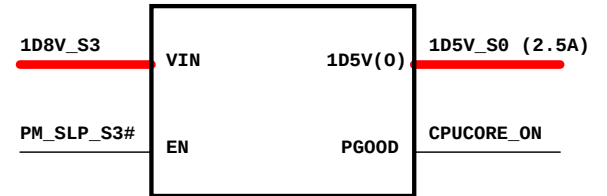


RT9026 0D9V_S0

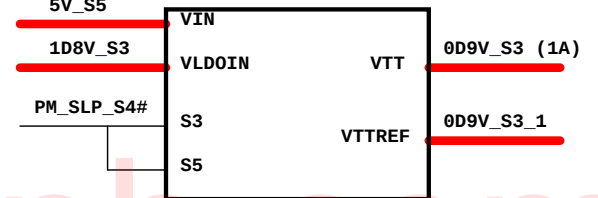




G9131 2D5V_S0




Charger BQ24750

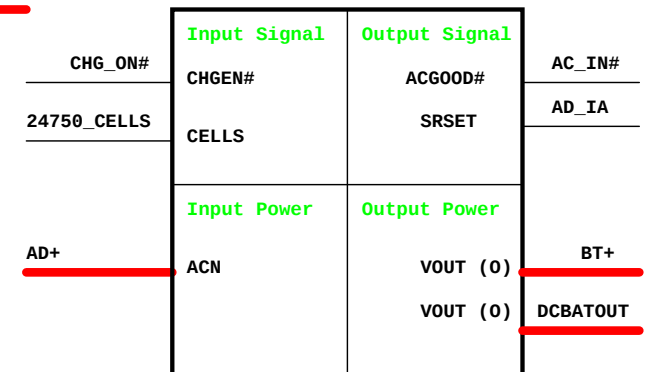


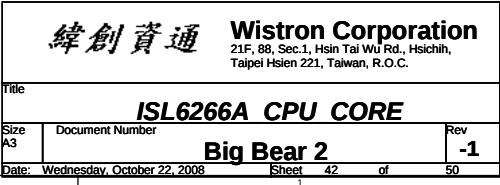


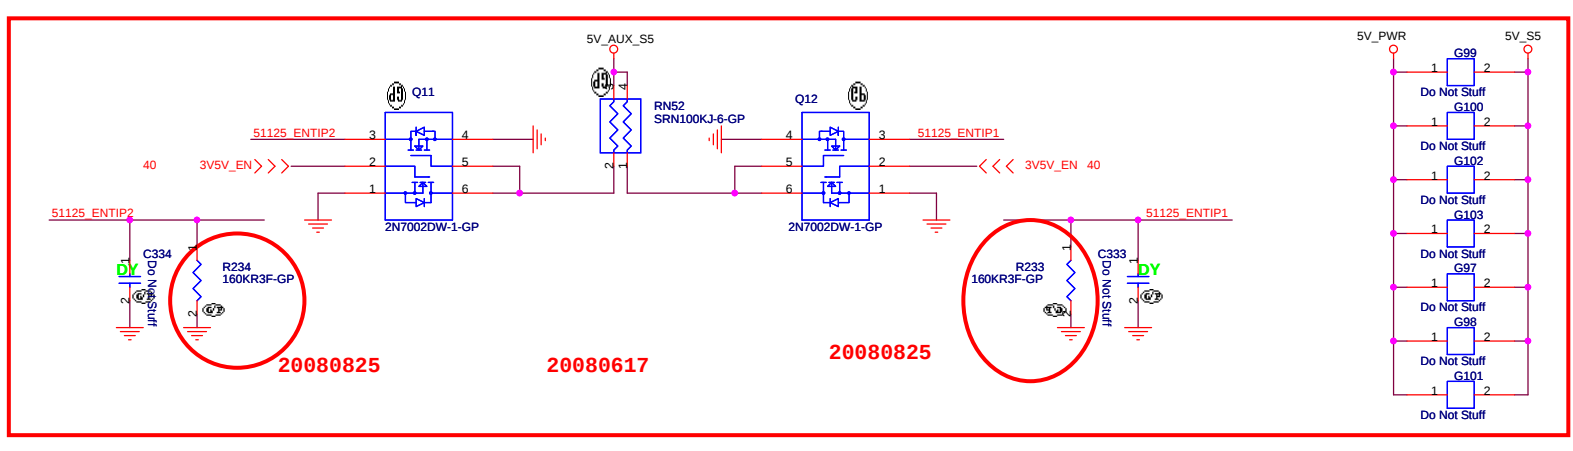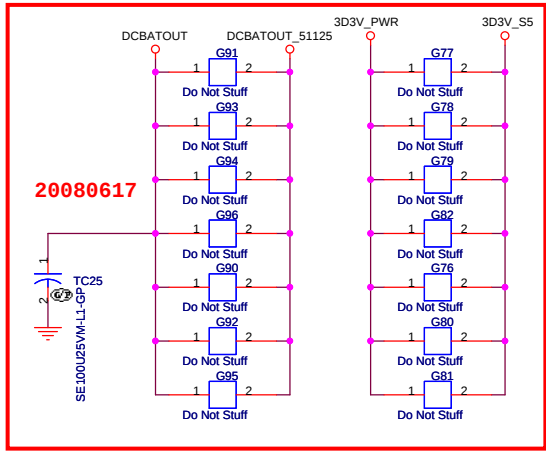


Design Current = 6A
 Max Current = 7A
 OCP min = 10A
 Cyntec 7*7*3
 DCR=30mohm, Irating=6A
 Isat=13.5A

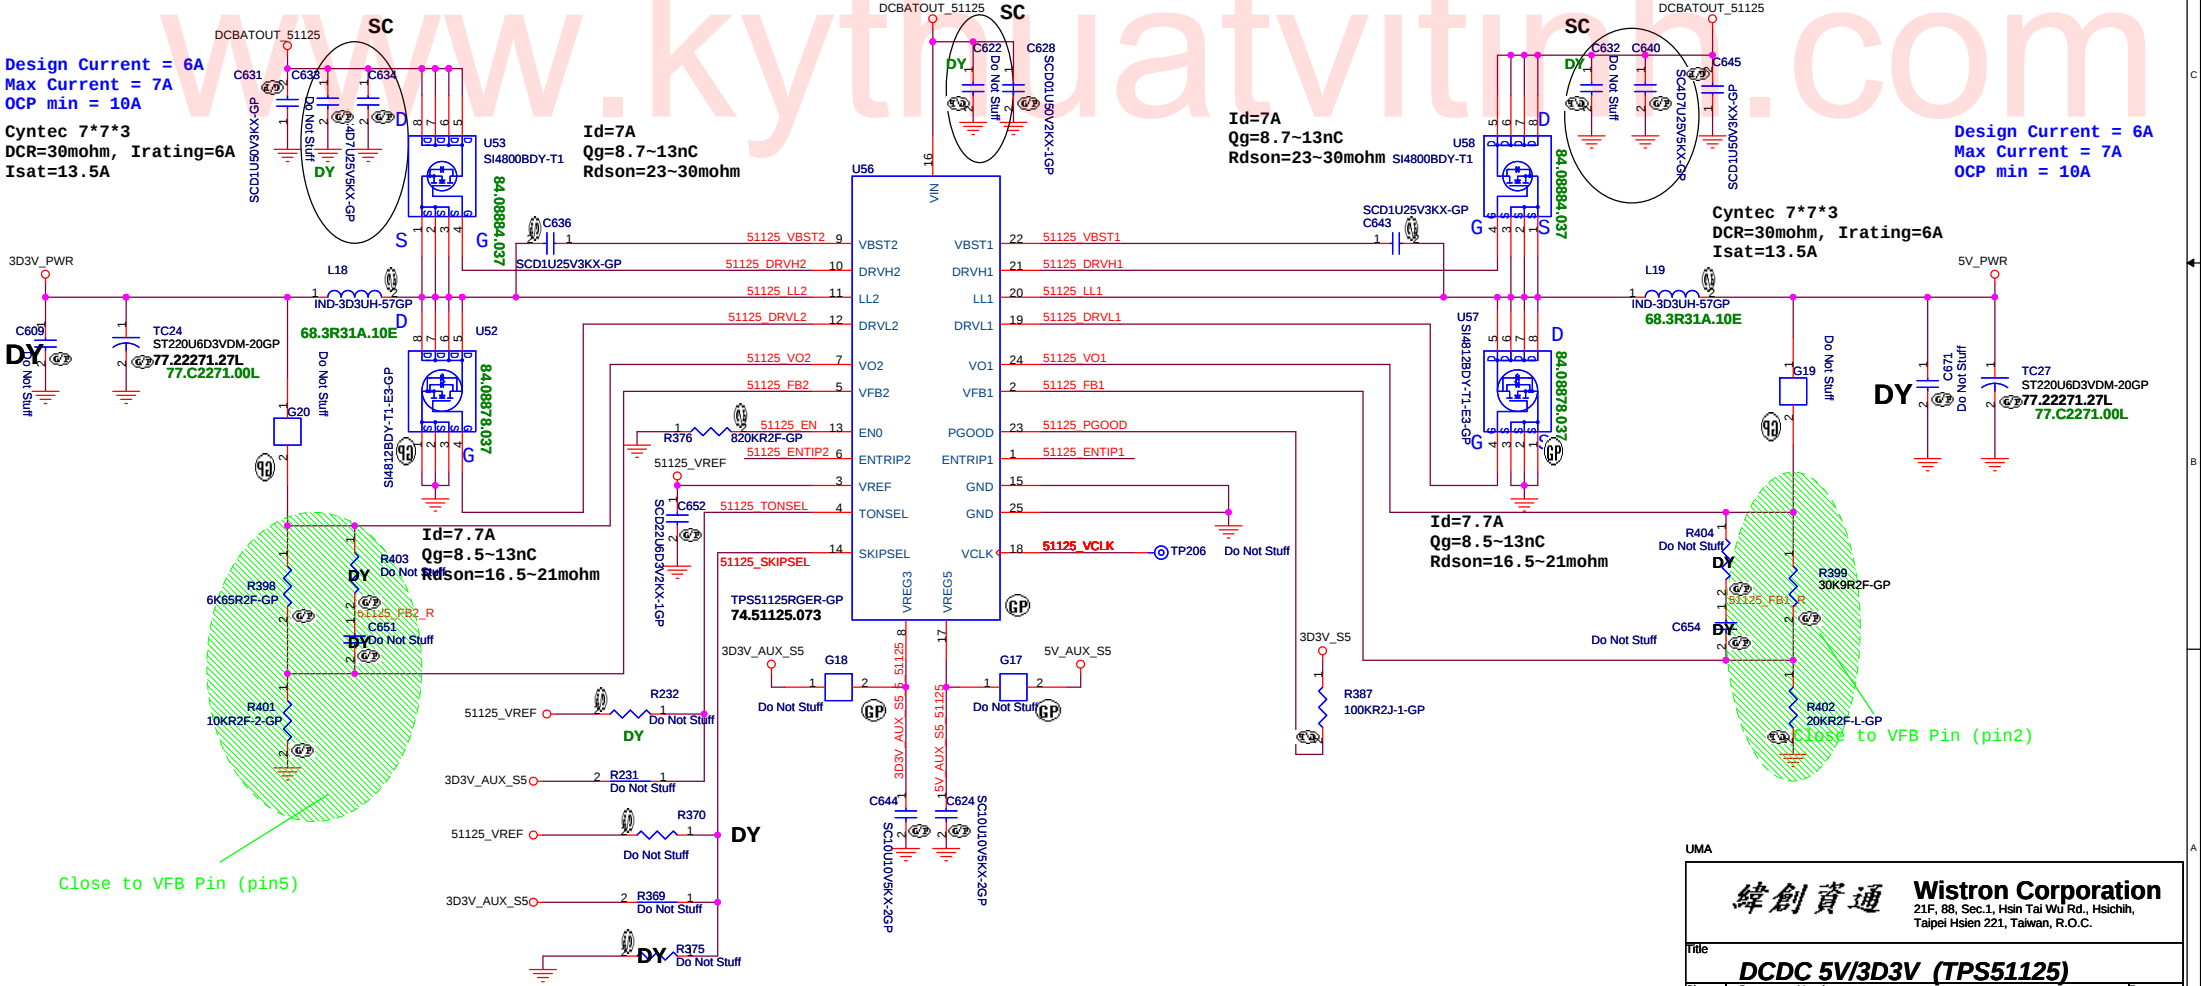


1D5V_S0
Iomax=2.5A

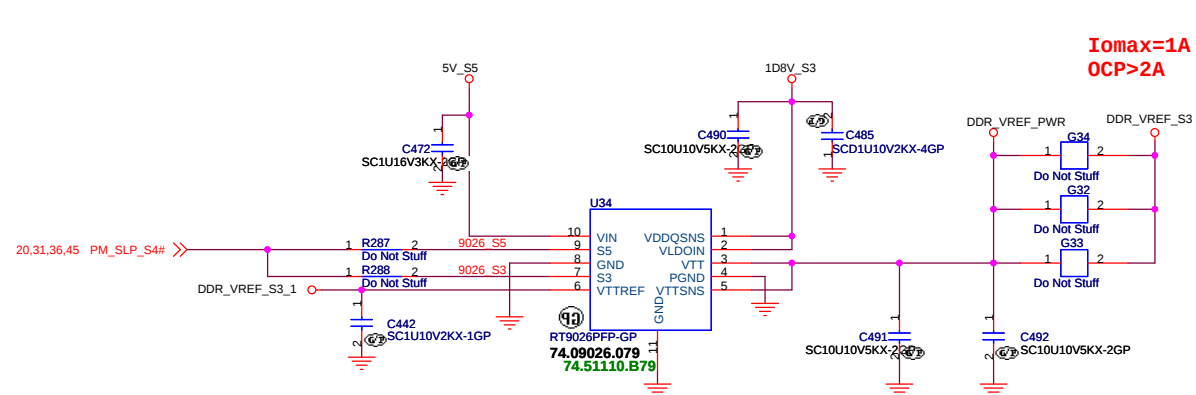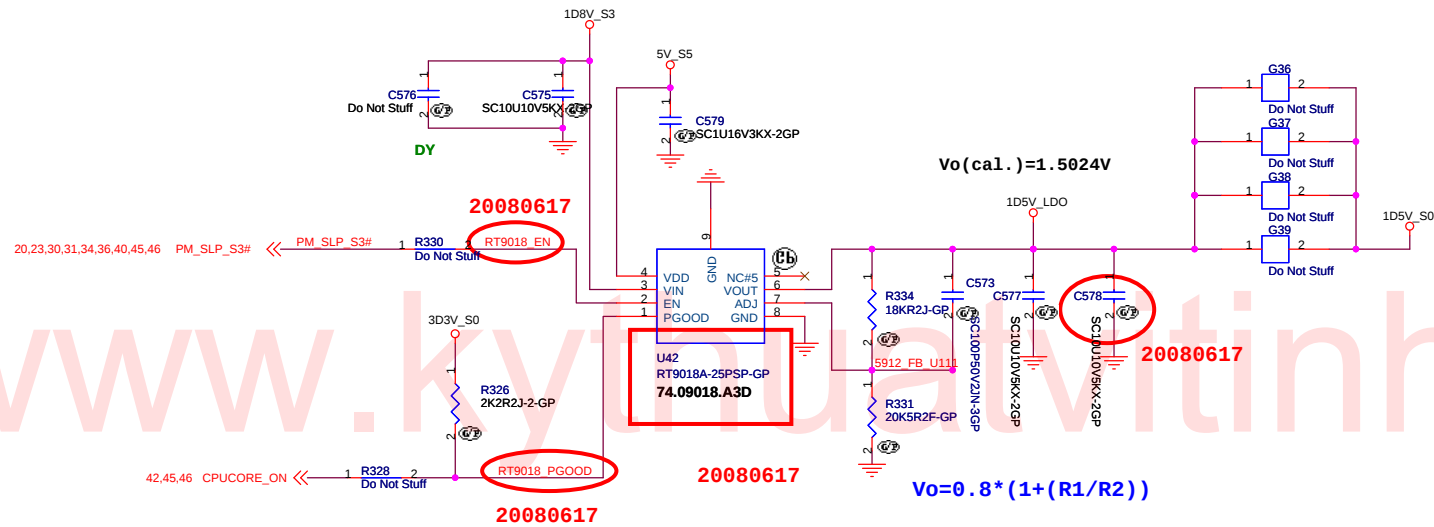

2D5V_S0
Iomax=0.3A



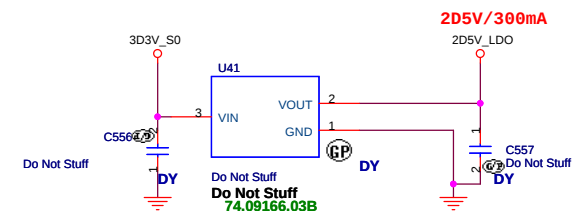


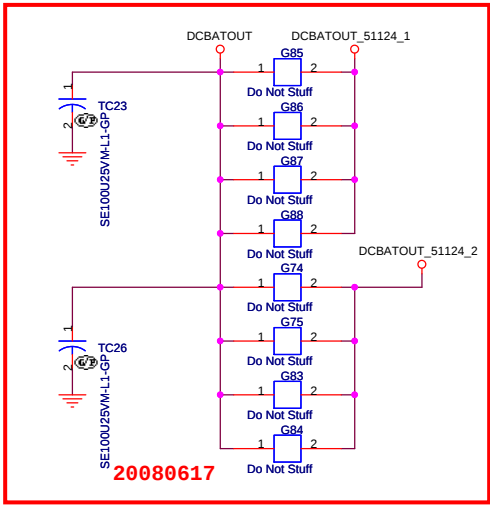

$$V_{trip}(mV) = R_{trip}(Kohm) * I_{0}(uA)$$


$$I_{ocp} = (V_{trip}/R_{ds(on)}) + ((1/(2 * L * f)) * ((V_{in} - V_{out}) * V_{out}) / V_{in}))$$

I/P cap: 10U 25V K1206 X5R/ 78.10622.52L

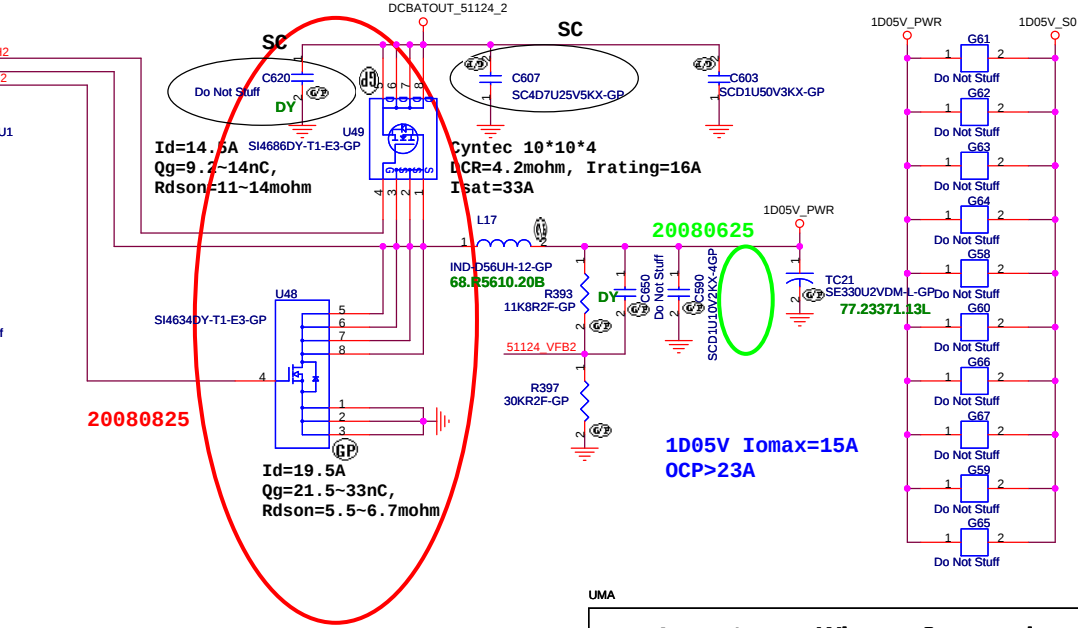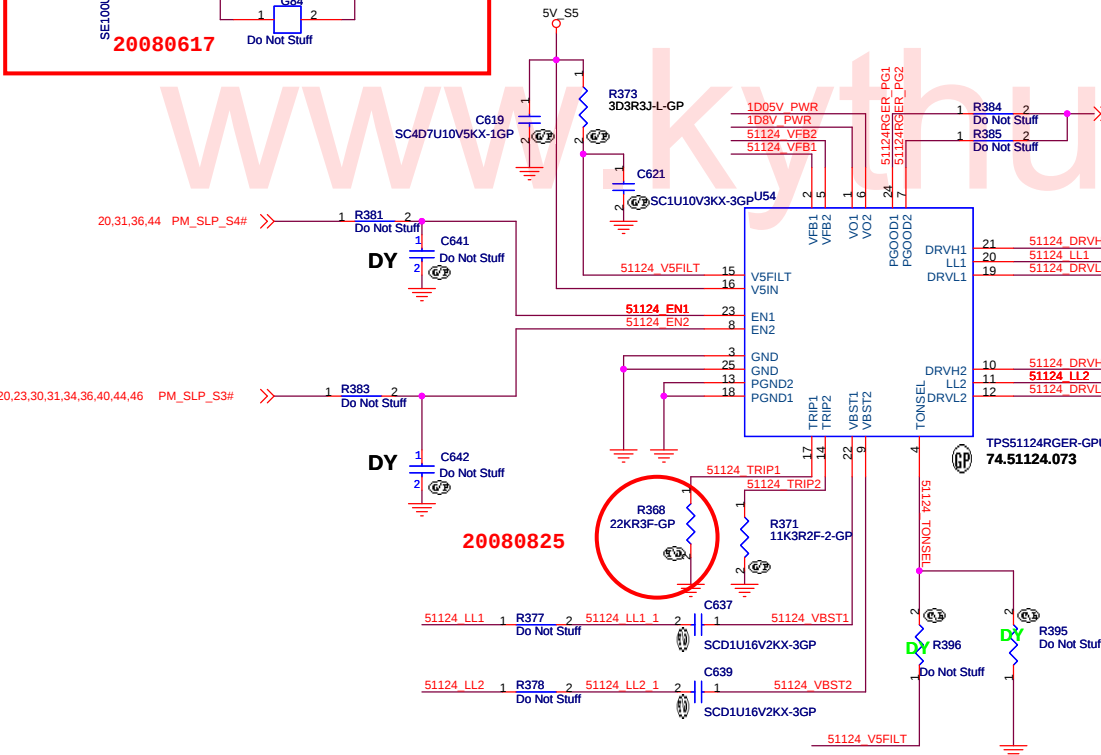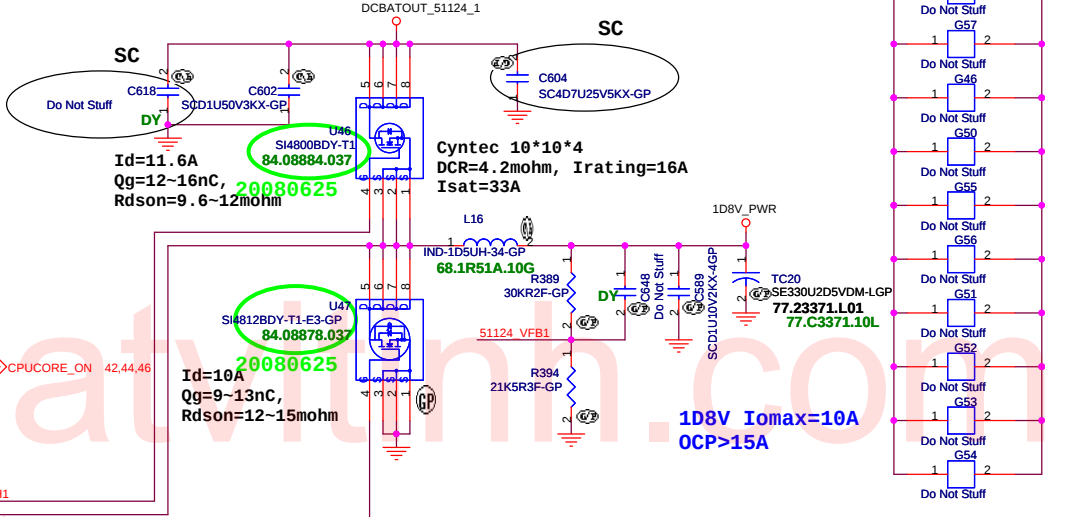


	GND	OPEN	V5FILT
TONSEL	240k/CH1 300k/CH2	300k/CH1 360k/CH2	360k/CH1 420k/CH2

Vout=0.758V*(R1+R2)/R2 --> PWM mode
Vout=0.764V*(R1+R2)/R2 --> Skip Mode

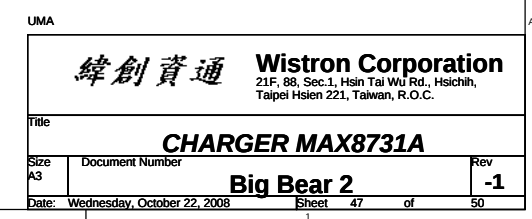

BATTERY CONNECTOR

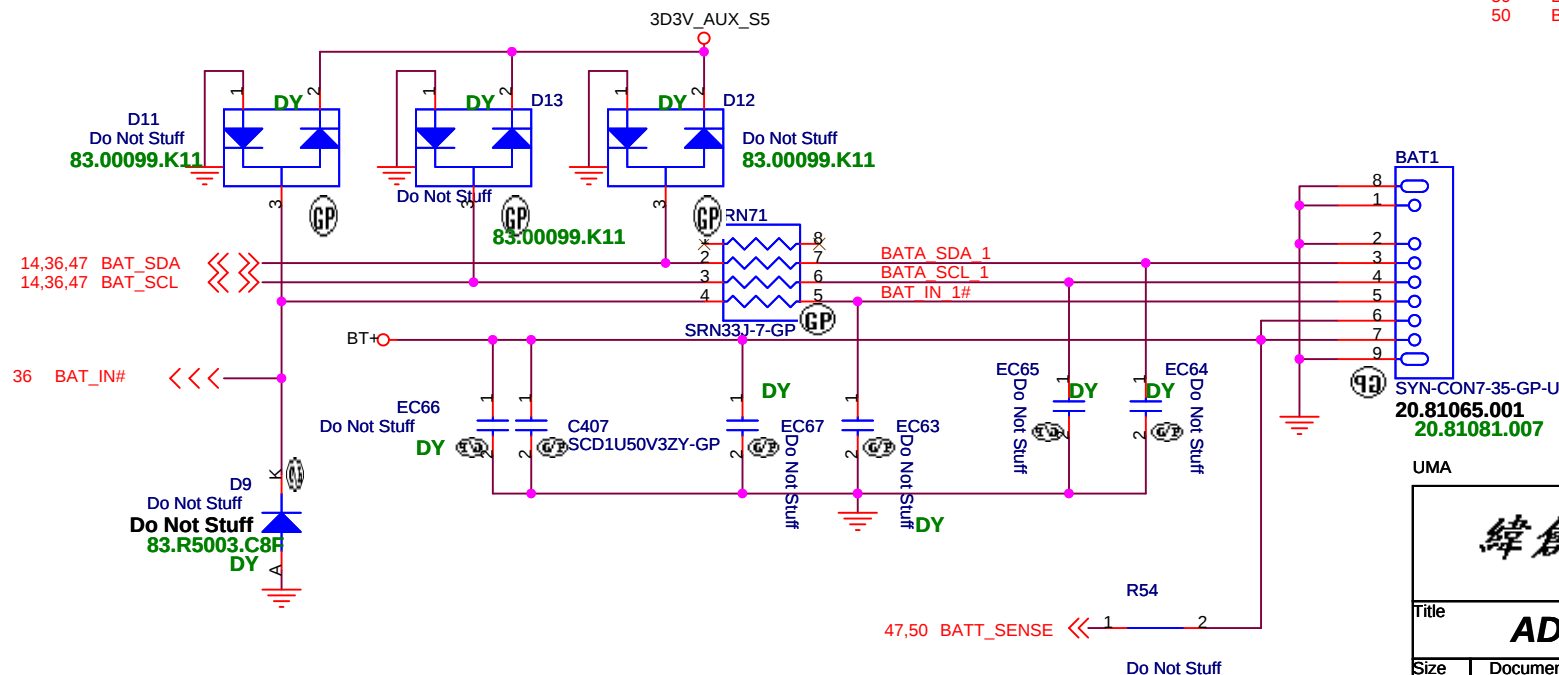

緯創資通 **Wistron Corporation**
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan, R.O.C.

Title	AD/BATT CONN
-------	---------------------

Size	Document Number
------	-----------------

Big Bear 2

-1

Date: Wednesday, October 22, 2008

Sheet	48	of	50
-------	----	----	----

STAND OFF

SPRING ON BOTTOM

CPU & NB

MDC


Mini Card

MXM


DIMM

Touch Pad

MXM SPRING













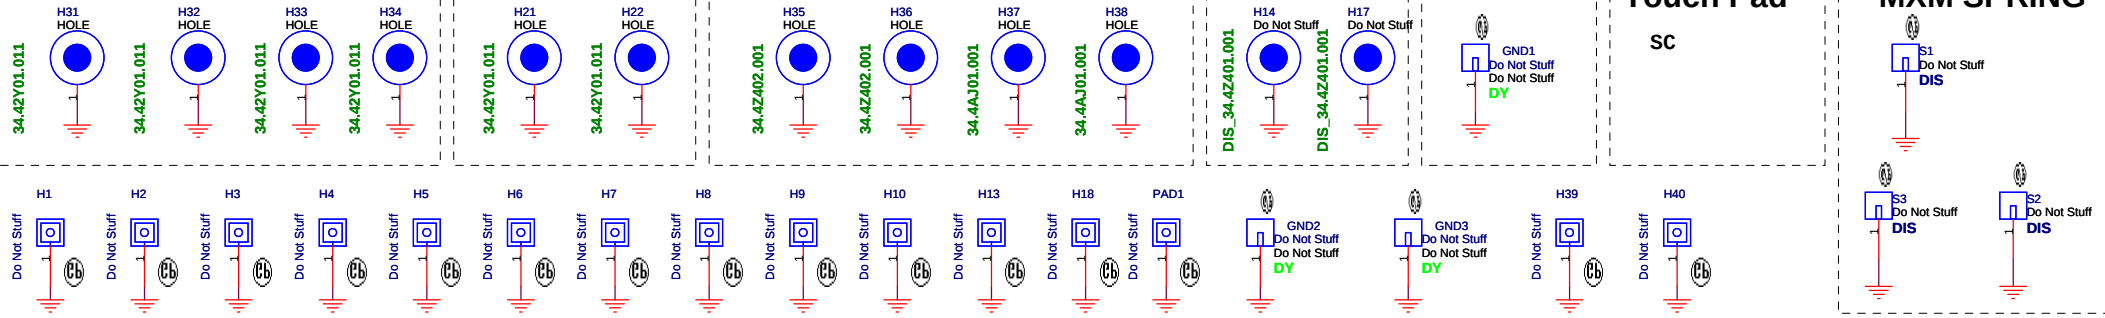


EMI

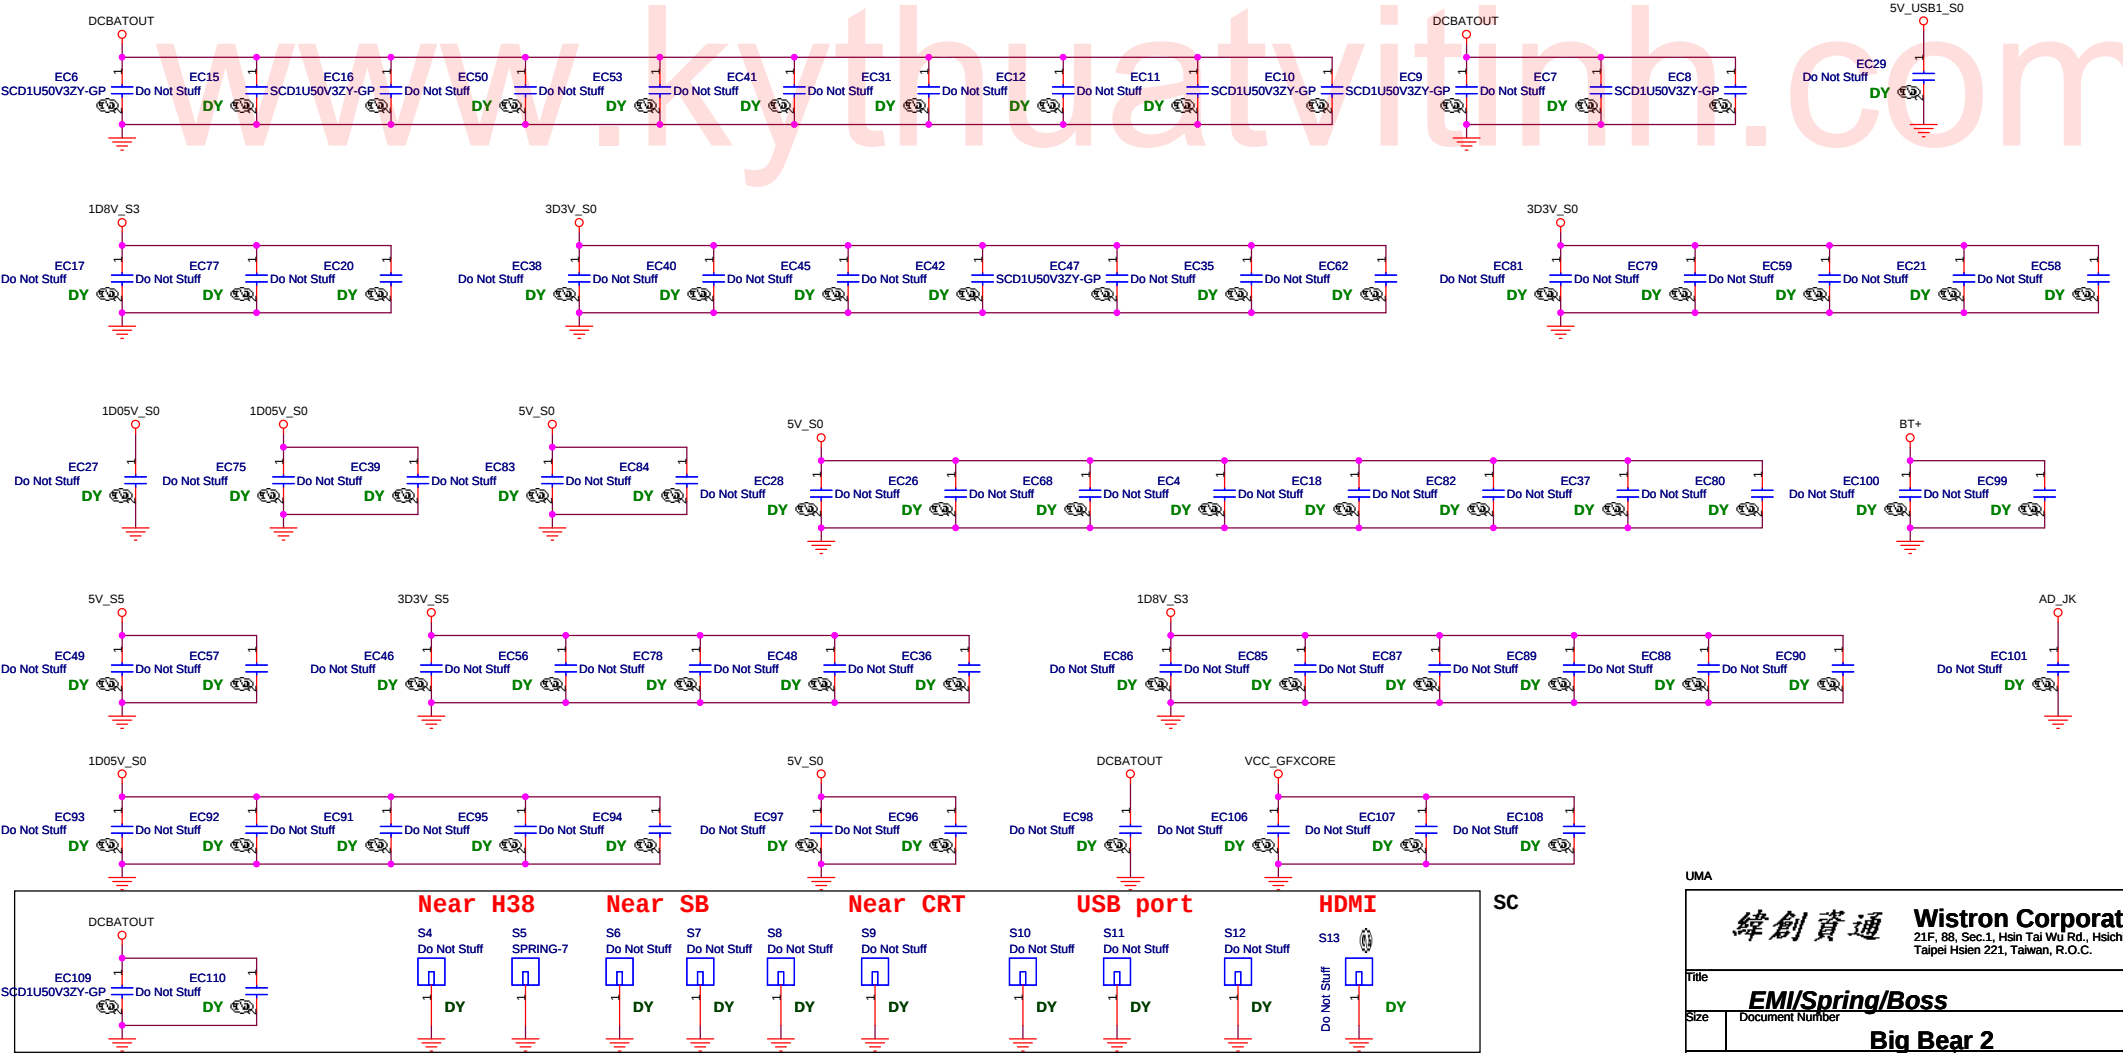

UMA

緯創資通 Wistron Corporation
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.

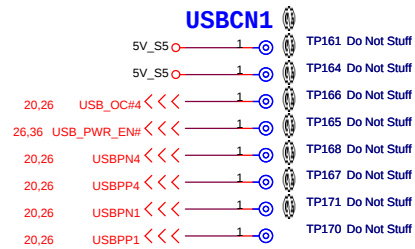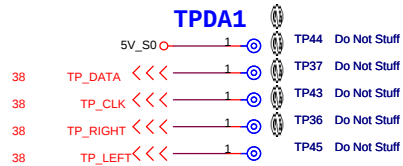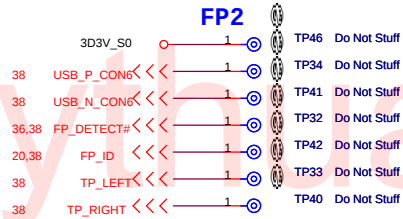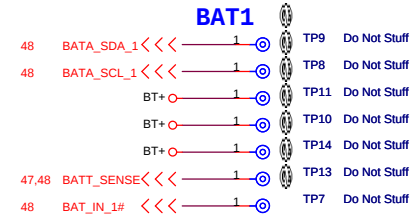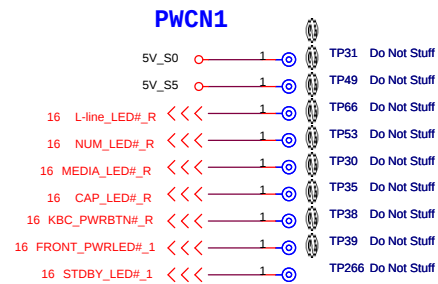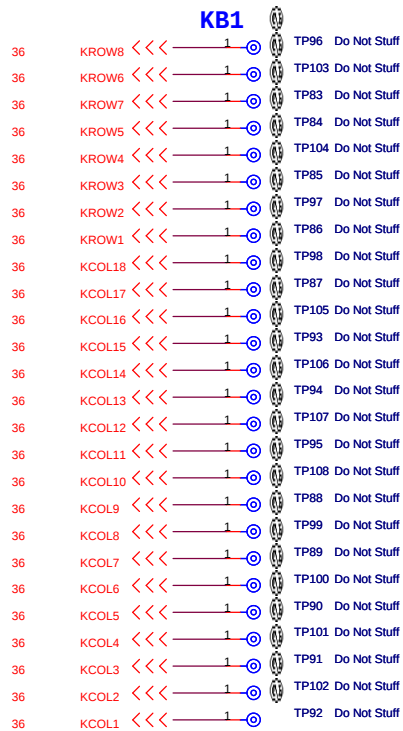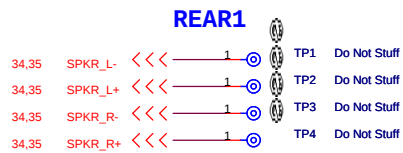

UMA

緯創資通		Wistron Corporation	
21F, 88, Sec.1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R.O.C.			
Title			
AFTE			
Size	Document Number	Rev	
A3	Big Bear 2	-1	
Date: Wednesday, October 22, 2008		Sheet	50 of 51

Big Bear 2 Schematic EC Tracking Record LAB 0911 , 2008
EC #/ Page / Description / Part Affected

- EC SC01/20/Change R316 to 20R2F(For USB eye diagram)
- EC SC02/24/Swap net SATA_RXN5 SATA_RXP5
- EC SC03/29/Add C679 C680 for XF1(For IEEE common voltage channel D fail)
- EC SC04/33/Add RN95 RN104(vendor realtek request)
- EC SC05/36/Swap KBI1 pin definition

www.kythuatvitinh.com