



ZQR BLOCK DIAGRAM

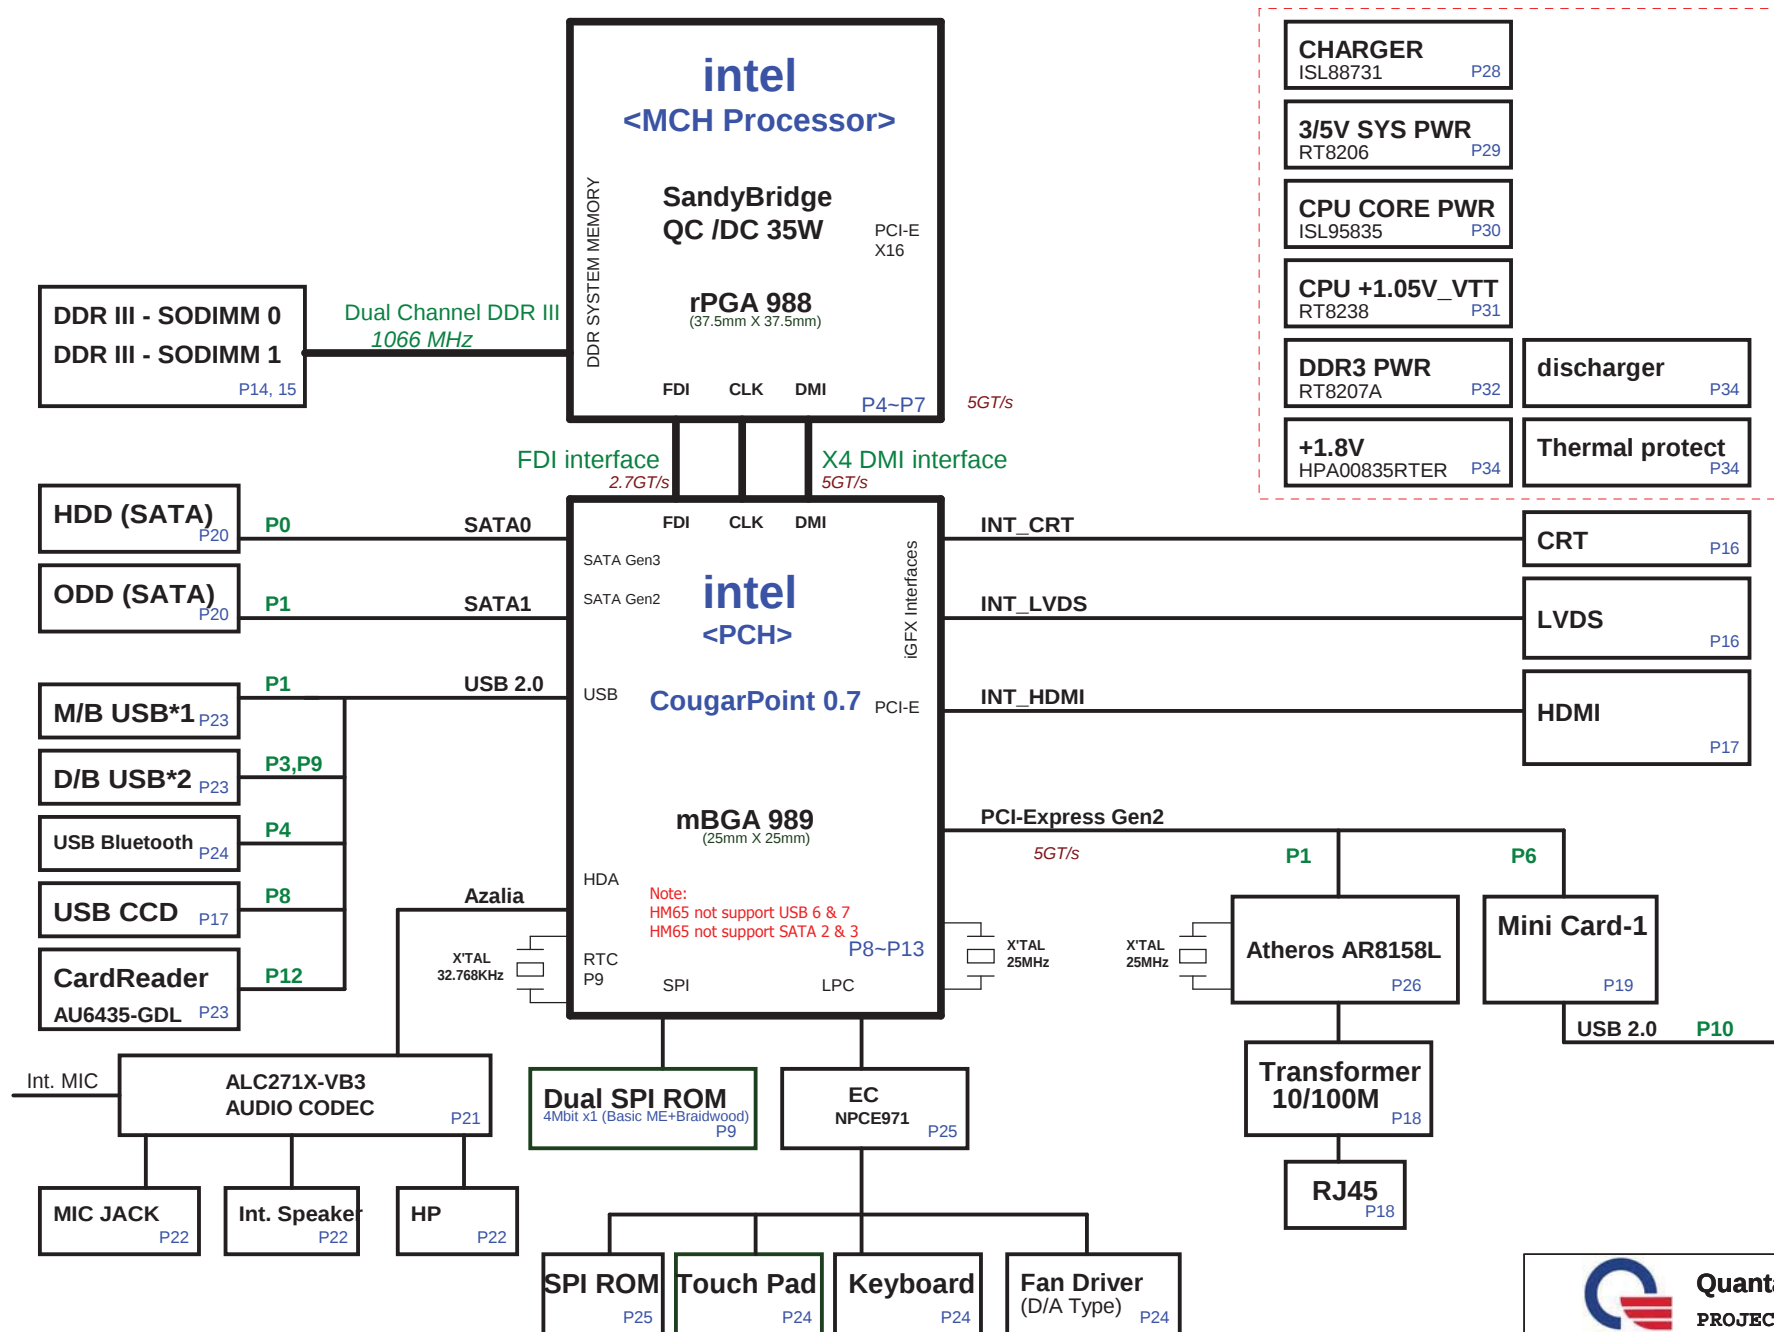

Power States


POWER PLANE	VOLTAGE	DESCRIPTION	CONTROL SIGNAL	ACTIVE IN
VIN	+10V--+19V	MAIN POWER	ALWAYS	ALWAYS
+VCCRTC	+3V--+3.3V	RTC POWER	ALWAYS	ALWAYS
+3VPCU	+3.3V	EC POWER	ALWAYS	ALWAYS
+5VPCU	+5V	CHARGE POWER	ALWAYS	ALWAYS
+15V	+15V	CHARGE PUMP POWER	ALWAYS	ALWAYS
+3V_S5	+3.3V	LAN/BT/CIR POWER	S5_ON	S0-S5
+5V_S5	+5V	USB POWER	S5_ON	S0-S5
+5V	+5V	HDD/ODD/Codec/TP/CRT/HDMI POWER	MAINON	S0
+3V	+3.3V	PCH/GPU/Peripheral component POWER	MAINON	S0
+1.5VSUS	+1.5V	CPU/SODIMM CORE POWER	SUSON	S0-S3
+0.75V_DDR_VTT	+0.75V	SODIMM Termination POWER	MAINON	S0
+VGFX_AXG	variation	Internal GPU POWER	GFX_ON	S0
+1.8V	+1.8V	CPU/PCH/Braidwood POWER	MAINON	S0
+1.5V	+1.5V	MINI CARD/NEW CARD POWER	MAINON	S0
+1.1V_VTT	+1.05V or +1.1V	CPU VTT POWER	MAINON	S0
+1.05V	+1.05V	PCH CORE POWER	MAINON	S0
+VCC_CORE	variation	CPU CORE POWER	VRON	S0
LCDVCC	+3.3V	LCD POWER	LVDS_VDDEN	S0
+5V_GPU	+5V	SWITCHABLE PWM IC POWER	dGPU_PWR_EN#	Discrete enable
+GPU_CORE	+0.9V--+1.1V	GPU CORE POWER	+3V_D	Discrete enable
+GPU_IO	+0.9V--+1.1V	GPU I/O POWER	PG_GPUIO_EN	Discrete enable
+1.5V_GPU	+1.5V	VRAM CORE POWER	PG_1.5V_EN	Discrete enable
+1.8V_GPU	+1.8V	GPU_CRE/LVDS/PLL POWER	+1.5V_GPU	Discrete enable
+1V	+1V	DP/PEG POWER	PG_1V_EN	Discrete enable

Thermal Follow Chart

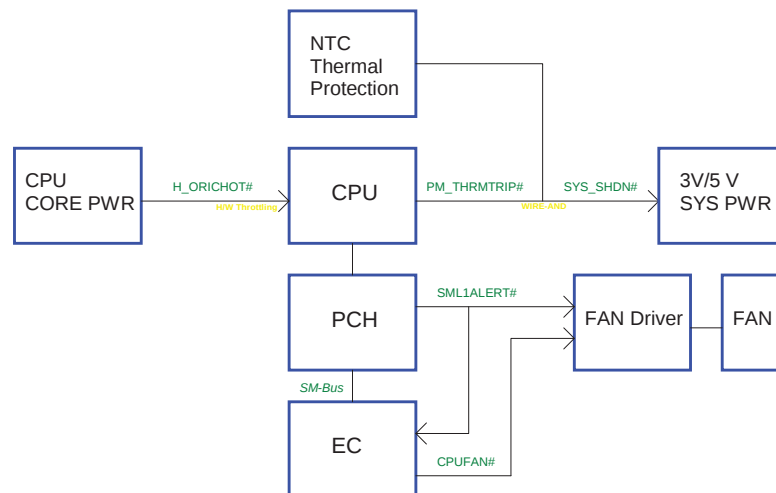




Sandy Bridge Processor (DMI,PEG,FDI)

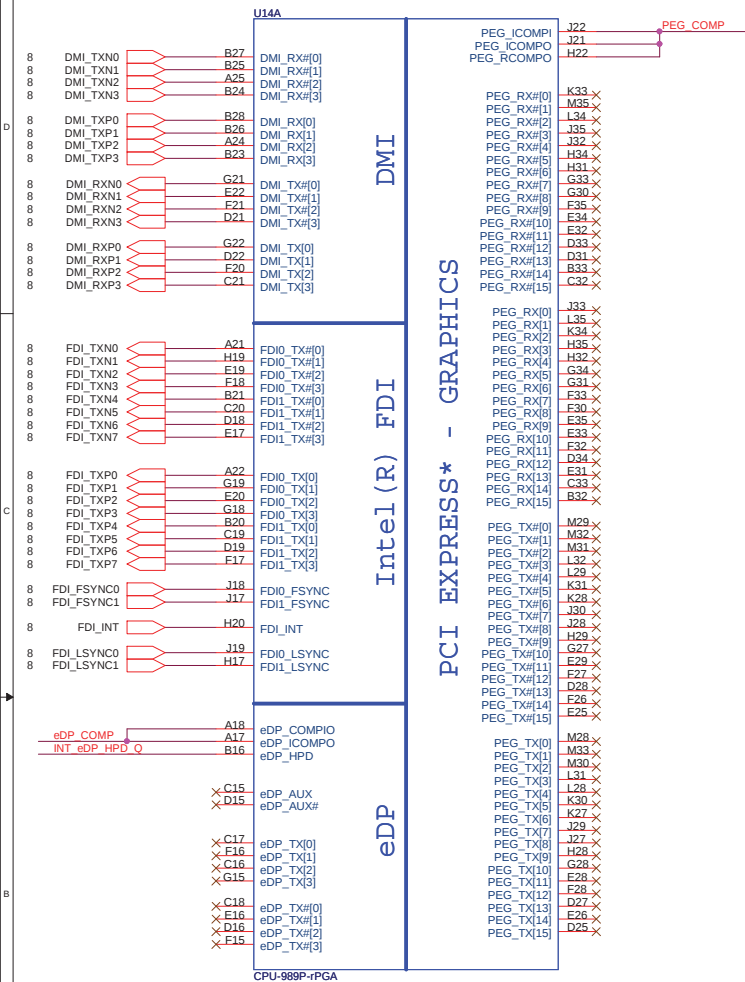


Sandy Bridge Processor (CLK,MISC,JTAG)



04

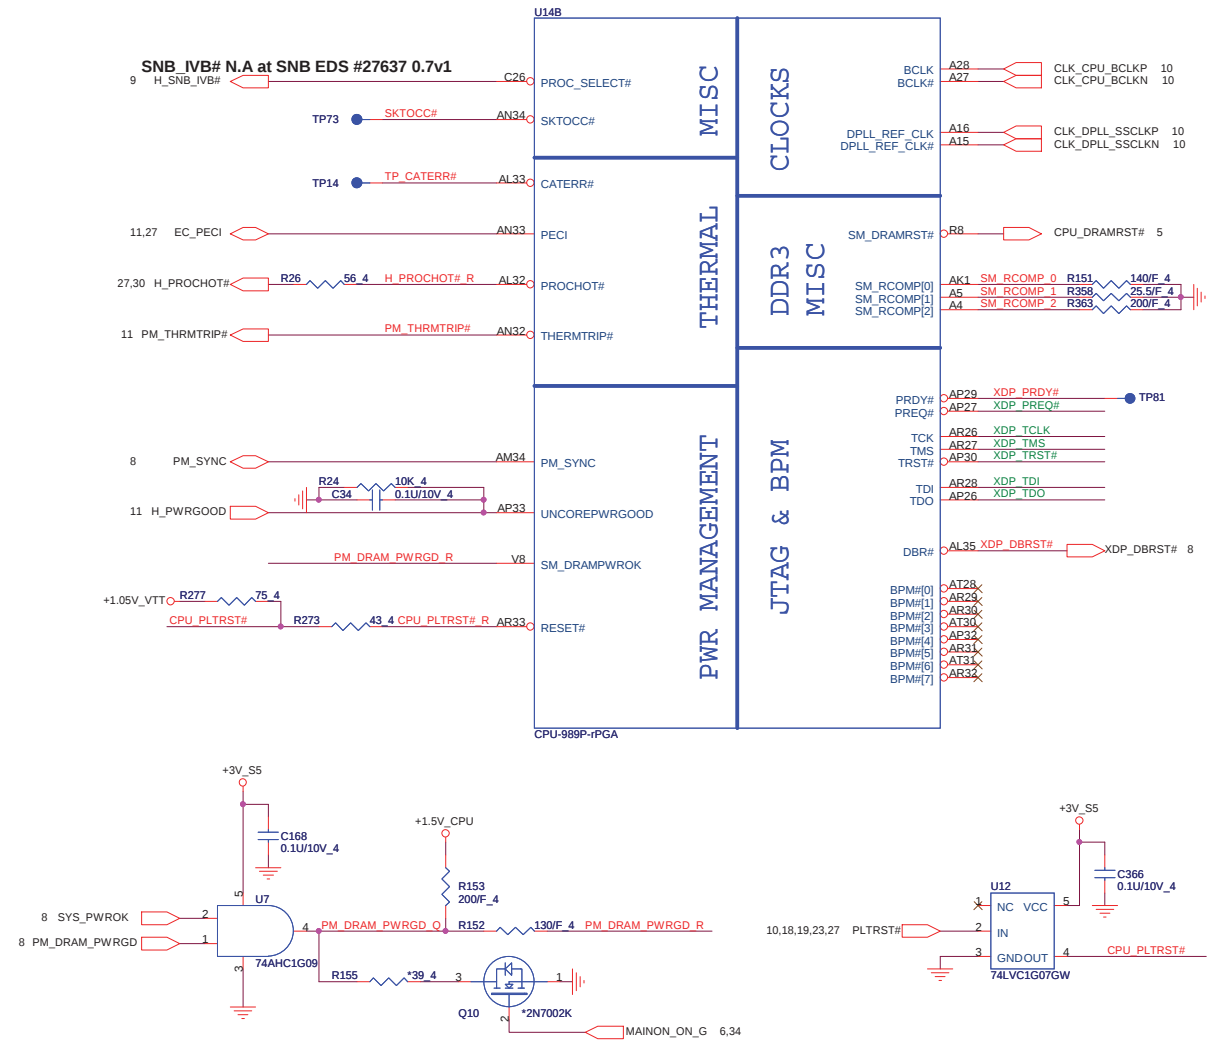

DP & PEG Compensation

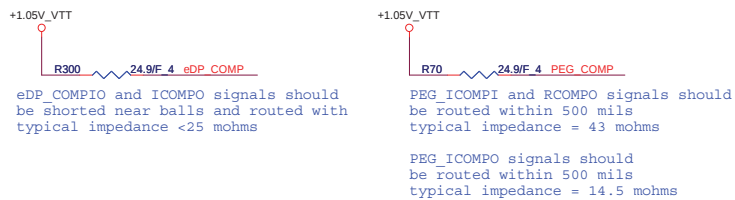

Processor pull-up(CPU)

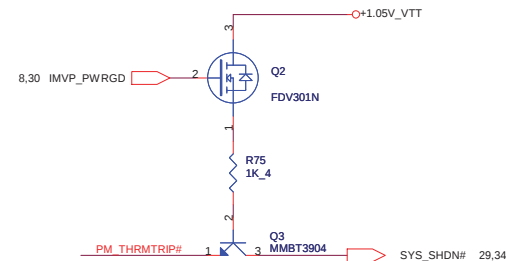

eDP Hot-plug

HPD disable

INT_eDP_HPDI_Q




Quanta Computer Inc.
PROJECT : ZQR

Size	Document Number	Rev
	Sandy Bridge 1/4	1A
Date: Monday, May 23, 2011	Sheet 4 of 35	

Sandy Bridge Processor (DDR3)

05

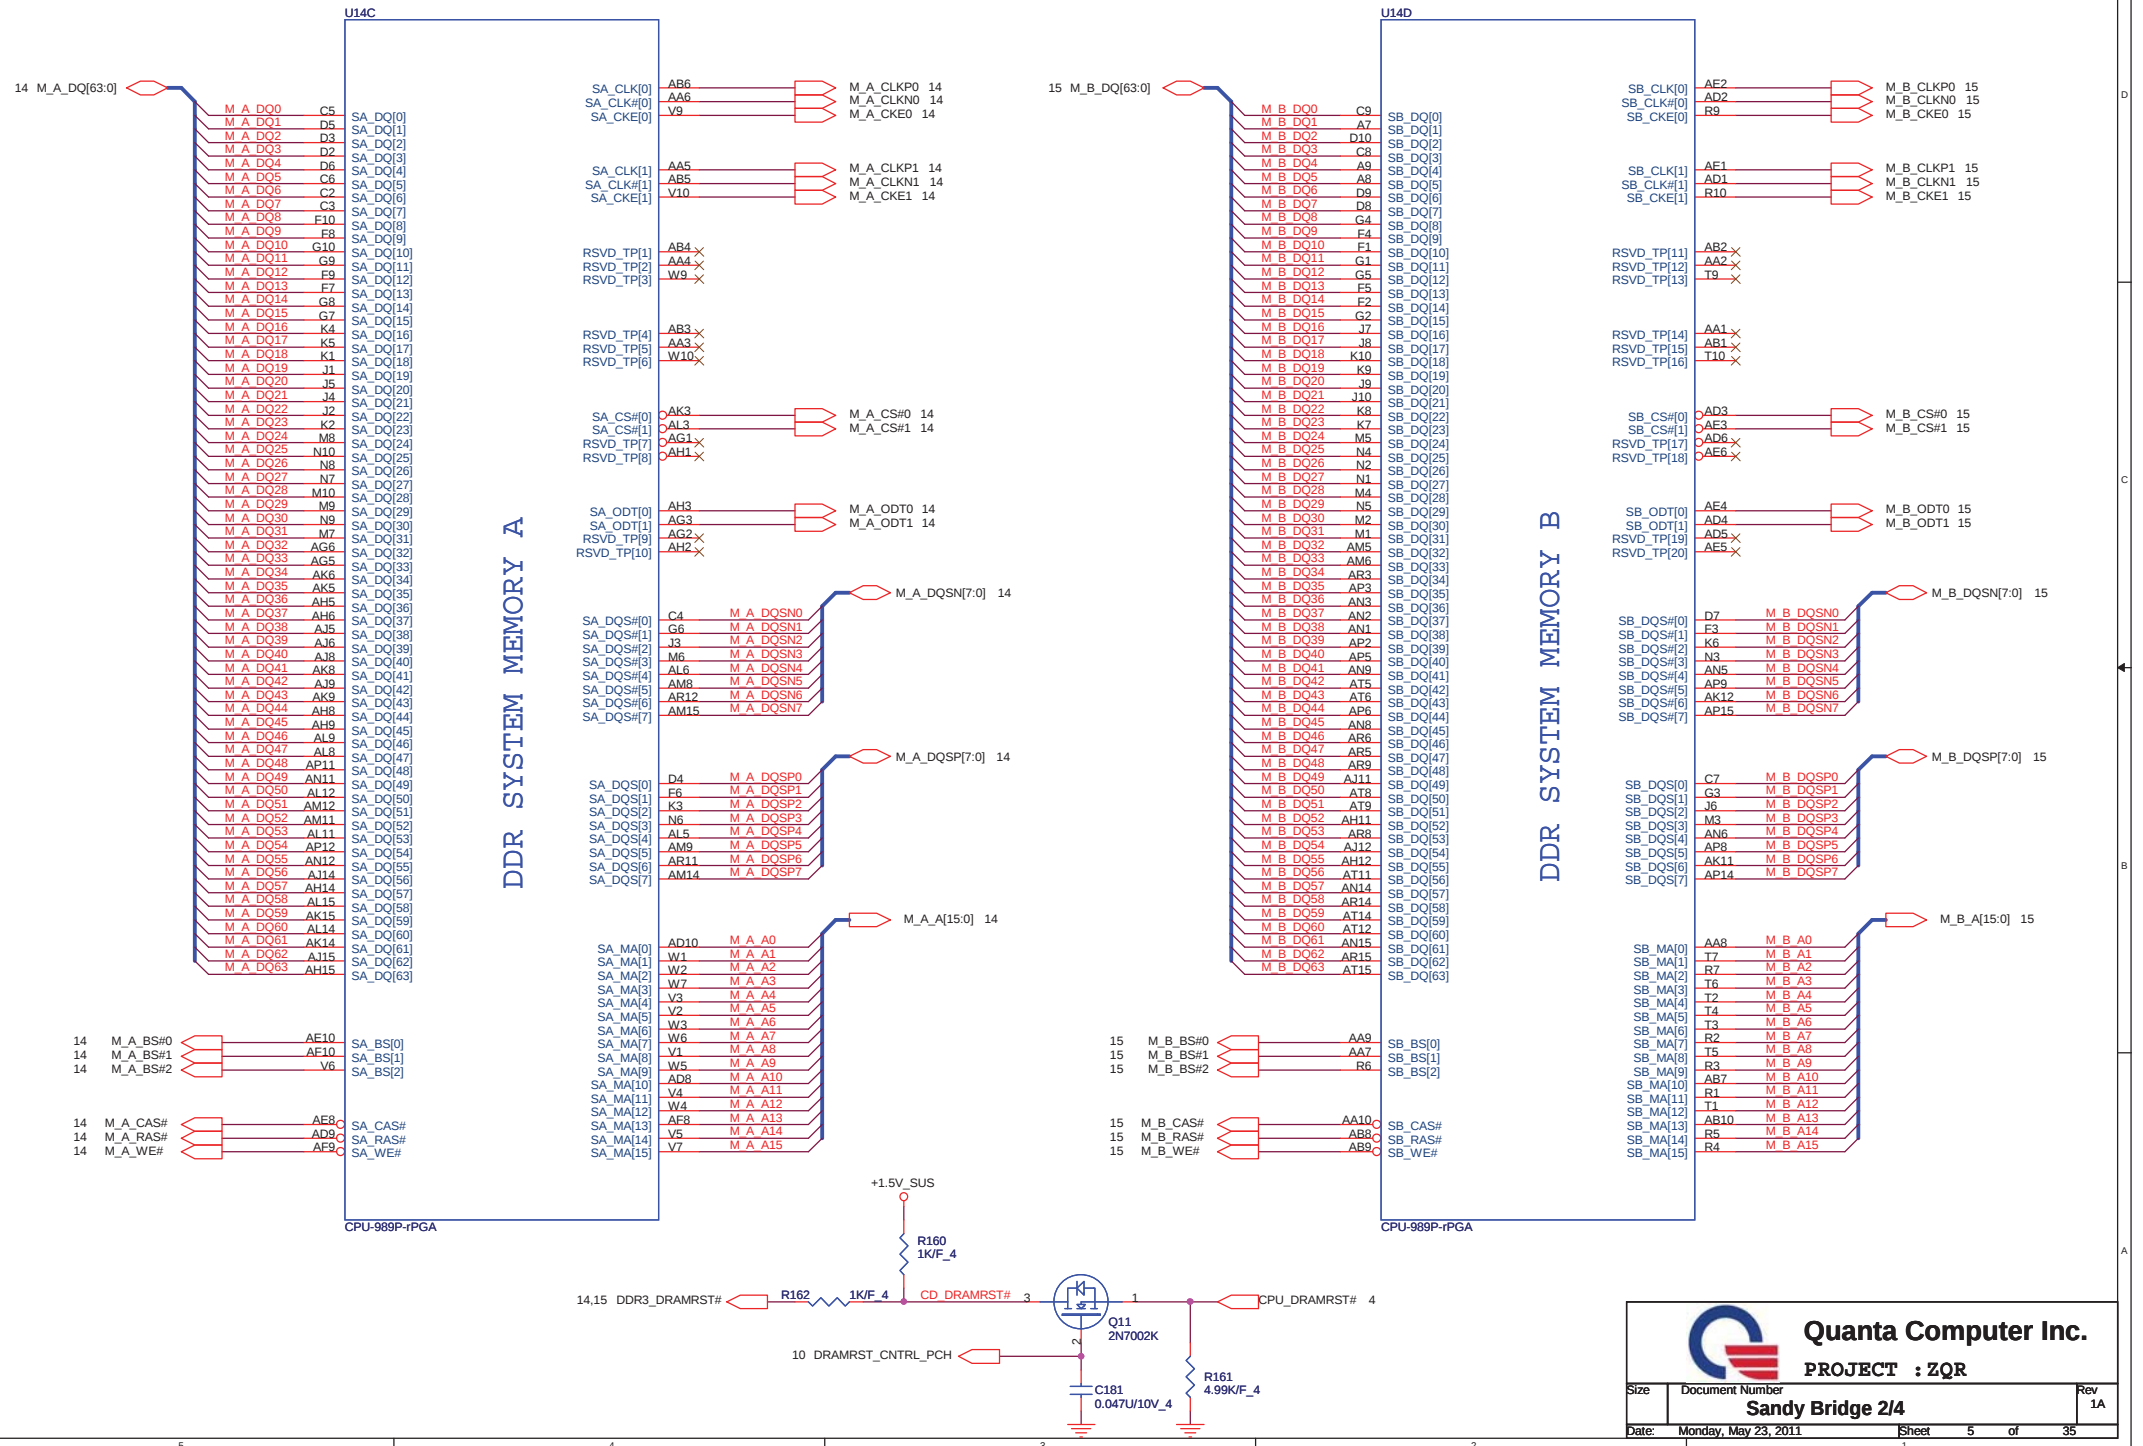


Quanta Computer Inc.

PROJECT : ZQR

Size	Document Number	Rev
	Sandy Bridge 214	1A
Date	Monday, May 23, 2011	Sheet 5 of 35

Sandy Bridge Processor (GND)

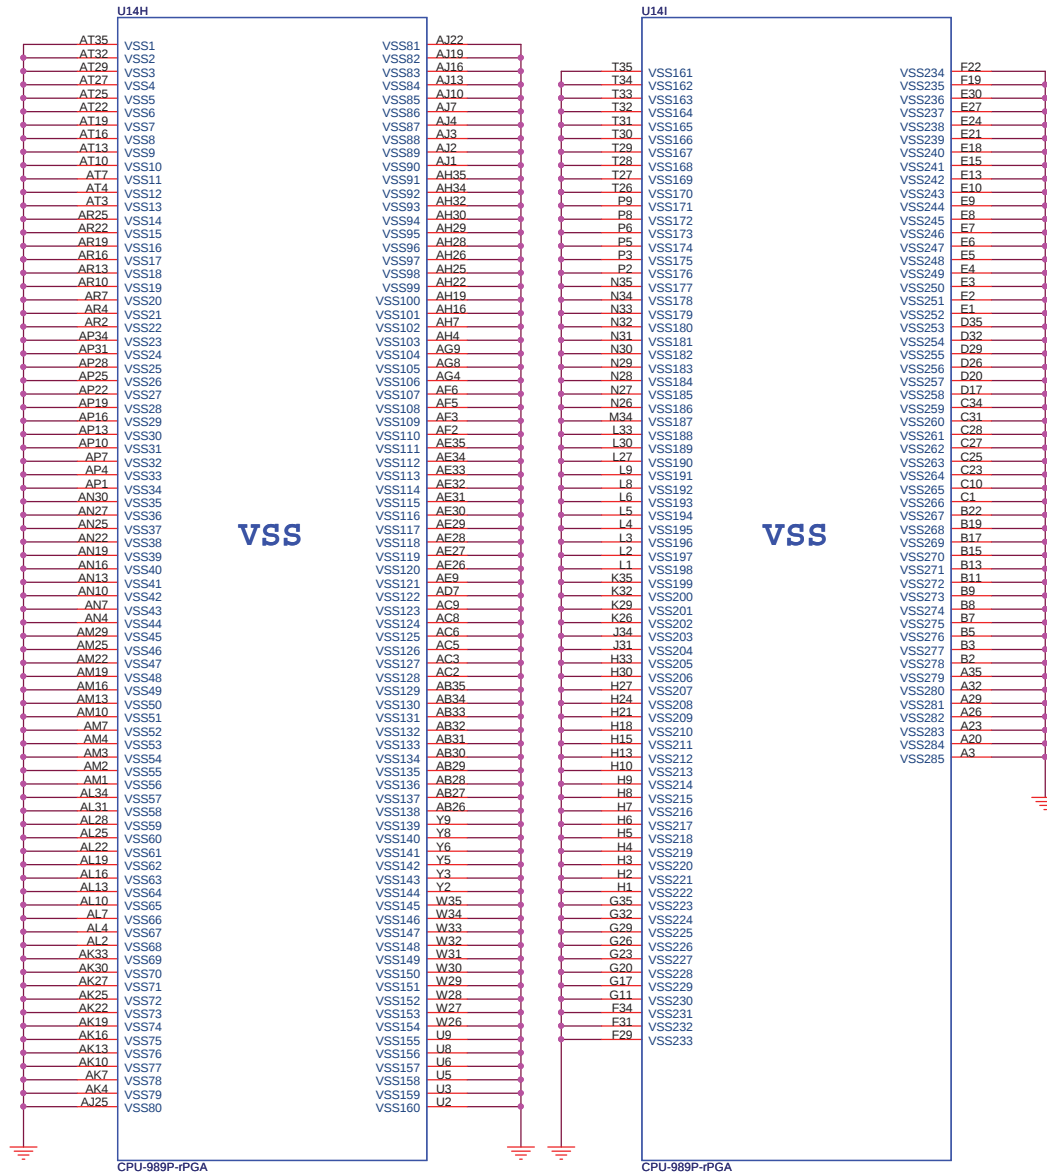

Sandy Bridge Processor (RESERVED, CFG)


07



Processor Strapping

The CFG signals have a default value of '1' if not terminated on the board.

	1	0
CFG2 (PEG Static Lane Reversal)	Normal Operation	Lane Reversed
CFG4 (DP Presence Strap)	Disable; No physical DP attached to eDP	Enable; An ext DP device is connected to eDP
CFG7 (PEG Defer Training)	PEG train immediately following xxRESETB de assertion	PEG wait for BIOS training



CFG[6:5] (PCIe Port Bifurcation Straps)

11: (Default) x16 - Device 1 functions 1 and 2 disabled
10: x8, x8 - Device 1 function 1 enabled ; function 2 disabled
01: Reserved - (Device 1 function 1 disabled ; function 2 enabled)
00: x8,x4,x4 - Device 1 functions 1 and 2 enabled




Quanta Computer Inc.


PROJECT : ZQR

Size	Document Number	Rev
	Sandy Bridge 4/4	1A
Date:	Monday, May 09, 2011	Sheet 7 of 35


RTC Circuitry(RTC)

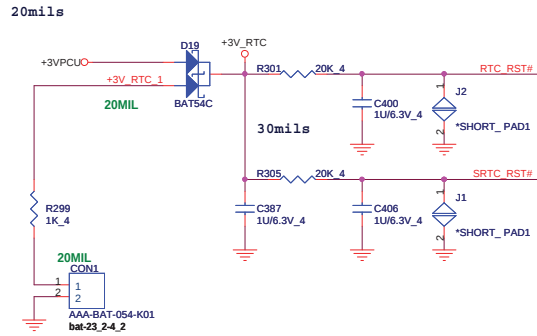


HDA Bus(CLG)

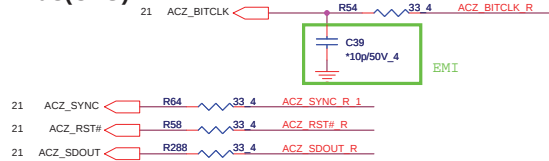

B41 Add a MOSFET Q26,R410,R412 to separate CODE SYNC and PCH Strap signal to avoid leakage issue. 5/19




PCH JTAG Debug (CLG)




PCH Dual SPI (CLG)


MX25L3205DM2I-12G: AKE39FP0Z00
W25X32VSSIG: AKE39ZP0N00

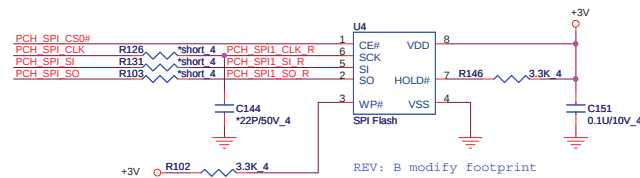

PCH2 (CLG)

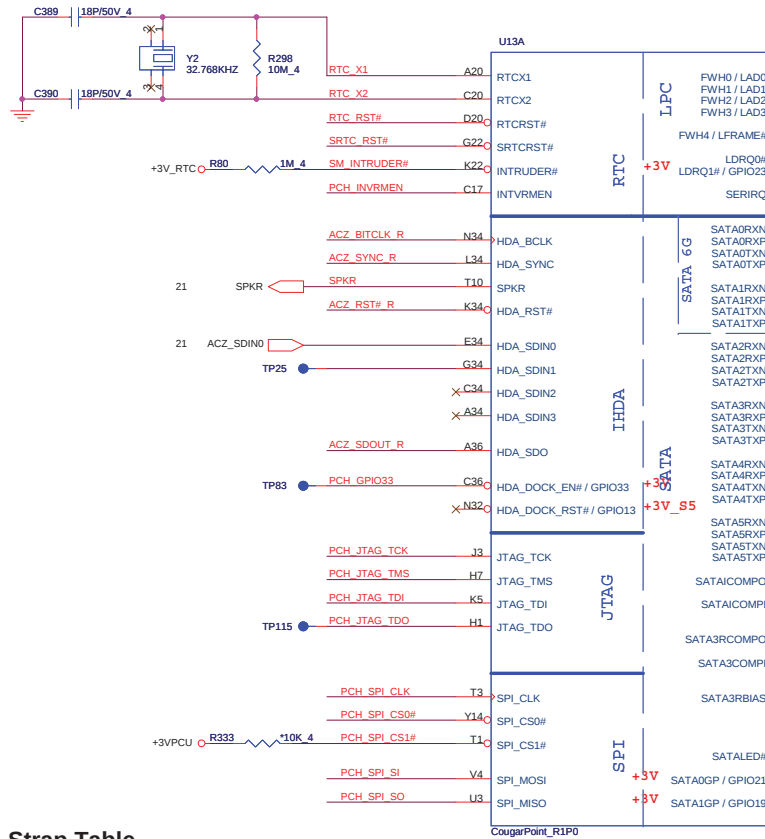

Cougar Point (HDA,JTAG,SATA)

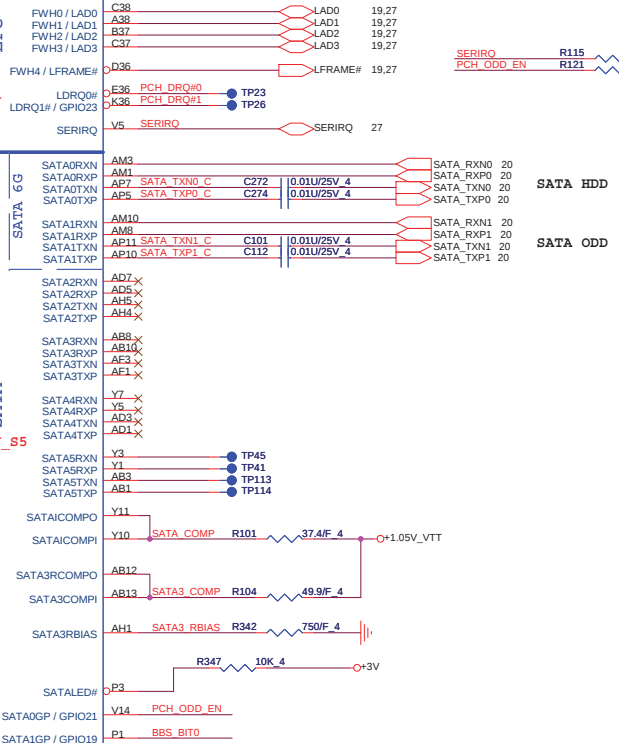


PCH Strap Table

Pin Name	Strap description	Sampled	Configuration										
SPKR	No reboot mode setting	PWROK	0 = Default (weak pull-down 20K) 1 = Setting to No-Reboot mode										
GNT3# / GPIO55	Top-Block Swap Override	PWROK	0 = "top-block swap" mode 1 = Default (weak pull-up 20K)										
INTVRMEN	Integrated 1.05V VRM enable	ALWAYS	Should be always pull-up										
GNT1# / GPIO51	Boot BIOS Selection 1 [bit-1]	PWROK	<table border="1"><thead><tr><th>GNT1#</th><th>GNT0#</th><th>Boot Location</th></tr></thead><tbody><tr><td>1</td><td>1</td><td>SPI *</td></tr><tr><td>0</td><td>0</td><td>LPC</td></tr></tbody></table>	GNT1#	GNT0#	Boot Location	1	1	SPI *	0	0	LPC	
GNT1#	GNT0#	Boot Location											
1	1	SPI *											
0	0	LPC											
GPIO19	Boot BIOS Selection 0 [bit-0]	PWROK											
HDA_SDO	Flash Descriptor Security	RSMRST	0 = Override 1 = Default (weak pull-up 20K)										
DF_TVS	DMI/FDI Termination voltage	PWROK	0 = Set to Vss 1 = Set to Vcc (weak pull-down 20K)										
GPIO28	On-die PLL Voltage Regulator	RSMRST#	0 = Disable 1 = Enable (Default)										
HDA_SYNC	On-Die PLL VR Voltage Select	RSMRST	0 = Support by 1.8V (weak pull-down) 1 = Support by 1.5V										
GPIO8	Integrated Clock Chip Enable	RSMRST#	Should be pull-down (weak pull-up 20K)										
SPI_MOSI	iTPM function Disable	APWROK	0 = Default (weak pull-down 20K) 1 = Enable										
NV_ALE	Intel Anti-Theft HDD protection	PWROK	0 = Disable (Internal pull-down 20kohm)										


Default weak pull-up on GNT0/1#
[Need external pull-down for LPC BIOS]

Cougar Point-M (PCI-E,SMBUS,CLK)


Cougar Point-M (PCI,USB,NVRAM)

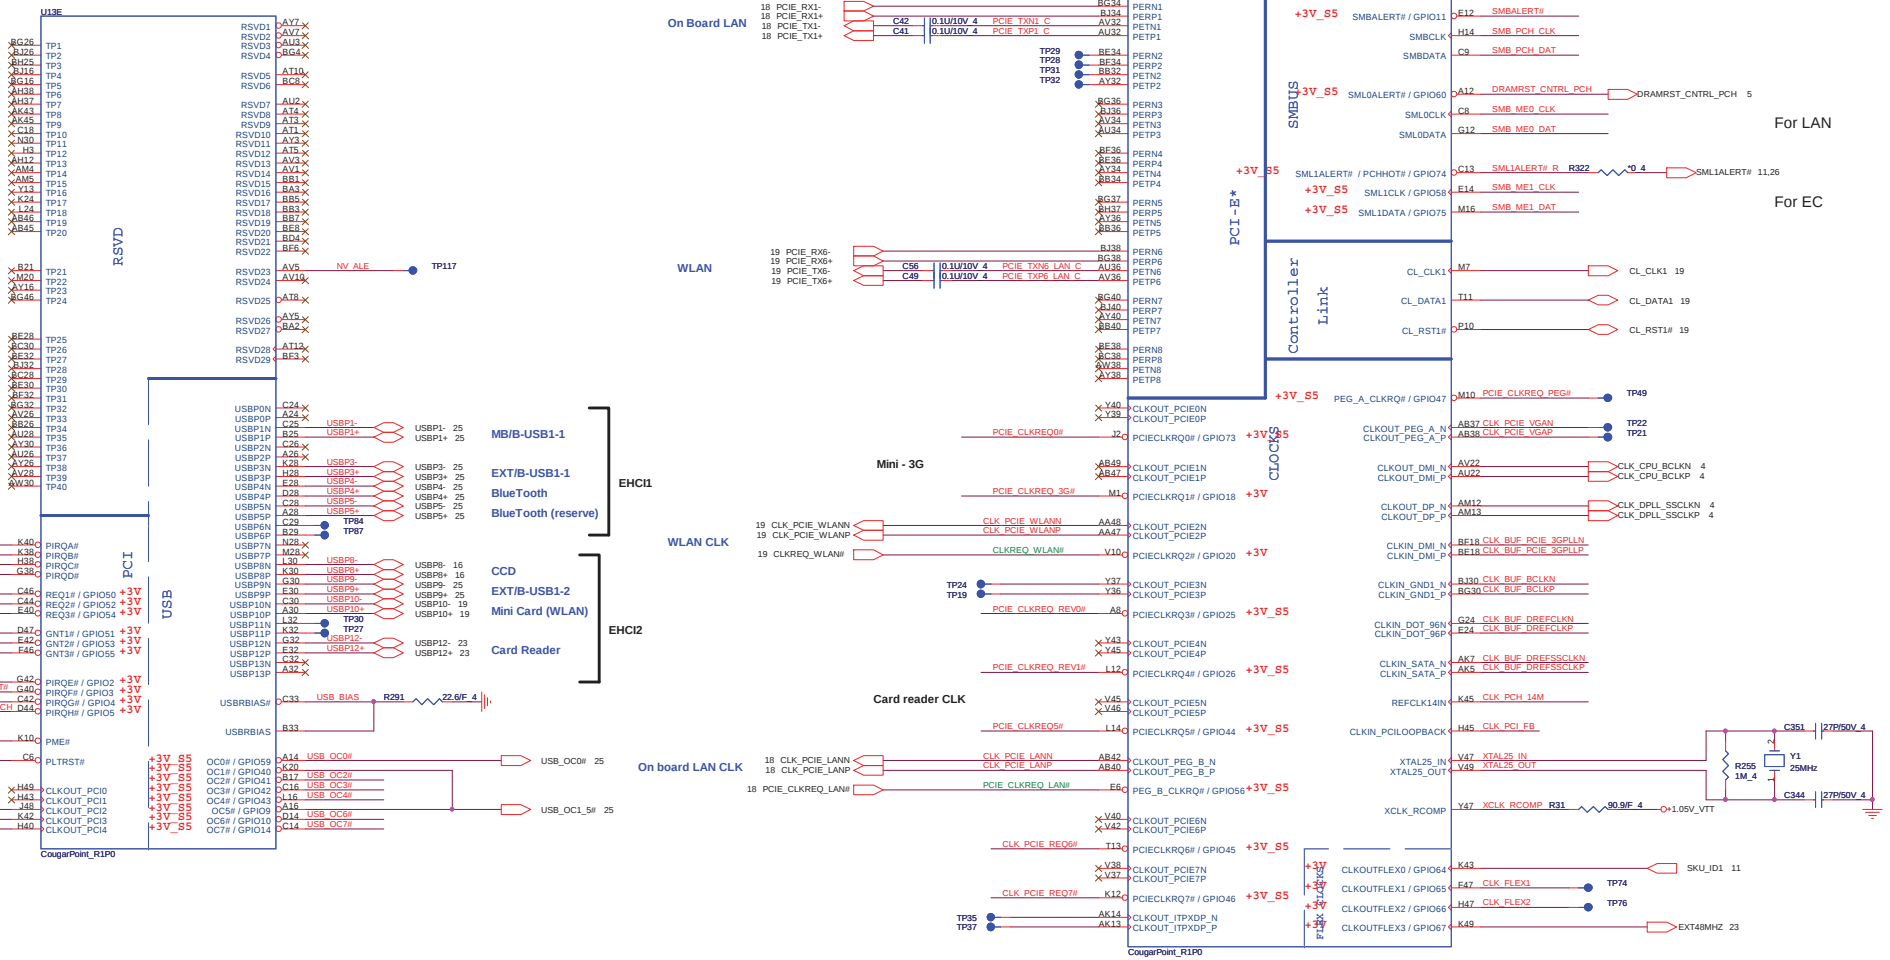


PLTRST#(CLG)

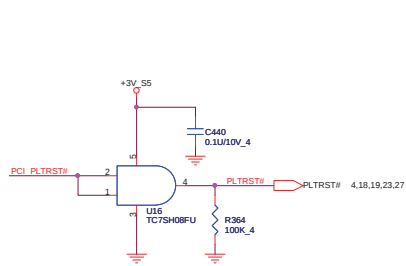


PCI/USBoc# Pull-up (CLG)

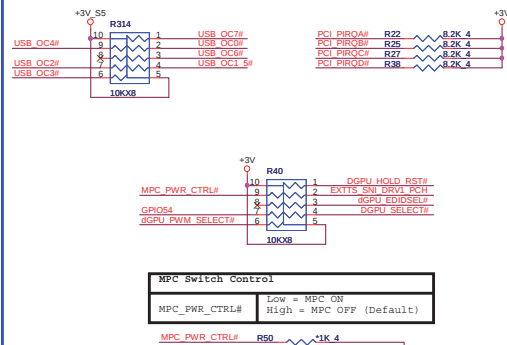


CLK_REQ/Strap Pin (CLG)

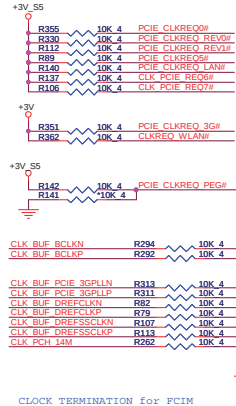

SMBus/Pull-up (CLG)

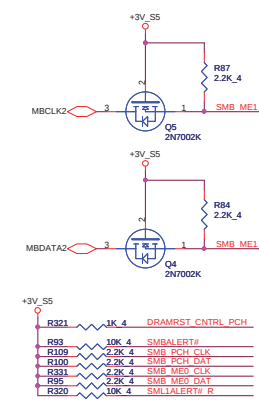

SMBus (PCH)

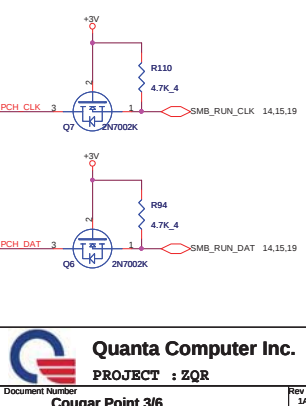


MPC Switch Control	
MPC_PWR_CTRL#	Low = MPC ON
MPC_PWR_CTRL#	High = MPC OFF (Default)


Cougar Point (GPIO,VSS_NCTF,RSVD)

11

check VR_ON GPIO


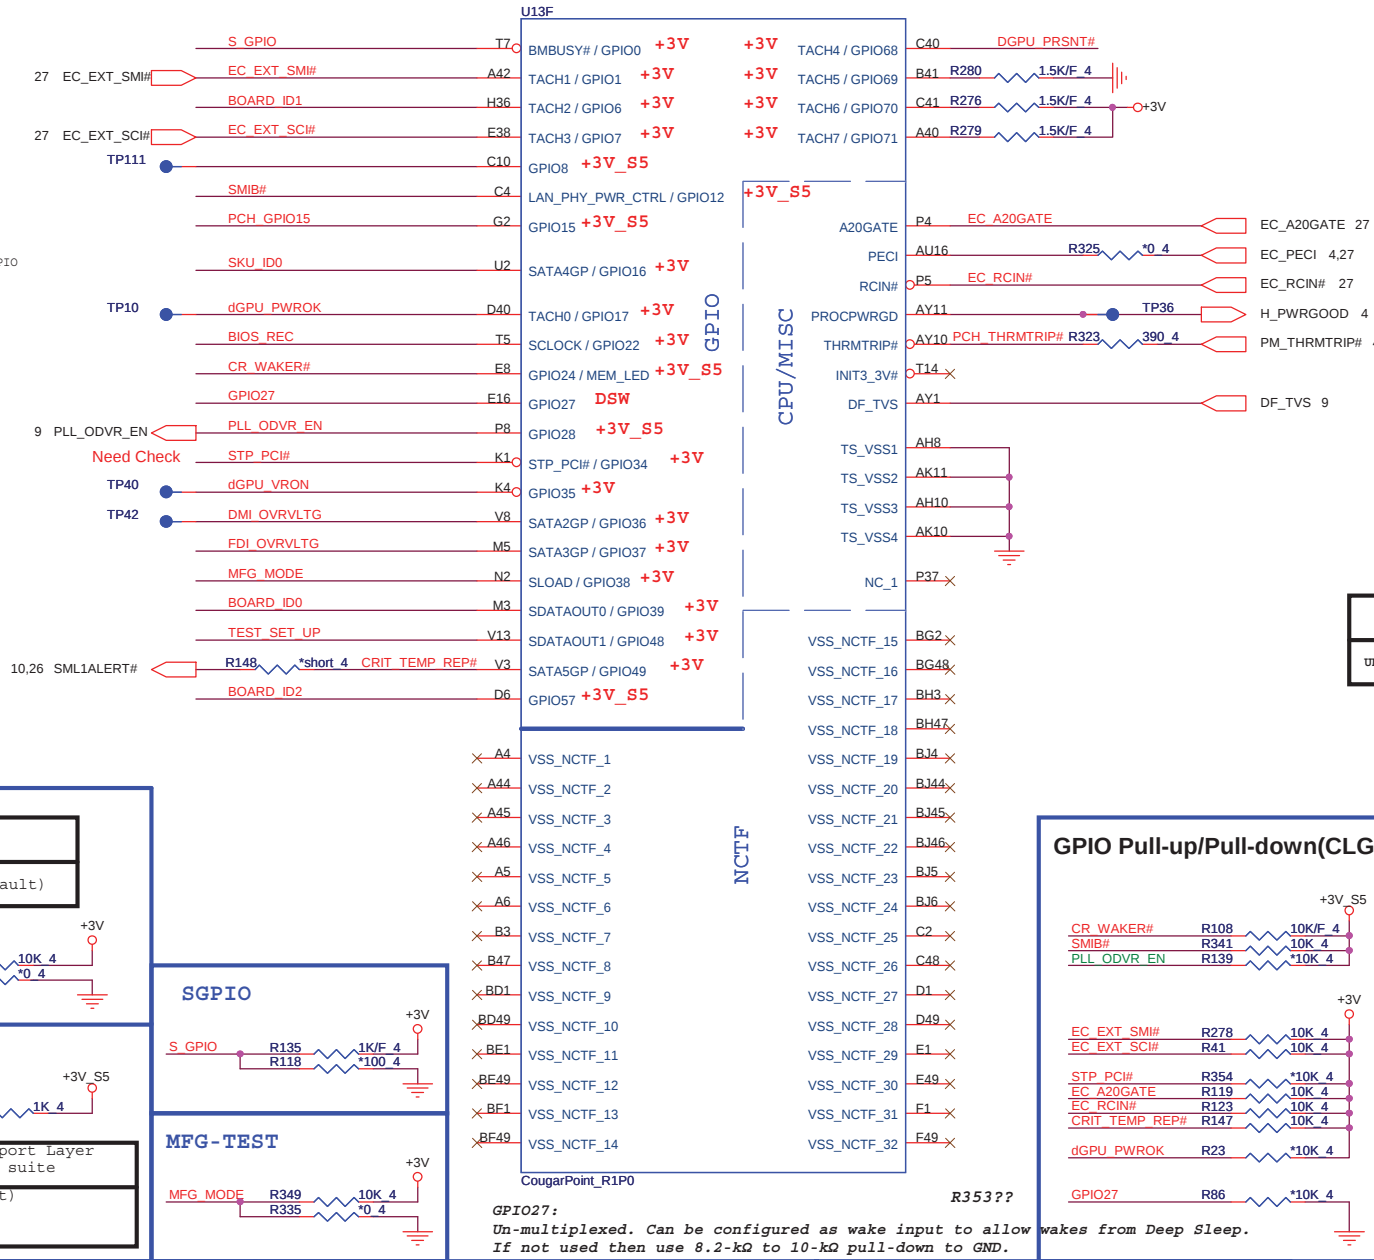


	DGPU_PRSENT# (GPIO68)	SKU_ID1 (GPIO64)	SKU_ID0 (GPIO16)	VGA H/W Signal	Setup Menu	
UMA Only	1	0	0	UMA	Hidden	UMA boot


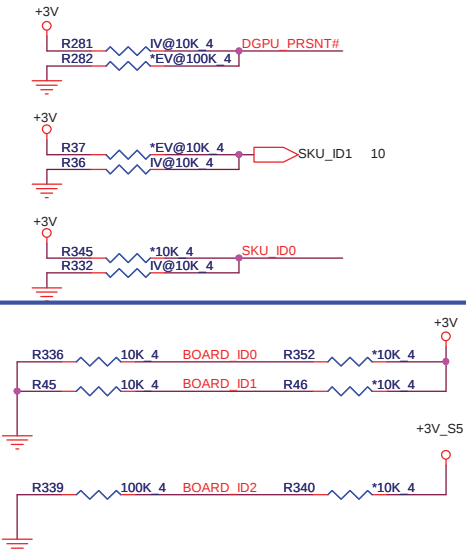


COUGAR POINT (POWER)


Cougar Point-M (POWER)

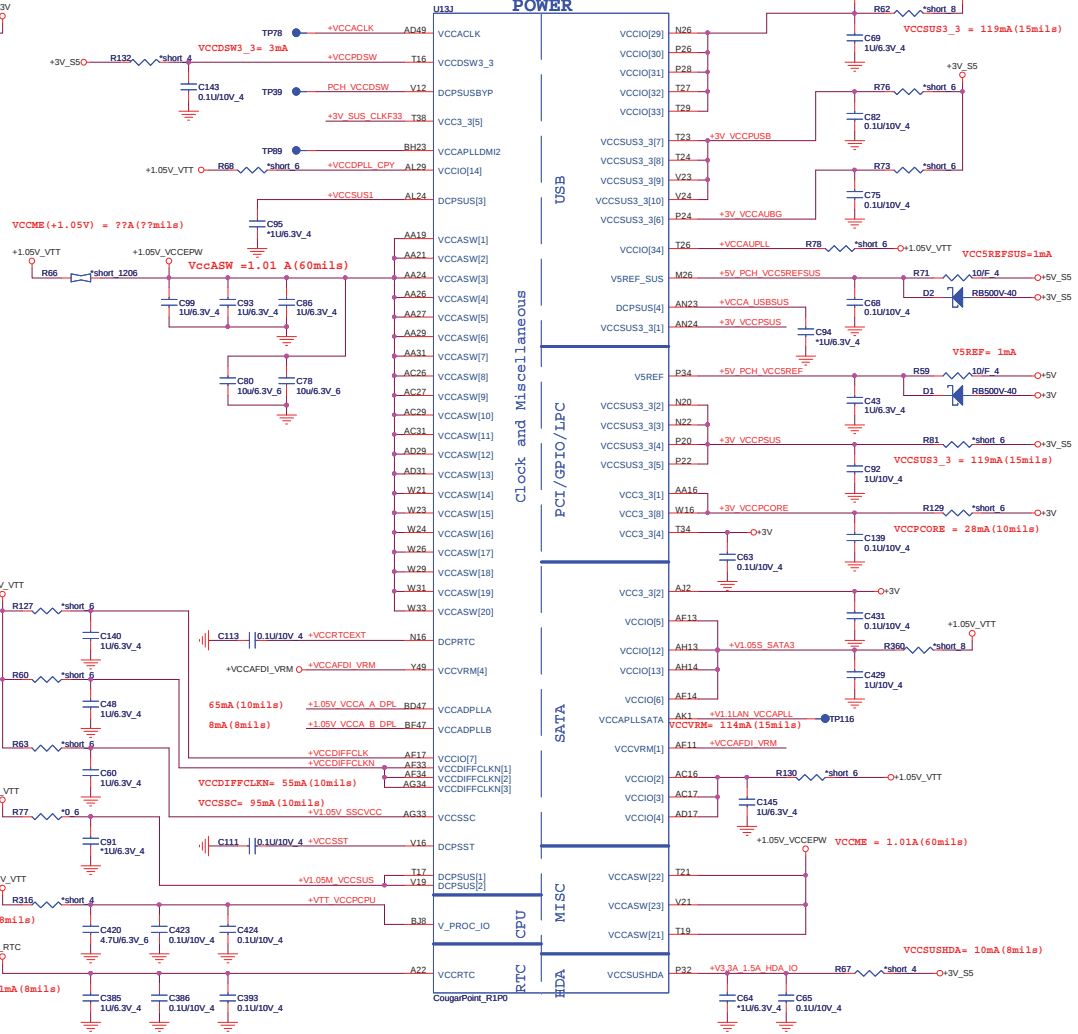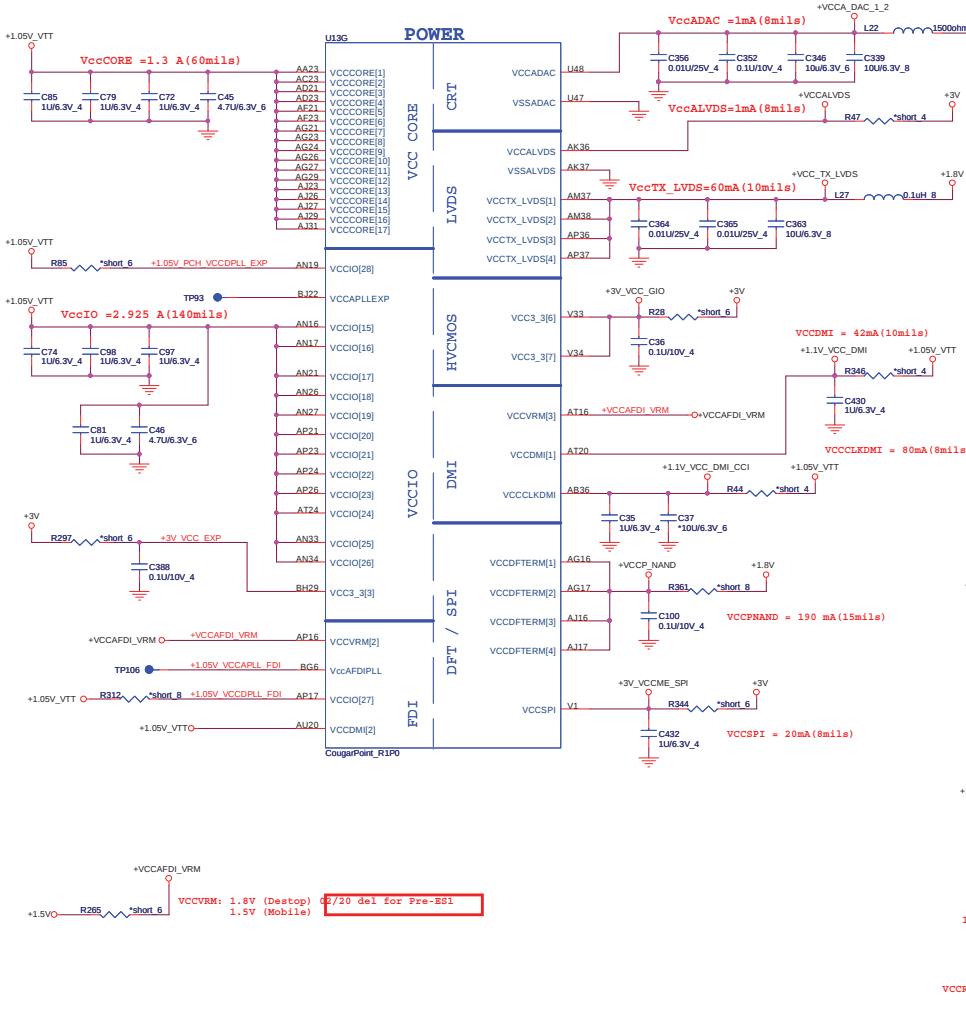



IBEX PEAK-M (GND)

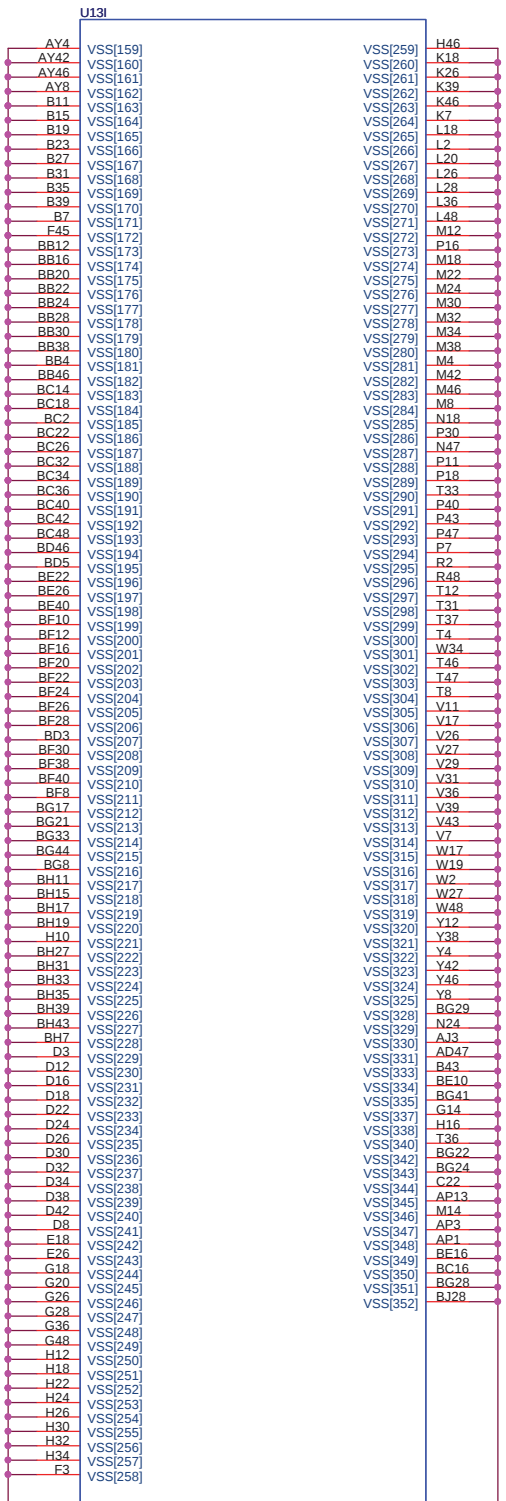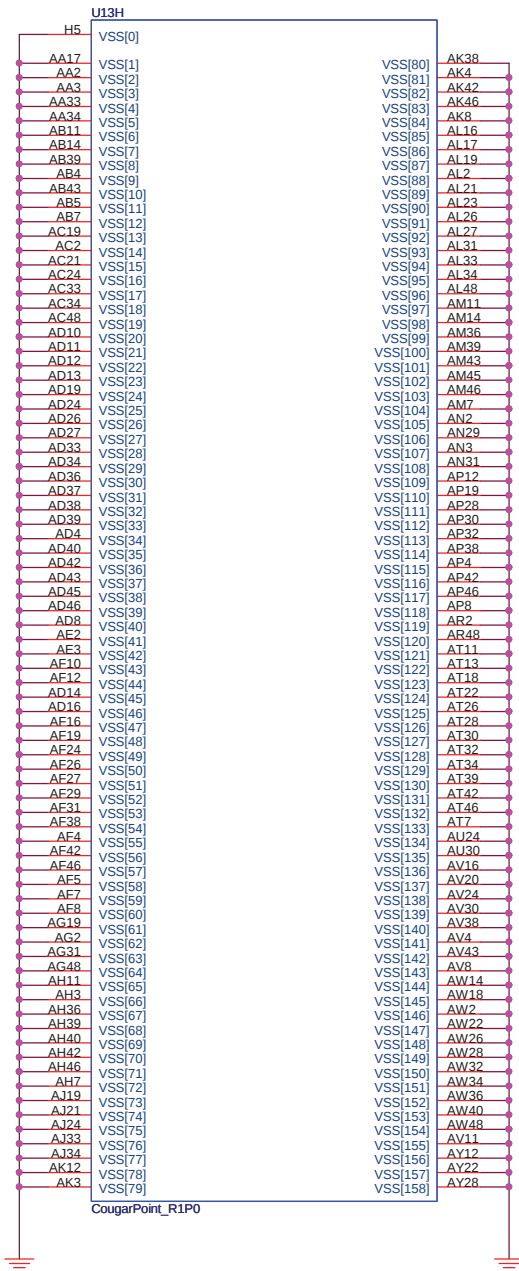


DDR RVS 4H

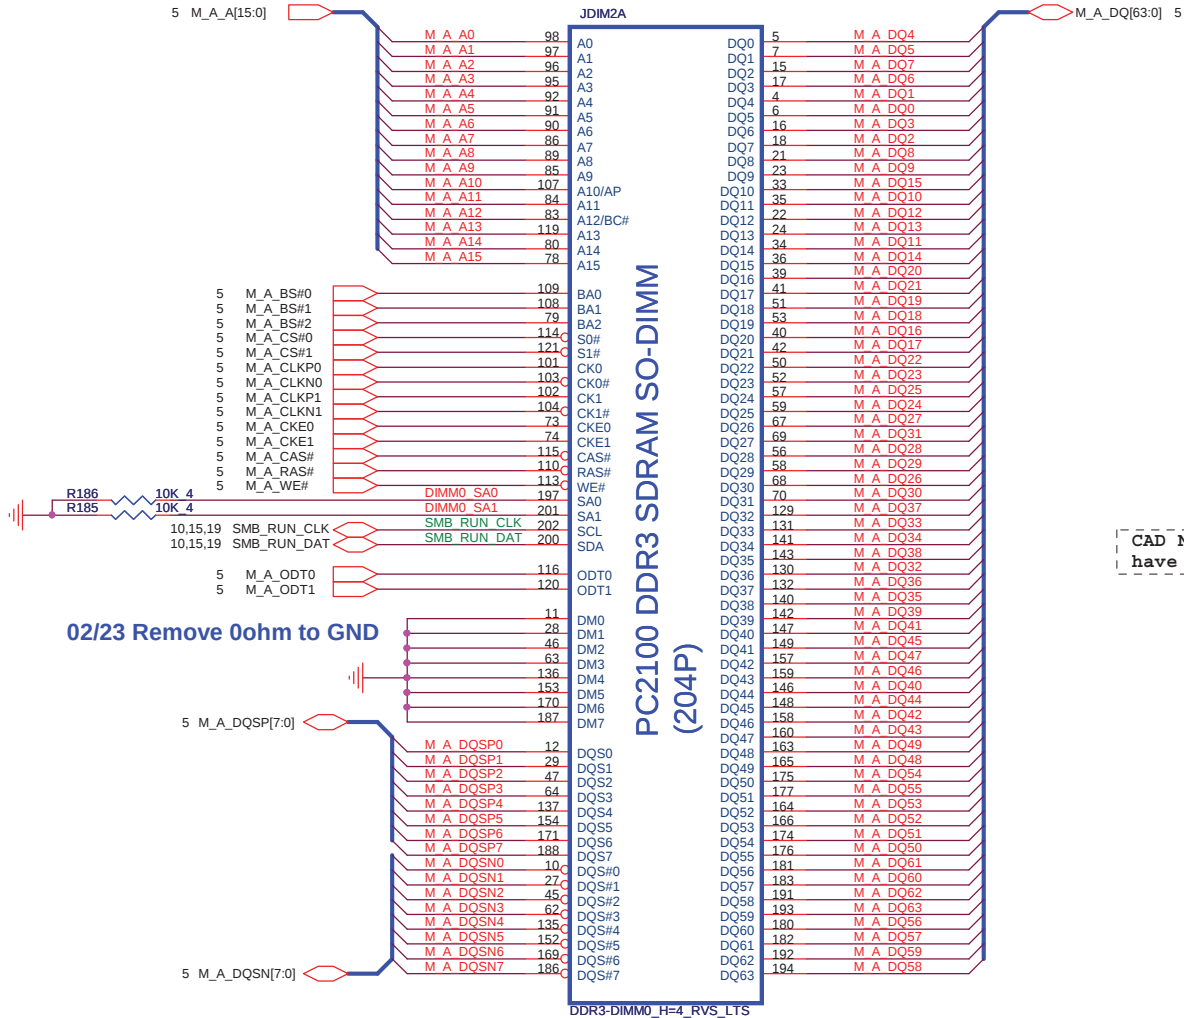

Place these Caps near So-Dimm0.

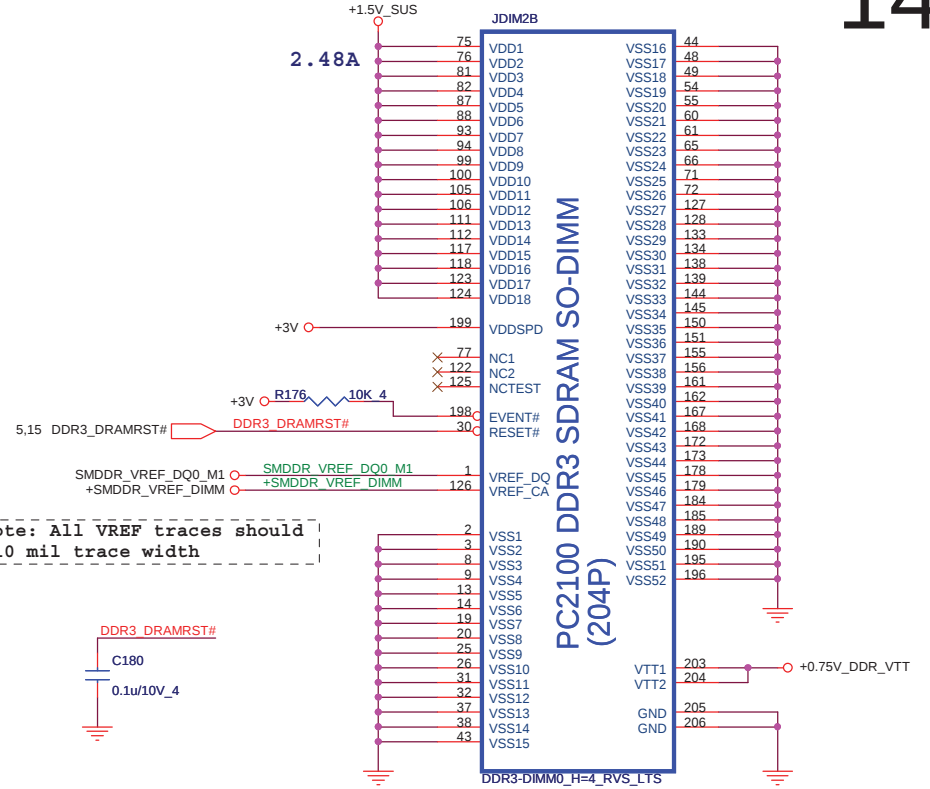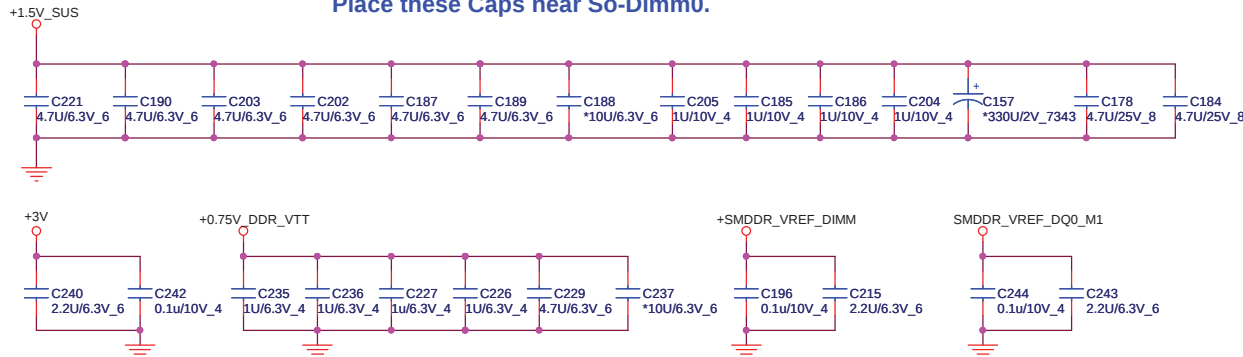


VREF DQ0 M1 Solution

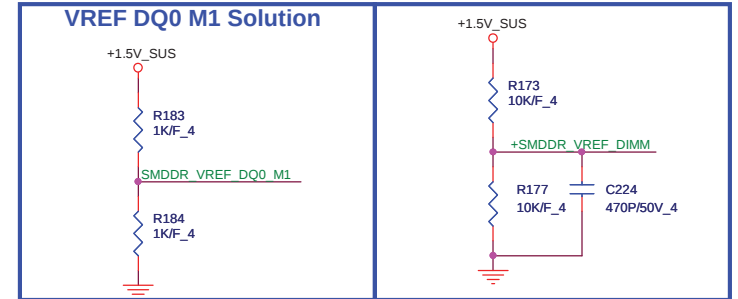


Quanta Computer Inc.

PROJECT : ZQR


DDR_RVS (DDR)

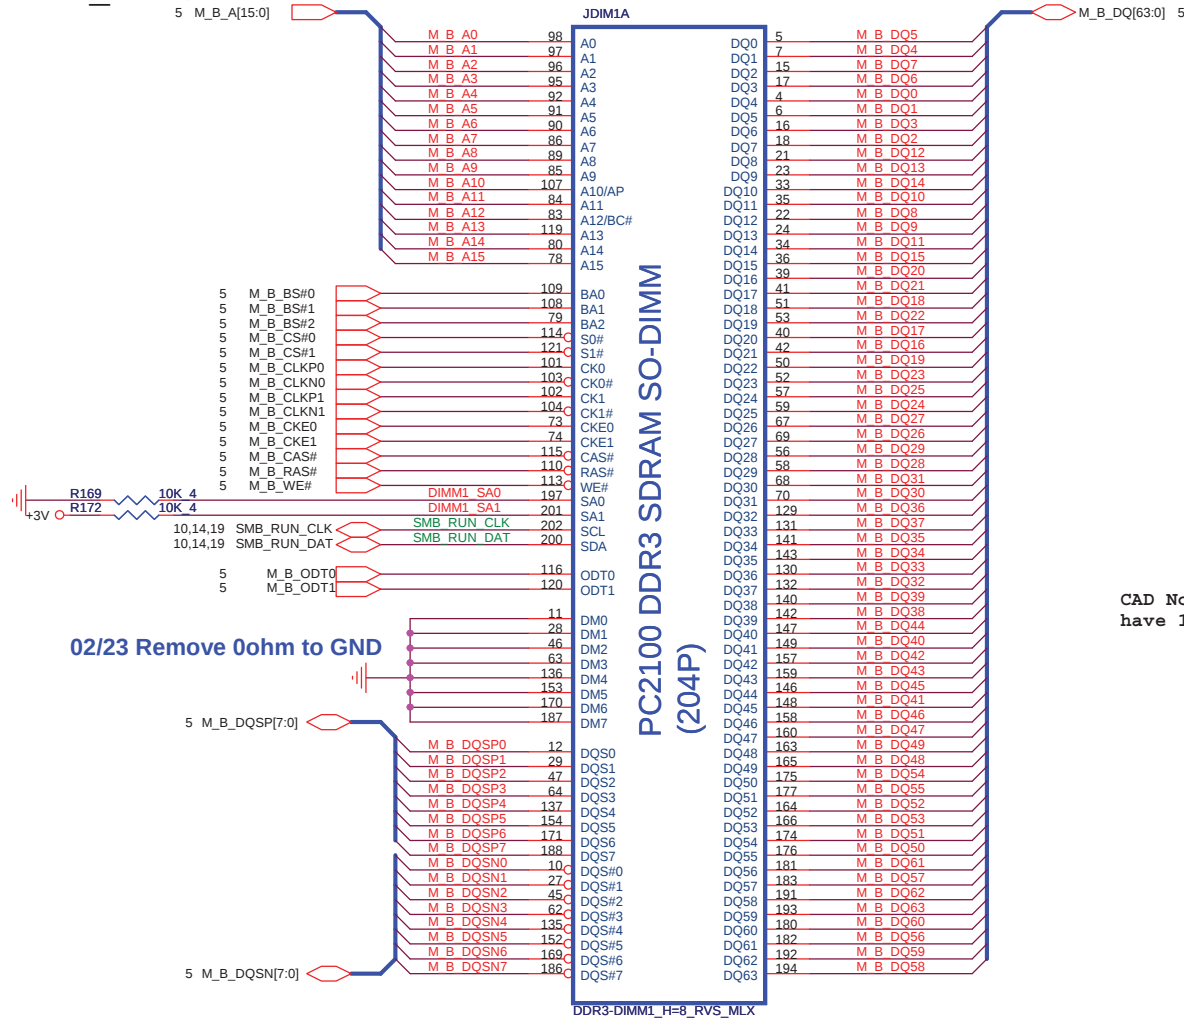

CAD Note: All VREF traces should have 10 mil trace width

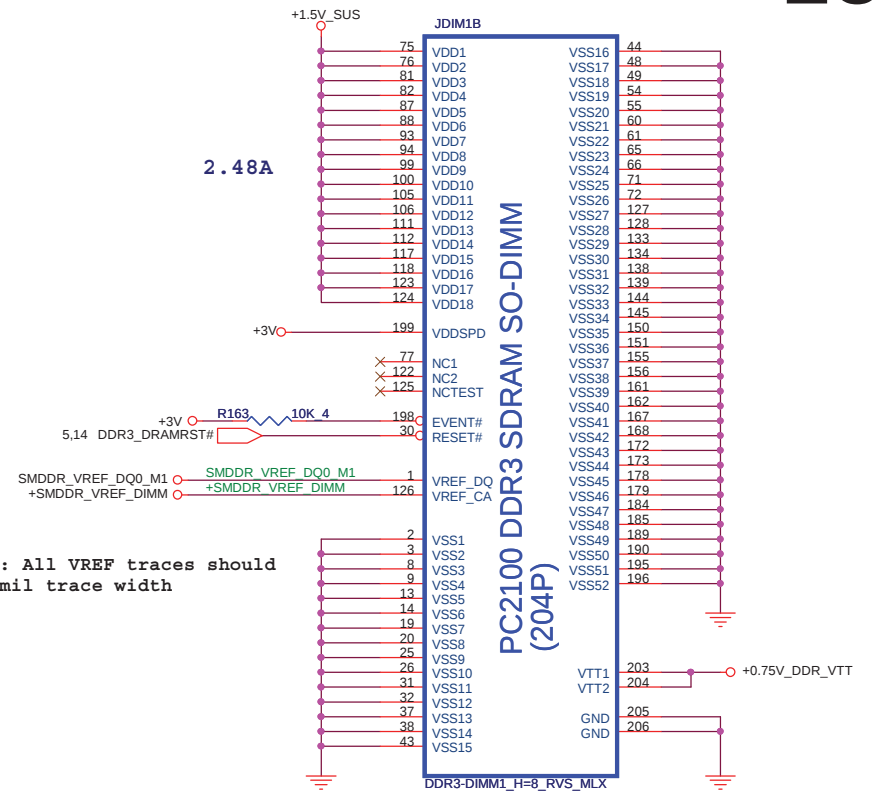


Place these Caps near So-Dimm1.

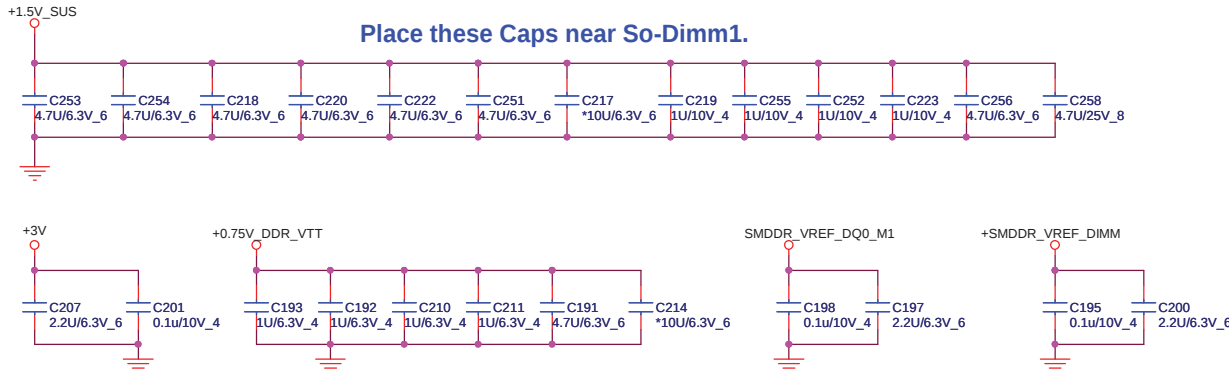


CRT Switch

0_ohm Resistor place close to Joint-Point




CRT

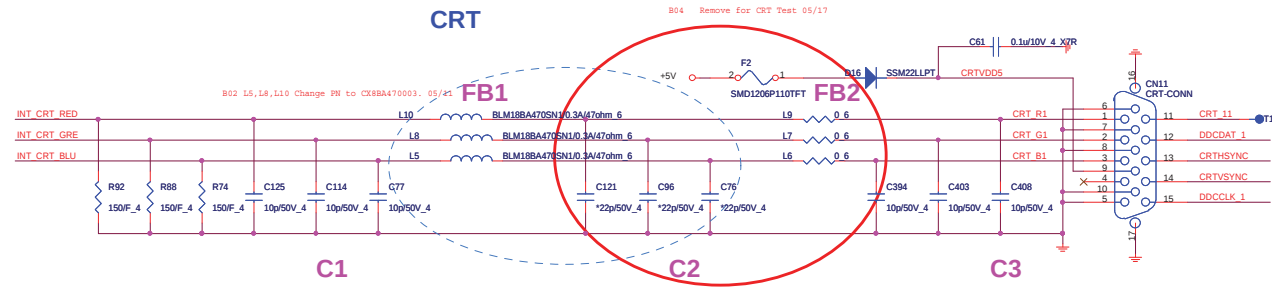

Note:this video filter is a 2-pole,low-pass filter configuration with a target design cutoff frequency of ~200MHZ




C1: 10pF ,C2 : 22pF , C3 :10pF,

FB1:47ohm@100MHZ , FB2:47ohm@100MHZ

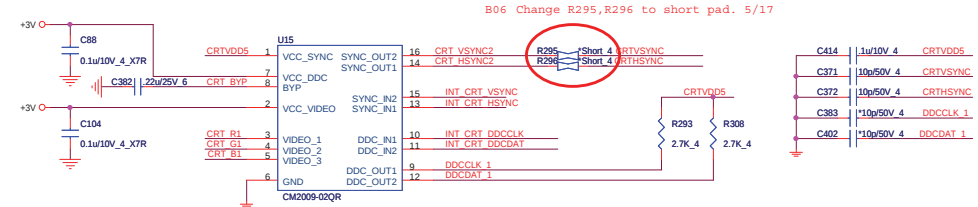


LVDS


0_ohm Resistor place close to Joint-Point

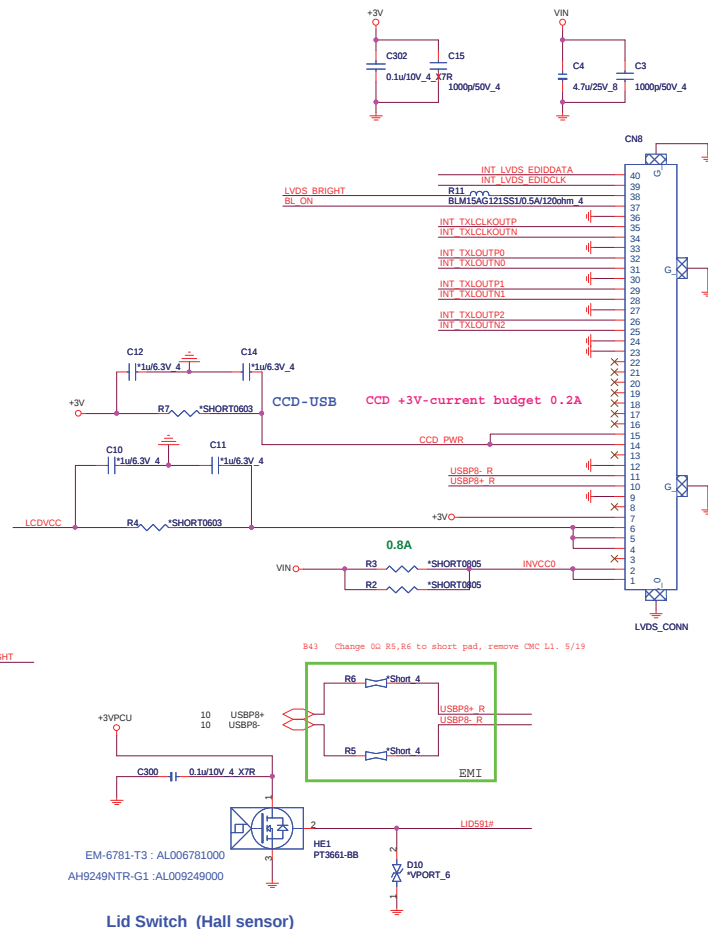


LCD Power

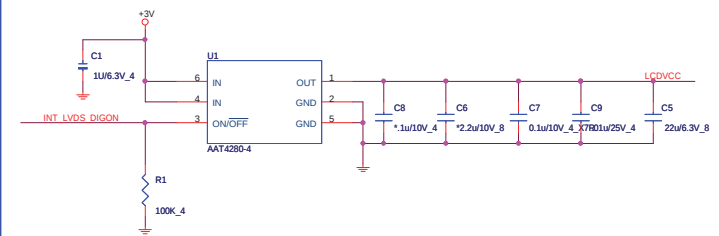

Backlight Control

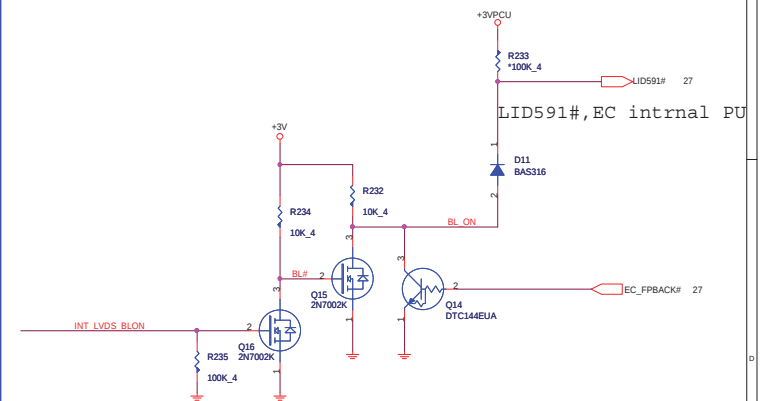

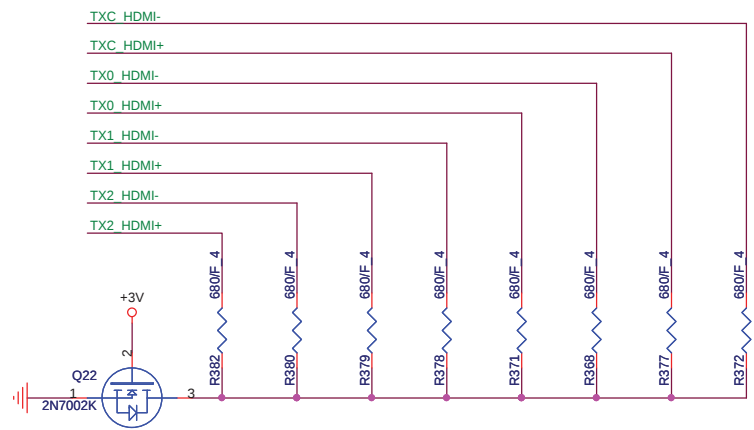


	EV@	IV@
SP@	500 ohm	680 ohm





PLACE PULL DOWN RESISTORS CLOSE TO DIFFERENTIAL PAIRS CONNECTED TO SOLID GROUND FLOOD WHICH IS CONTROLLED BY THE FET
AVOID STUBS TO ALL DIFFERENTIAL TRACES

INT-HDMI


PLACE AC CAP
CLOSE TO CONNECTOR

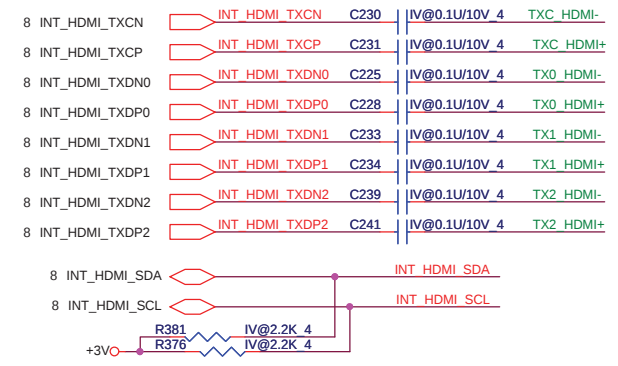


HDMI CONN

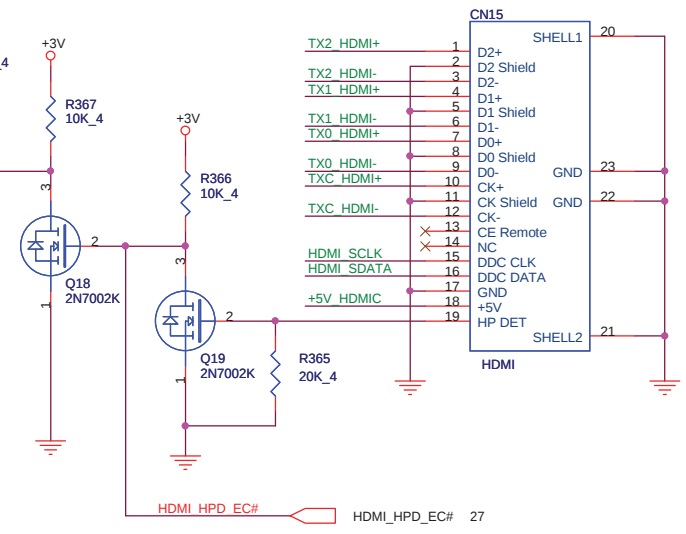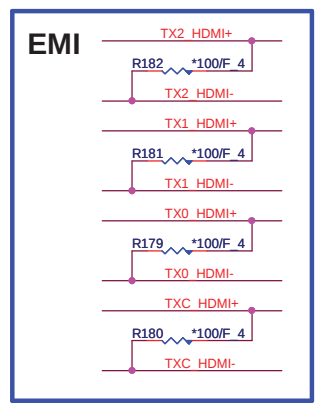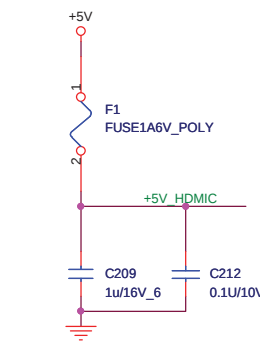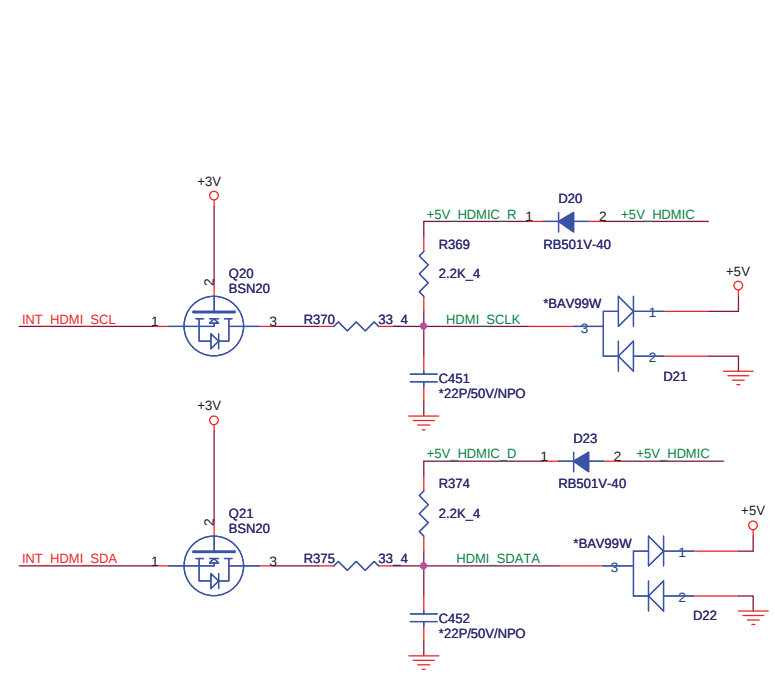


```
<BOM note>
If center tap power come from internal switch
regulator
=>Stuff 52SWR@ (Default)
If center tap power come from internal LDO
=>Stuff 52LDO@
```



B27 L11 change from 0 Ω to short pad. 5/18



Active LED Pin:
Non-overclocking=>active high

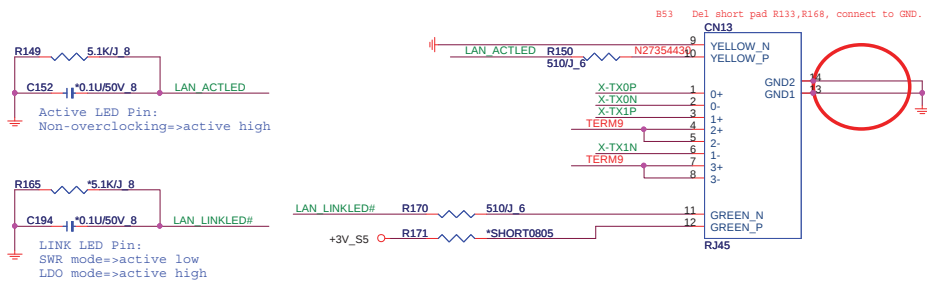




 Quanta Computer Inc. PROJECT : ZQR	
Size	Document Number LAN AR8158L
Date: Monday, May 23, 2011	Sheet 18 of 35 Rev 1A

MINI-CARD WLAN(MPC)

+3.3V: 1000mA
+3.3Vaux:330mA
+1.5V:500mA


Check LED signal. (active high or low)

H=7.0mm
LTS AAA-PCI-046-K01

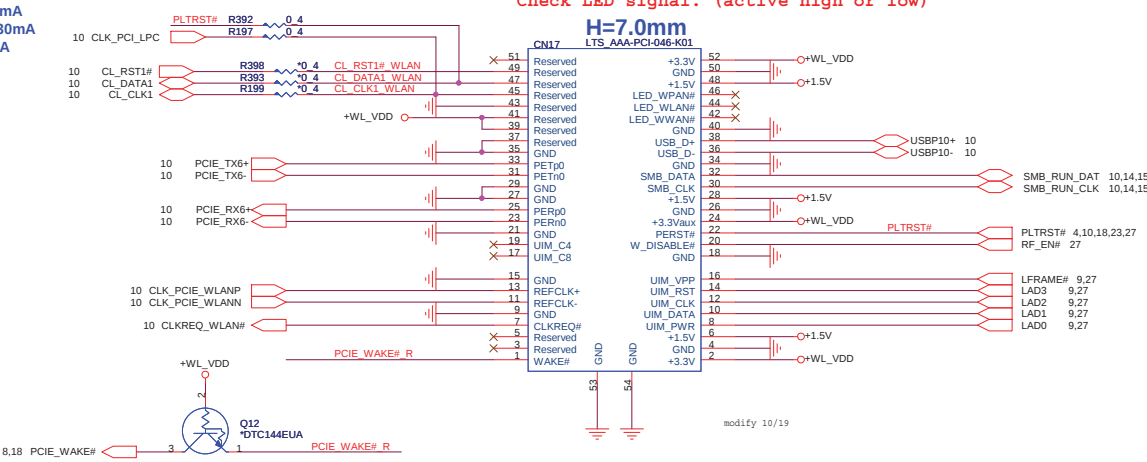


Debug


MAIN SATA HDD

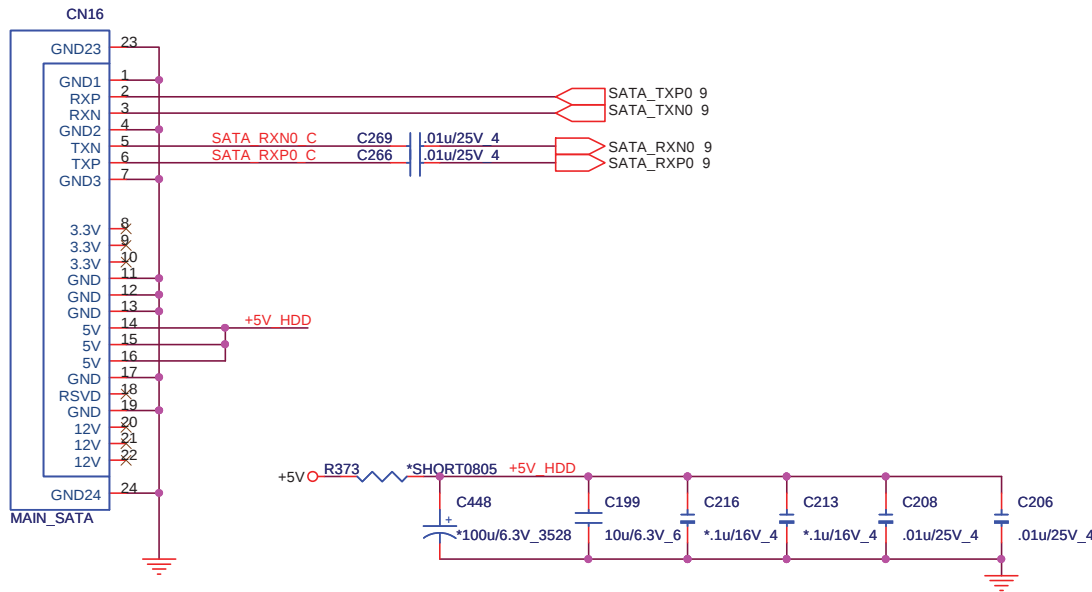

ODD (SATA)

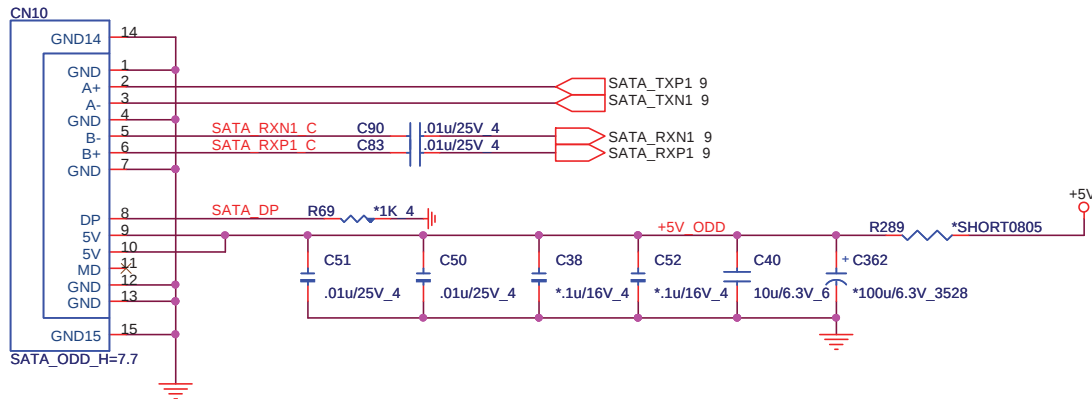

EE RETURN-PATH CAPACITORS

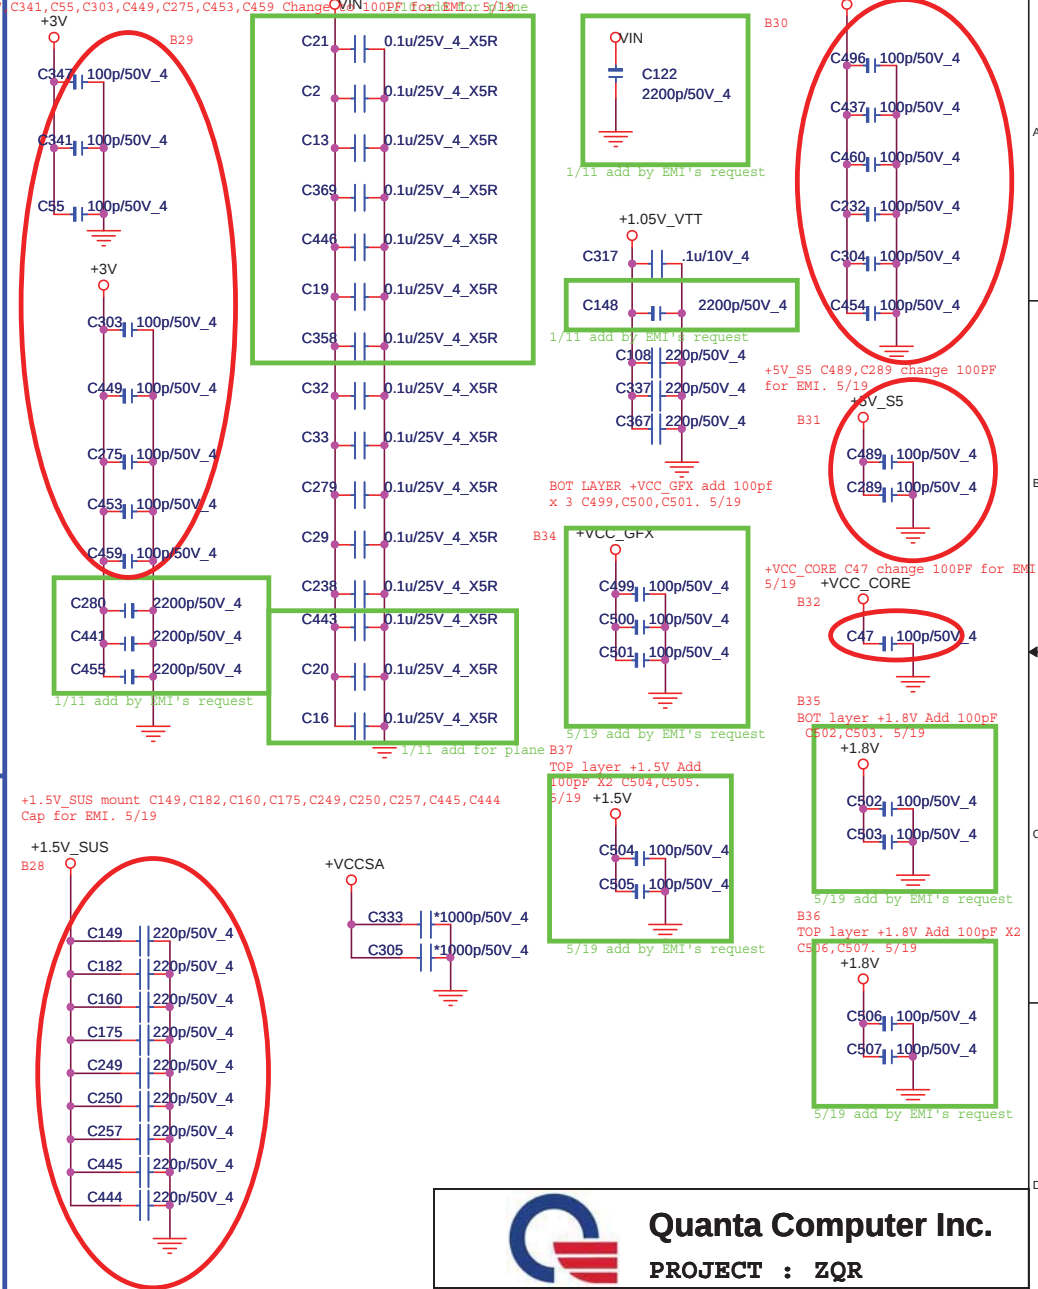


Quanta Computer Inc.
PROJECT : ZQR


Size	Document Number	Rev
	SATA-HDD/ODD	1A

Date: Monday, May 23, 2011 Sheet 20 of 35


Codec(ADO)

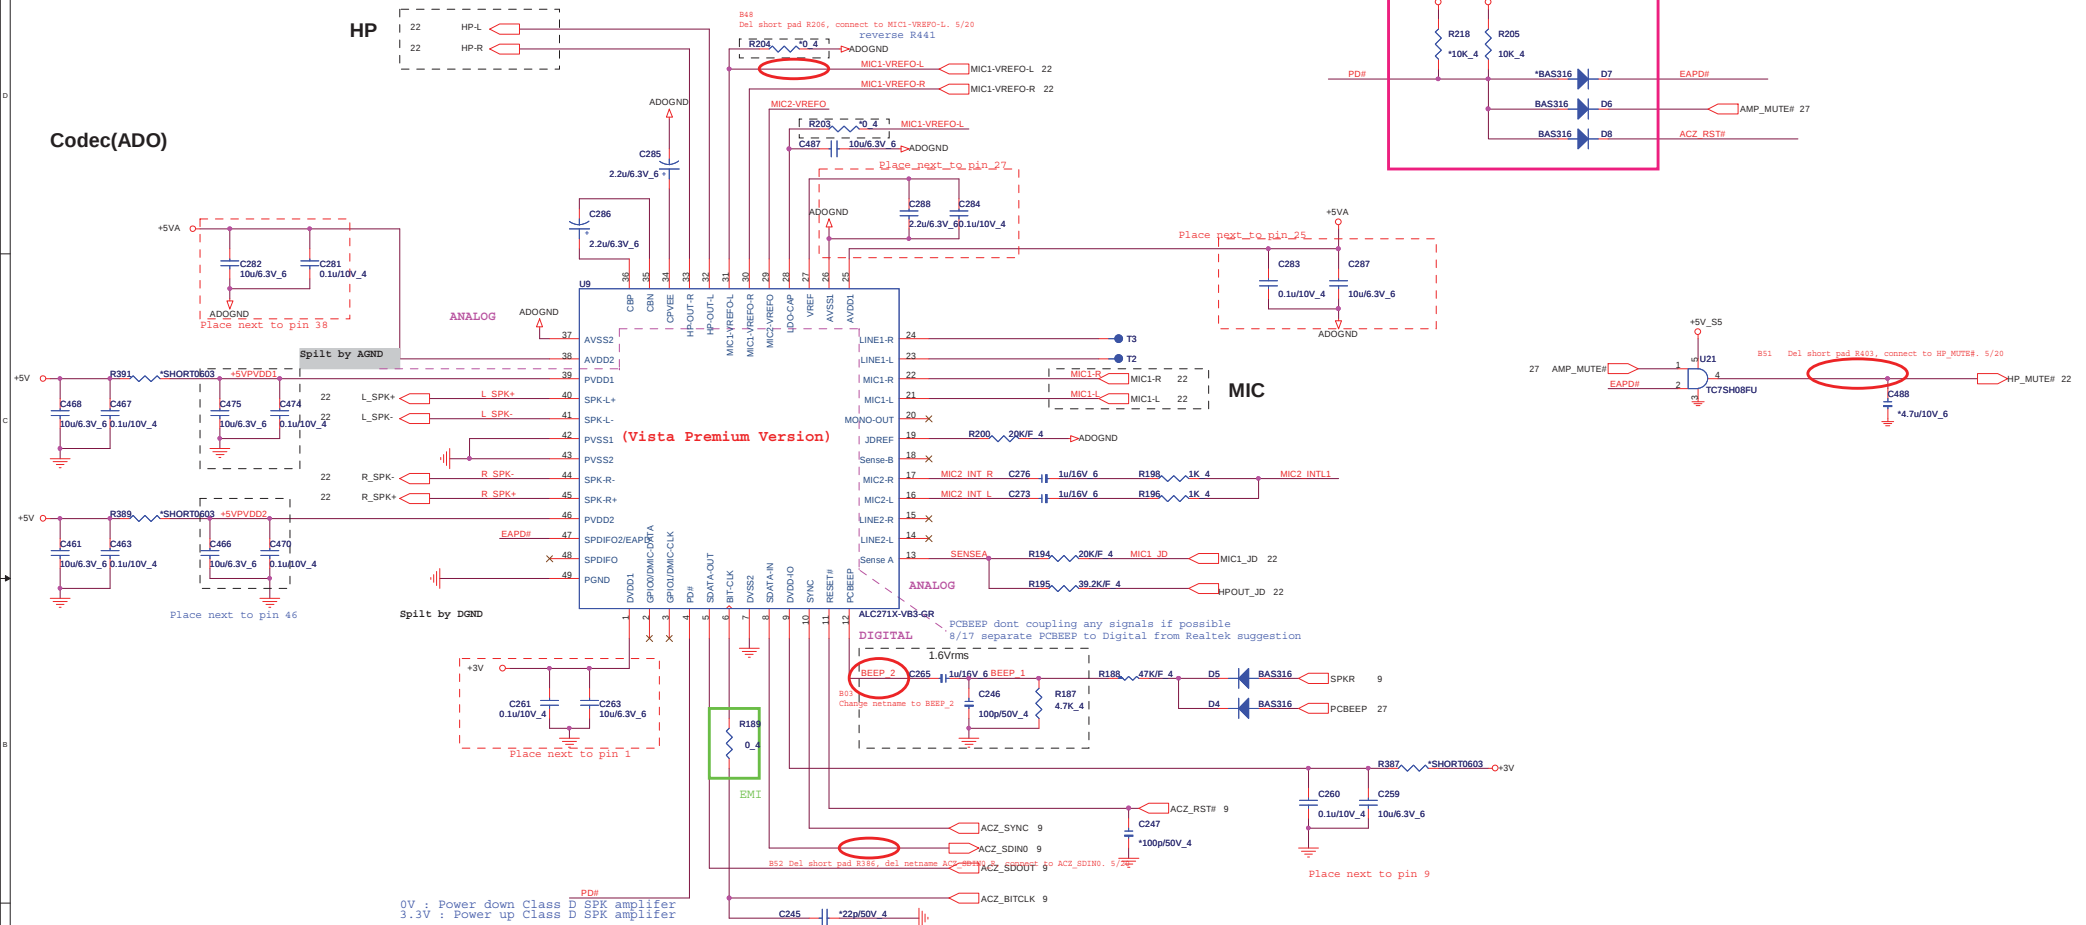

Power (ADO)

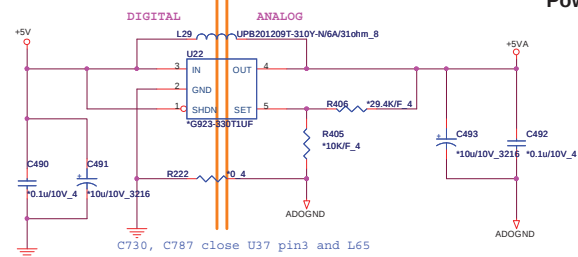


B06 Change R395,R402,R404,R408 to short pad. 5/17




Tied at one point only under
the codec or near the codec

INT MIC array




MIC

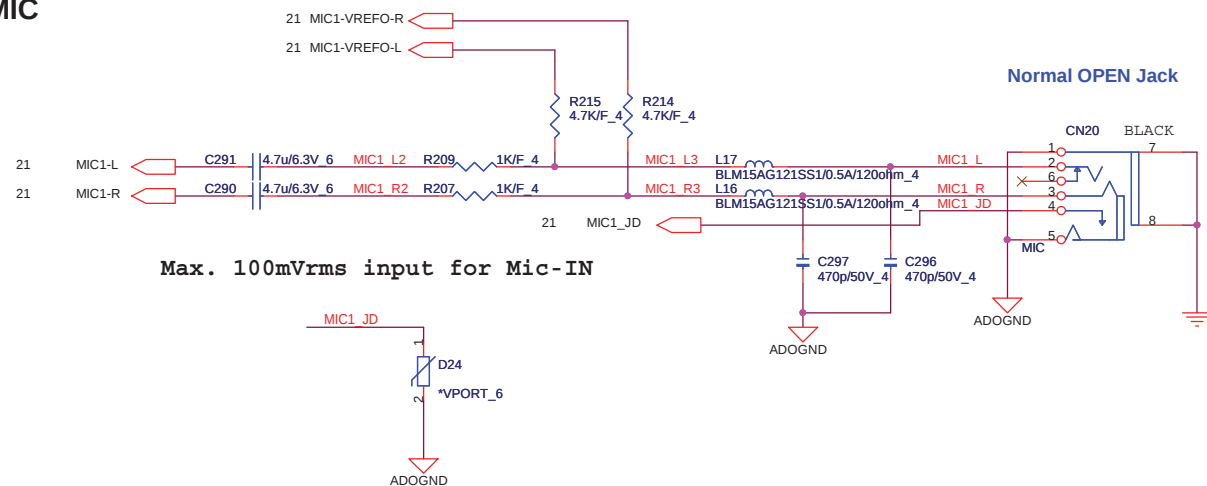


Internal Speaker

B27 R96,R97,R98,R99 change from 0 Ω to short pad. 5/18

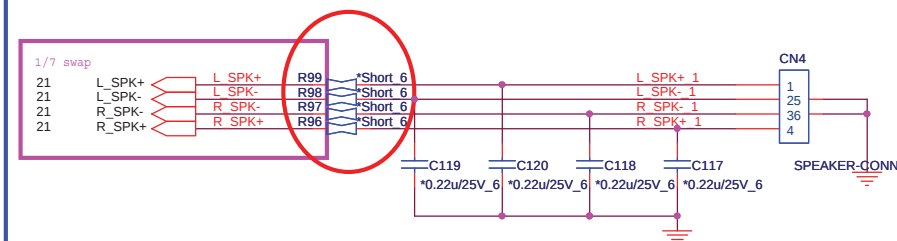

HP/SPDIF

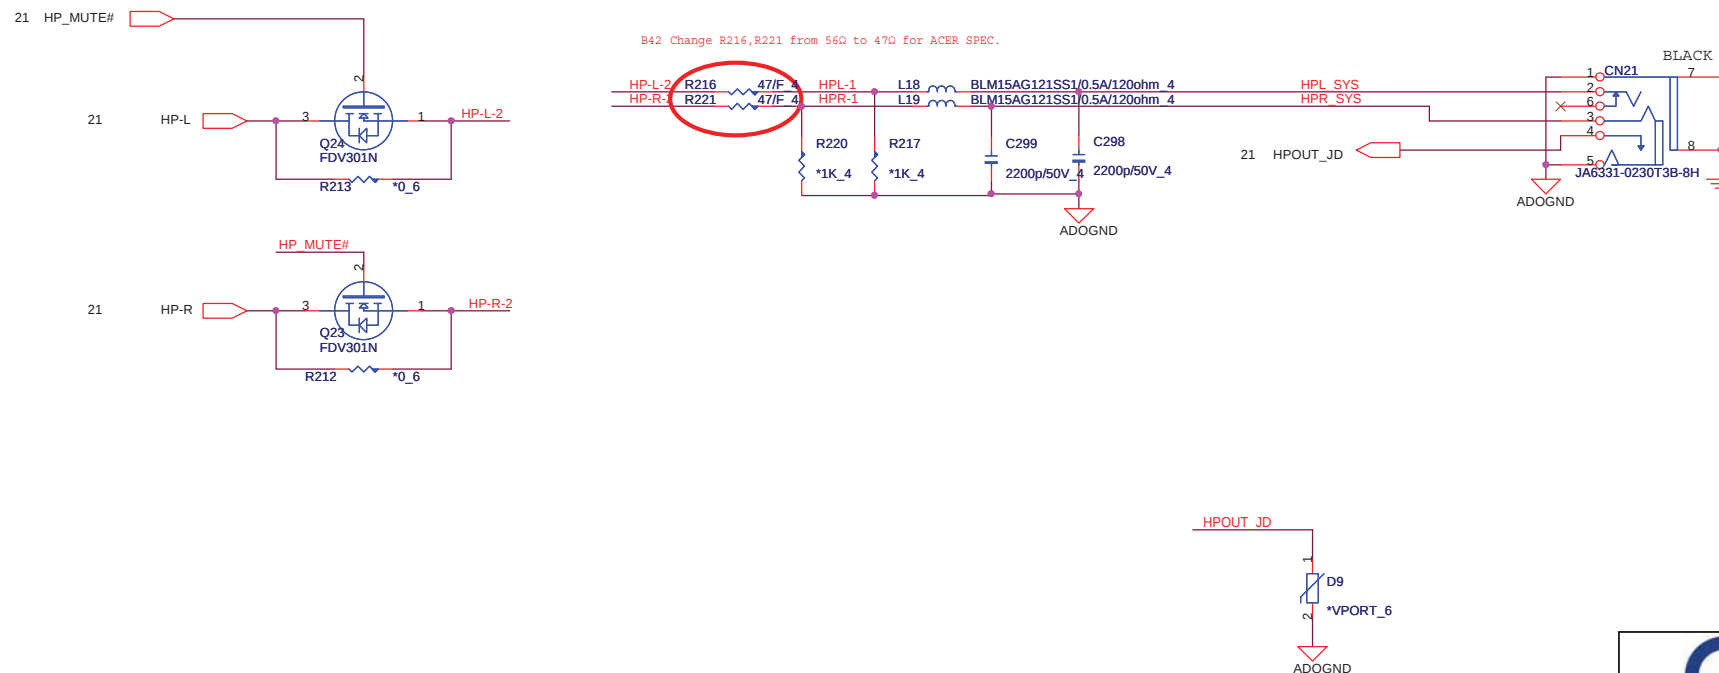**Quanta Computer Inc.**


PROJECT : ZQR

Size	Document Number	Rev
	AMP /AUDIO JACK CONN	1A
Date:	Monday, May 23, 2011	Sheet 22 of 35


CARD READER Controller AU6435-GDL

2 IN 1 CARD READER (SD/MMC)

Main	DFHS11FR011
Second	DFHS11FR033

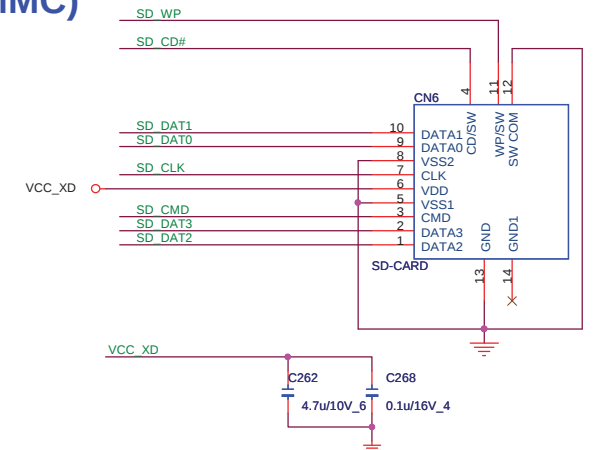


Close to CN14 pin 14 & pin23
4.7u CAP close to pin23

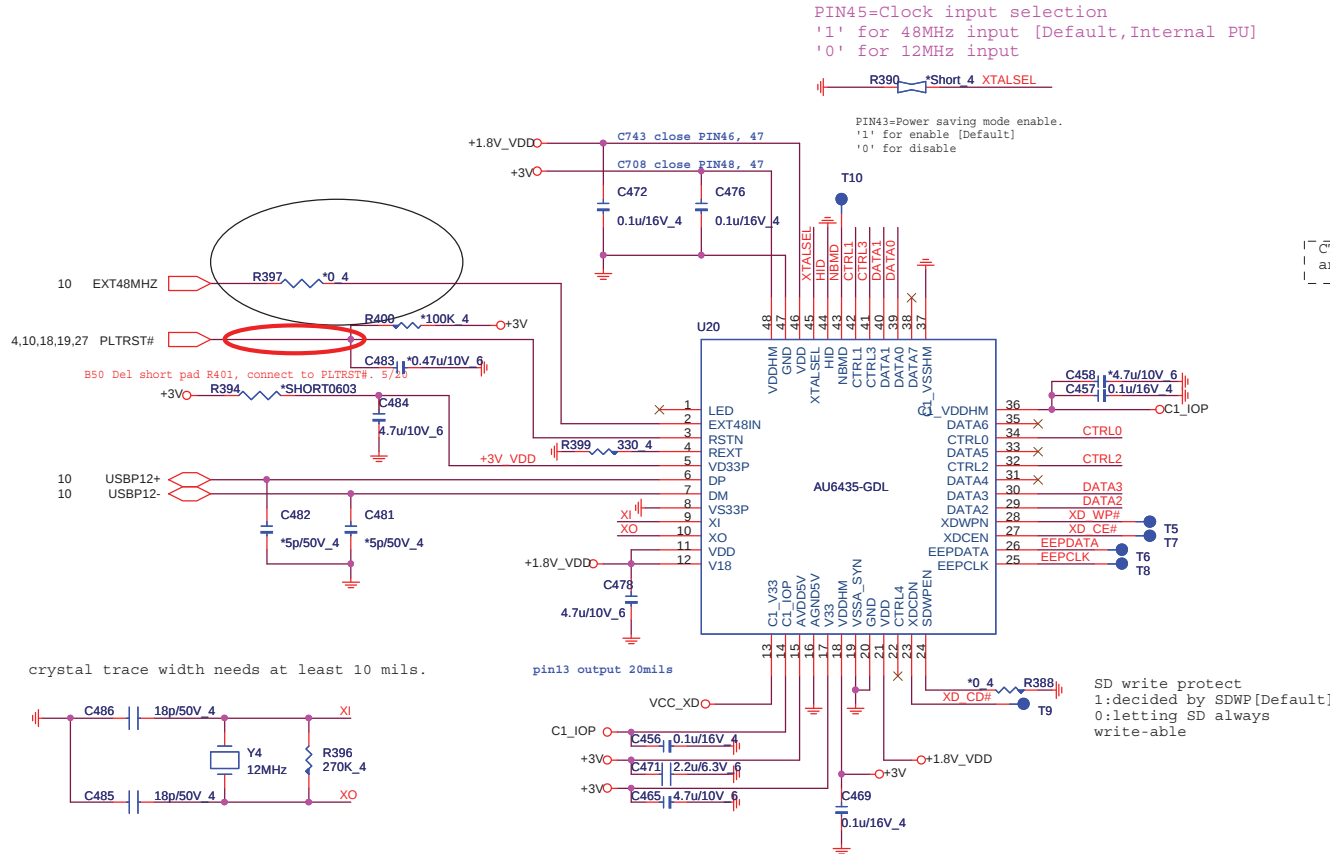


PROJECT : ZQ5
Quanta Computer Inc.

Size	Document Number AU6433 CardReader	Rev 1A
Date:	Monday, May 23, 2011	Sheet 23 of 43


LED

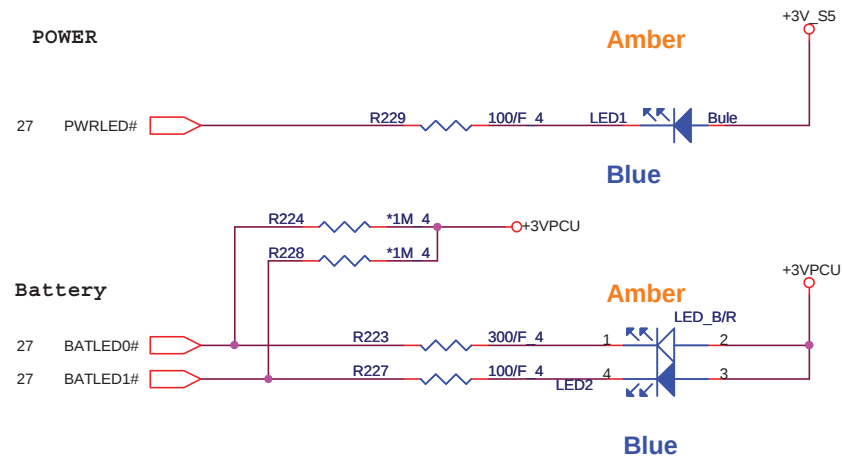


USB

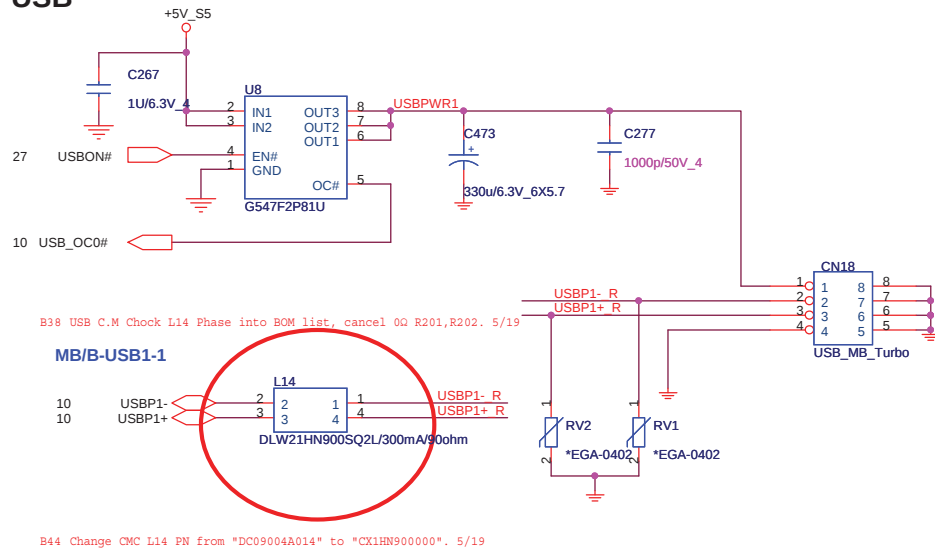


BLUETOOTH CONNECTOR for 3.0

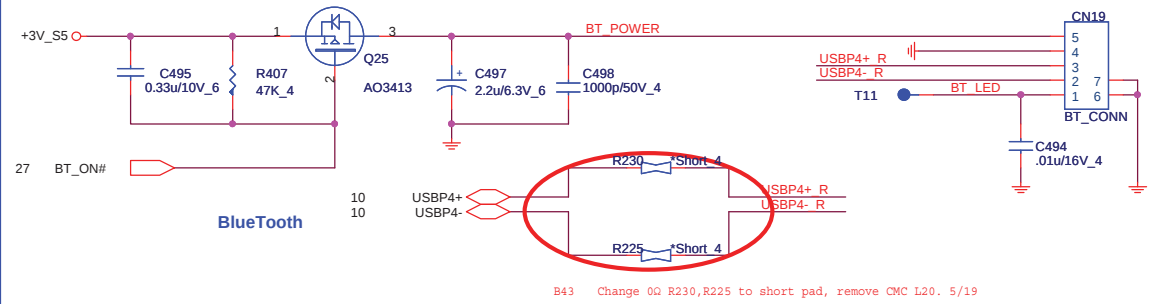

Reserve


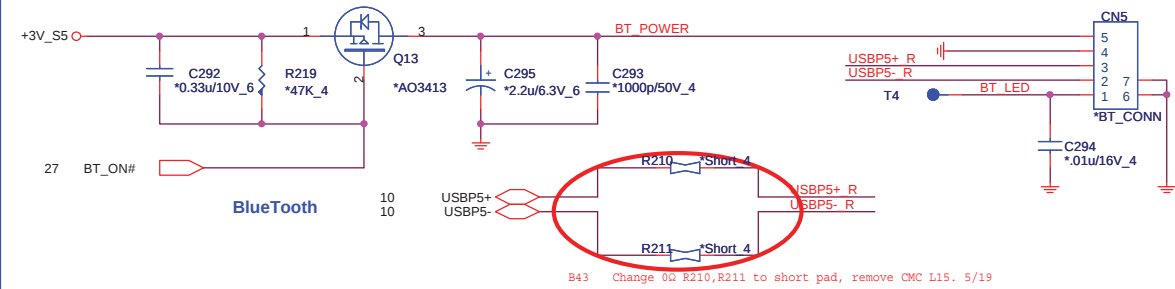


USB/B

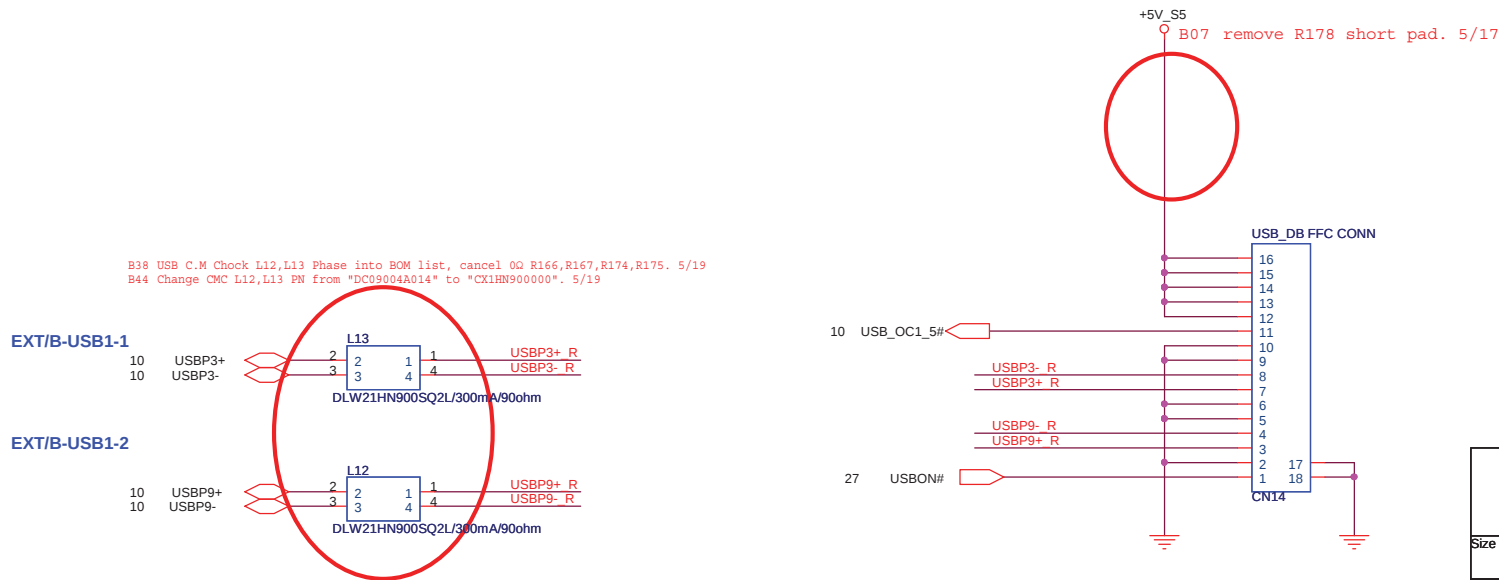


K/B


KB Cap CP1,CP2,CP3,CP4,CP5,CP6 change to 220 PF and phase into BOM list. 5/19 B33

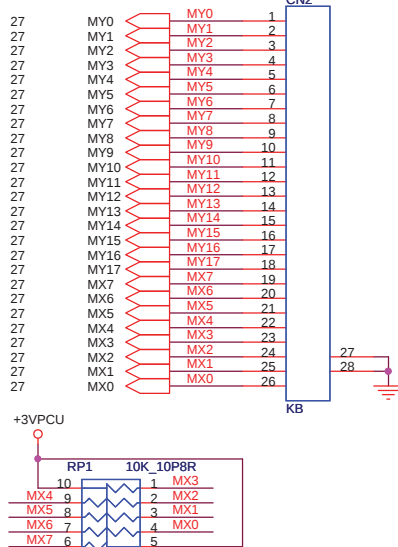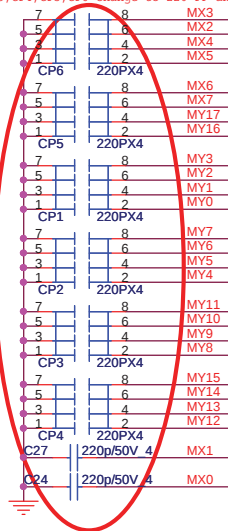


HOLE

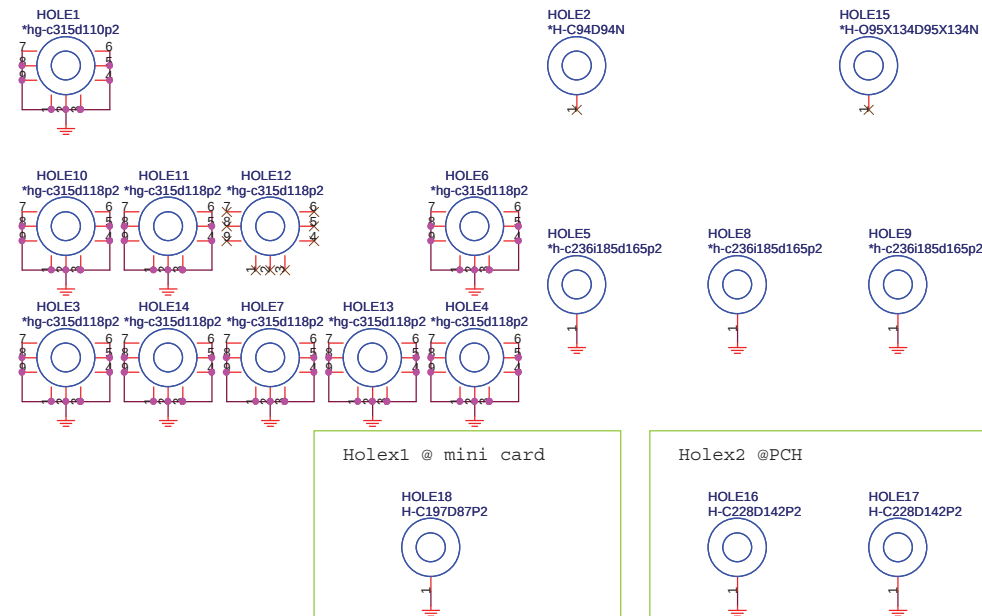

CPU FAN





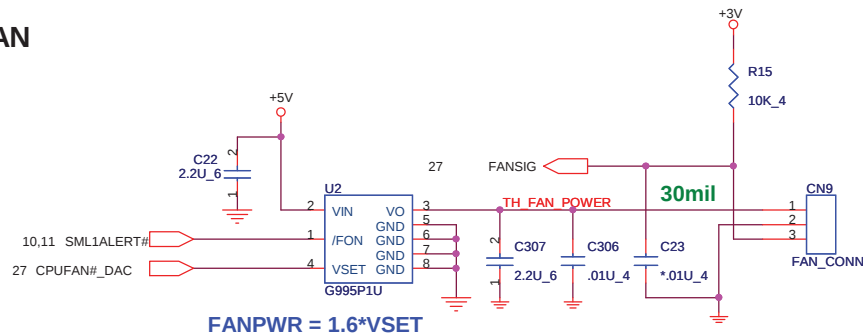



TOUCHPAD & Switch CONN.

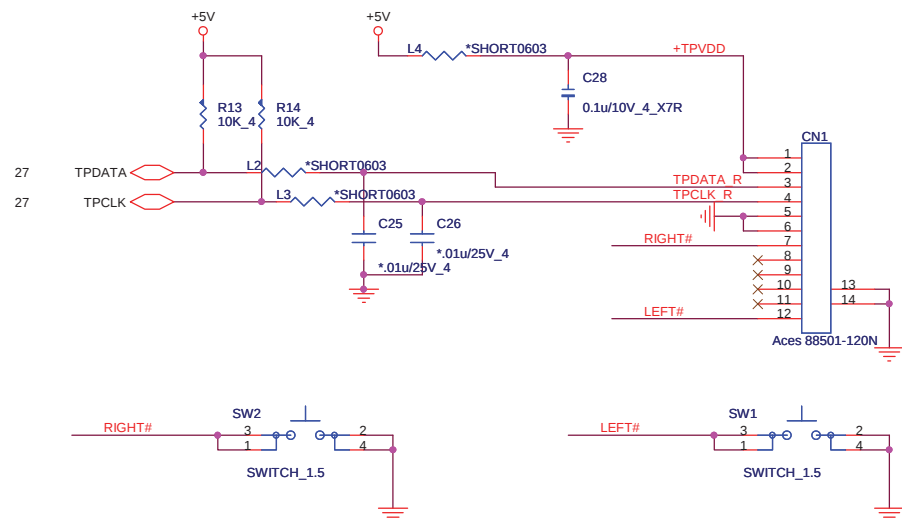



Quanta Computer Inc.
PROJECT : ZQR

Size	Document Number	Rev
	KB/FAN/TP+FP	1A
Date:	Monday, May 23, 2011	Sheet 26 of 35

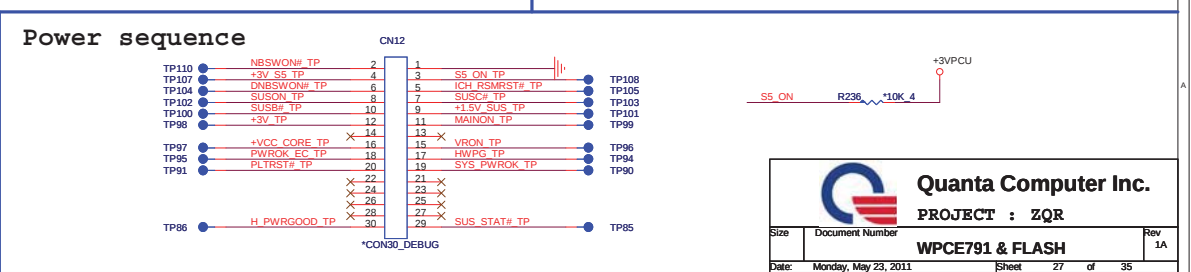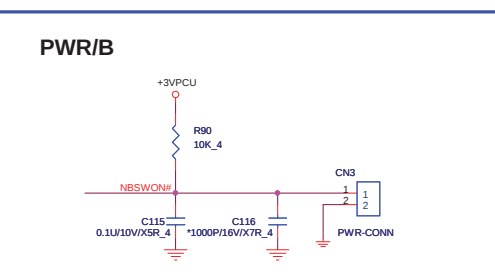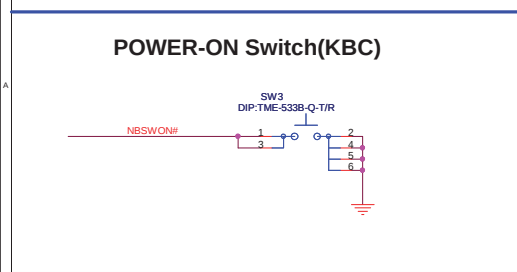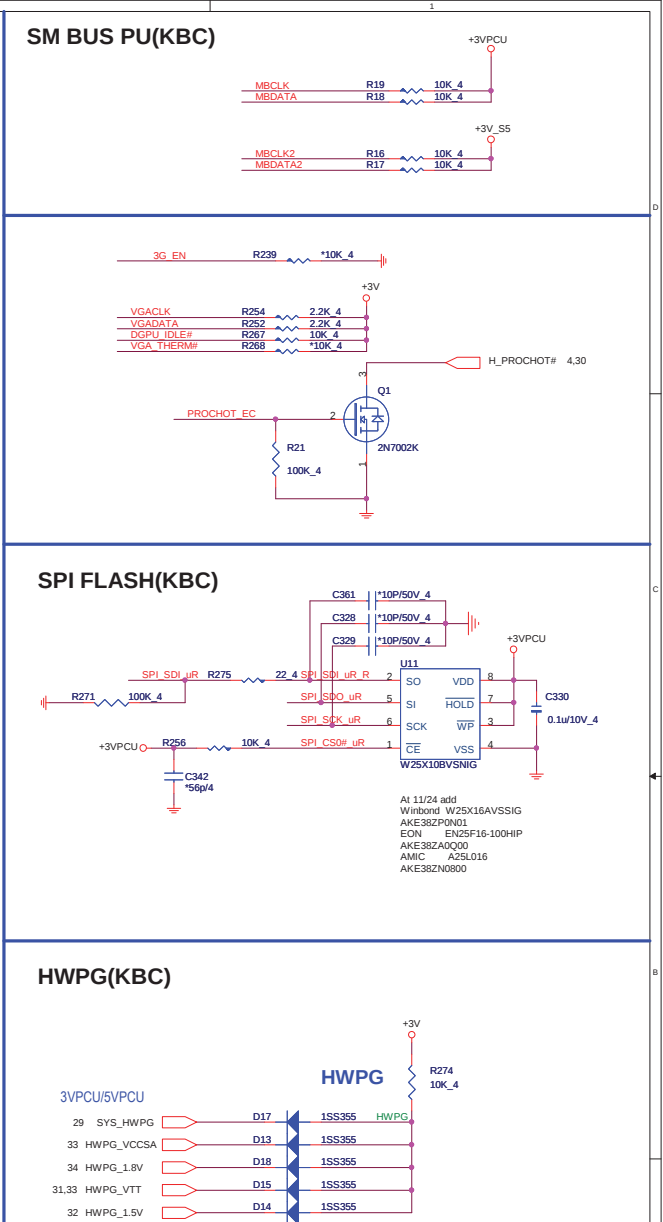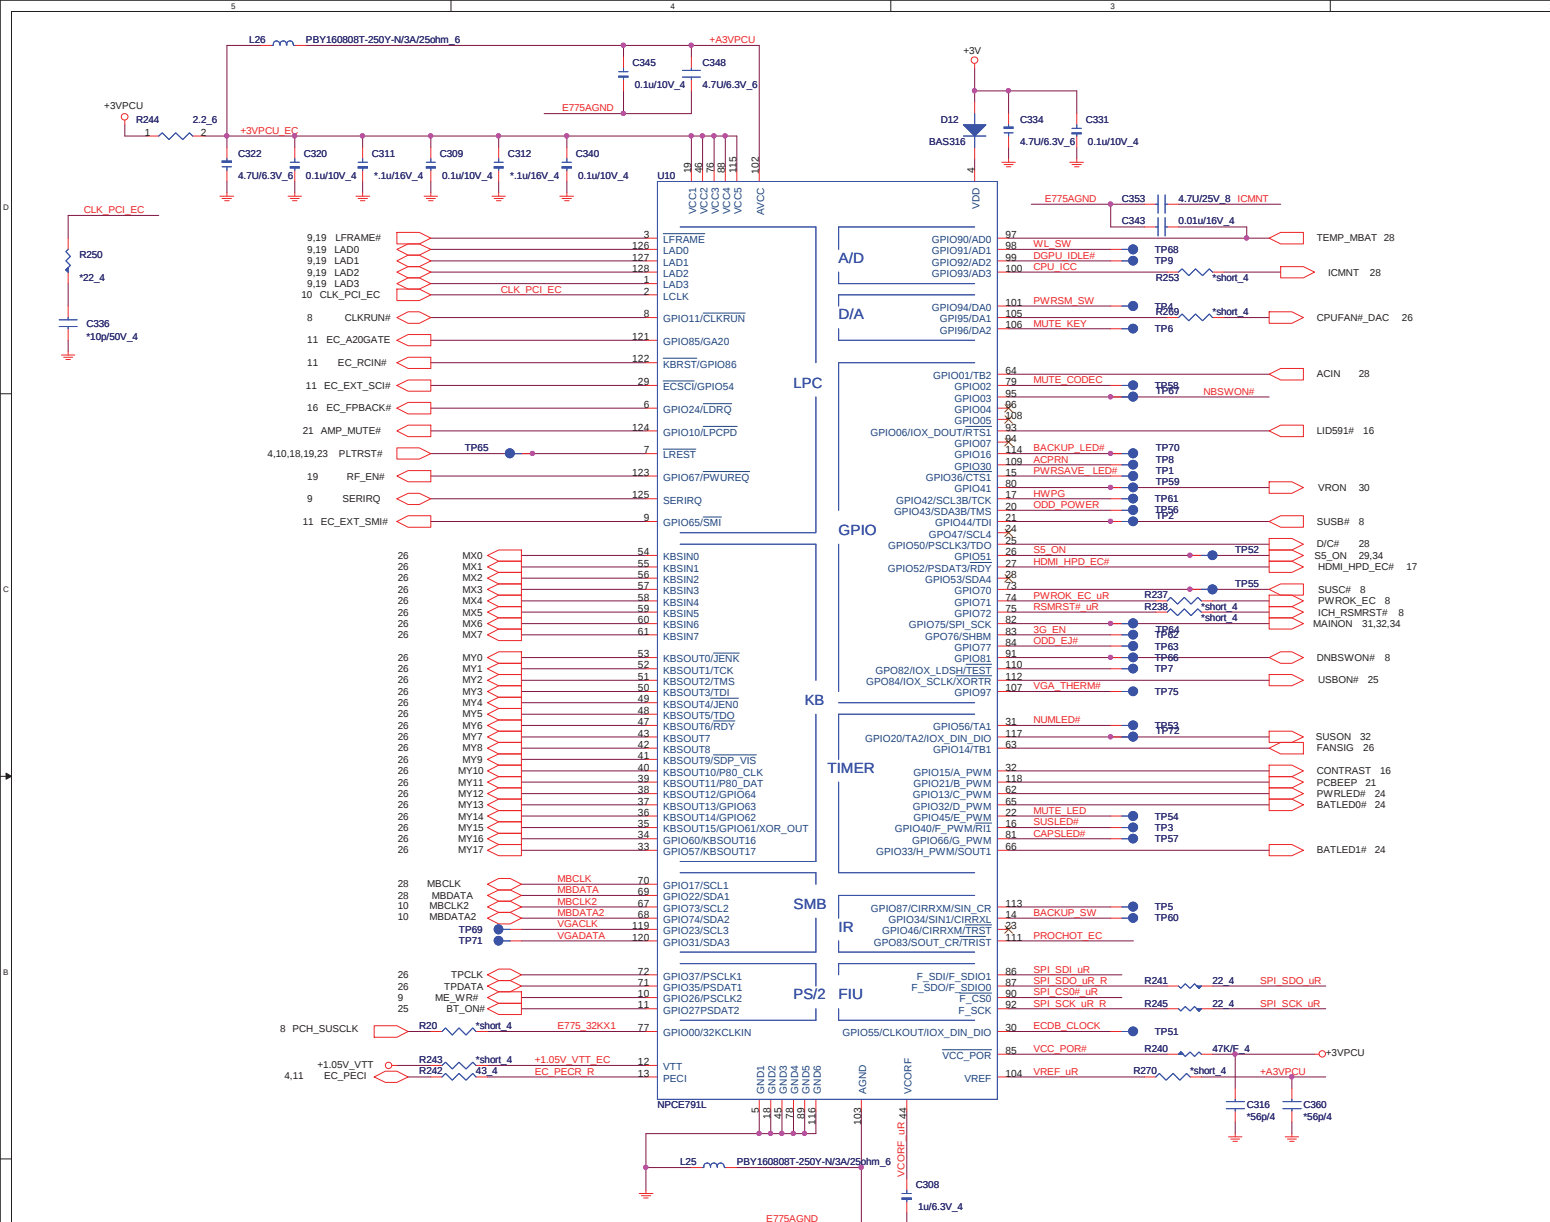

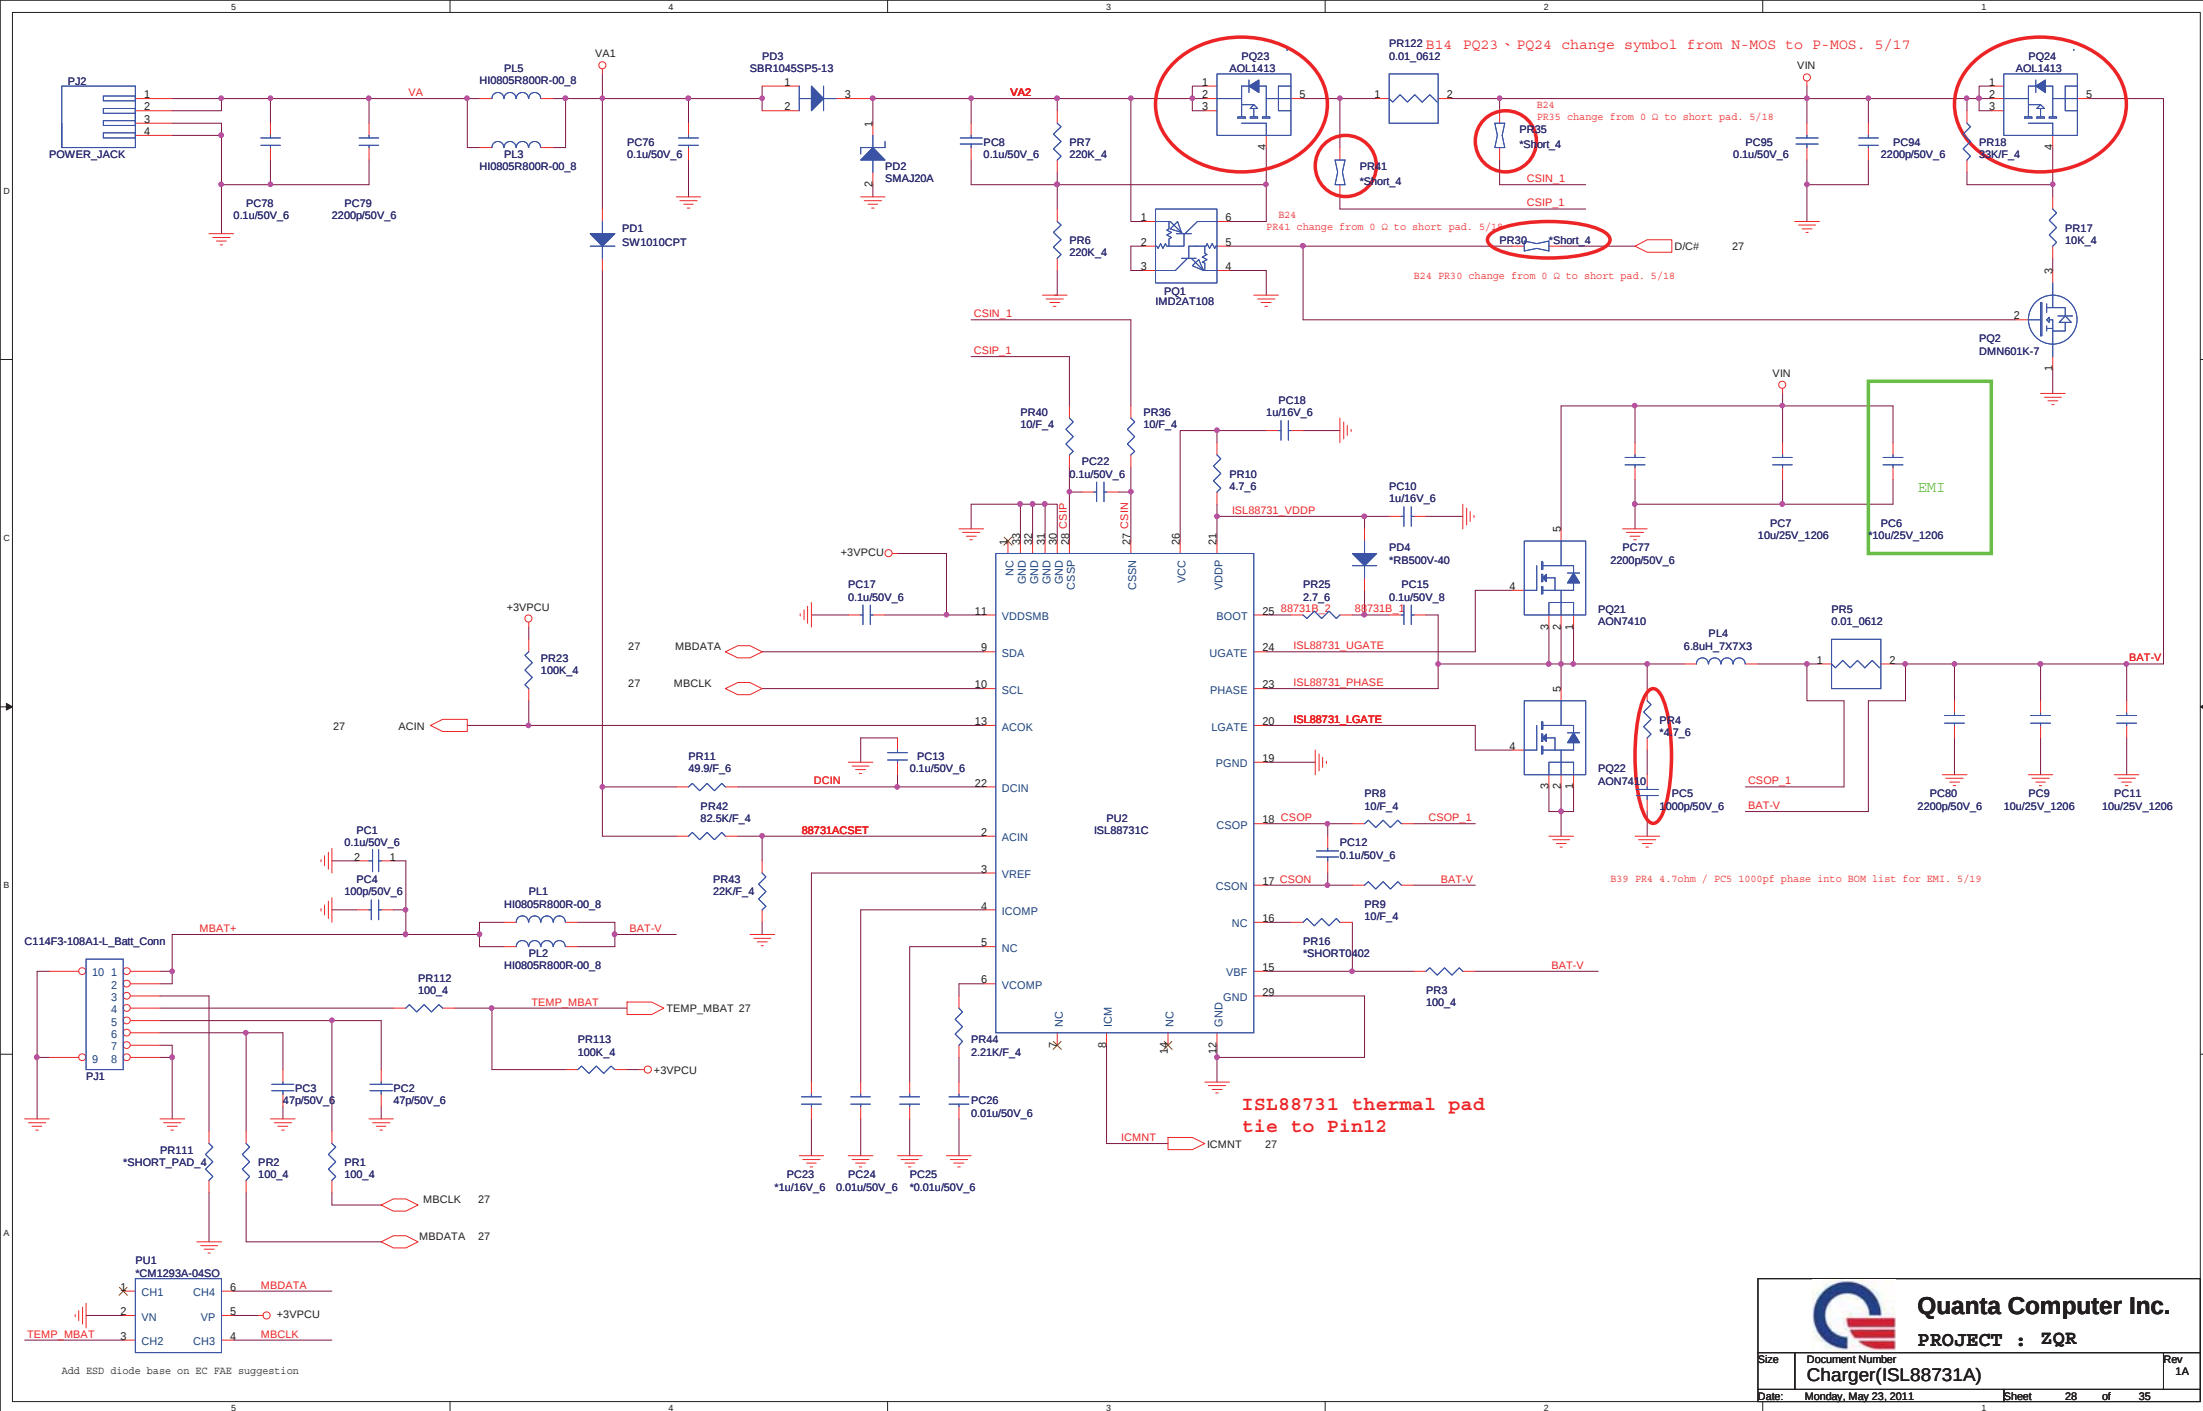

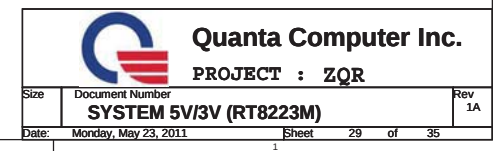


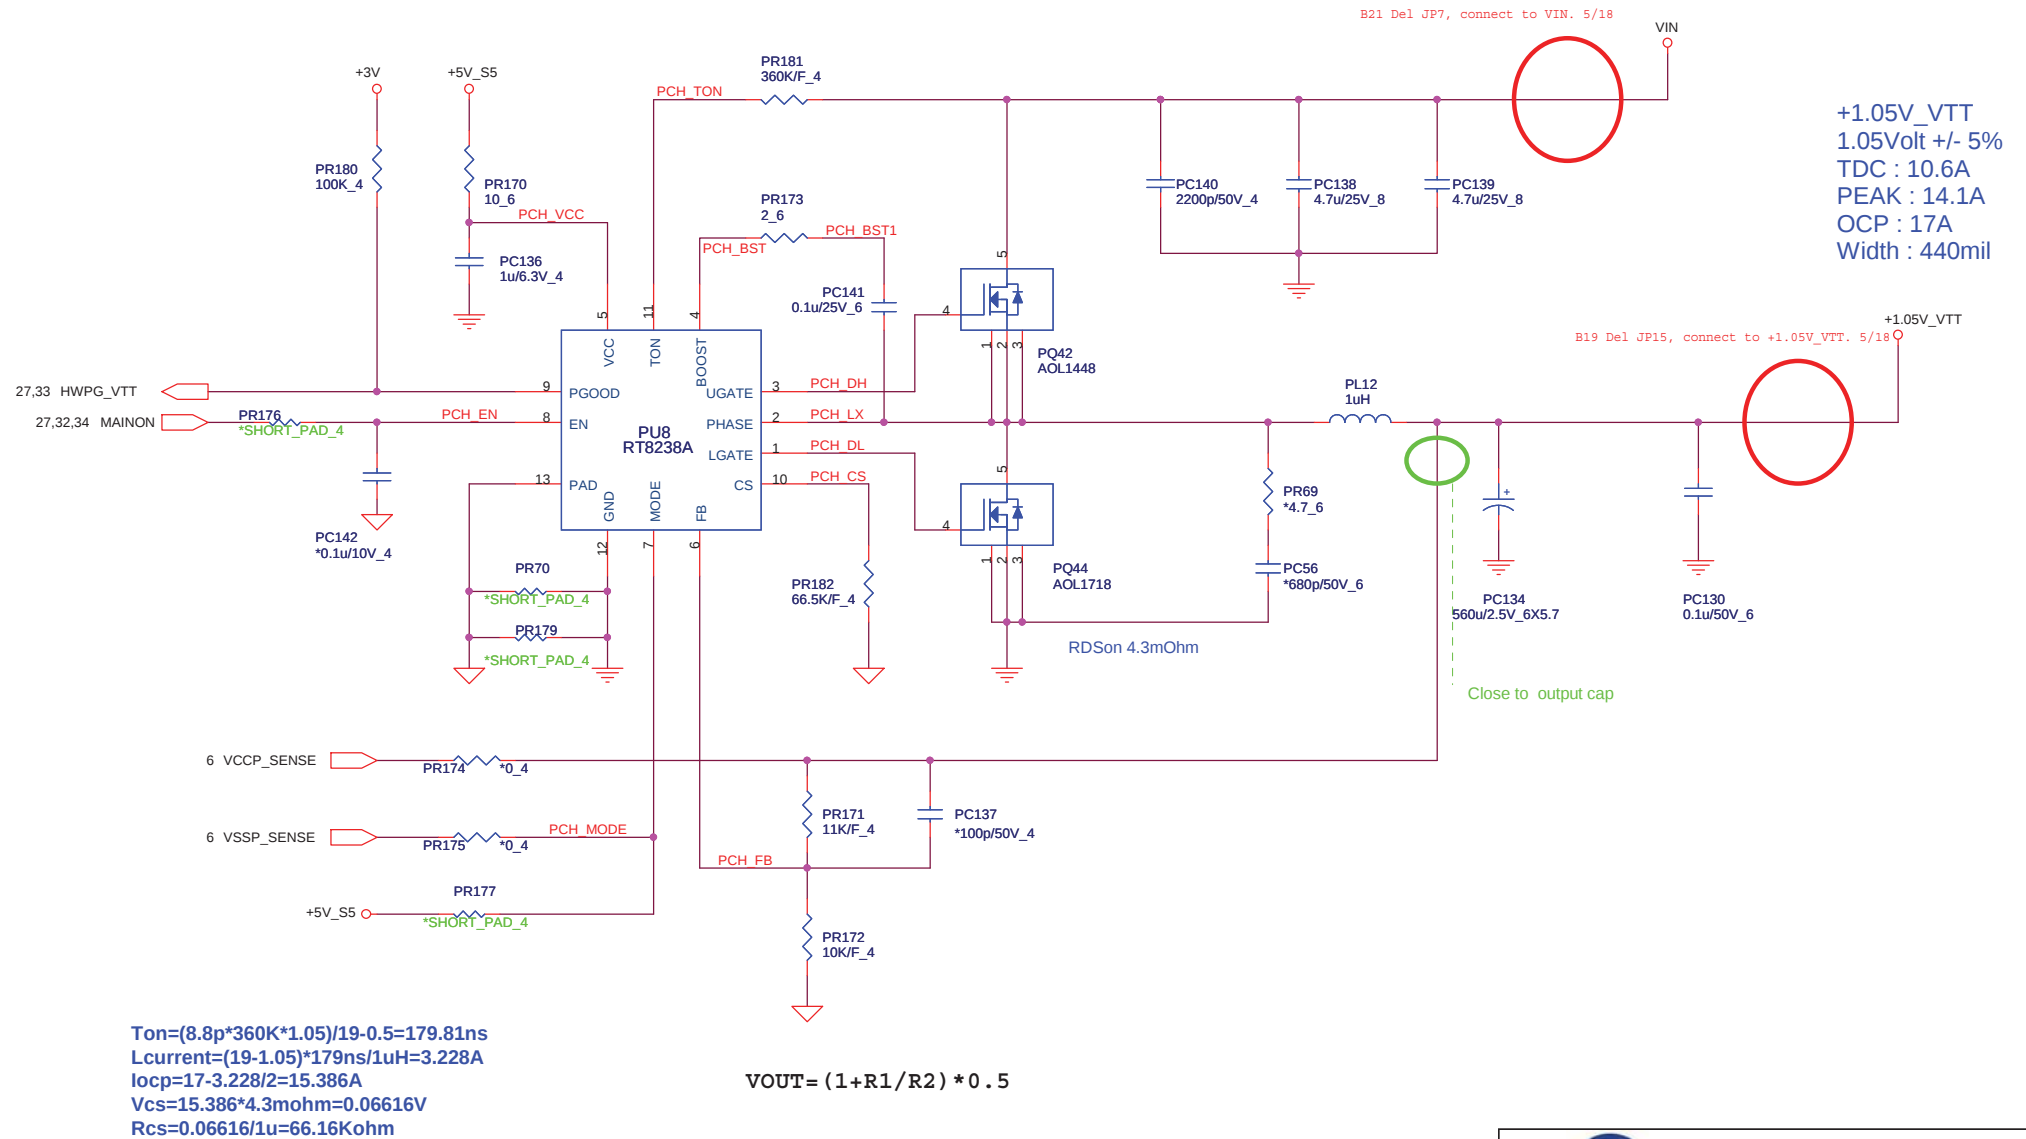

+0.75V_DDR_VTT
0.75 Volt +/- 5%
TDC : 0.75A
PEAK : 1A
Width : 40mil

+SMDDR_VREF
0.75 Volt +/- 5%
TDC : 0.38A
PEAK : 0.5A
Width : 20mil

+1.5V_SUS
1 Volt +/- 5%
TDC : 10A
PEAK : 13A
OCP : 15A
Width : 400mil

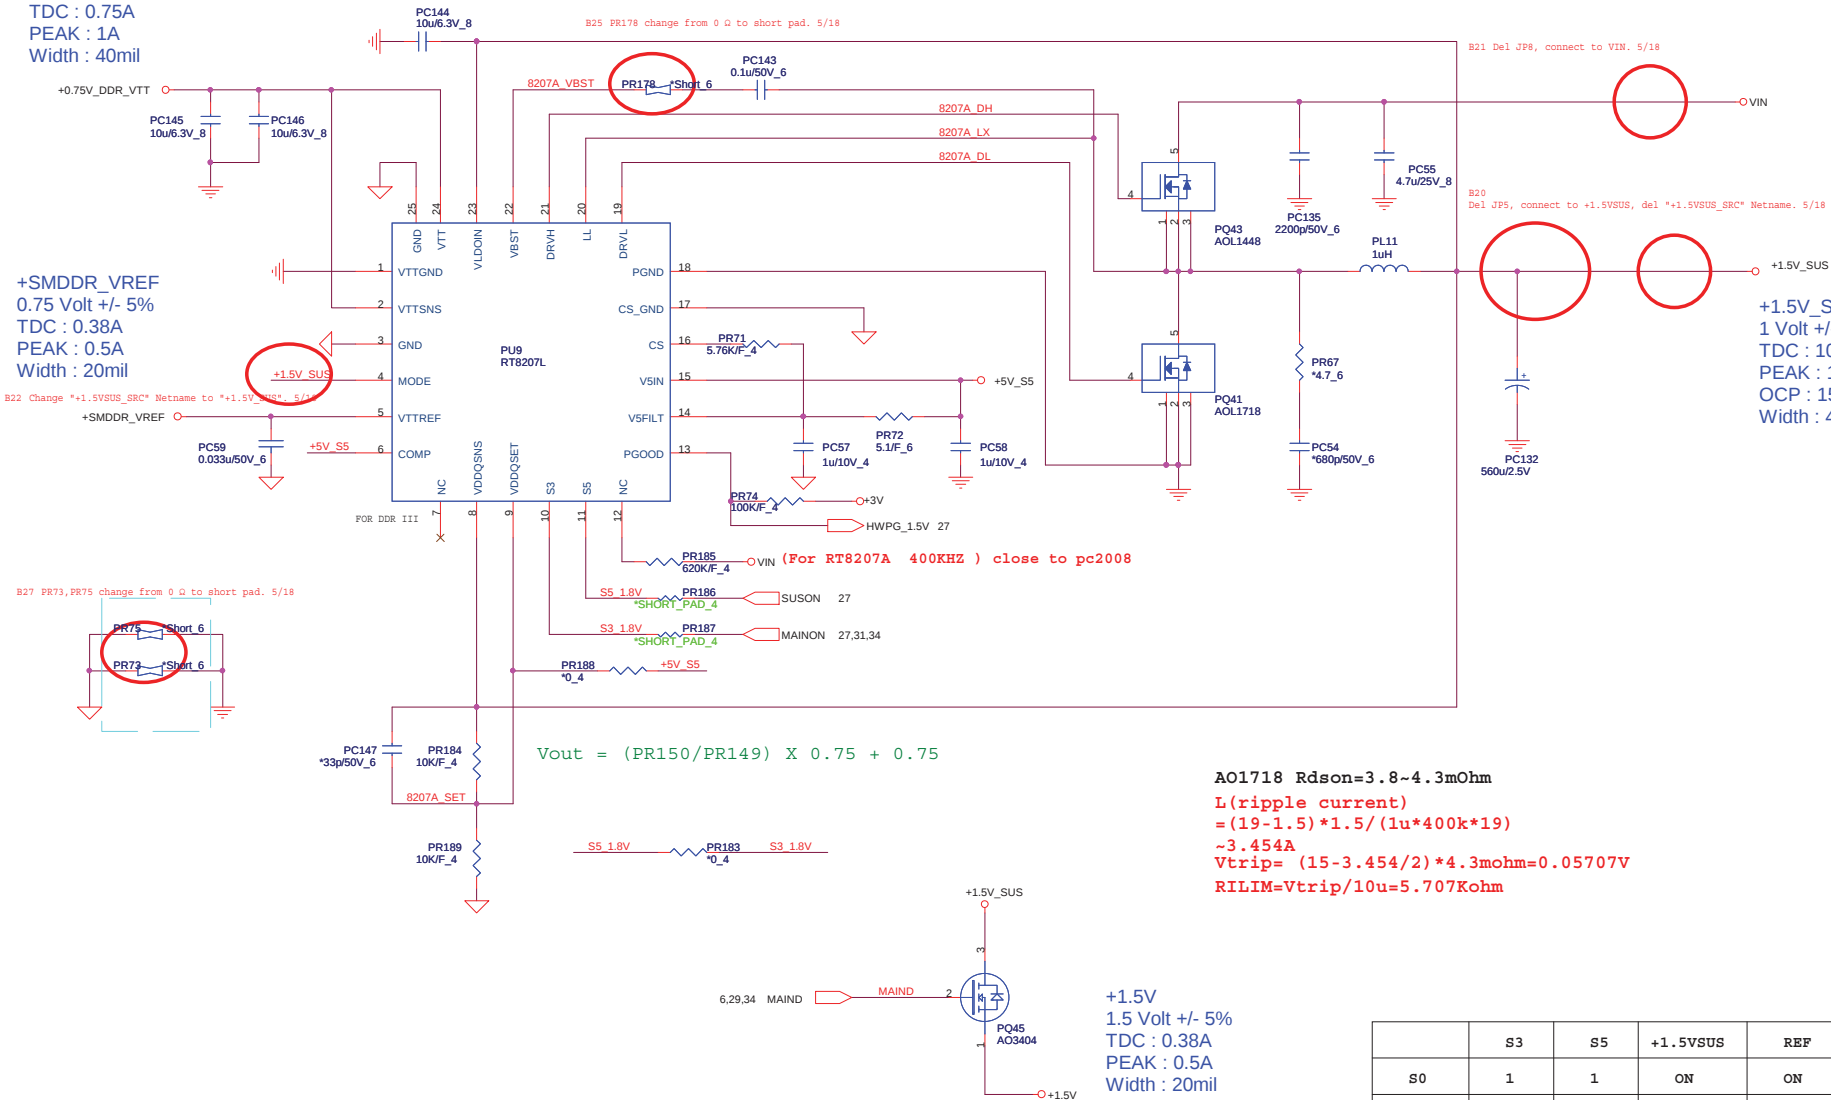


	S3	S5	+1.5VSUS	REF	VTT
S0	1	1	ON	ON	ON
S3	0	1	ON	ON	OFF
S4/S5	0	0	OFF	OFF	OFF

G0	G1	VCCSA
0	0	0.9V
0	1	0.8V
1	0	0.725V
1	1	0.675V

VCCSA_SEL	VCCSA
1	0.8V
0	0.9V

default 0.9V

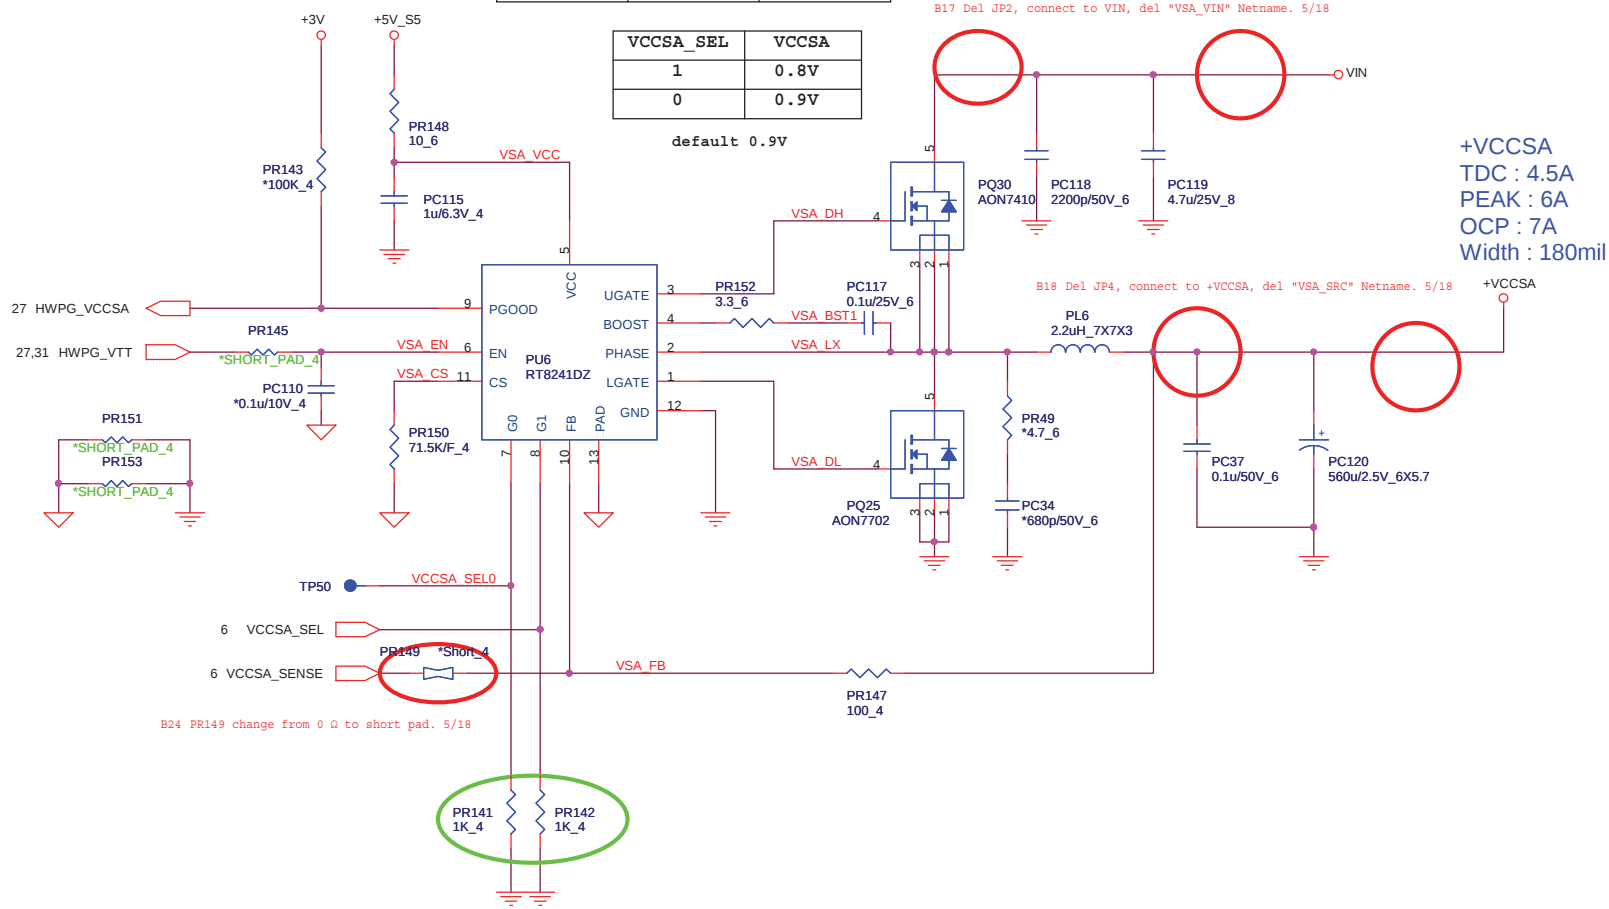

OCP=7A
 $I_{ripple} = (19 - 0.9) * 0.9 / (2.2u * 300K * 19)$
 $= 1.299A$
 $R_{th} = 14m\Omega * 8 * (7 - 0.65) / 10uA$
 $= 71.125K$
 $I_{peak} = 8.299A$



Quanta Computer Inc.
PROJECT : ZQR

Size	Document Number	Rev
	+VCCSA(RT8241A)	1A
Date:	Monday, May 23, 2011	Sheet 33 of 35

Model ZQR MB	REV	CHANGE LIST					
	B	2011/05/11 B01 remove PR22 from BOM for power up issue. B02 L5,L8,L10 Change PN to CX8BA470003. 2011/05/16 B03 Change net closed to Audio Codec PCBEEP netname to BEEP_2 2011/05/17 B04 Change L6,L7,L9 to 0Ω, remove C76,C96,C121 for CRT Test. B05 Add R409, remove U5, C142 for saving cost. B06 Change Bottom side 0Ω to short pad for cost and SMT cycle time issue; R284,R295,R296, R392 ,R395, R401 ,R402, R403 ,R404,R408. B07 Remove R178 short pad, connect to +5V_S5. B08 Change "+VIN_VCC_CORE" net to Vin. B09 Del JP1,JP13, connect to Vin, del "+VIN_VCC_CORE" netname. B10 Del JP3, connect to Vin. Del "VCC_GT_VIN" netname. B11 Del JP9,JP10 connect to Vin. B12 Del JP11, connect to +3VPCU. B13 Del JP12, connect to +5VPCU. B14 PQ23 ~ PQ24 change symbol from N-MOS to P-MOS 2011/05/18 B15 Del JP14, connect to +1.8V. B16 Del JP6, connect to +3VPCU. B17 Del JP2, connect to VIN, del "VSA_VIN" Netname. B18 Del JP4, connect to +VCCSA, del "VSA_SRC" Netname. B19 Del JP15, connect to +1.05V_VTT. B20 Del JP5, connect to +1.5VSUS, del "+1.5VSUS_SRC" Netname. B21 Del JP7,JP8 connect to VIN. B22 Change "+1.5VSUS_SRC" Netname to "+1.5V_SUS". B23 Mount C70, C71 for +Vcc_core overshoot issue. B24 PR29,PR30,PR35,PR37,PR41,PR46,PR93,PR120,PR128,PR132,PR149(0_4) change from 0ohm to short-pad. B25 PR178(0_6) change from 0ohm to short-pad. B26 R114,R197,R206(0_4) change from 0ohm to short-pad. B27 L11,PR64,PR73,PR75,R96,R97,R98,R99, R133,R168 (0_6) change from 0ohm to short-pad. 2011/05/19 B28 Page 20 +1.5V_SUS mount C149,C182,C160,C175,C249,C250,C257,C445,C444 Cap for EMI B29 Page 20 +3V C347,C341,C55,C303,C449,C275,C453,C459 Change to 100PF for EMI. B30 Page 20 +5V C496,C437,C460,C232,C304,C454 change 100PF for EMI. B31 Page 20 +5V_S5 C489,C289 change 100PF for EMI. B32 Page 20 +VCC_CORE C47 change 100PF for EMI. B33 KB Cap CP1,CP2,CP3,CP4,CP5,CP6 change to 220 PF and phase into BOM list for EMI. B34 BOT layer +VCC_GFX add 100pf x 3 C499,C500,C501 for EMI. B35 BOT layer +1.8V Add 100pF X2 C502,C503 for EMI. B36 TOP layer +1.8V Add 100pF X2 C506,C507 for EMI. B37 TOP layer +1.5V Add 100pF X2 C504,C505 for EMI. B38 USB C.M Chock L12,L13,L14 Phase into BOM list, cancel 0Ω R166,R167,R174,R175,R201,R202 for EMI. B39 PR4 4.7ohm / PCS 1000pf phase into BOM list for EMI. B40 Change R286 from 220 to short pad. B41 Add a MOSFET Q26,R410,R412 to separate CODE SYNC and PCH Strap signal to avoid leakage issue. B42 Change R216,R221 from 56Ω to 47Ω for ACER SPEC. B43 Change 0Ω R5,R6,R210,R211,R225,R230 to short pad, remove CMC L1,L15,L20 for SMT. B44 Change CMC L12,L13,L14 PN from "DC09004A014" to "CX1HN900000". B45 Remove C315 for cost issue. 2011/05/20 B46 R392,R197 change from short pad to 0Ω. B47 Del short pad R114, connect to PCIE_CLKREQ_LAN#. B48 Del short pad R206, connect to MIC1-VREF0-L. B49 Del short pad R264, connect to HP_VB#. B50 Del short pad R401, connect to PLTRST#. B51 Del short pad R403, connect to HP_MUTE#. B52 Del short pad R386, del netname ACZ_SDIN0_R, connect to ACZ_SDIN0. B53 Del short pad R133,R168, connect to GND. B54 Del C442. 2011/05/23 B55 PR139 changes from 1.33Kohm(CS21332FB11) to 1.58Kohm(CS21582FB00). B56 PR130 changes from 2.55Kohm(CS22552FB01) to 2.49Kohm(CS22492BB00). B57 PC99 ~ PC103 change from 33nf(CH3334K1B00) to 0.1uf(CH4104K9B03).					
3C							
Quanta Computer Inc. PROJECT : ZQR Doc No Document Number Change list Monday, May 23, 2011 Sheet 35 of 35 Rev 1A		DOC NO.	PROJECT MODEL :	ZQR	APPROVED BY:		DATE: 2011/05/09
		PART NUMBER:		DRAWING BY:		REVISION: 1A	