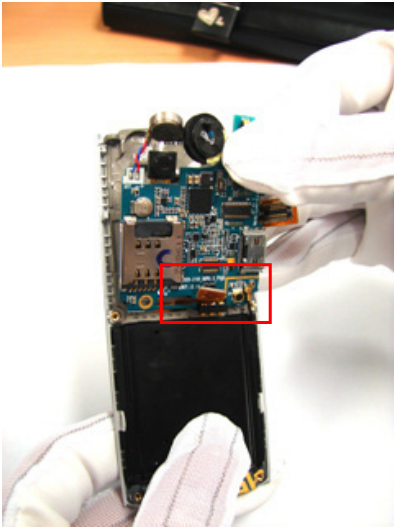
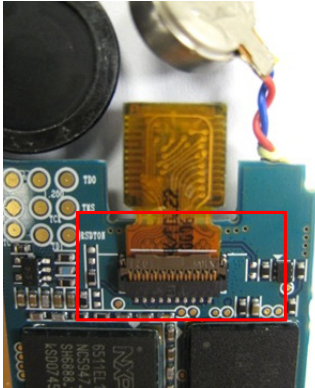
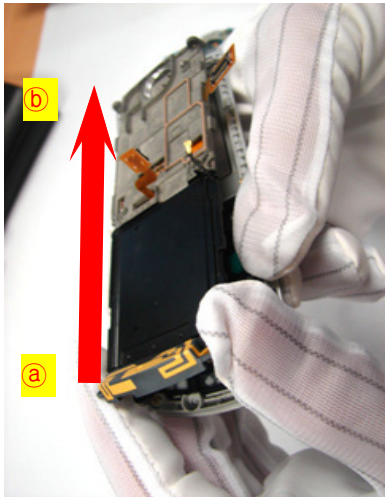



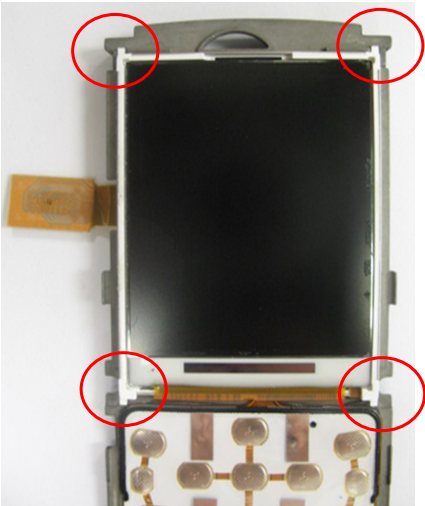
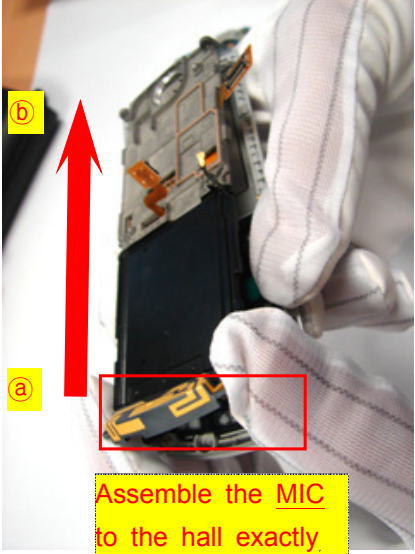
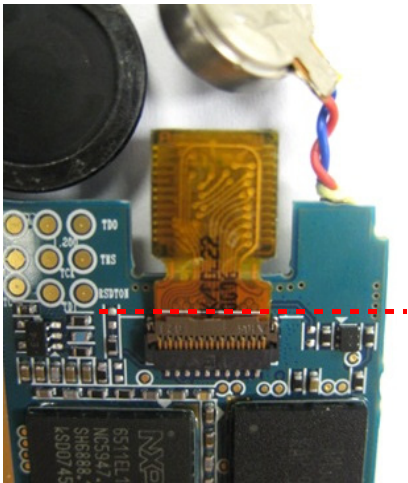

# 7. Disassembly and Assembly Instructions

## 7-1. Disassembly

<p><b>1</b></p> 	<p><b>2</b></p> 
<p>1) Detach Cover from a set 2) Release SCREW 2 POINTS at top</p> <p><b>* Caution</b></p> <p>1) Be careful not to make scratch and molding damage!</p>	<p>1) Release SCREW 4 POINTS at Rear</p> <p><b>* Caution</b></p> <p>1) Be careful not to make scratch and molding damage!</p>
<p><b>3</b></p> 	<p><b>4</b></p> 
<p>1) Seperate connectors from the PBA</p> <p><b>* Caution</b></p> <p>1) Be careful not to make scratch and molding damage!</p>	<p>1) Release SCREW 2 POINTS at Rear</p> <p><b>* Caution</b></p> <p>1) Be careful not to make scratch and molding damage!</p>

<p><b>5</b></p> 	<p><b>6</b></p> 
<p>1) Detach the motor and speaker 2) Separate the PBA from the bracket</p> <p><b>※ Caution</b></p> <p>1) Be careful not to make scratch and molding damage! 2) Beware that you do not damage F-PCB.</p>	<p>1) Separate the camera after release the connector</p> <p><b>※ Caution</b></p> <p>1) Be careful not to make scratch and molding damage! 2) Beware that you do not damage F-PCB.</p>
<p><b>7</b></p> 	<p><b>8</b></p> 
<p>1) Separate the bracket from ① to ②</p> <p><b>※ Caution</b></p> <p>1) Be careful not to make scratch and molding damage!</p>	<p>1) Detach the LCD from the bracket</p> <p><b>※ Caution</b></p> <p>1) Be careful not to make scratch and molding damage!</p>

## 7-2. Assembly

<p><b>1</b></p> 	<p><b>2</b></p>  <p>Assemble the MIC to the hall exactly</p>
<p>1) Set the LCD to the bracket  <b>※ Caution</b>          1) Be careful not to make scratch and molding damage!</p>	<p>1) Assemble the bracket from ① to ②  <b>※ Caution</b>          1) Be careful not to make scratch and molding damage!          2) Arrange Inttena's WIRE not to be interfered with other components.</p>
<p><b>3</b></p> 	<p><b>4</b></p> 
<p>1) Assemble the camera with guide line  <b>※ Caution</b>          1) Be careful not to make scratch and molding damage!          2) Beware that you do not damage F-PCB.</p>	<p>1) Attach motor and speaker after twist wires          2) Assemble PBA to the bracket  <b>※ Caution</b>          1) Be careful not to make scratch and molding damage!          2) Arrange Inttena's WIRE not to be interfered with other components.          3) Beware that you do not damage F-PCB.</p>

<p><b>5</b></p> 	<p><b>6</b></p> 
<p>1) Drivers 2 screws on the PBA.  <b>* Caution</b>          1) Be careful not to make scratch and molding damage!</p>	<p>1) Driver 4 screws on the PBA after assemble the REAR  <b>* Caution</b>          1) Be careful not to make scratch and molding damage!          2) Arrange Inttena's WIRE not to be interfered with other components.</p>
<p><b>7</b></p> 	<p><b>8</b></p>
<p>1) Driver 2 screws at top          2) Attach the Cover from a set  <b>* Caution</b>          1) Be careful not to make scratch and molding damage!</p>	