

1. ALL RESISTANCE VALUES ARE IN OHMS, 0.1 WATT +/- 5%.
 2. ALL CAPACITANCE VALUES ARE IN MICROFARADS.
 3. ALL CRYSTALS & OSCILLATOR VALUES ARE IN HERTZ.

REV	ECN	DESCRIPTION OF REVISION	CK APPD DATE
			2010-08-05

SCHEM, FLYING_CLOUD, MLB, K90i

"EVT3" 11/22/10

Page	(.cna)	Contents	Sync	Date
1	1	Table of Contents	MASTER	MASTER
2	2	System Block Diagram	K17_REF	06/30/2009
3	3	Power Block Diagram	K17_REF	06/30/2009
4	4	Revision History	MASTER	MASTER
5	5	BOM Configuration	K17_REF	05/28/2009
6	7	FUNC TEST	K24_MLB	07/20/2009
7	8	Power Aliases	K91_MLB	05/15/2010
8	9	Signal Aliases	K91_MLB	05/15/2010
9	10	CPU DMI/PEG/FDI/RSVD	ANNE_K90I	06/22/2010
10	11	CPU CLOCK/MISC/JTAG	ANNE_K90I	06/28/2010
11	12	CPU DDR3 INTERFACES	ANNE_K90I	06/18/2010
12	13	CPU POWER	ANNE_K90I	06/18/2010
13	14	CPU GROUNDS	ANNE_K90I	06/18/2010
14	16	CPU DECOUPLING-I	JACK_K90I	06/28/2010
15	17	CPU DECOUPLING-II	JACK_K90I	06/28/2010
16	18	PCH SATA/PCIE/CLK/LPC/SPI	K91_MLB	06/18/2010
17	19	PCH DMI/FDI/GRAPHICS	K91_MLB	06/18/2010
18	20	PCH PCI/FLASHCACHE/USB	K91_MLB	06/10/2010
19	21	PCH MISC	K91_MLB	06/18/2010
20	22	PCH POWER	K91_MLB	06/25/2010
21	23	PCH GROUNDS	K91_MLB	05/27/2010
22	24	PCH DECOUPLING	K91_MLB	06/25/2010
23	25	CPU & PCH XDP	ANNE_K90I	06/22/2010
24	26	USB HUBS	K91_MLB	06/08/2010
25	27	Clock (CK505)	K91_MLB	06/21/2010
26	28	Chipset Support	LINDA_K90I	07/08/2010
27	29	DDR3 SO-DIMM Connector A	MASTER	MASTER
28	30	DDR3 Byte/Bit Swaps	ANNE_K90I	06/22/2010
29	31	DDR3 SO-DIMM Connector B	MASTER	MASTER
30	32	CPU Memory S3 Support	ANNE_K90I	06/22/2010
31	33	FSB/DDR3/FRAMBUF Vref Margining	K91_MLB	06/01/2010
32	34	X19/ALS/CAMERA CONNECTOR	K91_MLB	05/15/2010
33	35	SD READER CONNECTOR	K91_MLB	05/26/2010
34	36	T29 Host (1 of 2)	T29	10/12/2010
35	37	T29 Host (2 of 2)	T29	10/12/2010
36	38	T29 Power Support	T29	10/12/2010
37	39	ETHERNET PHY (CAESAR IV)	K91_MLB	05/26/2010
38	40	Ethernet Connector	K91_MLB	05/26/2010
39	41	FireWire LLC/PHY (FW643E)	T27_MLB	07/20/2009
40	42	FireWire Port & PHY Power	T27_MLB	12/15/2009
41	43	FireWire Connector	T27_MLB	07/28/2009
42	45	SATA/IR/SIL Connectors	K91_MLB	05/15/2010
43	46	External USB Connectors	K91_MLB	06/01/2010
44	48	Front Flex Support	K91_MLB	05/15/2010
45	49	SMC	LINDA_K90I	07/07/2010

Page	(.cna)	Contents	Sync	Date
46	50	SMC Support	LINDA_K90I	07/08/2010
47	51	LPC+SPI Debug Connector	K91_MLB	05/15/2010
48	52	SMBus Connections	K91_MLB	05/26/2010
49	53	Voltage & Load Side Current Sensing	LINDA_K90I	10/22/2010
50	54	High Side Current Sensing	LINDA_K90I	10/22/2010
51	55	Thermal Sensors	LINDA_K90I	10/22/2010
52	56	Fan	K24_MLB	07/20/2009
53	57	WELLSRING 1	LINDA_K90I	07/12/2010
54	58	WELLSRING 2	LINDA_K90I	07/12/2010
55	59	Digital Accelerometer	LINDA_K90I	07/08/2010
56	61	SPI ROM	K91_MLB	05/15/2010
57	62	AUDIO: CODEC/REGULATOR	LENG_K90I	08/10/2010
58	63	AUDIO: LINE INPUT FILTER	LENG_K90I	08/10/2010
59	65	AUDIO: HEADPHONE FILTER	LENG_K90I	08/10/2010
60	66	AUDIO: SPEAKER AMP	LENG_K90I	08/10/2010
61	67	AUDIO: JACK	LENG_K90I	08/10/2010
62	68	AUDIO: JACK TRANSLATORS	LENG_K90I	08/10/2010
63	69	DC-In & Battery Connectors	JACK_K90I	08/20/2010
64	70	PBus Supply & Battery Charger	JACK_K90I	10/11/2010
65	71	System Agent Supply	JACK_K90I	08/19/2010
66	72	5V/3.3V SUPPLY	JACK_K90I	10/04/2010
67	73	1.5V DDR3 Supply	JACK_K90I	10/11/2010
68	74	CPU IMVP7 & AXG VCore Regulator	JACK_K90I	10/14/2010
69	75	CPU IMVP7 & AXG VCore Output	JACK_K90I	09/03/2010
70	76	CPUVCCIO (1.05V) Power Supply	JACK_K90I	08/19/2010
71	77	Misc Power Supplies	JACK_K90I	08/19/2010
72	78	Power FETs	JACK_K90I	10/22/2010
73	79	Power Control 1/ENABLE	JACK_K90I	10/22/2010
74	90	LVDS CONNECTOR	K24_MLB	07/20/2009
75	93	DisplayPort/T29 A MUXing	T29	10/16/2010
76	94	DisplayPort/T29 A Connector	T29	10/16/2010
77	97	LCD Backlight Driver	VENMIRI_K90I	06/25/2010
78	100	CPU Constraints	ANNE_K90I	06/08/2010
79	101	Memory Constraints	ANNE_K90I	05/28/2010
80	102	PCH Constraints 1	K91_MLB	05/15/2010
81	103	PCH Constraints 2	K91_MLB	05/15/2010
82	104	Ethernet/FW Constraints	K91_MLB	05/15/2010
83	105	T29 Constraints	Master	06/21/2010
84	106	SMC Constraints	K91_MLB	05/15/2010
85	108	Project Specific Constraints	ANNE_K90I	06/08/2010
86	109	PCB Rule Definitions	ANNE_K90I	06/08/2010


ALIASES RESOLVED

Schematic / PCB #'s

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
051-8658	1	SCHEM,MLB,K90I	SCH	CRITICAL	
820-2936	1	PCHP,MLB,K90I	PCB	CRITICAL	


DRAWING TITLE=MLB
 ABBREV=DRAWING
 LAST_MODIFIED=Mon Nov 22 19:21:11 2010

DRAWING TITLE SCHEM, FLYING CLOUD, MLB, K90i		DRAWING NUMBER D
Apple Inc.		REVISION
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH
PAGE 1 OF 109		SHEET 1 OF 86

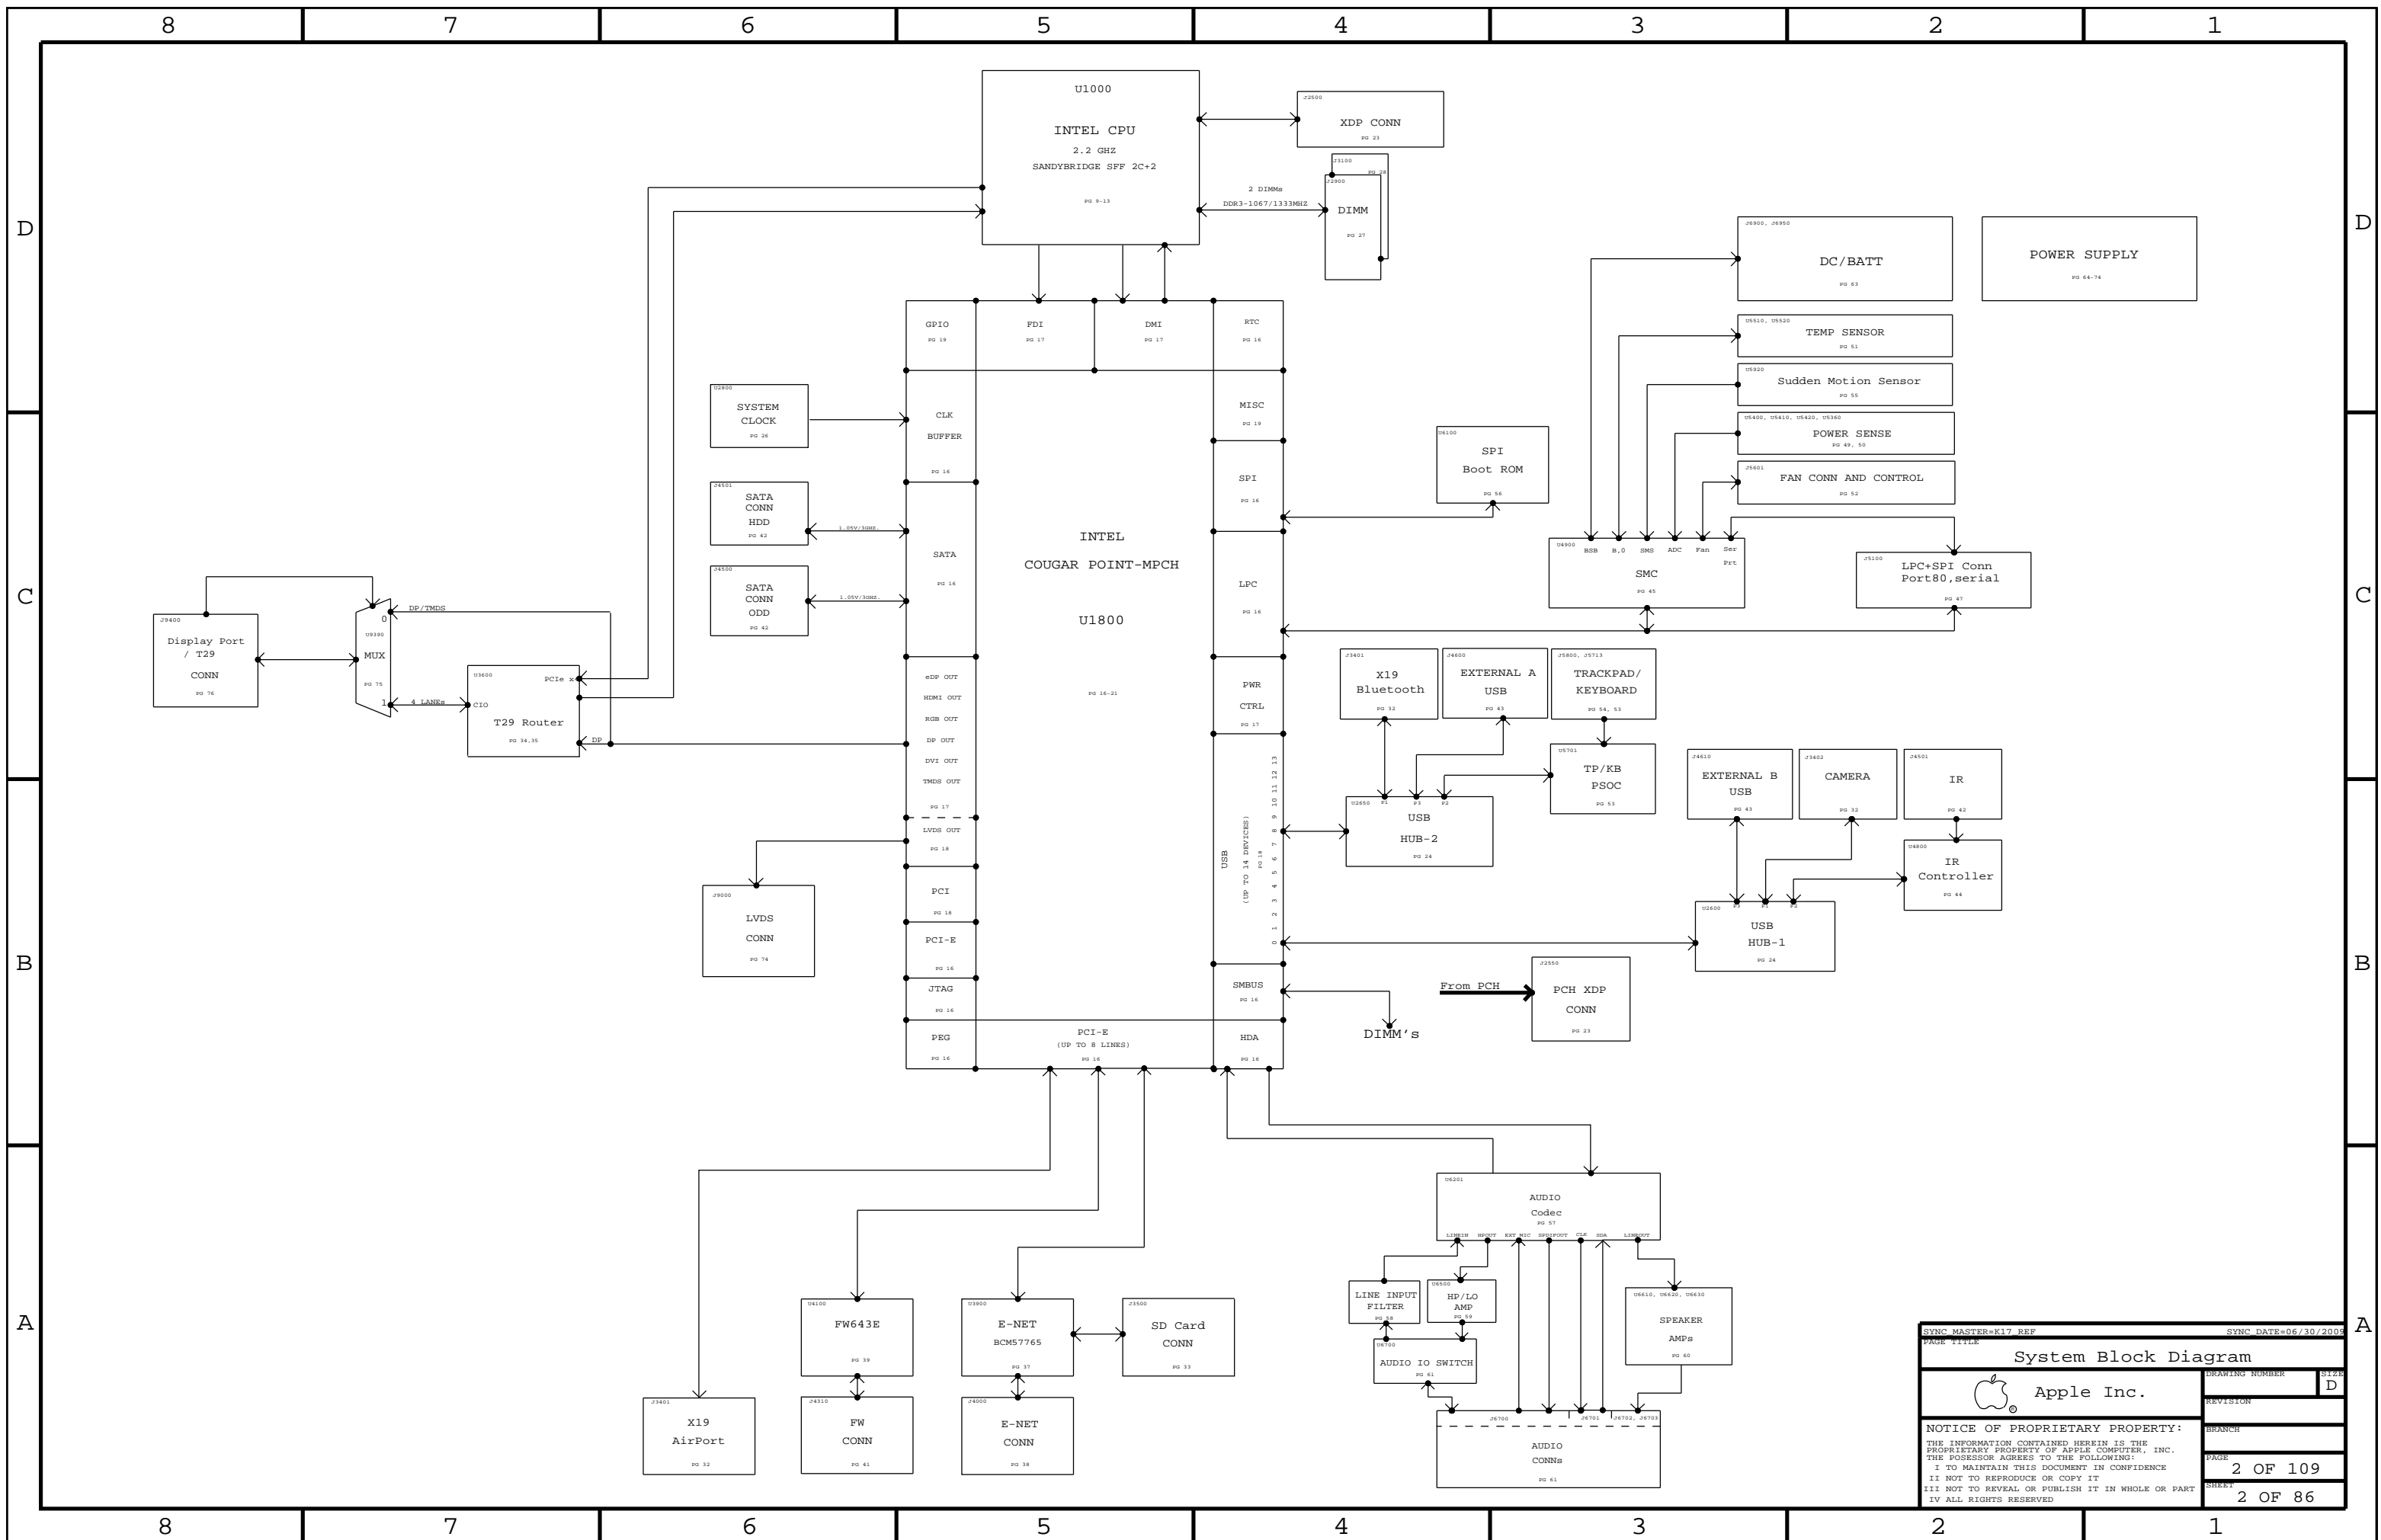

SYNC MASTER=K17_REF		SYNC DATE=06/30/2009	
System Block Diagram			
Apple Inc.		DRAWING NUMBER	SIZE
		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	
		PAGE	2 OF 109
		SHEET	2 OF 86

K90I POWER SYSTEM ARCHITECTURE

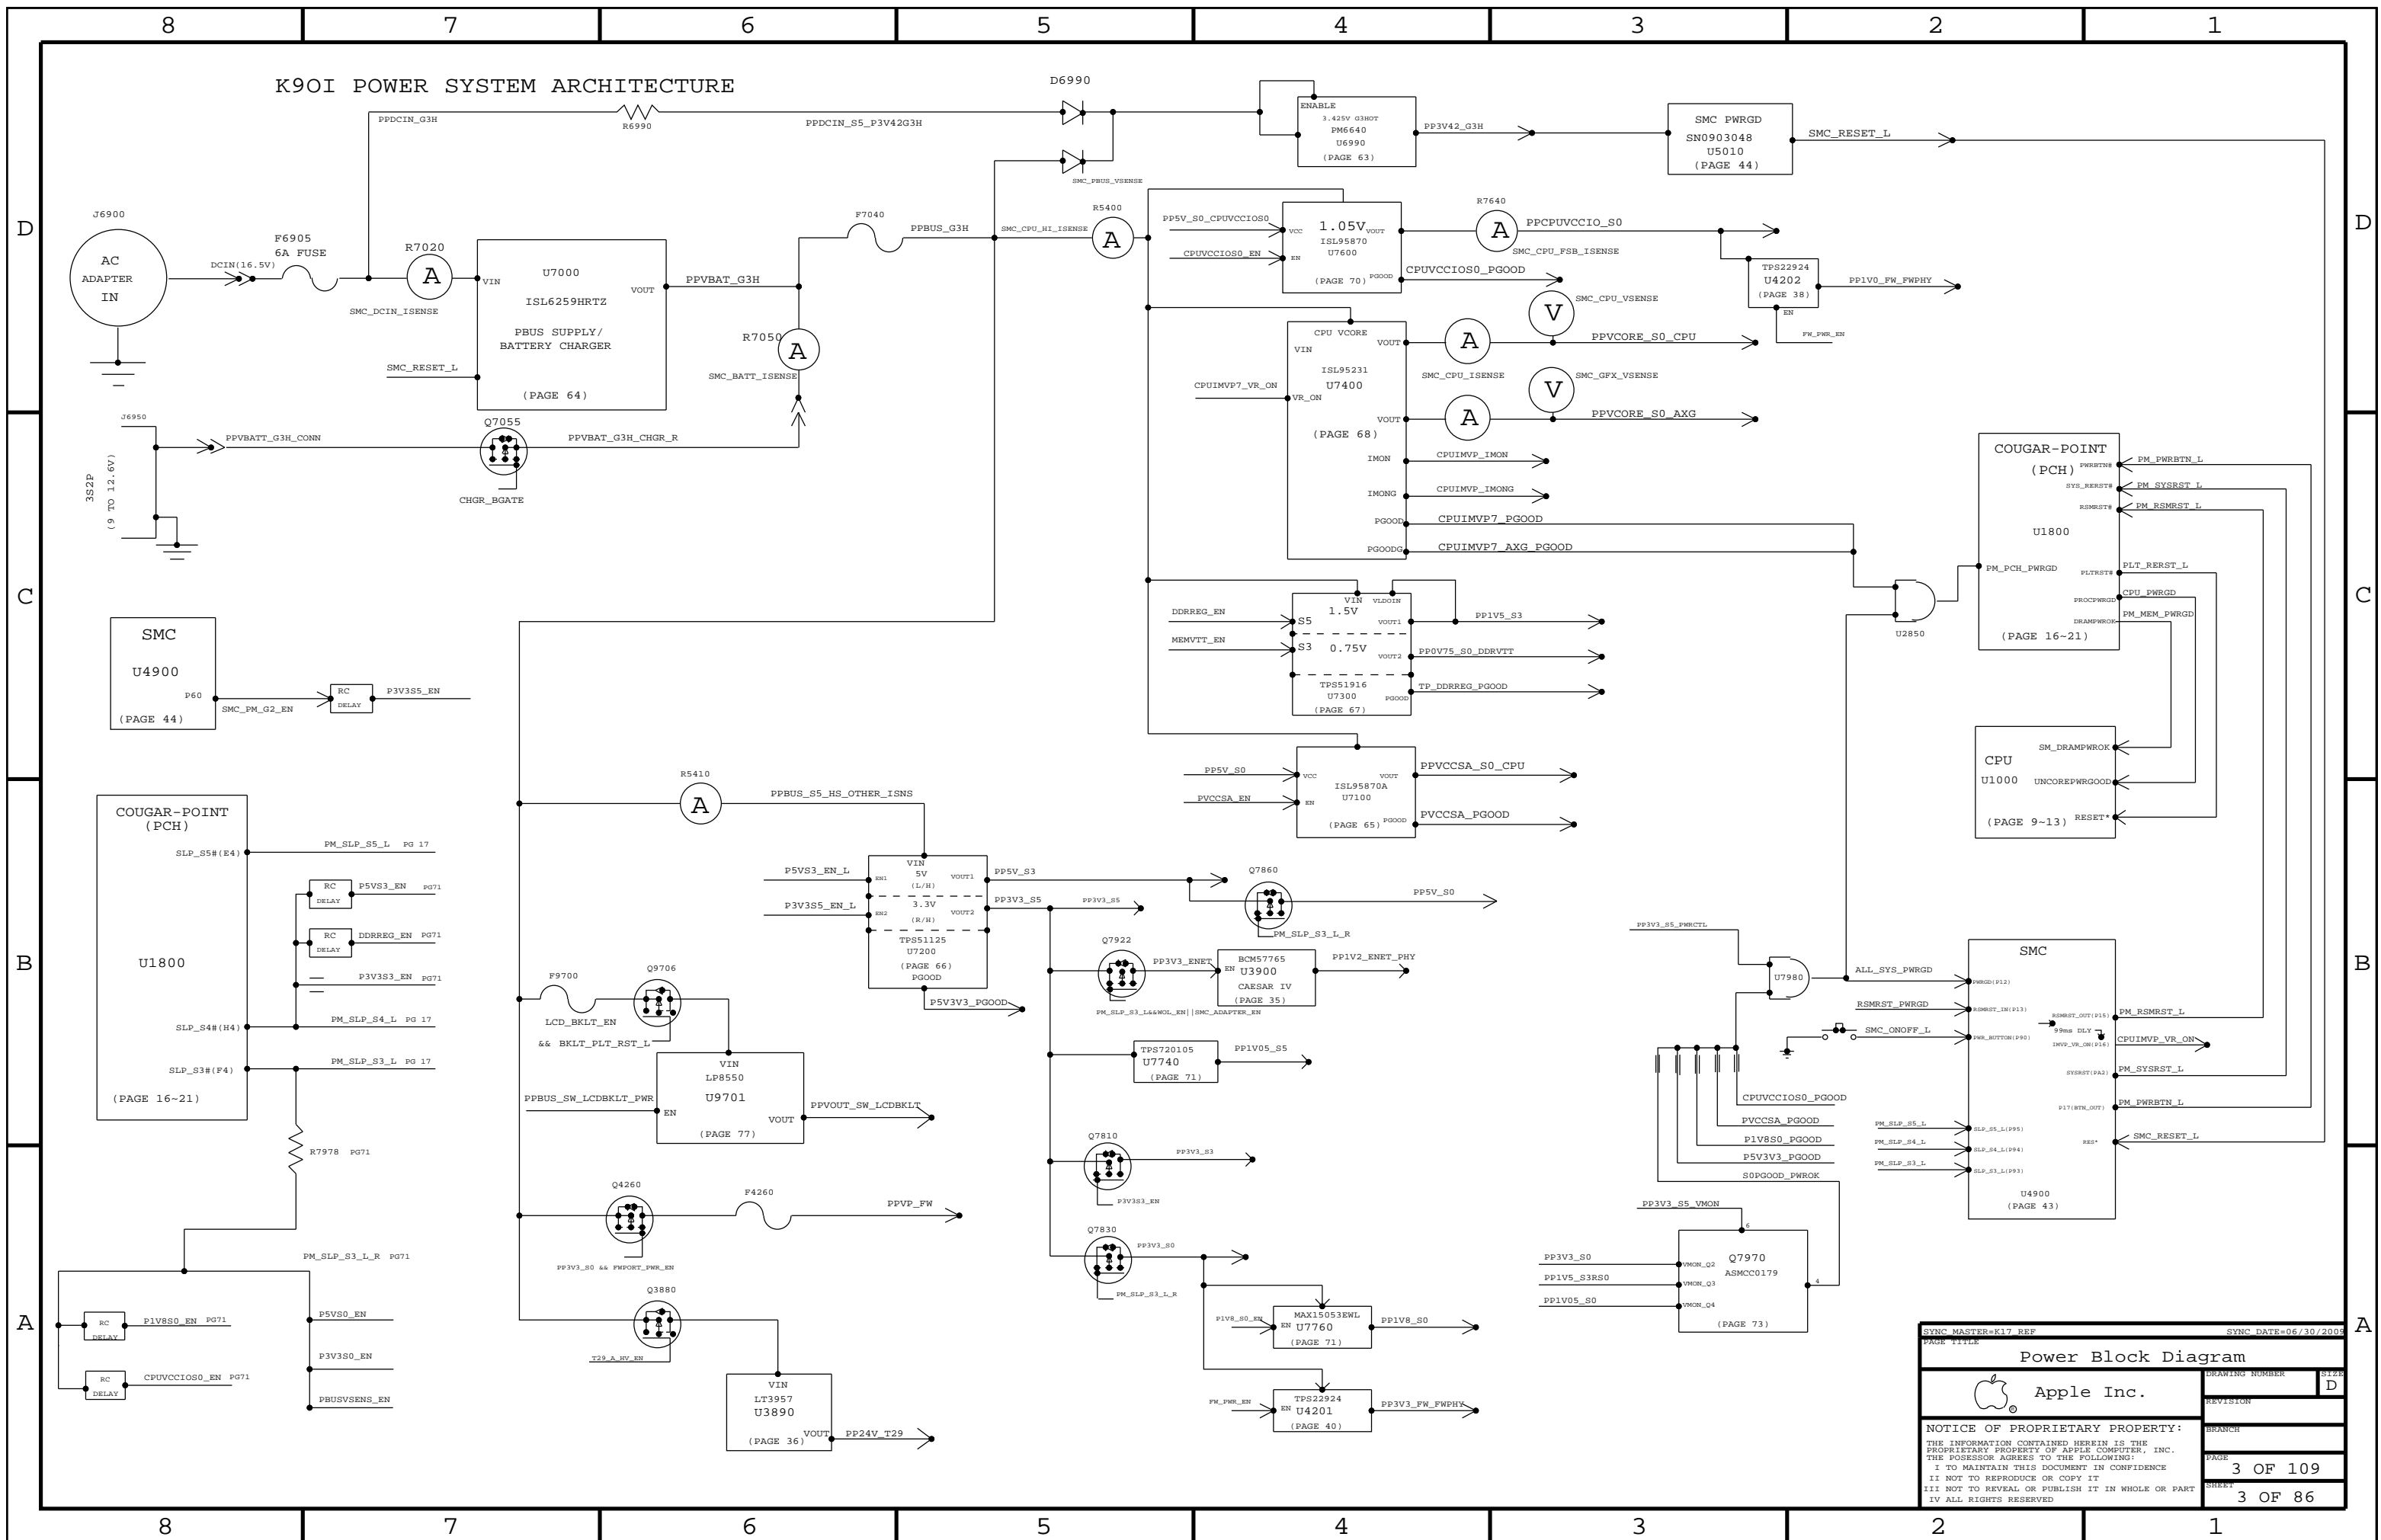

SYNC MASTER=K17_REF		SYNC DATE=06/30/2005	
PAGE TITLE			
Power Block Diagram		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:			
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE			
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			
		PAGE	3 OF 109
		SHEET	3 OF 86

8

7

6

5

4

3

2

1

PROTO:

D

D

C

C

B

B

A

A

SYNC MASTER=MASTER		SYNC DATE=MASTER	
Revision History			
DRAWING NUMBER		SIZE	
		D	
REVISION		BRANCH	
PAGE		4 OF 109	
SHEET		4 OF 86	

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

8

7

6

5

4

3

2

1

BOM Variants

BOM NUMBER	BOM NAME	BOM OPTIONS
639-1294	PCBA, 2.5G, K901	K901_COMMON, CPU_2_5GHZ, EEEE_DDRQ
639-1581	PCBA, 2.7G, K901	K901_COMMON, CPU_2_7GHZ, EEEE_DH78
639-1698	PCBA, 2.6G, K901	K901_COMMON, CPU_2_6GHZ, EEEE_DH8F
639-1699	PCBA, 2.3G, K901	K901_COMMON, CPU_2_3GHZ, EEEE_DH8G
085-1998	K901 MLB DEVELOPMENT BOM	K901_DEVEL:ENG

Bar Code Labels / EEEE #'s

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
826-4393	1	LBL, P/N LABEL, PCB, 28MM X 6 MM	[EEEE:DDRQ]	CRITICAL	EEEE_DDRQ
826-4393	1	LBL, P/N LABEL, PCB, 28MM X 6 MM	[EEEE:DH78]	CRITICAL	EEEE_DH78
826-4393	1	LBL, P/N LABEL, PCB, 28MM X 6 MM	[EEEE:DH8F]	CRITICAL	EEEE_DH8F
826-4393	1	LBL, P/N LABEL, PCB, 28MM X 6 MM	[EEEE:DH8G]	CRITICAL	EEEE_DH8G

K901 BOM GROUPS

BOM GROUP	BOM OPTIONS
K901_COMMON	ALTERNATE, COMMON, K901_COMMON1, K901_COMMON2, K901_DEBUG:ENG, K901_PROGPARTS, USBHUB_2513B, T29BST:Y
K901_COMMON1	BATT_3S, CPUMEM_S0, SMC_DEBUG_YES, HUB1_2NONREM, HUB2_3NONREM, T29:YES, DP_SDRV:A2, SDRV_PD, SDRVI2C:MCU
K901_COMMON2	MIKEY, KB_BL
K901_PROGPARTS	BOOTROM_PROG, SMC_PROG, TPAD_PROG, ENET_PROG, T29ROM:PROG, T29MCU:PROG
K901_DEVEL:ENG	BKLT:ENG, BMON:ENG, XDP_CONN, XDP_CPU:BPM, XDP_PCH, LPCPLUS, VREFMRGN, S0P000_ISL, IMPV1S_ENG
K901_DEVEL:PVT	LPCPLUS, XDP_CONN, XDP_PCH
K901_DEBUG:ENG	DEVEL_BOM, SMC_DEBUG_YES, XDP
K901_DEBUG:PVT	DEVEL_BOM, BKLT:PROD, BMON:PROD, SMC_DEBUG_YES, XDP, VREFMRGN_NOT
K901_DEBUG:PROD	BKLT:PROD, BMON:PROD, SMC_DEBUG_YES, XDP, VREFMRGN_NOT, LPCPLUS

Alternate Parts

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
138S0603	138S0602		ALL	Murata alt to Samsung
157S0058	157S0055		ALL	Delta alt to THE Magnetec
516S0805	516S0806		ALL	Molex alt to Foxconn
128S0303	128S0282		ALL	Panasonic alt to Sanyo
138S0676	138S0691		ALL	Murata alt to Samsung
152S0778	152S0693		ALL	Cyntec alt to Vishay
376S0855	376S0613		ALL	Diodes alt to Toshiba
376S0977	376S0859		ALL	Diodes alt to Toshiba
376S0972	376S0612		ALL	Robm alt to Toshiba
376S0927	376S0966		ALL	Fairchild alt to Renesas
376S0927	376S0790		ALL	Fairchild alt to CICOLOM
376S0960	376S0801		ALL	Renesas alt to Renesas
376S0790	376S0928		ALL	CICOLOM alt to Fairchild
376S0928	376S0895		ALL	Fairchild alt to Renesas
376S0937	376S0845		ALL	Fairchild alt to Renesas
376S0777	376S0761		ALL	AGW alt to Siliconix
376S0957	376S0958		ALL	Fairchild alt to Fairchild
376S0953	376S0958		ALL	Fairchild alt to Renesas
353S3085	353S1658		ALL	Stalco alt to LT

Module Parts

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
337S3934	1	SNB, 2C, QXXX, RES, 2.2, 15M, B2, 3M, 0T1, BGA	U1000	CRITICAL	CPU_2_2GHZ
337S4058	1	SNB, Q18A, QS, J1, 2.5, 35M, 2+2.1.30, 3M, BGA	U1000	CRITICAL	CPU_2_5GHZ
337S4057	1	SNB, Q183, QS, J1, 2.7, 35M, 2+2.1.30, 4M, BGA	U1000	CRITICAL	CPU_2_7GHZ
337S4024	1	SNB, Q189, QS, J1, 2.3, 35M, 2+2.1.30, 3M, BGA	U1000	CRITICAL	CPU_2_3GHZ
337S4064	1	SNB, Q187, QS, J1, 2.6, 35M, 2+2.1.30, 3M, BGA	U1000	CRITICAL	CPU_2_6GHZ
337S4029	1	IC, PCH, COUGARPOINT, SLH9D, FRQ, BDB28M65	U1800	CRITICAL	
343S0534	1	IC, BCM5776580, ENET6SD, 8X8	U3900	CRITICAL	
338S0753	1	IC, P9643-E2, 13948 800/OHCI 1.18M/PCI-E, 12	U4100	CRITICAL	
338S0921	1	IC, T29-C0, 220 PCBGA, 15x15MM	U3600	CRITICAL	T29:YES
353S3055	1	IC, P13VED9212, X2 DISPLAYPORT 2/1 MIX, QFN	U9390	CRITICAL	

Programmable Parts

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
335S0663	1	IC, FLASH, SERIAL, SPI, 1MBIT, 2V7, EP, 801C	U3990	CRITICAL	ENET_BLANK
341S3026	1	IC, ENET, 11MBITFLAH, CIV REV01, K60/K62	U3990	CRITICAL	ENET_PROG
335S0777	1	IC, EEPROM, SERIAL, SPI, 1Kx8, 1.8V, MLP8, LF	U3690	CRITICAL	T29ROM:BLANK
341T0317	1	IC, T29 ASSY	U3690	CRITICAL	T29ROM:PROG
337S3997	1	IC, MCU, 32B, LPC1112A, 16KB/2KB, HVQFN25	U9330	CRITICAL	T29MCU:BLANK
341S2939	1	IC, PROGRAMD, LPC1112A, T29 PORT MCU, HVQFN25	U9330	CRITICAL	T29MCU:PROG
338S0895	1	IC, SMC, HSB/2117/9MMx9MM, TLP	U4900	CRITICAL	SMC_BLANK
341T0300	1	IC, SMC, K901	U4900	CRITICAL	SMC_PROG
335S0770	1	64 MBIT SPI SERIAL DUAL I/O FLASH	U6100	CRITICAL	BOOTROM_BLANK
335S0769	1	64 MBIT SPI SERIAL DUAL I/O FLASH	U6100	CRITICAL	BOOTROM_BLANK
341T0299	1	IC, EFI ROM, K901	U6100	CRITICAL	BOOTROM_PROG
341S2384	1	18, ENCORE II, CY7C6303-LQXC	U4800	CRITICAL	
341S3024	1	IC, TP, FSOC, K90, K91, K91F, K92	U5701	CRITICAL	TPAD_PROG

Development BOM

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
085-1998	1	K901 MLB DEVELOPMENT	DEVEL	CRITICAL	DEVEL_BOM

SYNC MASTER=K17_REF SYNC DATE=05/28/2009

PAGE TITLE: BOM Configuration


Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

DRAWING NUMBER: D
 REVISION:
 BRANCH:
 PAGE: 5 OF 109
 SHEET: 5 OF 86

Functional Test Points

8	7	6	5	4	3	2	1																		
Fan Connectors TRUE PP5V_S0 TRUE FAN_RT_PWM TRUE FAN_RT_TACH (NEED TO ADD 1 GND TP)		X19 CONN TRUE PP3V3_WLAN (NEED 3 TP) TRUE PCIE_AP_D2R_PI_P TRUE PCIE_AP_D2R_PI_N TRUE PCIE_AP_R2D_P TRUE PCIE_AP_R2D_N TRUE PCIE_CLK100M_AP_CONN_P TRUE PCIE_CLK100M_AP_CONN_N TRUE PP3V3_S3_BT_F TRUE PCIE_WAKE_L TRUE SMBUS_SMC_0_S0_SCL TRUE SMBUS_SMC_0_S0_SDA TRUE USB_BT_P TRUE USB_BT_N TRUE AP_CLKREQ_O_L TRUE AP_RESET_CONN_L TRUE AP_TEMP_SMB_SDA_R TRUE AP_TEMP_SMB_SCL_R TRUE WIFI_EVENT_L_R (NEED TO ADD 5 GND TP)		DEBUG VOLTAGE TRUE PPVCORE_S0_CPU TRUE PPVCORE_S0_AXG TRUE PP1V2_S3_ENET_INTREG TRUE PP1V05_S0 TRUE PP1V5_S3RS0 TRUE PP1V8_S0 TRUE PP3V3_S0 TRUE PP5V_S0 TRUE PP3V3_S3 TRUE PP5V_S3 TRUE PPVCCSA_S0_CPU TRUE PP3V3_S5 TRUE PP3V42_G3H TRUE PPBUS_G3H TRUE PP3V3_ENET TRUE PP3V3_WLAN TRUE PP5V_SW_ODD TRUE PP5V_S0_HDD_FLT TRUE PP18V5_S5 TRUE PP3V3_S0_LCD_F TRUE PP3V3_LCDVDD_SW_F TRUE PP4V5_AUDIO_ANALOG TRUE PPMV5_S3 TRUE SMC_PM_G2_EN TRUE PM_SLP_S4_L TRUE PM_SLP_S3_L (NEED TO ADD 6 GND TP)		DC POWER CONN (NEED 3 TP) TRUE PP18V5_DCIN_FUSE TRUE ADAPTER_SENSE (NEED TO ADD 4 GND TP)		NC NO_TESTS NC CRT IG BLUE NC CRT IG GREEN NC CRT IG RED NC CRT IG DDC CLK NC CRT IG DDC DATA NC CRT IG HSYNC NC CRT IG VSYNC NC LVDS IG_CTRL_CLK NC LVDS IG_CTRL_DATA NC PCH LVDS_VBG NC HDA_SDN1 NC HDA_SDN2 NC HDA_SDN3 NC PCI_PME_L NC PCI_CLK33M_OUT3 NC CLINK_CLK NC CLINK_DATA NC CLINK_RESET_L NC PCIE_CLK100M_PEBN NC PCIE_CLK100M_PEBP NC FW643_SDA NC FW643_SM NC FW643_TCK NC FW643_TMS NC FW643_FW620_L NC FW643_VBUF NC FW643_OCR10_CTL NC FW643_AVREG NC FW643_TDI TP_XDP_PCH_OBSFN_A<0..1> TP_XDP_PCH_OBSFN_B<0..1> NC_TP_XDPPCH_HOOK2 NC_TP_XDPPCH_HOOK3 TP_XDP_PCH_OBSFN_D<0..1> NC_TP_XDP_PCH_HOOK4 NC_TP_XDP_PCH_HOOK5 NC_PCH_GPIO64_CLKOUTFLEX0 NC_PCH_GPIO65_CLKOUTFLEX1 NC_PCH_GPIO66_CLKOUTFLEX2 NC_PCH_GPIO67_CLKOUTFLEX3 NC FW2_TBPB NC FW2_TBBN NC FW2_TBIAS NC FW2_TPAP NC FW2_TPAN NC FW0_TBPB NC FW0_TBBN NC FW0_TPAP XDP_PCH_AP_PWR_EN XDP_PCH_USB_HUB_SOFT_RST_L XDP_PCH_SDCONN_STATE_RST_L XDP_PCH_ENET_PWR_EN XDP_PCH_SDCONN_DET_L XDP_PCH_S5_PWRGD XDP_PCH_PWRBTN_L XDP_PCH_ISOLATE_CPU_MEM_L XDP_FW_CLKREQ_L XDP_AP_CLKREQ_L XDP_PCH_AUD_IPHS_SWITCH_EN NC_SDVO_TVCLKINN NC_SDVO_TVCLKINP NC_SDVO_STALLN NC_SDVO_STALLP NC_SDVO_INTN NC_SDVO_INTP		NC NO_TESTS TP EDP_TX_P<0..3> TP EDP_TX_N<0..3> NC_EDP_AUXP NC_EDP_AUXN NC_CPU_THERMDA NC_CPU_THERMDC NC_CPU_RSVD<30..45> NC_CPU_RSVD<8..27> =PEG_R2D_C_P<0..7> =PEG_R2D_C_N<0..7> =PEG_D2R_P<0..7> =PEG_D2R_N<0..7> =PEG_R2D_C_P<12..15> =PEG_R2D_C_N<12..15> =PEG_D2R_P<12..15> =PEG_D2R_N<12..15> NC_PCIE_CLK100M_PEA4 NC_PCIE_CLK100M_PEA6 NC_PCIE_CLK100M_PEA8 NC_PCIE_CLK100M_PEB4 NC_PCIE_CLK100M_PEB6 NC_PCIE_CLK100M_PEB8 NC_PCIE_CLK100M_PEN4 NC_PCIE_CLK100M_PEN6 NC_PCIE_CLK100M_PEN8 NC_PCIE_CLK100M_PET4 NC_PCIE_CLK100M_PET6 NC_PCIE_CLK100M_PET8 NC_PSOC_P1_3 NC_SATA_B_D2RN NC_SATA_B_D2RP NC_SATA_B_R2D_CN NC_SATA_B_R2D_CP NC_SATA_D_D2RN NC_SATA_D_D2RP NC_SATA_D_R2D_CN NC_SATA_D_R2D_CP NC_SATA_E_D2RN NC_SATA_E_D2RP NC_SATA_E_R2D_CN NC_SATA_E_R2D_CP NC_SATA_F_D2RN NC_SATA_F_D2RP NC_SATA_F_R2D_CN NC_SATA_F_R2D_CP NC_PCH_TP18 NC_PCH_TP17 NC_PCH_TP16 NC_PCH_TP15 NC_PCH_TP14 NC_PCH_TP13 NC_PCH_TP12 NC_PCH_TP10 NC_PCH_TP9 NC_PCH_TP8 NC_PCH_TP7 NC_PCH_TP6 NC_PCH_TP5 NC_PCH_TP4 NC_PCH_TP3 NC_PCH_TP2 NC_PCH_TP1 PCH_VSS_NCTF<1> PCH_VSS_NCTF<2> PCH_VSS_NCTF<5> PCH_VSS_NCTF<9> PCH_VSS_NCTF<11> PCH_VSS_NCTF<12> TP_LVDS_IG_B_CLKN TP_LVDS_IG_B_CLKP NC_LVDS_IG_BKL_PWM NC_SMC_BS_ALERT_L		SPEAKER FUNC_TEST TRUE SPKRAMP_L_N_OUT TRUE SPKRAMP_L_P_OUT TRUE SPKRAMP_R_N_OUT TRUE SPKRAMP_R_P_OUT TRUE SPKRAMP_SUB_N_OUT TRUE SPKRAMP_SUB_P_OUT		IPD_FLEX_CONN TRUE PP3V3_S5 TRUE PP18V5_S5 TRUE Z2_CS_L TRUE Z2_DEBUG3 TRUE Z2_MOSI TRUE Z2_MISO TRUE Z2_SCLK TRUE Z2_BOOST_EN TRUE Z2_HOST_INTN TRUE Z2_CLKIN TRUE Z2_KEY_ACT_L TRUE Z2_RESET TRUE PSOC_MISO TRUE PSOC_MOSI TRUE PSOC_SCLK TRUE SMBUS_SMC_A_S3_SDA TRUE SMBUS_SMC_A_S3_SCL TRUE PSOC_F_CS_L TRUE PICKB_L (NEED TO ADD 2 GND TP)		KEYBOARD CONN TRUE PP3V3_S5 TRUE PP3V42_G3H TRUE WS_KBD1 TRUE WS_KBD2 TRUE WS_KBD3 TRUE WS_KBD4 TRUE WS_KBD5 TRUE WS_KBD6 TRUE WS_KBD7 TRUE WS_KBD8 TRUE WS_KBD9 TRUE WS_KBD10 TRUE WS_KBD11 TRUE WS_KBD12 TRUE WS_KBD13 TRUE WS_KBD14 TRUE WS_KBD15_CAP TRUE WS_KBD16_NUM TRUE WS_KBD17 TRUE WS_KBD18 TRUE WS_KBD19 TRUE WS_KBD20 TRUE WS_KBD21 TRUE WS_KBD22 TRUE WS_KBD23 TRUE WS_KBD_ONOFF_L TRUE WS_LEFT_SHIFT_KBD TRUE WS_LEFT_OPTION_KBD TRUE WS_CONTROL_KBD (NEED TO ADD 2 GND TP)		LPC+SPI DEBUG_CONN TRUE LEC_AD<0> TRUE LEC_AD<1> TRUE LEC_AD<2> TRUE LEC_AD<3> TRUE LPC_CLK33M_LPCPLUS TRUE LPC_FRAME_L TRUE LPC_PWRDWN_L TRUE LPC_SERIRO TRUE LPCPLUS_GPIO TRUE LPCPLUS_RESET_L TRUE PM_CLKRUN_L TRUE PP3V42_G3H TRUE PP5V_S0 TRUE SMC_MD1 TRUE SMC_RX_L TRUE SMC_TCK TRUE SMC_TDI TRUE SMC_TDO TRUE SMC_TMS TRUE SMC_TRST_L TRUE SMC_TX_L TRUE SPI_ALT_CLK TRUE SPI_ALT_CS_L TRUE SPI_ALT_MISO TRUE SPI_ALT_MOSI TRUE SPIROM_USE_MLB (NEED TO ADD 2 GND TP)		DC POWER CONN (NEED 3 TP) TRUE PP18V5_DCIN_FUSE TRUE ADAPTER_SENSE (NEED TO ADD 4 GND TP)		NC NO_TESTS NC FW2_TBPB NC FW2_TBBN NC FW2_TBIAS NC FW2_TPAP NC FW2_TPAN NC FW0_TBPB NC FW0_TBBN NC FW0_TPAP XDP_PCH_AP_PWR_EN XDP_PCH_USB_HUB_SOFT_RST_L XDP_PCH_SDCONN_STATE_RST_L XDP_PCH_ENET_PWR_EN XDP_PCH_SDCONN_DET_L XDP_PCH_S5_PWRGD XDP_PCH_PWRBTN_L XDP_PCH_ISOLATE_CPU_MEM_L XDP_FW_CLKREQ_L XDP_AP_CLKREQ_L XDP_PCH_AUD_IPHS_SWITCH_EN NC_SDVO_TVCLKINN NC_SDVO_TVCLKINP NC_SDVO_STALLN NC_SDVO_STALLP NC_SDVO_INTN NC_SDVO_INTP		NC NO_TESTS TP EDP_TX_P<0..3> TP EDP_TX_N<0..3> NC_EDP_AUXP NC_EDP_AUXN NC_CPU_THERMDA NC_CPU_THERMDC NC_CPU_RSVD<30..45> NC_CPU_RSVD<8..27> =PEG_R2D_C_P<0..7> =PEG_R2D_C_N<0..7> =PEG_D2R_P<0..7> =PEG_D2R_N<0..7> =PEG_R2D_C_P<12..15> =PEG_R2D_C_N<12..15> =PEG_D2R_P<12..15> =PEG_D2R_N<12..15> NC_PCIE_CLK100M_PEA4 NC_PCIE_CLK100M_PEA6 NC_PCIE_CLK100M_PEA8 NC_PCIE_CLK100M_PEB4 NC_PCIE_CLK100M_PEB6 NC_PCIE_CLK100M_PEB8 NC_PCIE_CLK100M_PEN4 NC_PCIE_CLK100M_PEN6 NC_PCIE_CLK100M_PEN8 NC_PCIE_CLK100M_PET4 NC_PCIE_CLK100M_PET6 NC_PCIE_CLK100M_PET8 NC_PSOC_P1_3 NC_SATA_B_D2RN NC_SATA_B_D2RP NC_SATA_B_R2D_CN NC_SATA_B_R2D_CP NC_SATA_D_D2RN NC_SATA_D_D2RP NC_SATA_D_R2D_CN NC_SATA_D_R2D_CP NC_SATA_E_D2RN NC_SATA_E_D2RP NC_SATA_E_R2D_CN NC_SATA_E_R2D_CP NC_SATA_F_D2RN NC_SATA_F_D2RP NC_SATA_F_R2D_CN NC_SATA_F_R2D_CP NC_PCH_TP18 NC_PCH_TP17 NC_PCH_TP16 NC_PCH_TP15 NC_PCH_TP14 NC_PCH_TP13 NC_PCH_TP12 NC_PCH_TP10 NC_PCH_TP9 NC_PCH_TP8 NC_PCH_TP7 NC_PCH_TP6 NC_PCH_TP5 NC_PCH_TP4 NC_PCH_TP3 NC_PCH_TP2 NC_PCH_TP1 PCH_VSS_NCTF<1> PCH_VSS_NCTF<2> PCH_VSS_NCTF<5> PCH_VSS_NCTF<9> PCH_VSS_NCTF<11> PCH_VSS_NCTF<12> TP_LVDS_IG_B_CLKN TP_LVDS_IG_B_CLKP NC_LVDS_IG_BKL_PWM NC_SMC_BS_ALERT_L	
BATT POWER CONN TRUE SMBUS_SMC_BSA_SCL TRUE SMBUS_SMC_BSA_SDA TRUE SYS_DETECT_L TRUE PPVBT_G3H_CONN (NEED 5 TP) (NEED TO ADD 5 GND TP)		KBD BACKLIGHT CONN TRUE KBDLED_ANODE TRUE SMC_KBDLED_PRESENT_L (NEED TO ADD 1 GND TP)		CAMERA/ALS CONN TRUE PP5V_S3_ALSCAMERA_F TRUE SMBUS_SMC_A_S3_SCL TRUE SMBUS_SMC_A_S3_SDA TRUE USB_CAMERA_CONN_P TRUE USB_CAMERA_CONN_N (NEED TO ADD 2 GND TP)		FUNC TEST DRAWING NUMBER: D REVISION: BRANCH: PAGE: 7 OF 109 SHEET: 6 OF 86																			

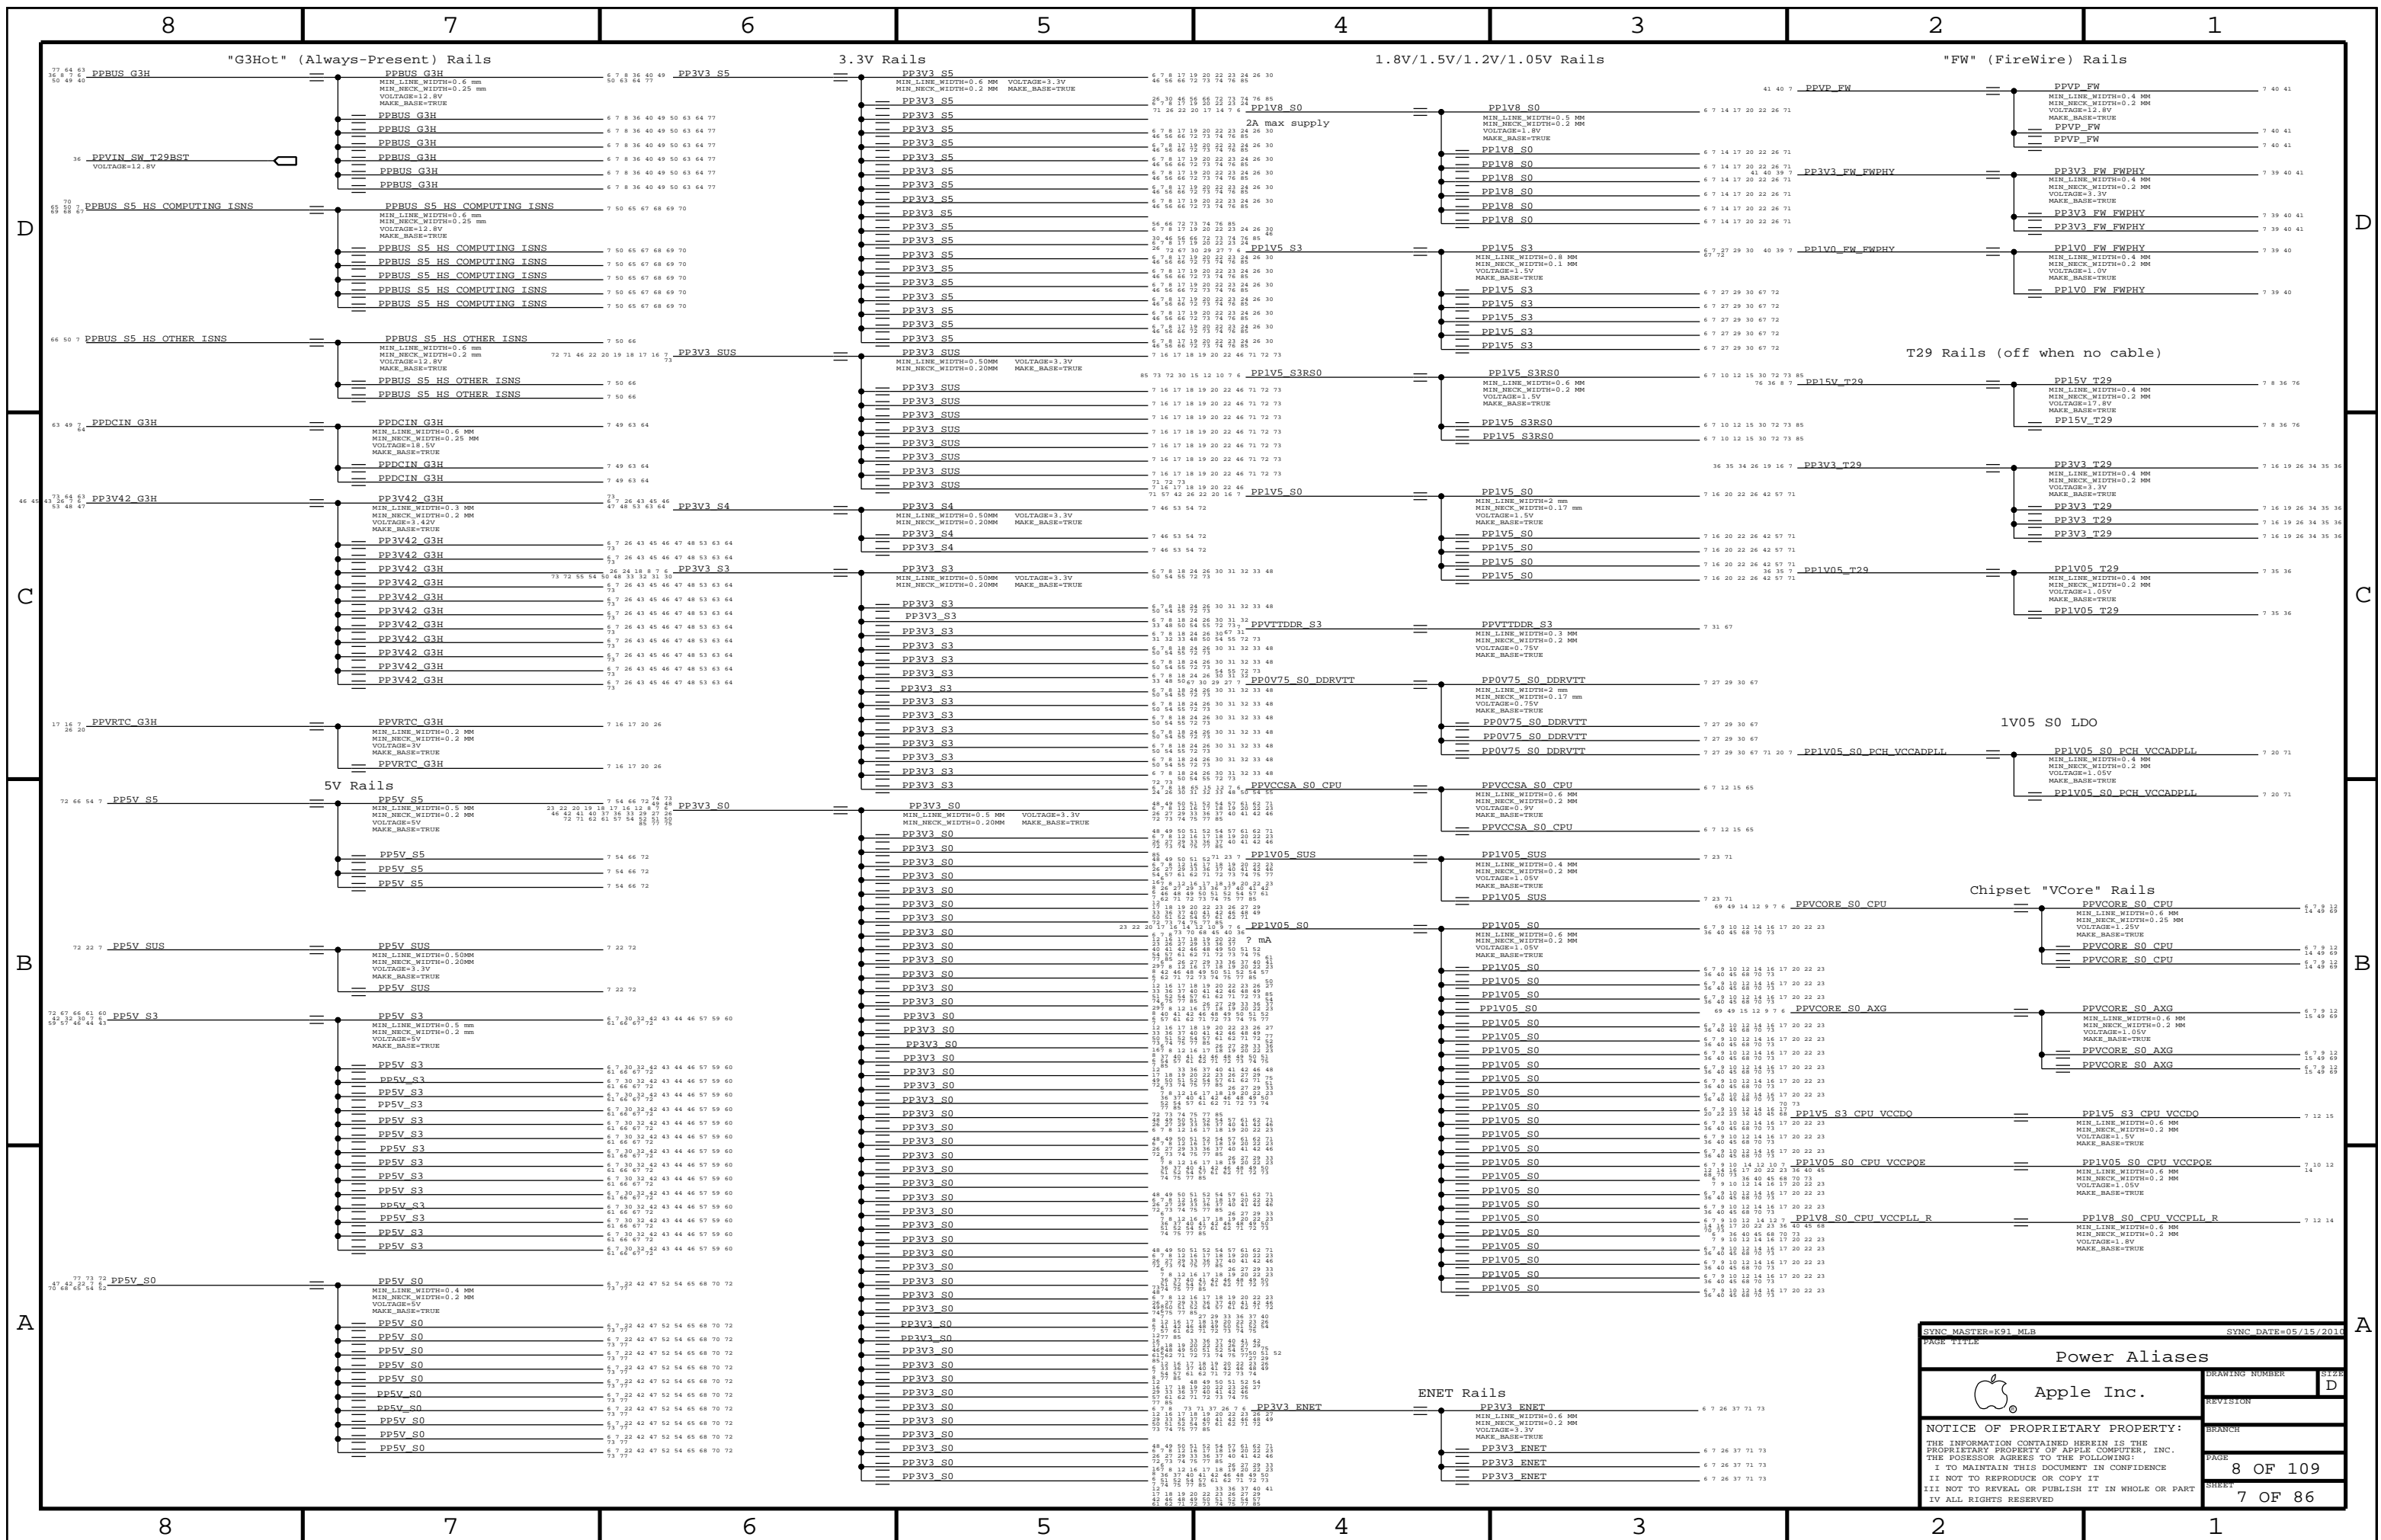

SYNC MASTER=K91.MLB SYNC DATE=05/15/2011


PAGE TITLE

Power Aliases

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THIS POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

DRAWING NUMBER	SIZE
REVISION	D
BRANCH	
PAGE	8 OF 109
SHEET	7 OF 86

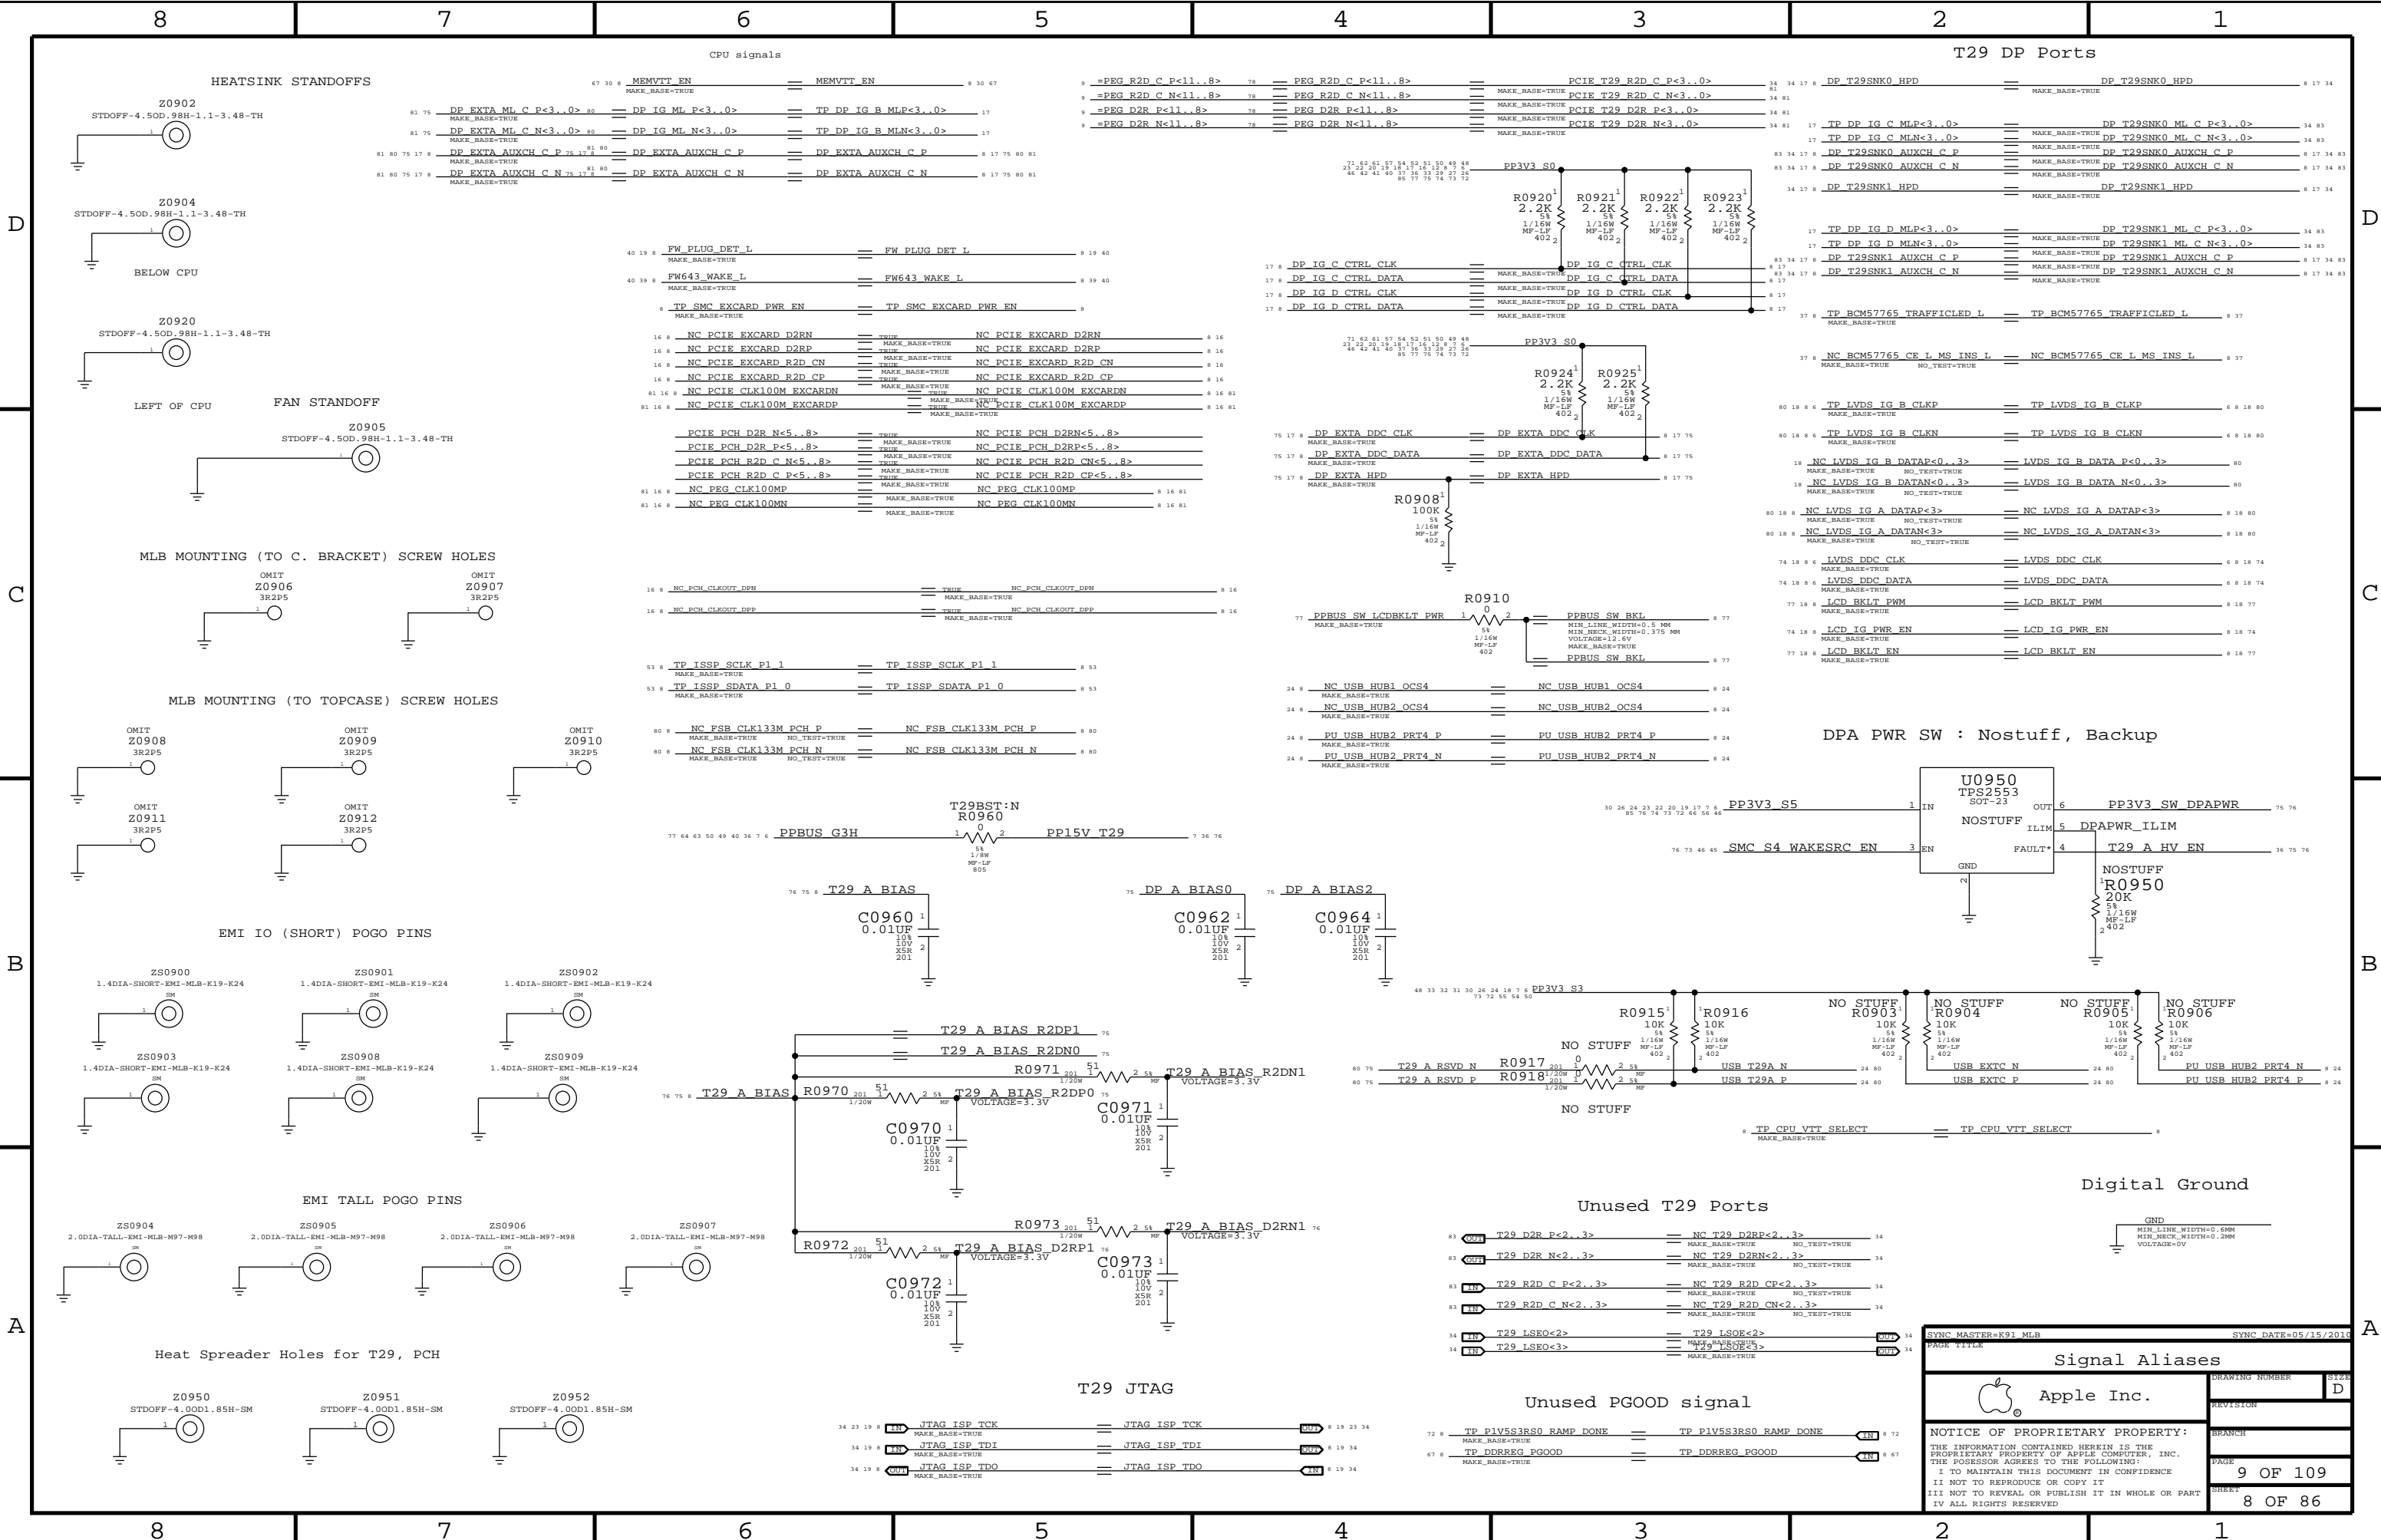

Apple Inc.		DRAWING NUMBER	SIZE
		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE I I NOT TO REPRODUCE OR COPY IT I I I NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART I V ALL RIGHTS RESERVED		BRANCH	
		PAGE	9 OF 109
		SHEET	8 OF 86

SYNC MASTER=K91 MLB SYNC DATE=05/15/2011

PAGE TITLE

Signal Aliases

TP PIV5S3RS0 RAMP DONE == TP PIV5S3RS0 RAMP DONE

TP DDRREG PGOOD == TP DDRREG PGOOD

T29 LSEO<2> == T29 LSEO<2>

T29 LSEO<3> == T29 LSEO<3>

T29 R2D C P<2..3> == NC T29 R2D CP<2..3>

T29 R2D C N<2..3> == NC T29 R2D CN<2..3>

T29 D2R P<2..3> == NC T29 D2RP<2..3>

T29 D2R N<2..3> == NC T29 D2RN<2..3>


T29 D2R P<3..0> == NC T29 D2RP<3..0>

T29 D2R N<3..0> == NC T29 D2RN<3..0>

TP DP IG C MLP<3..0> == TP DP IG C MLP<3..0>


TP DP IG C MLP<3..0> == TP DP IG C MLP<3..0>


TP DP IG C MLP<3..0> == TP DP IG C MLP<3..0>

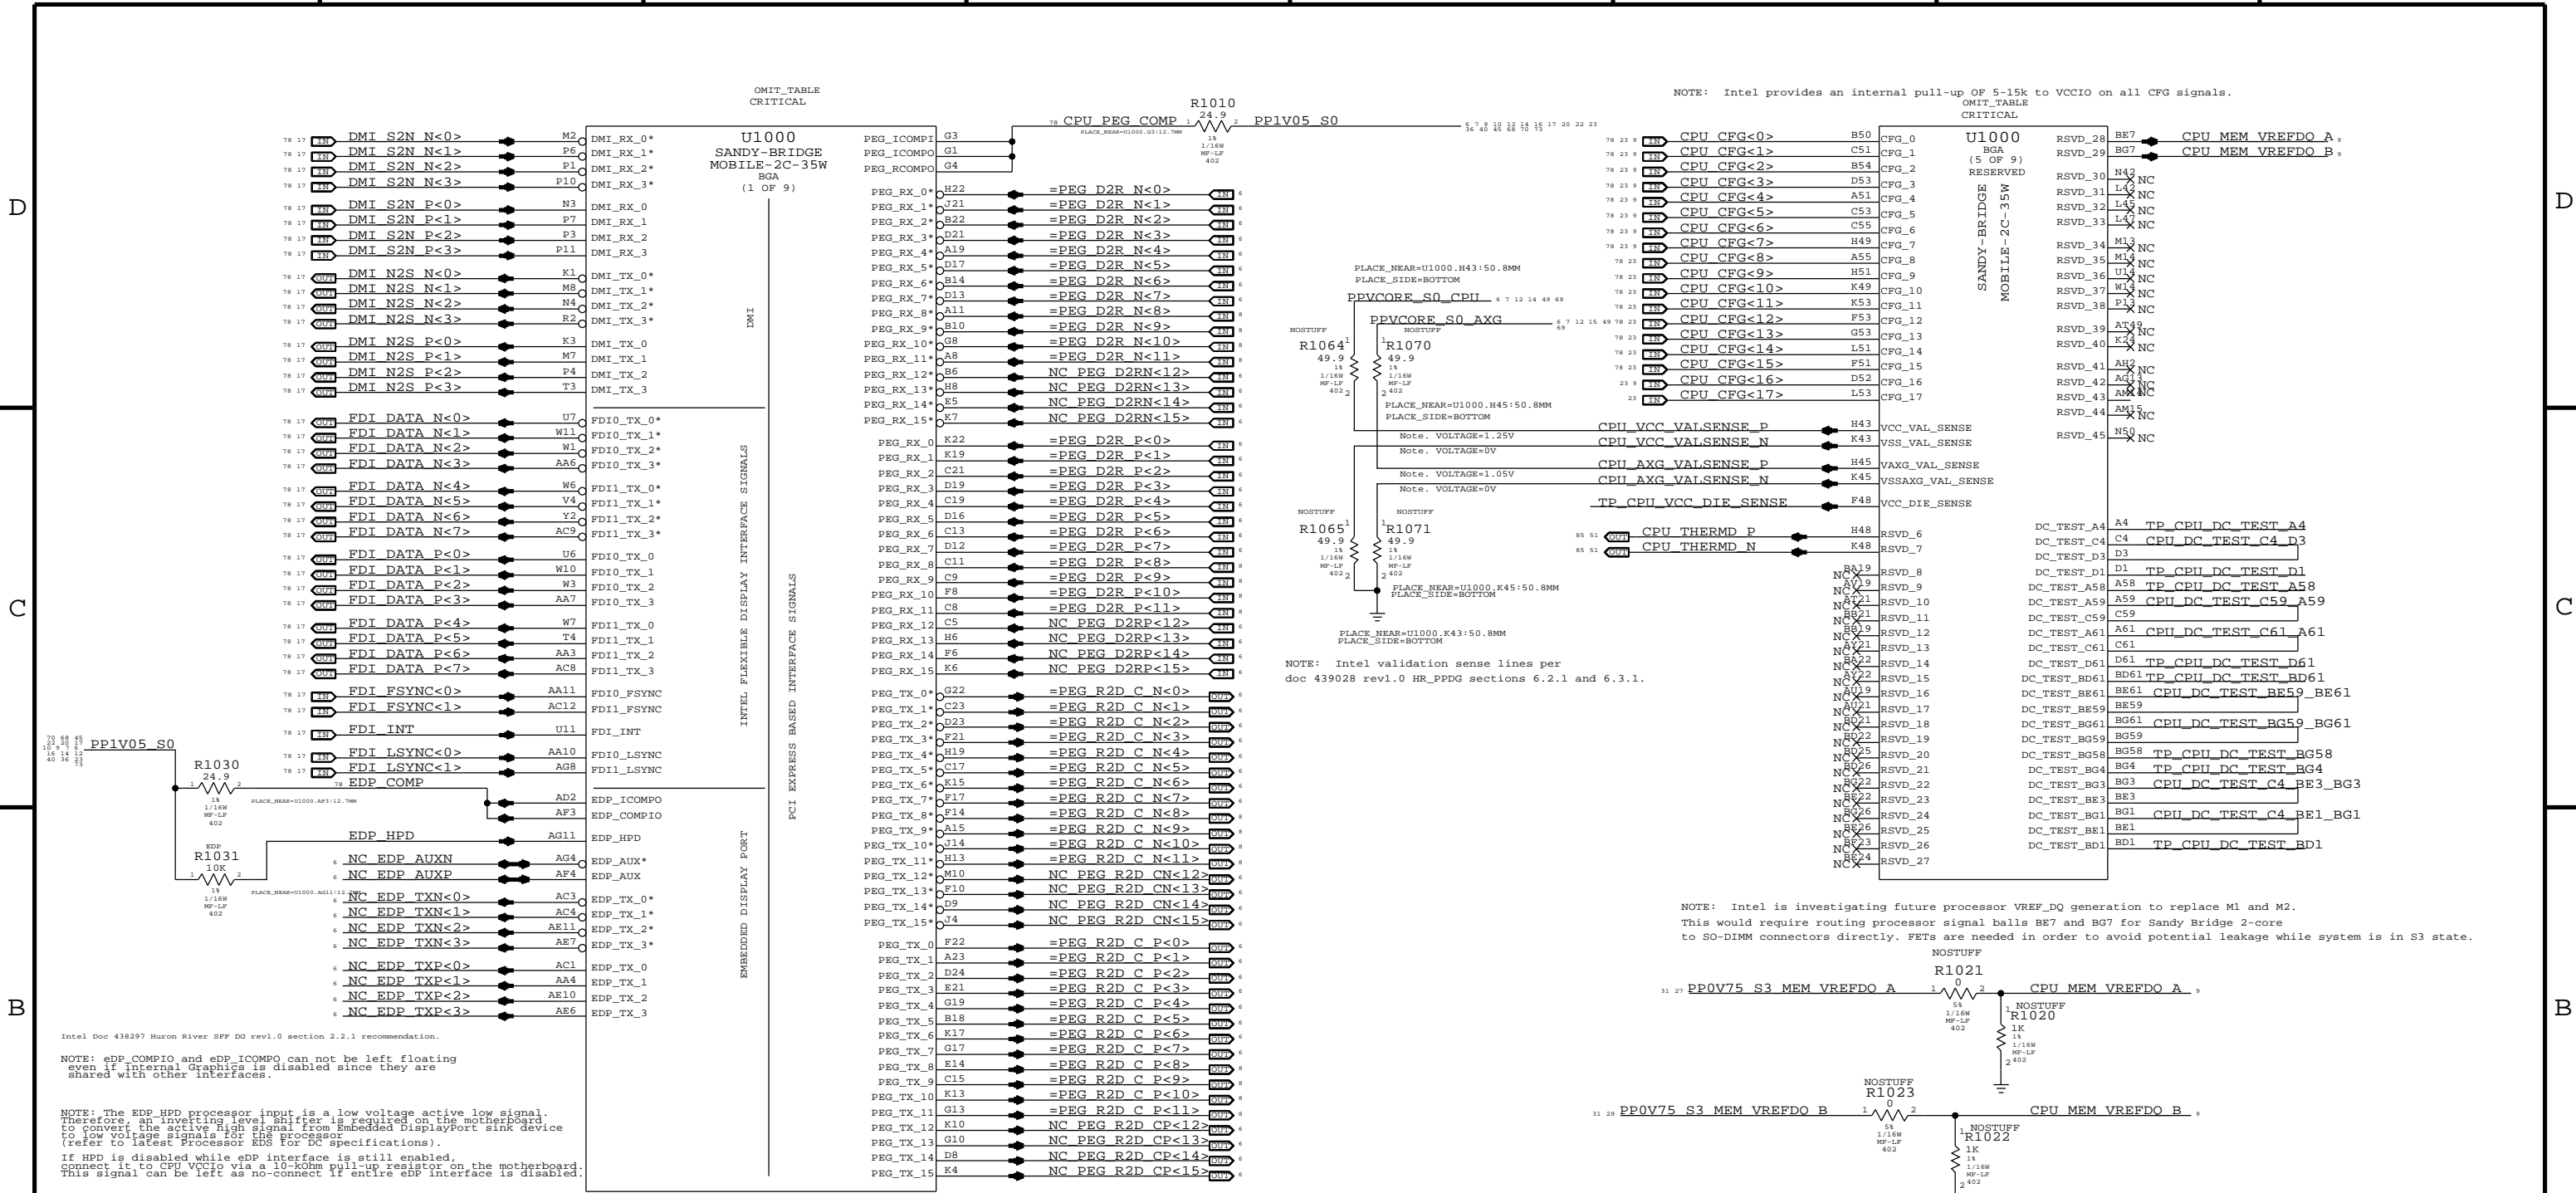

FOR SANDYBRIDGE PROCESSOR	
CFG [7] : PEG DEFER TRAINING	1 = (DEFAULT) IMMEDIATELY AFTER xRESETB 0 = WAIT FOR BIOS
CFG [6:5] : PCIE BIFURCATION	11 = 1 X16 (DEFAULT) 10 = 2 X8 01 = RSVD 00 = X8, X4, X4
CFG [4] : eDP ENABLE/DISABLE	1 = DISABLED 0 = ENABLED
CFG [3] : PCIE x4 LANE REVERSAL	1 = NORMAL OPERATION 0 = LANES REVERSED
CFG [2] : PCIE x16 LANE REVERSAL	1 = NORMAL OPERATION 0 = LANES REVERSED

CPU DMI/PEG/FDI/RSVD		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	10 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	9 OF 86
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

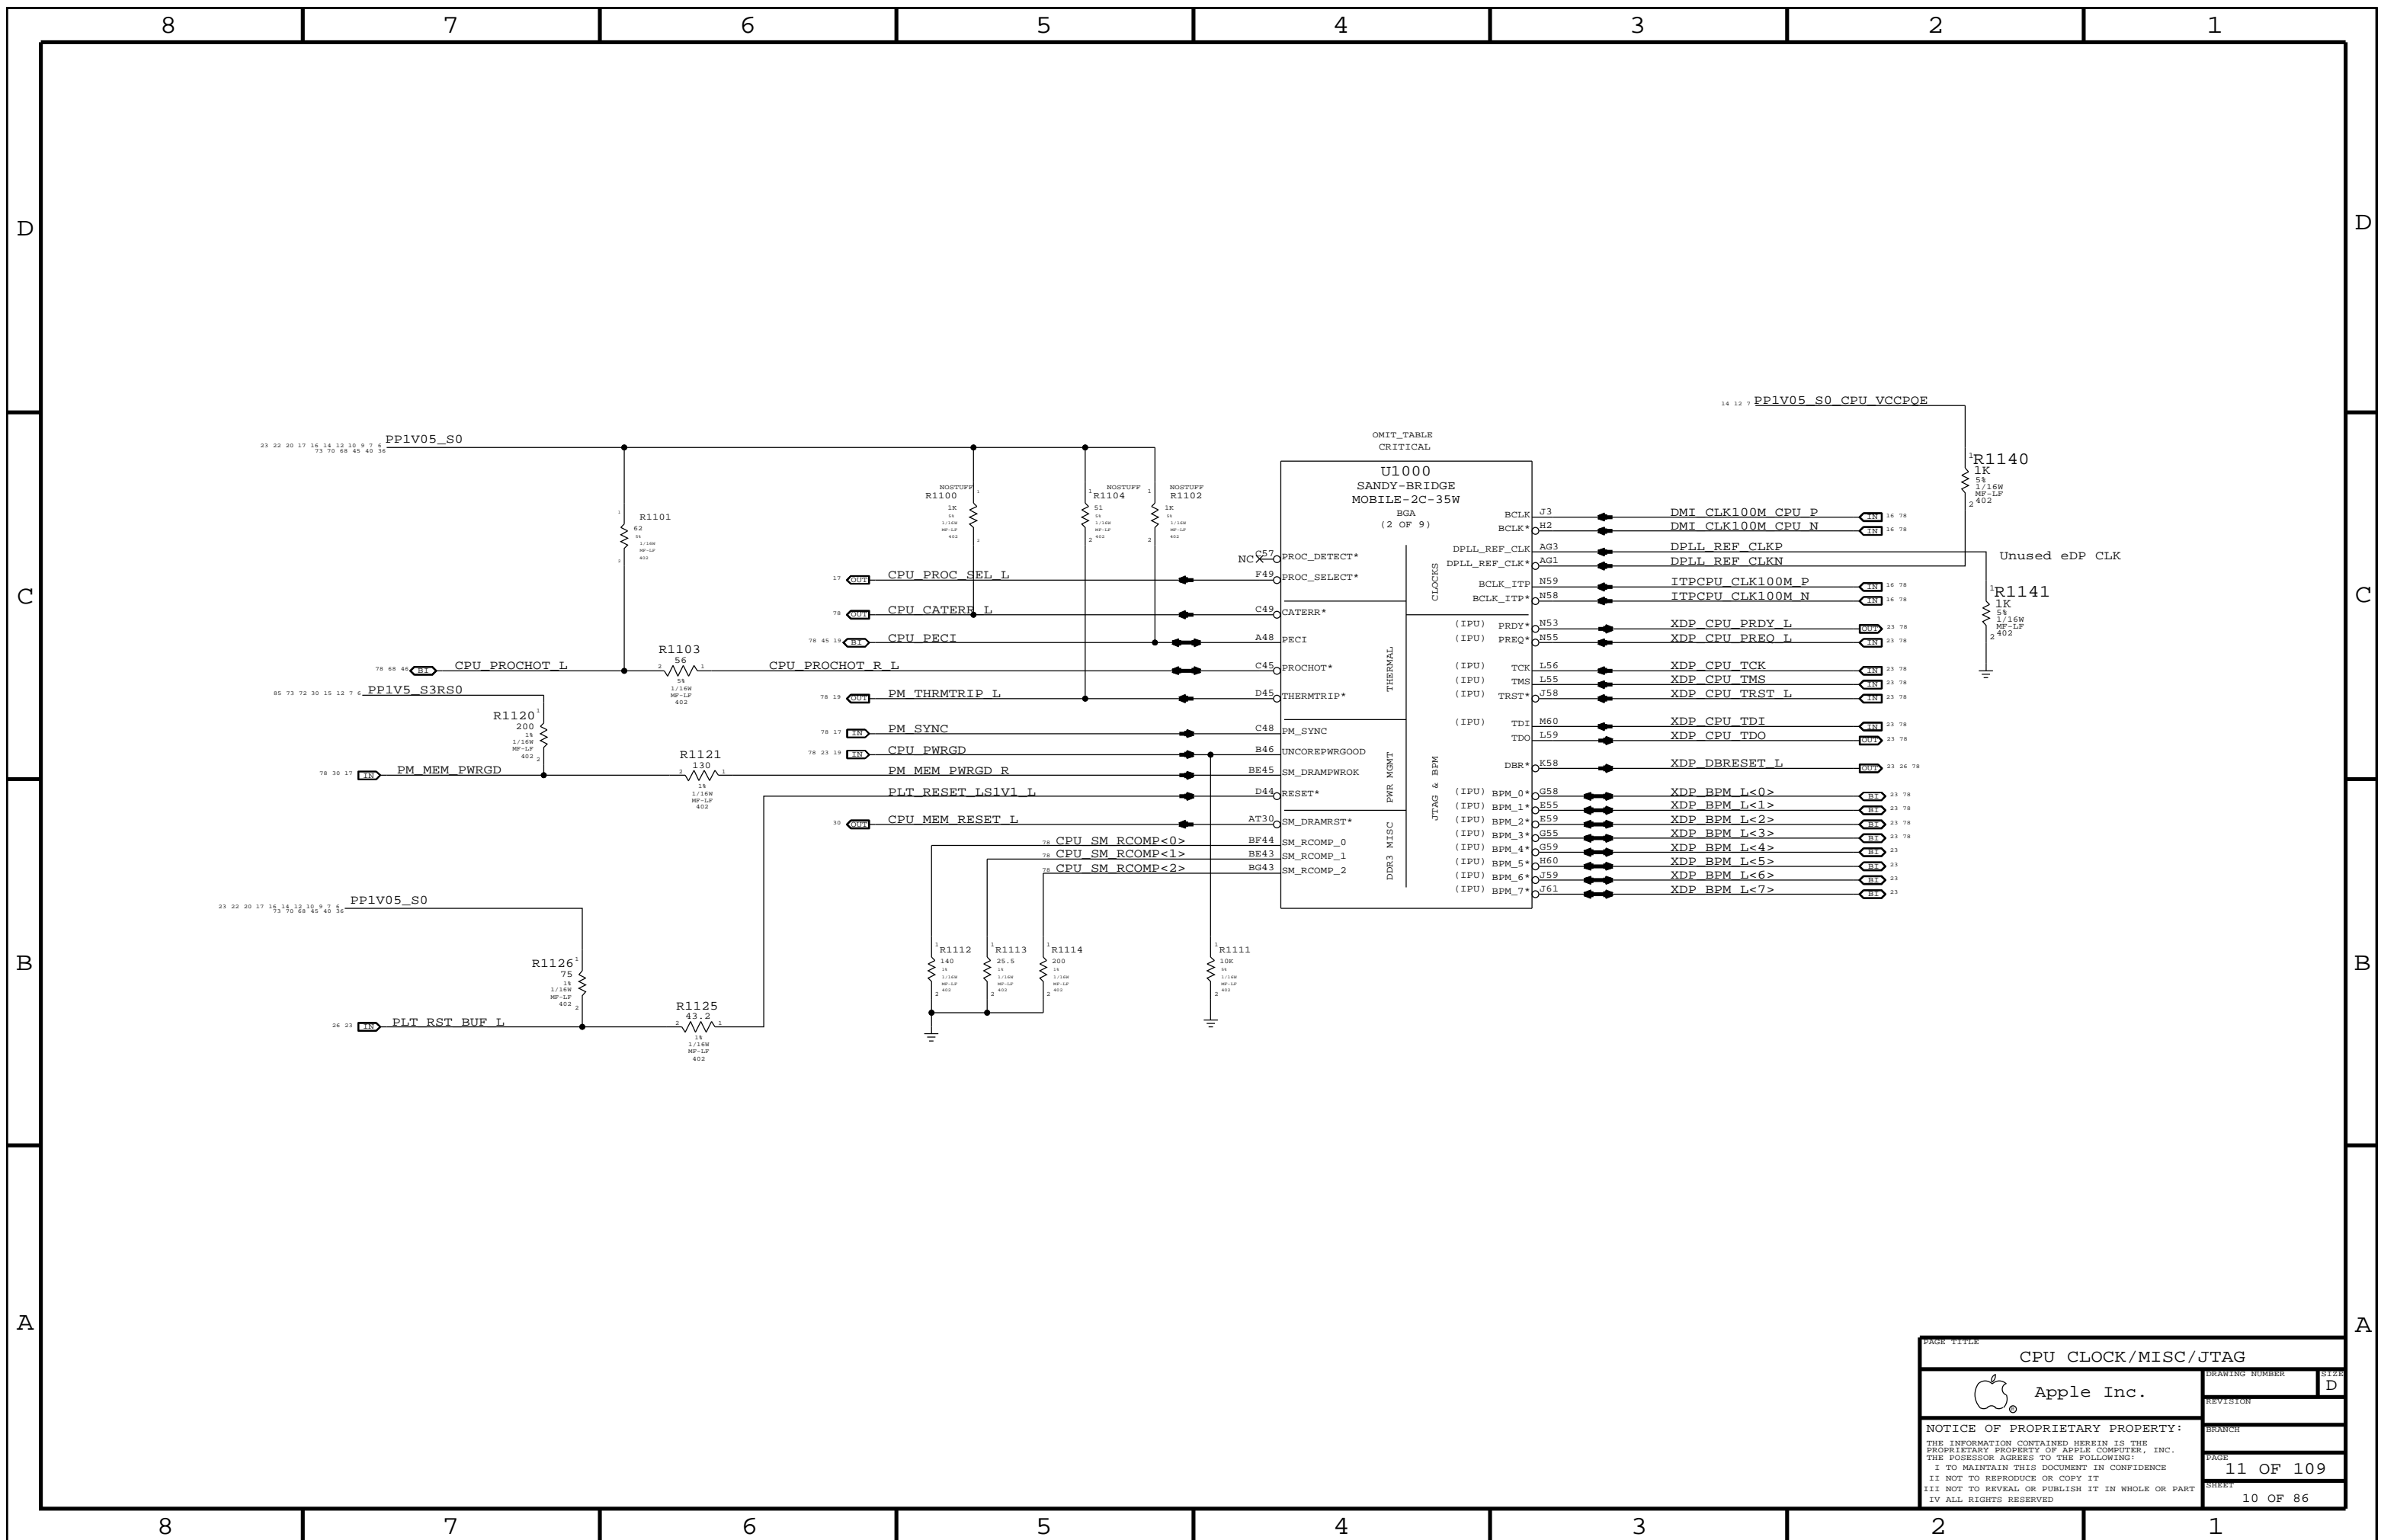

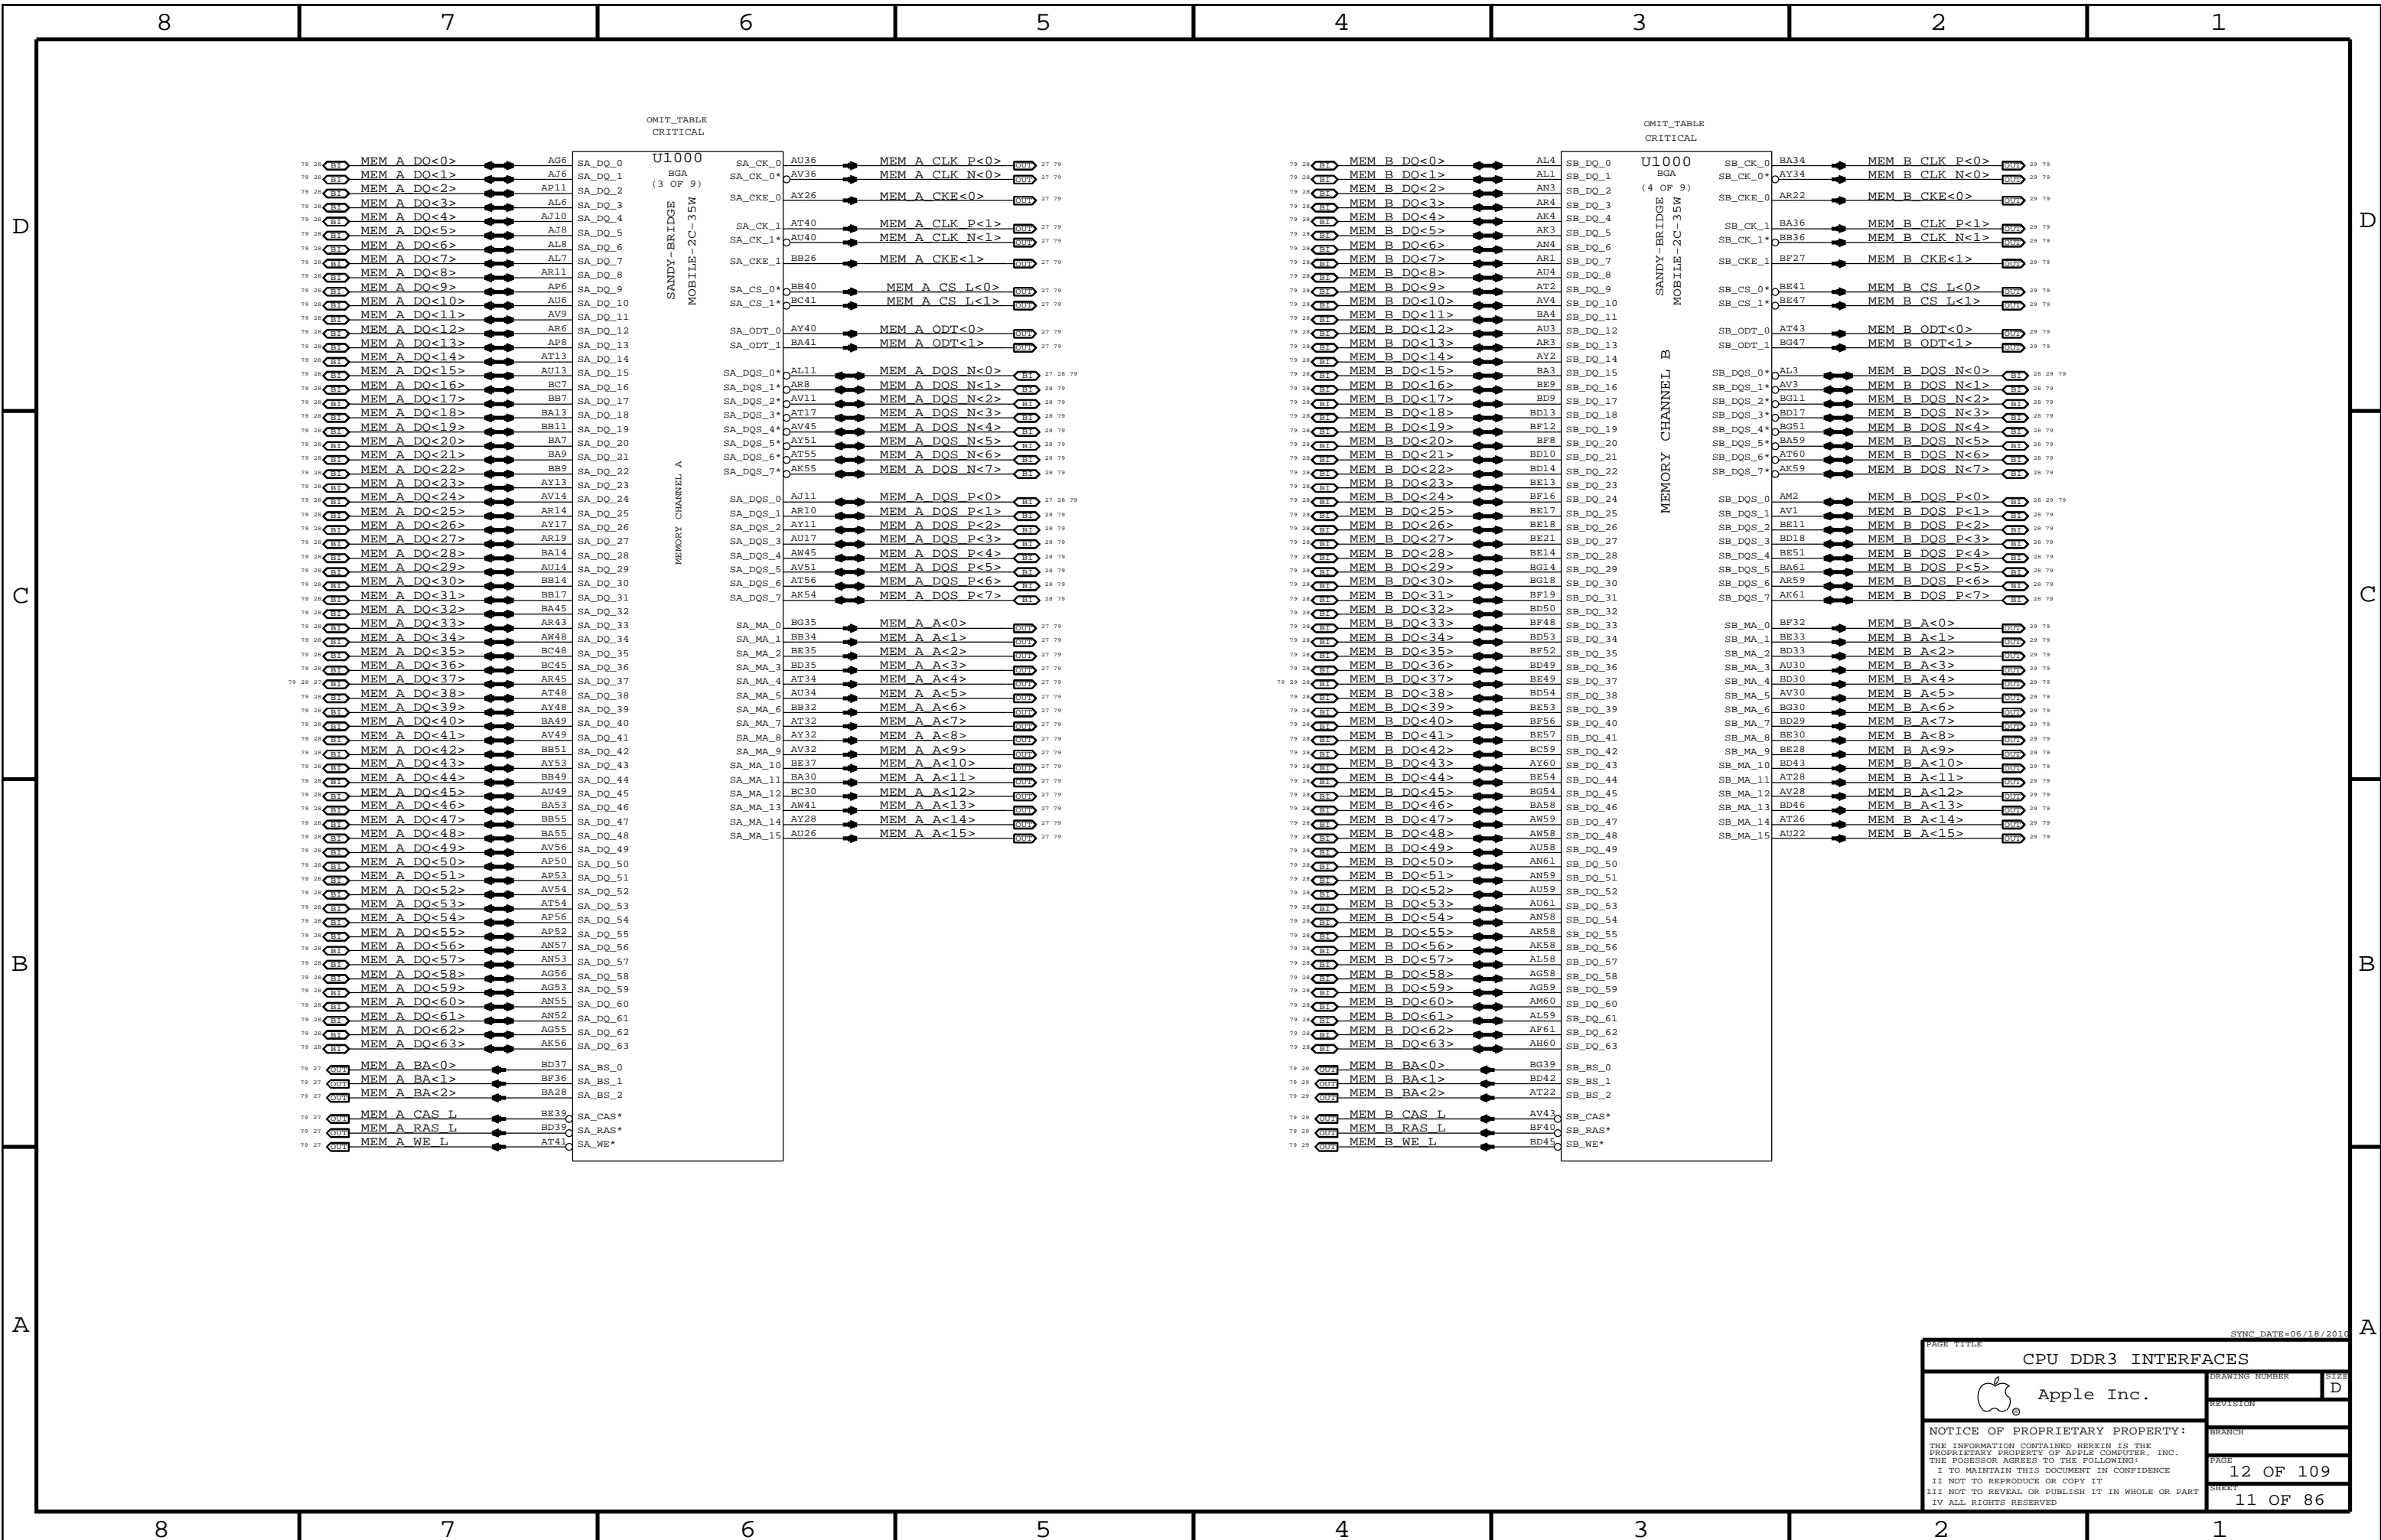

OMIT TABLE
CRITICAL

OMIT TABLE
CRITICAL

U1000
BGA
(3 OF 9)


U1000
BGA
(4 OF 9)

SANDY-BRIDGE
MOBILE-2C-35W

SANDY-BRIDGE
MOBILE-2C-35W


MEMORY CHANNEL A

MEMORY CHANNEL B

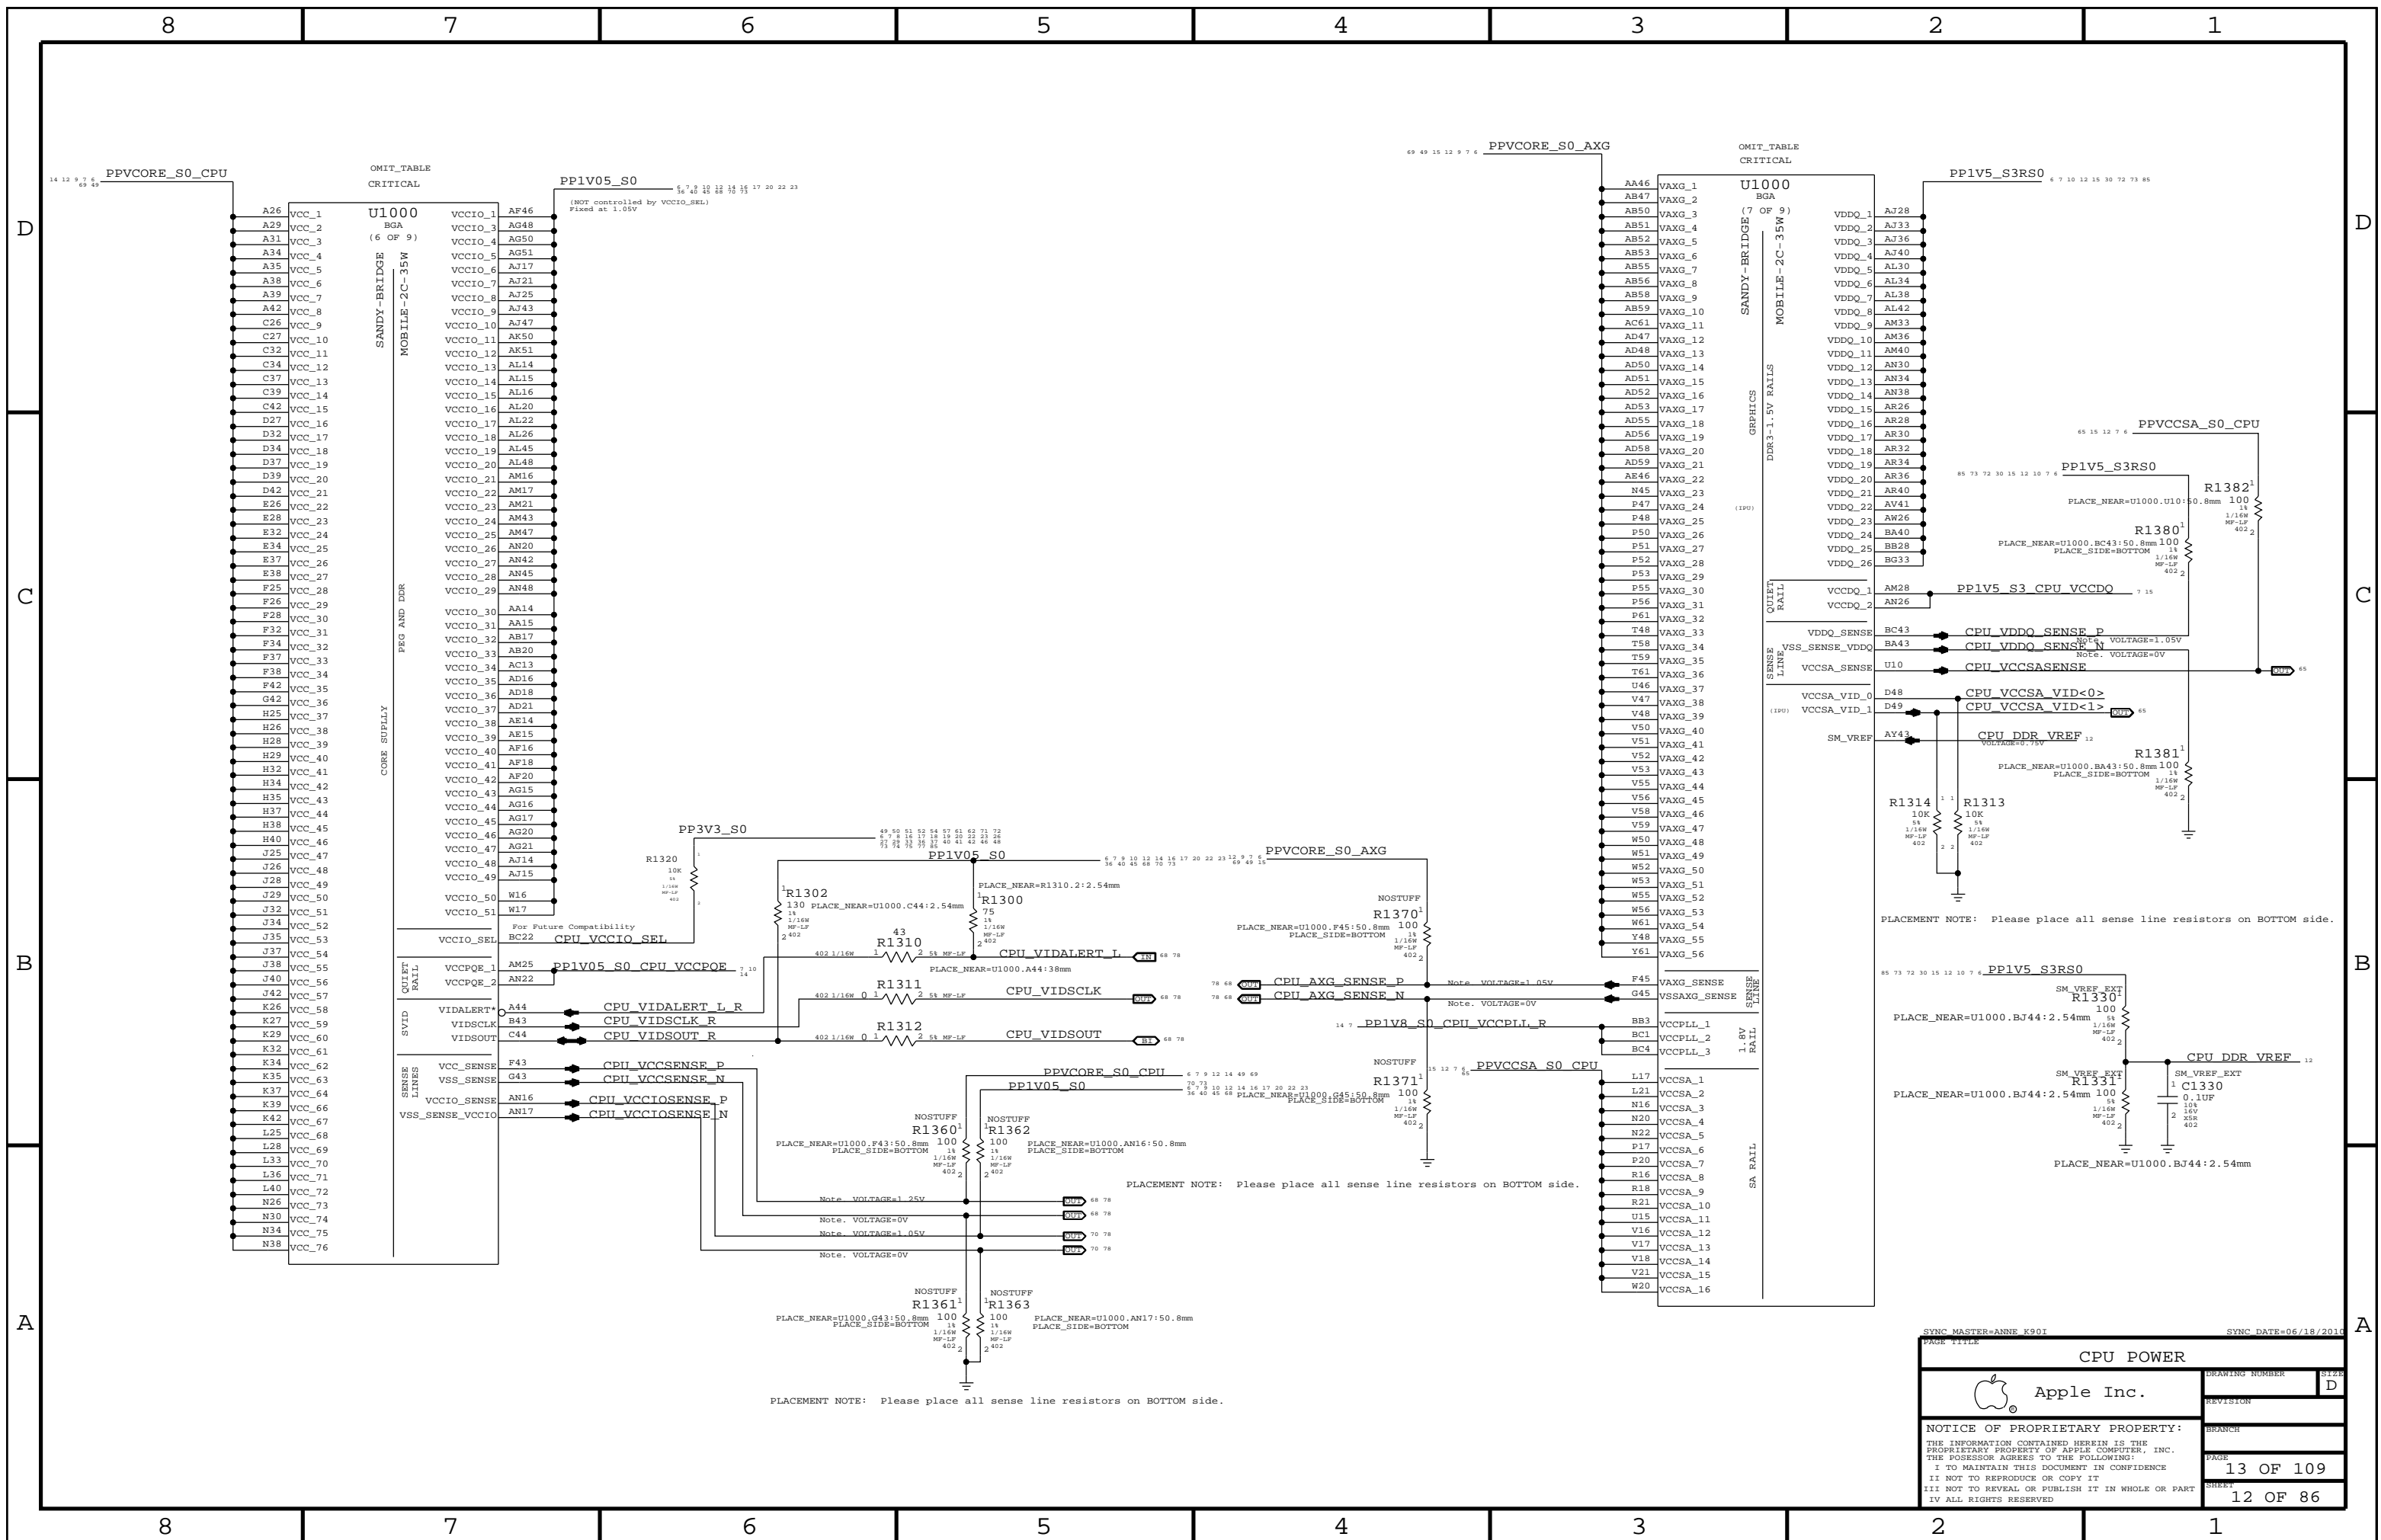

PAGE TITLE		CPU POWER	
DRAWING NUMBER		D	
REVISION			
BRANCH			
PAGE		13 OF 109	
SHEET		12 OF 86	


SYNC MASTER=ANNE K901
 SYNC DATE=06/18/2016
 Apple Inc.
 NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

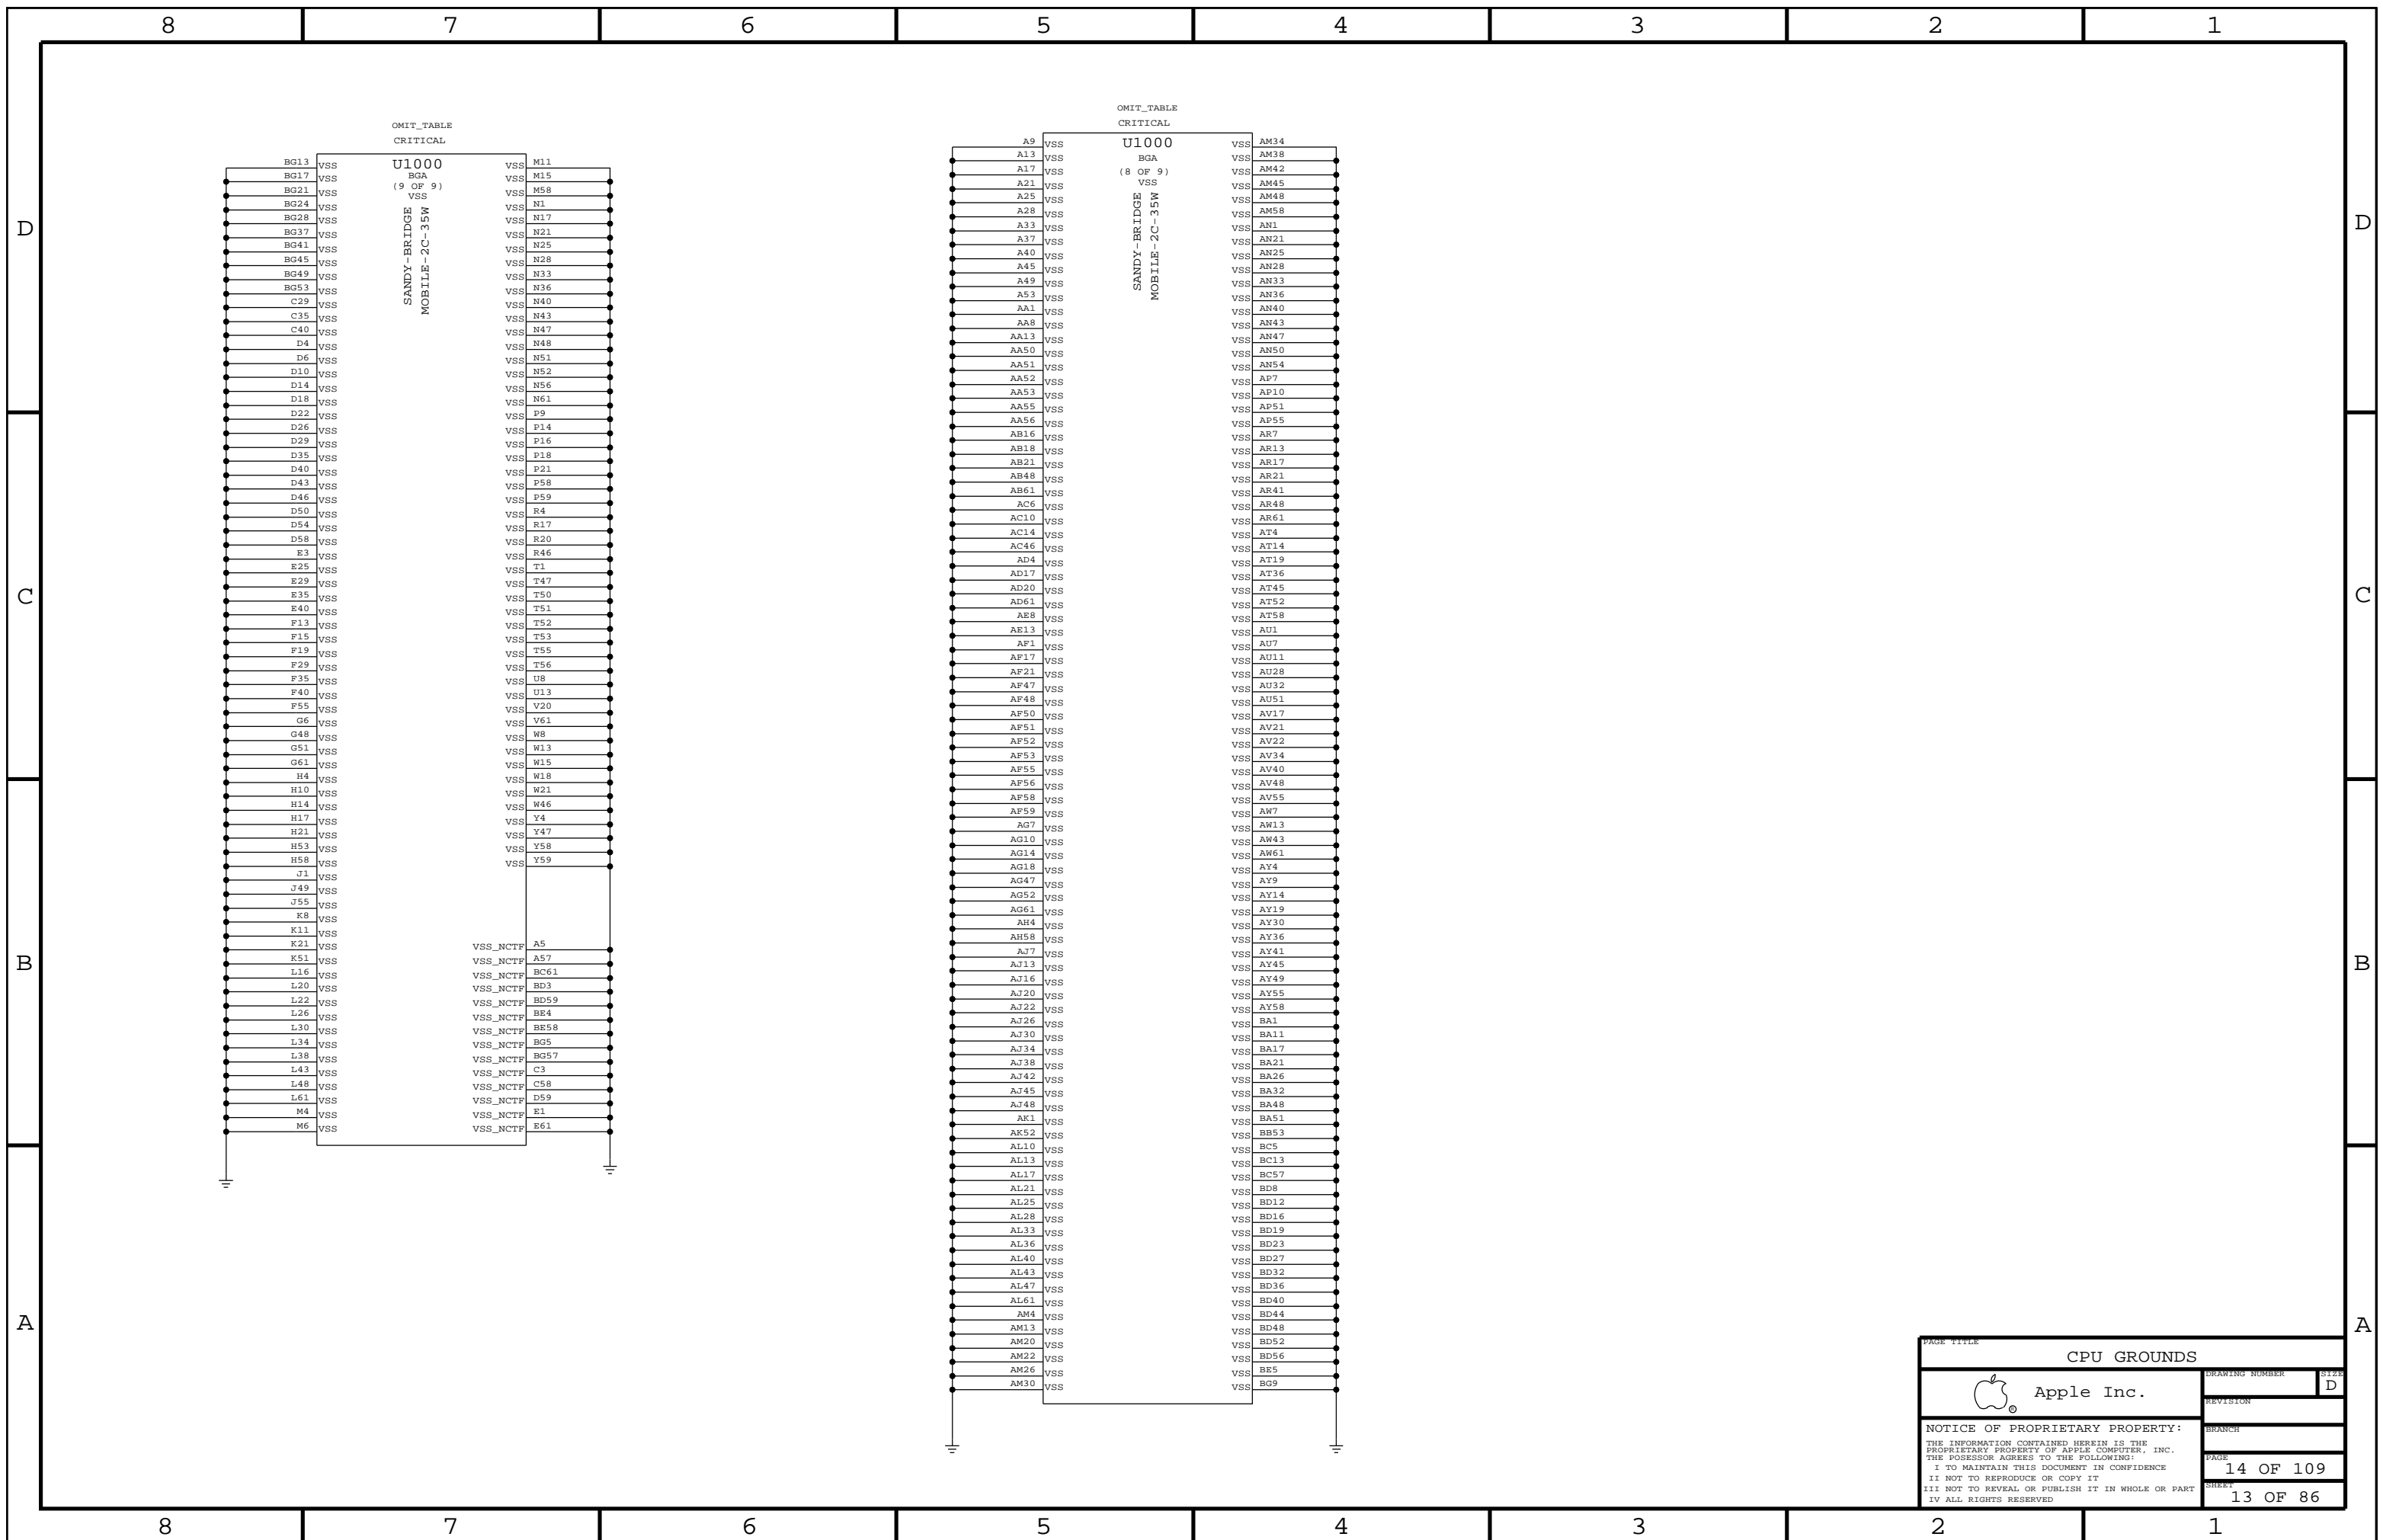

PAGE TITLE		CPU GROUNDS	
Apple Inc. NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED	DRAWING NUMBER	SIZE D	
	REVISION		
BRANCH			
PAGE	14 OF 109		
SHEET	13 OF 86		

CPU VCORE DECOUPLING


Intel recommendation (Section 6.2): 35x 2.2uF, 25x 22uF, 4x 470uF

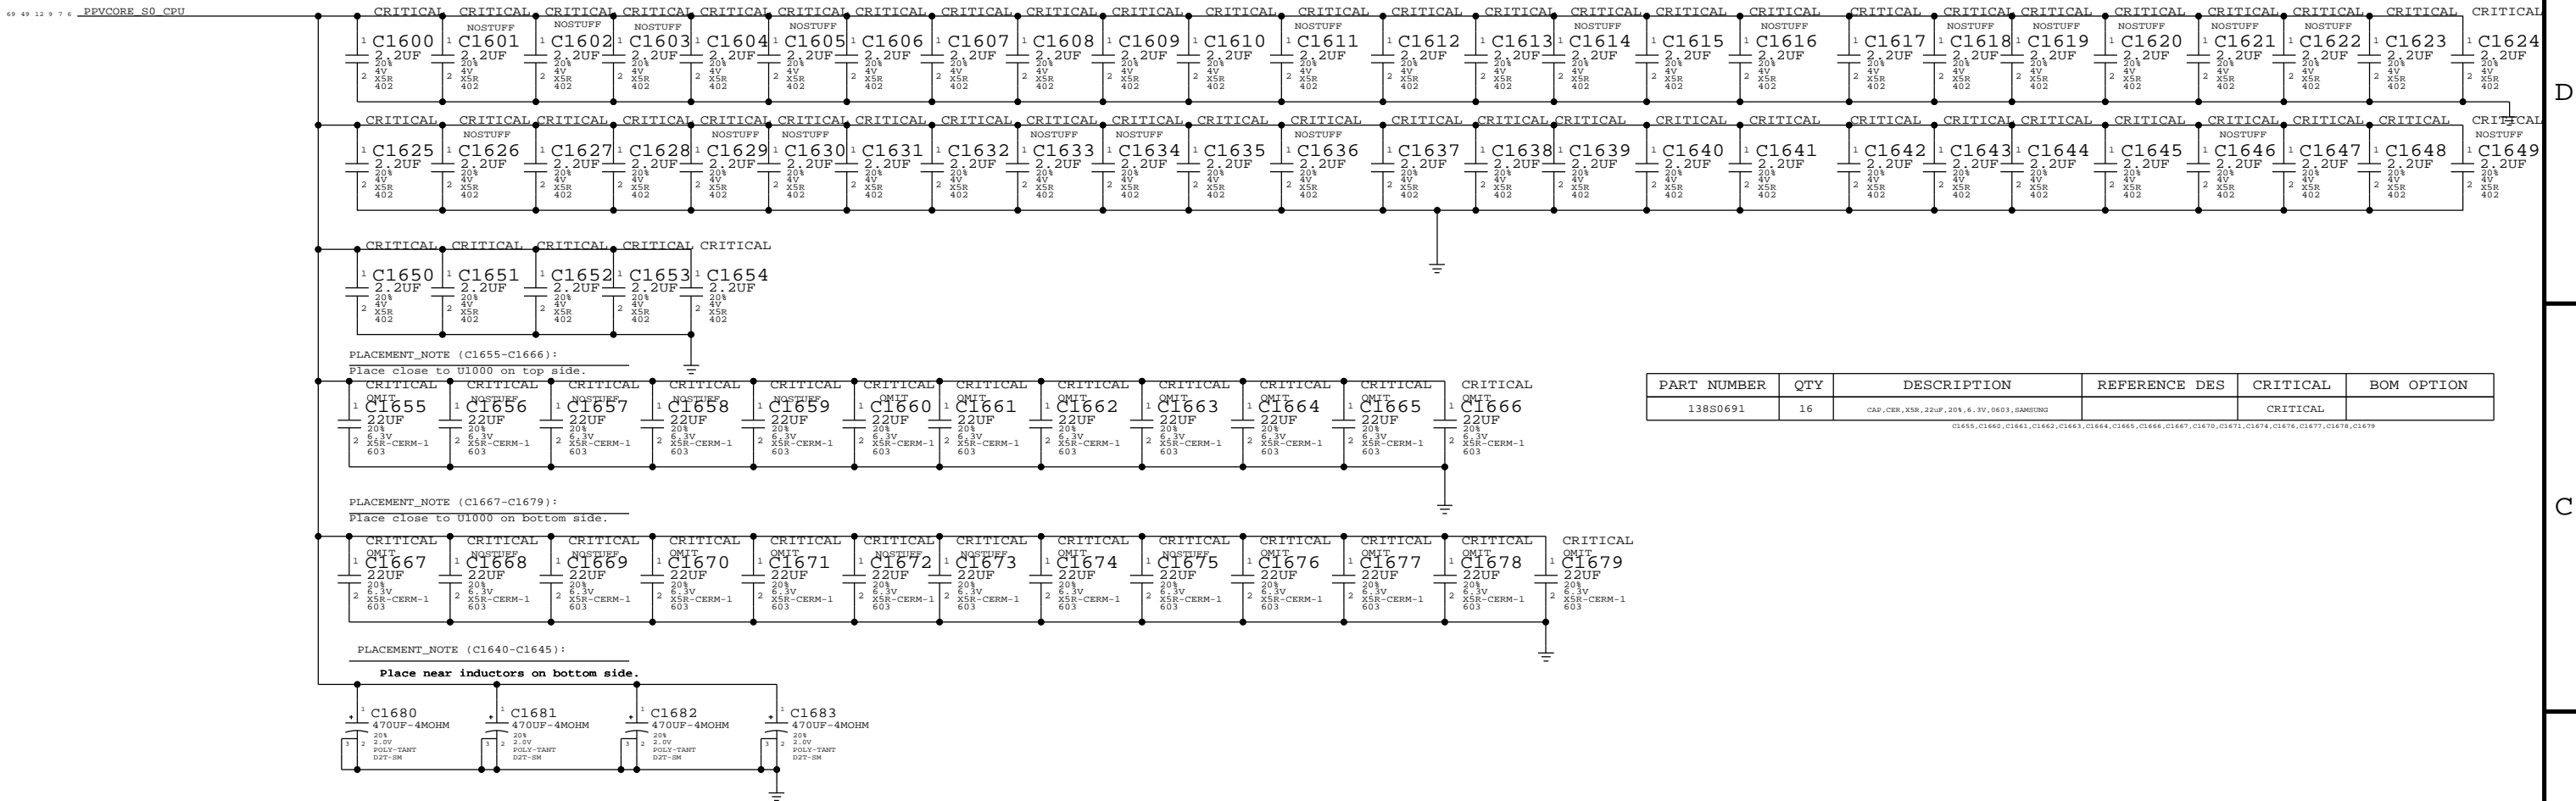


CPU VCCIO/VCCPQ DECOUPLING

Intel recommendation (Section 6.5): 26x 1uF, 10x 10uF, 2x 330uF

PLACEMENT_NOTE (C1684-C167F):
Place on bottom side of U1000

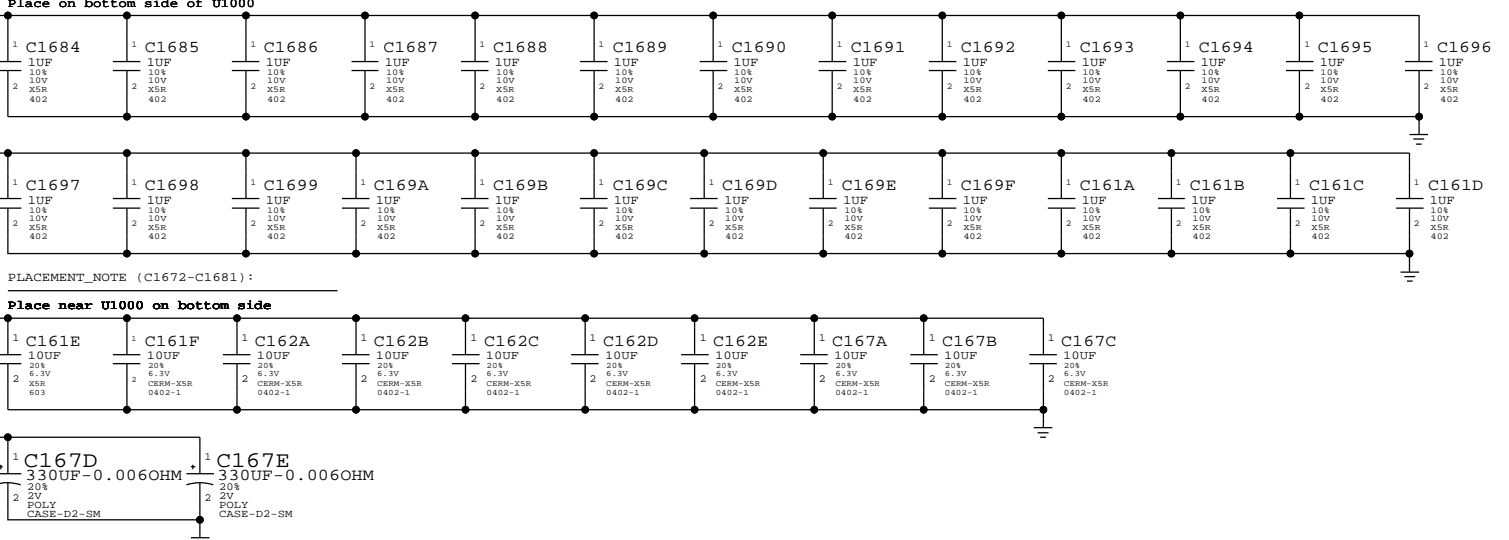

Intel recommendation: 1x 10mOhm resistor, 1x 1uF 0402




Note: The smallest 10mOhm available in the library are 0805s

CPU VCCPLL DECOUPLING

Intel recommendation (section 6.4): 2x 1uF, 1x 330uF

PLACEMENT_NOTE (C1646-C1671):
Place near U1000 on top side

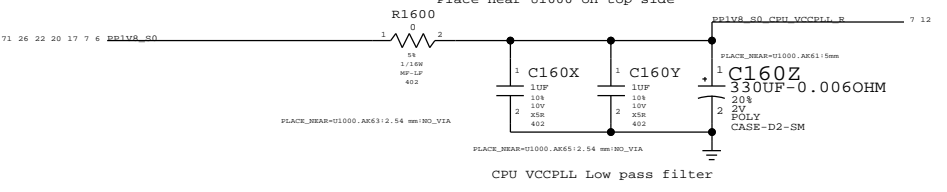

SYNC MASTER=JACK K901 SYNC DATE=06/28/2011


CPU DECOUPLING-I		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	PAGE
		16 OF 109	SHEET
		14 OF 86	

VAXG DECOUPLING


Intel recommendation (section 6.3): 21x 1uF, 6x 10uF, 6x 22uF, 2x 470uF

PLACEMENT_NOTE (C1700-C1710):


Place on bottom side of U1000

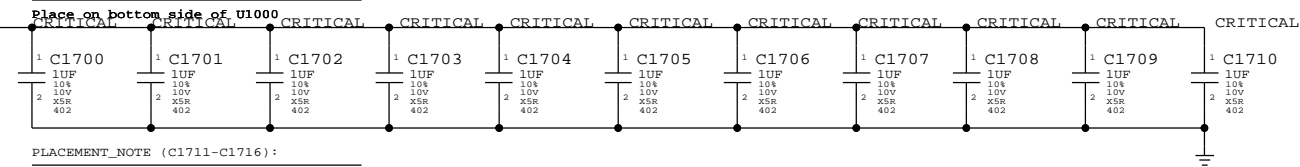

PLACEMENT_NOTE (C1711-C1716):

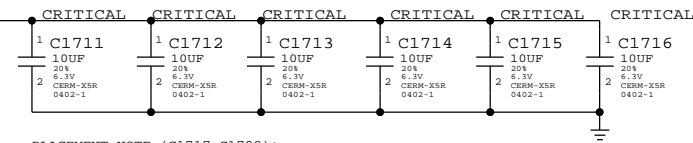


PLACEMENT_NOTE (C1717-C1722):

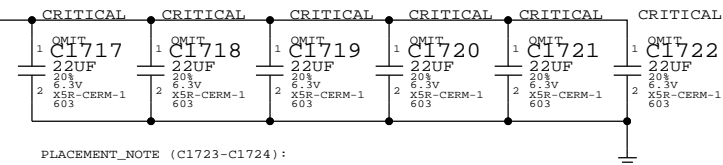

PLACEMENT_NOTE (C1723-C1724):

Place near inductors on bottom side.




PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0691	6	CAP, CER, XSR, 22UF, 20V, 6.3V, 0603, SAMSUNG	C1717, C1718, C1719, C1720, C1721, C1722	CRITICAL	

CPU VDDQ/VCCDQ DECOUPLING



Intel recommendation (Section 6.5): 10x 1uF, 8x 10uF, 1x 330uF

PLACEMENT_NOTE (C1738-C1747):


Place on bottom side of U1000

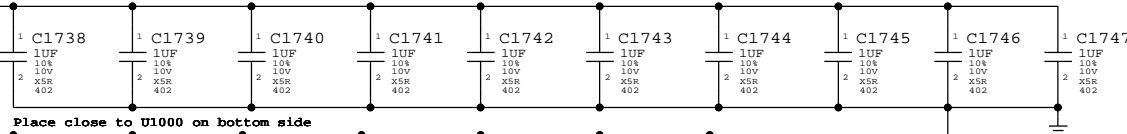

Place close to U1000 on bottom side



Intel recommendation: 1x 10mOhm resistor, 1x 1uF 0402






CPU VCCSA DECOUPLING

Intel recommendation (Section 6.6): 6x 1uF, 5x 10uF, 1x 330uF


PLACEMENT_NOTE (C1758-C1762):

Place on bottom side of U1000

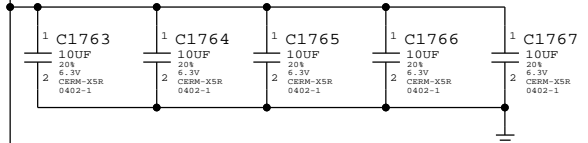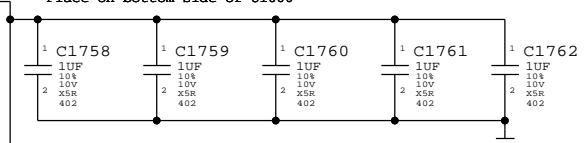

SYNC MASTER=JACK_K90I SYNC DATE=06/28/2010

CPU DECOUPLING-II		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	PAGE
			17 OF 109
		SHEET	15 OF 86

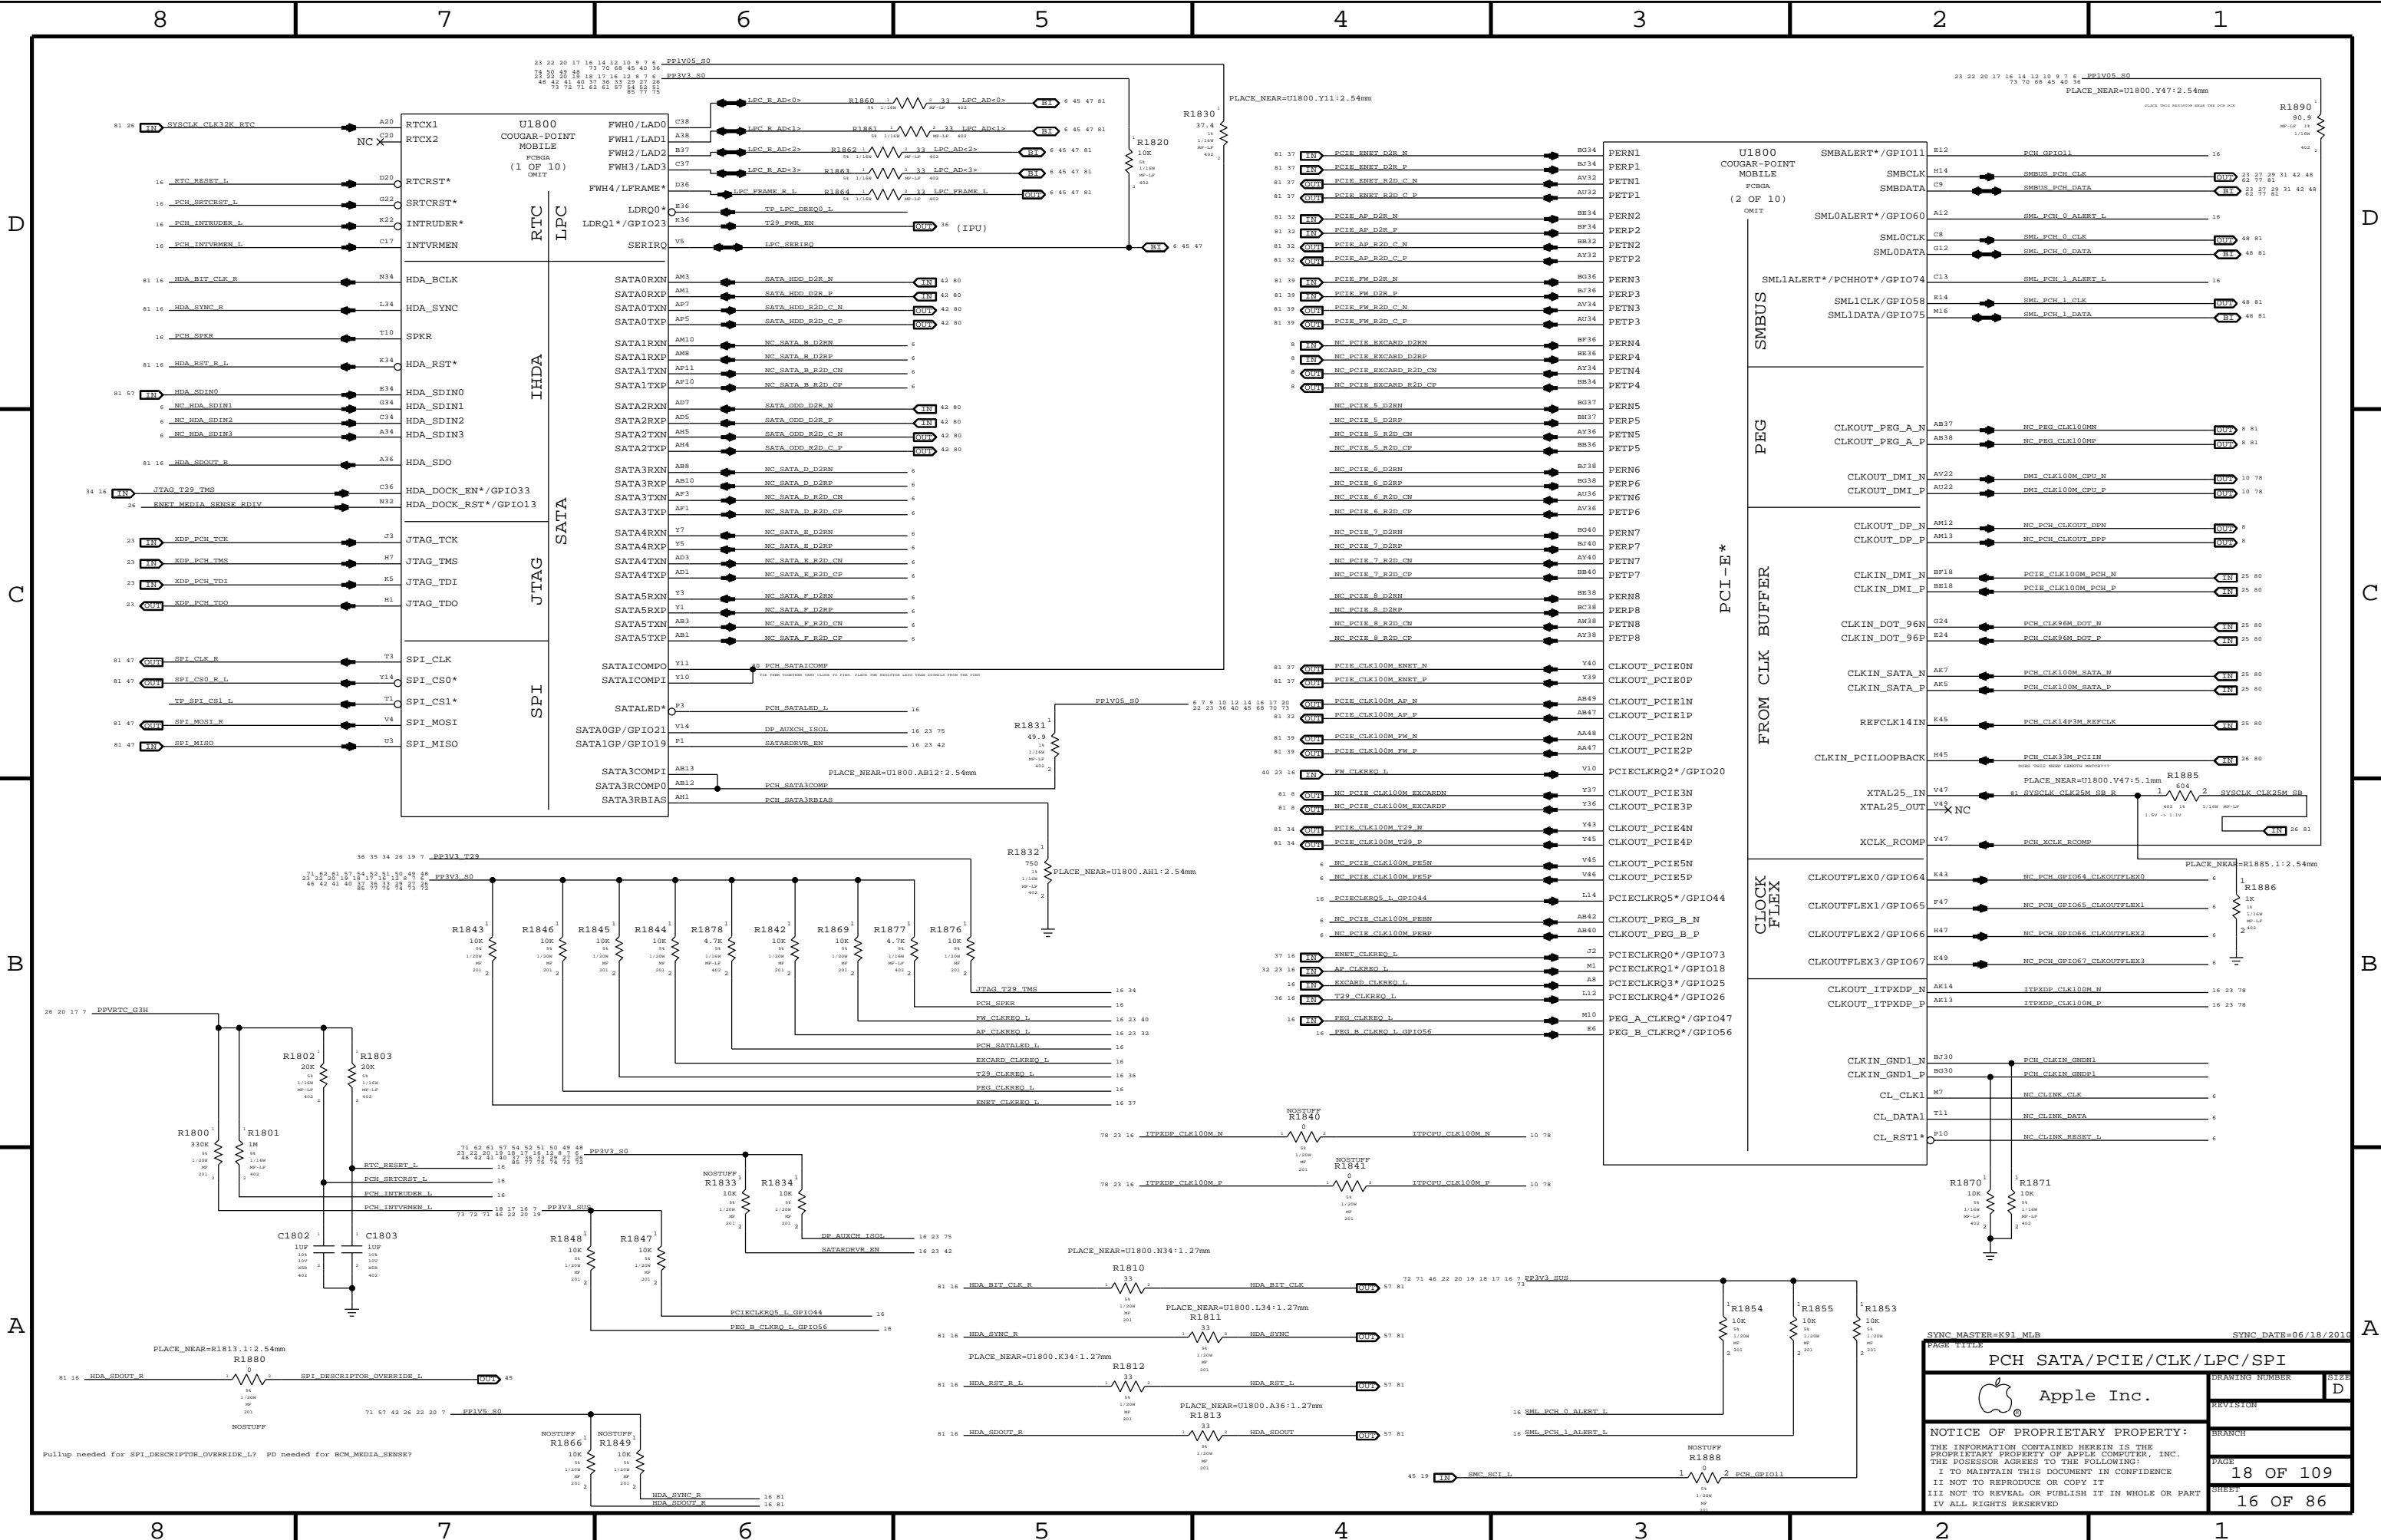



Apple Inc. logo and text: Apple Inc.


NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
IV ALL RIGHTS RESERVED

DRAWING NUMBER	SIZE
REVISION	D
BRANCH	
PAGE	18 OF 109
SHEET	16 OF 86

SYNC MASTER=K91 MLB SYNC DATE=06/18/2011

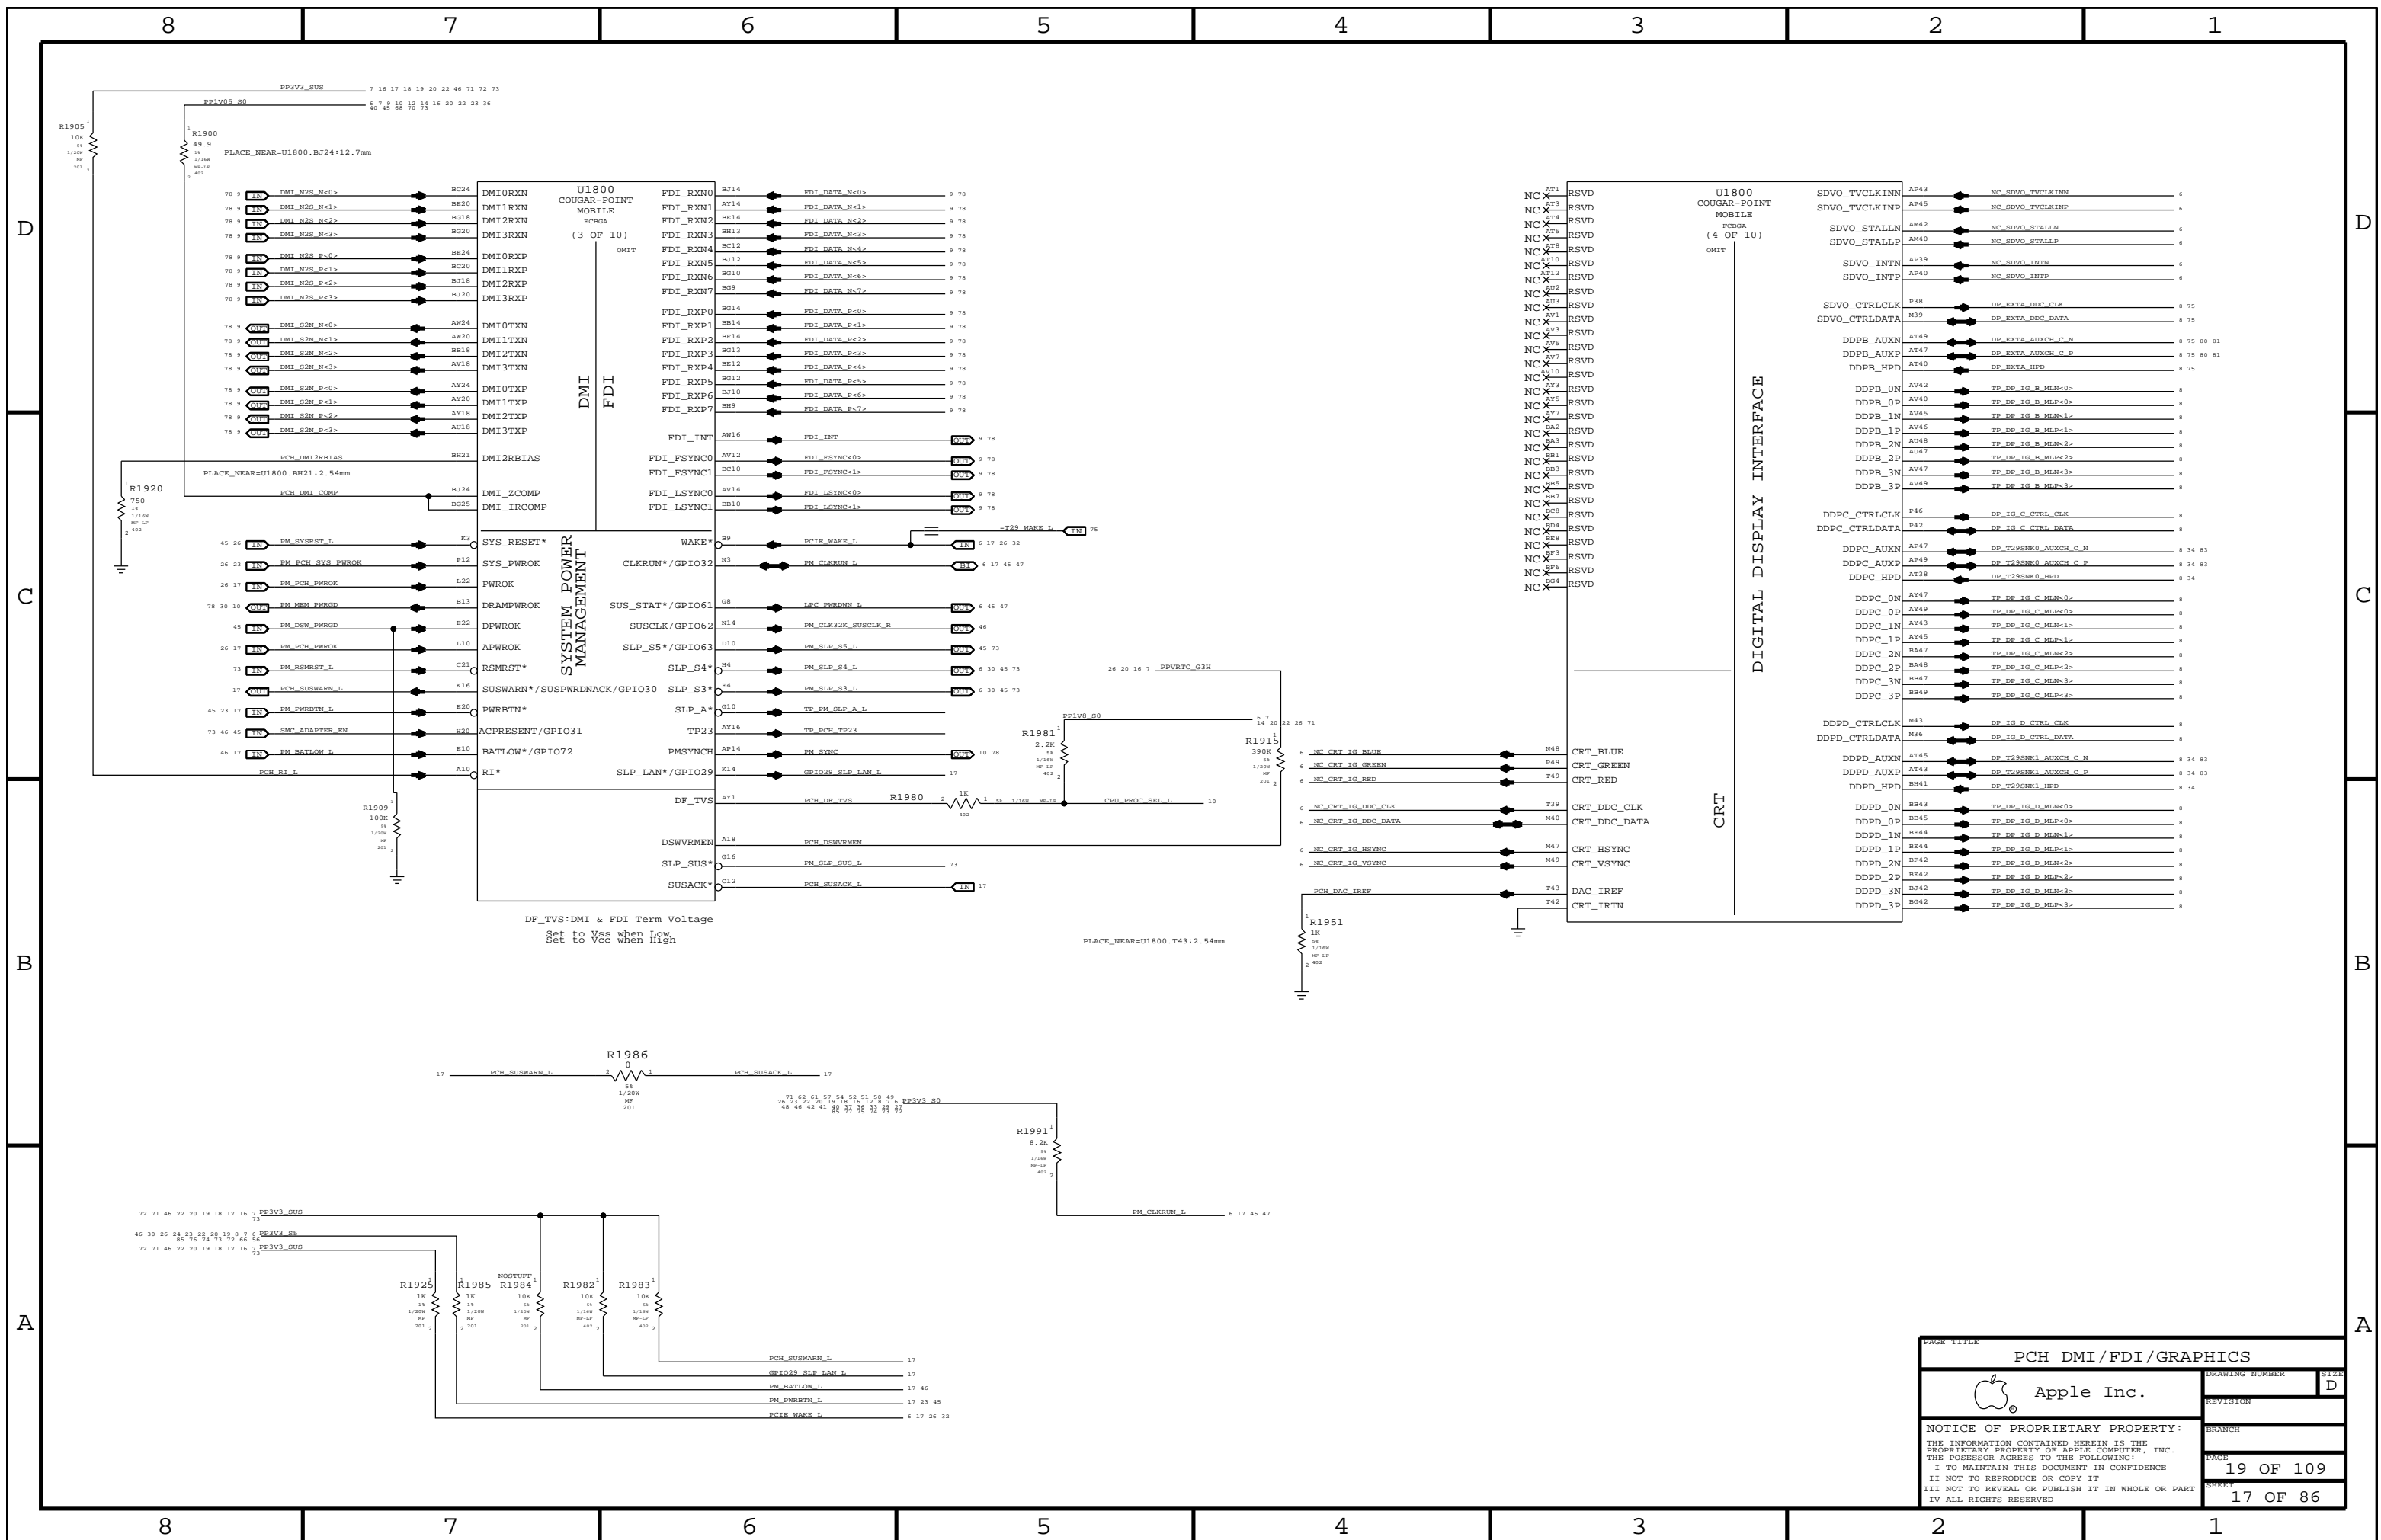


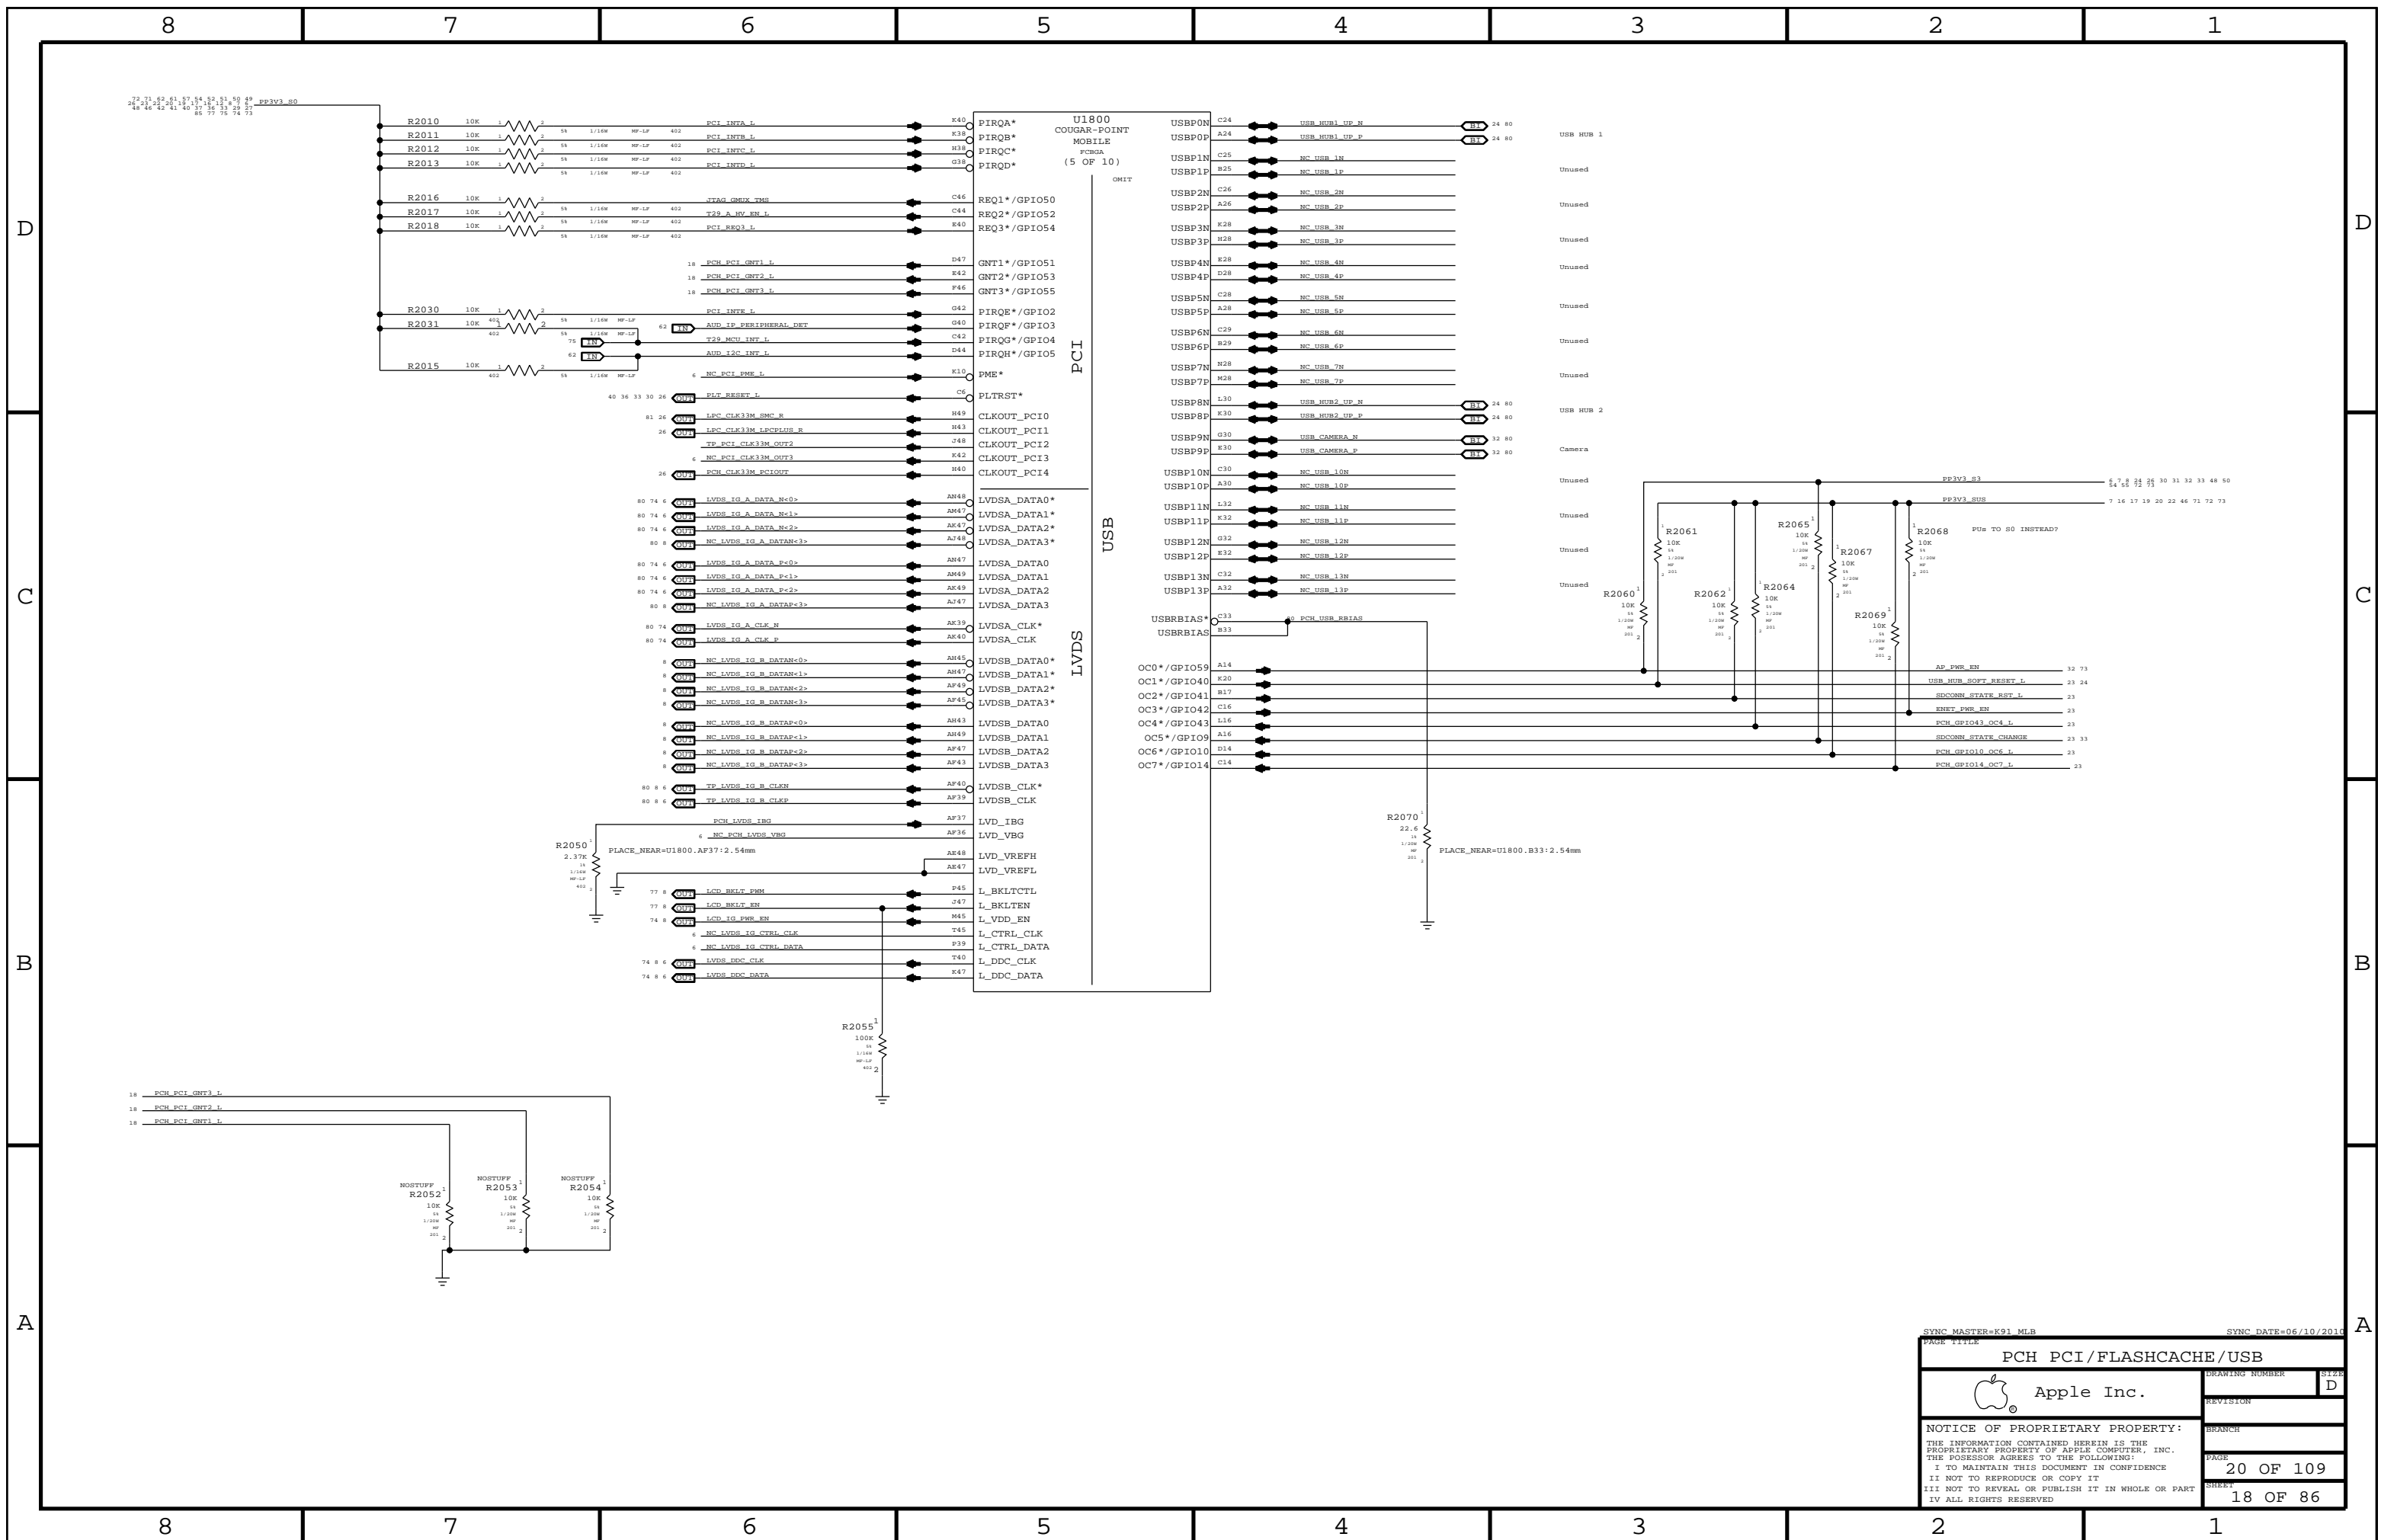

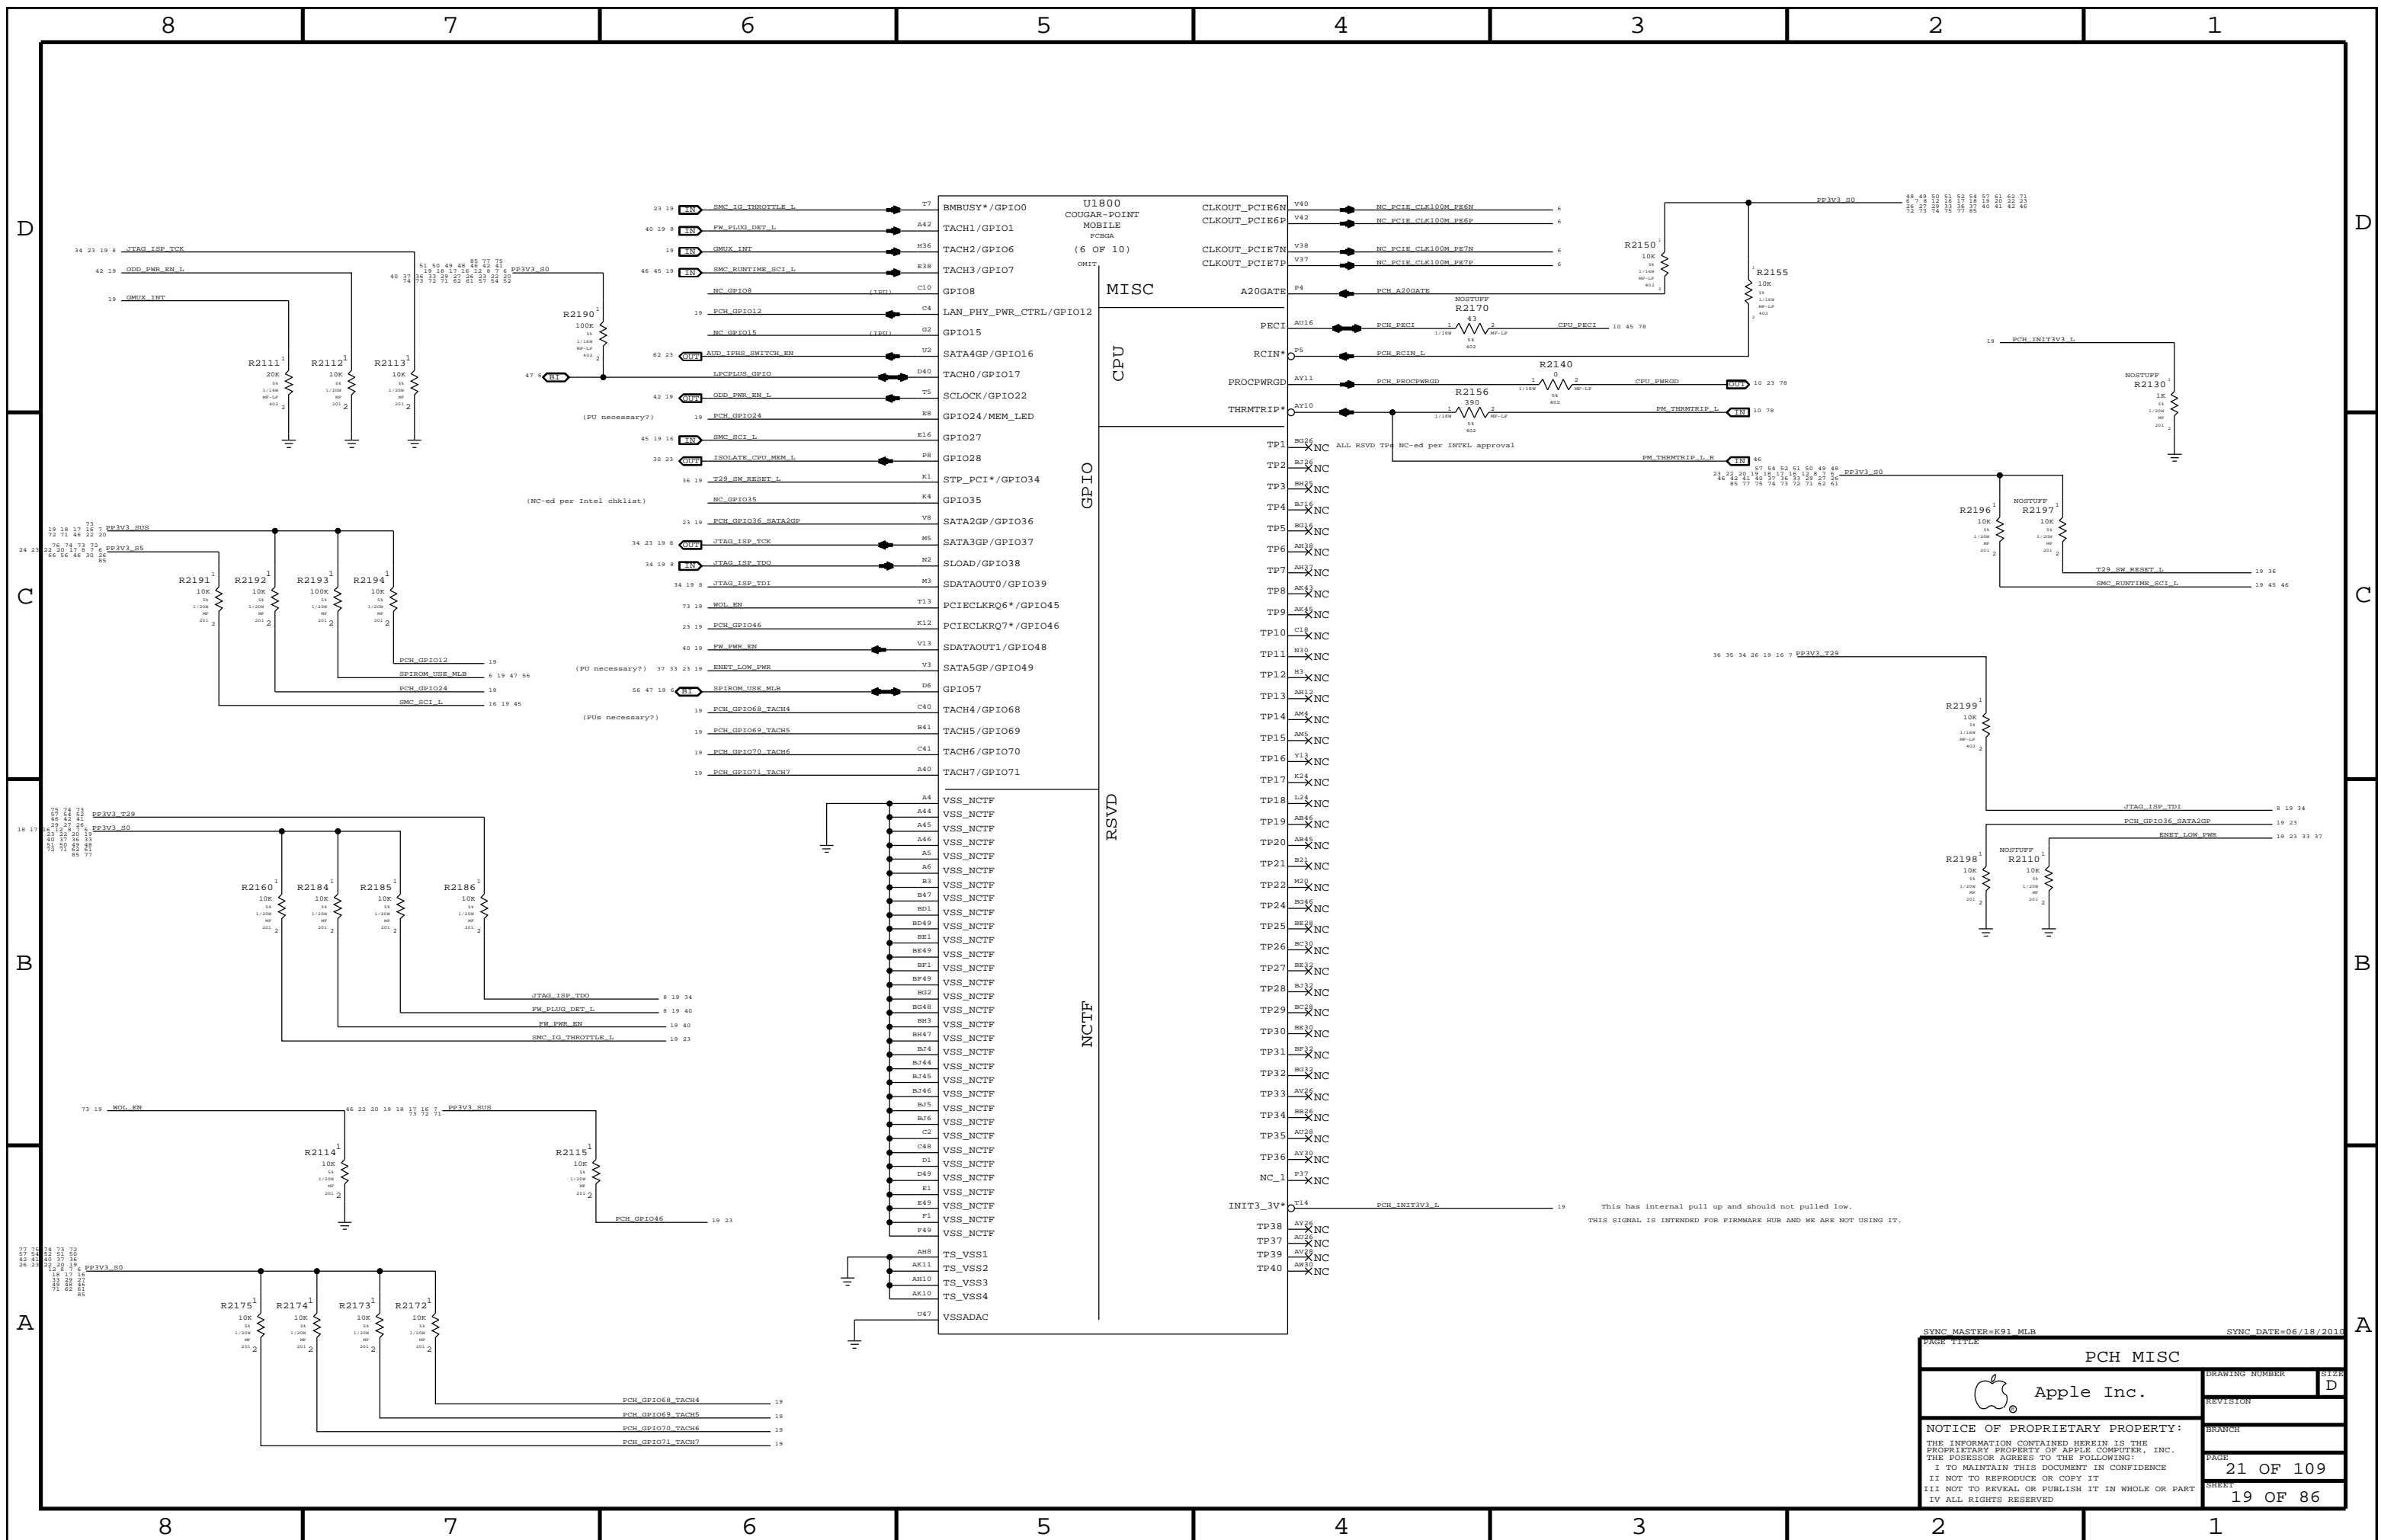


SYNC MASTER=K91_MLB SYNC DATE=06/18/2011

PCH MISC		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	
		PAGE	21 OF 109
		SHEET	19 OF 86

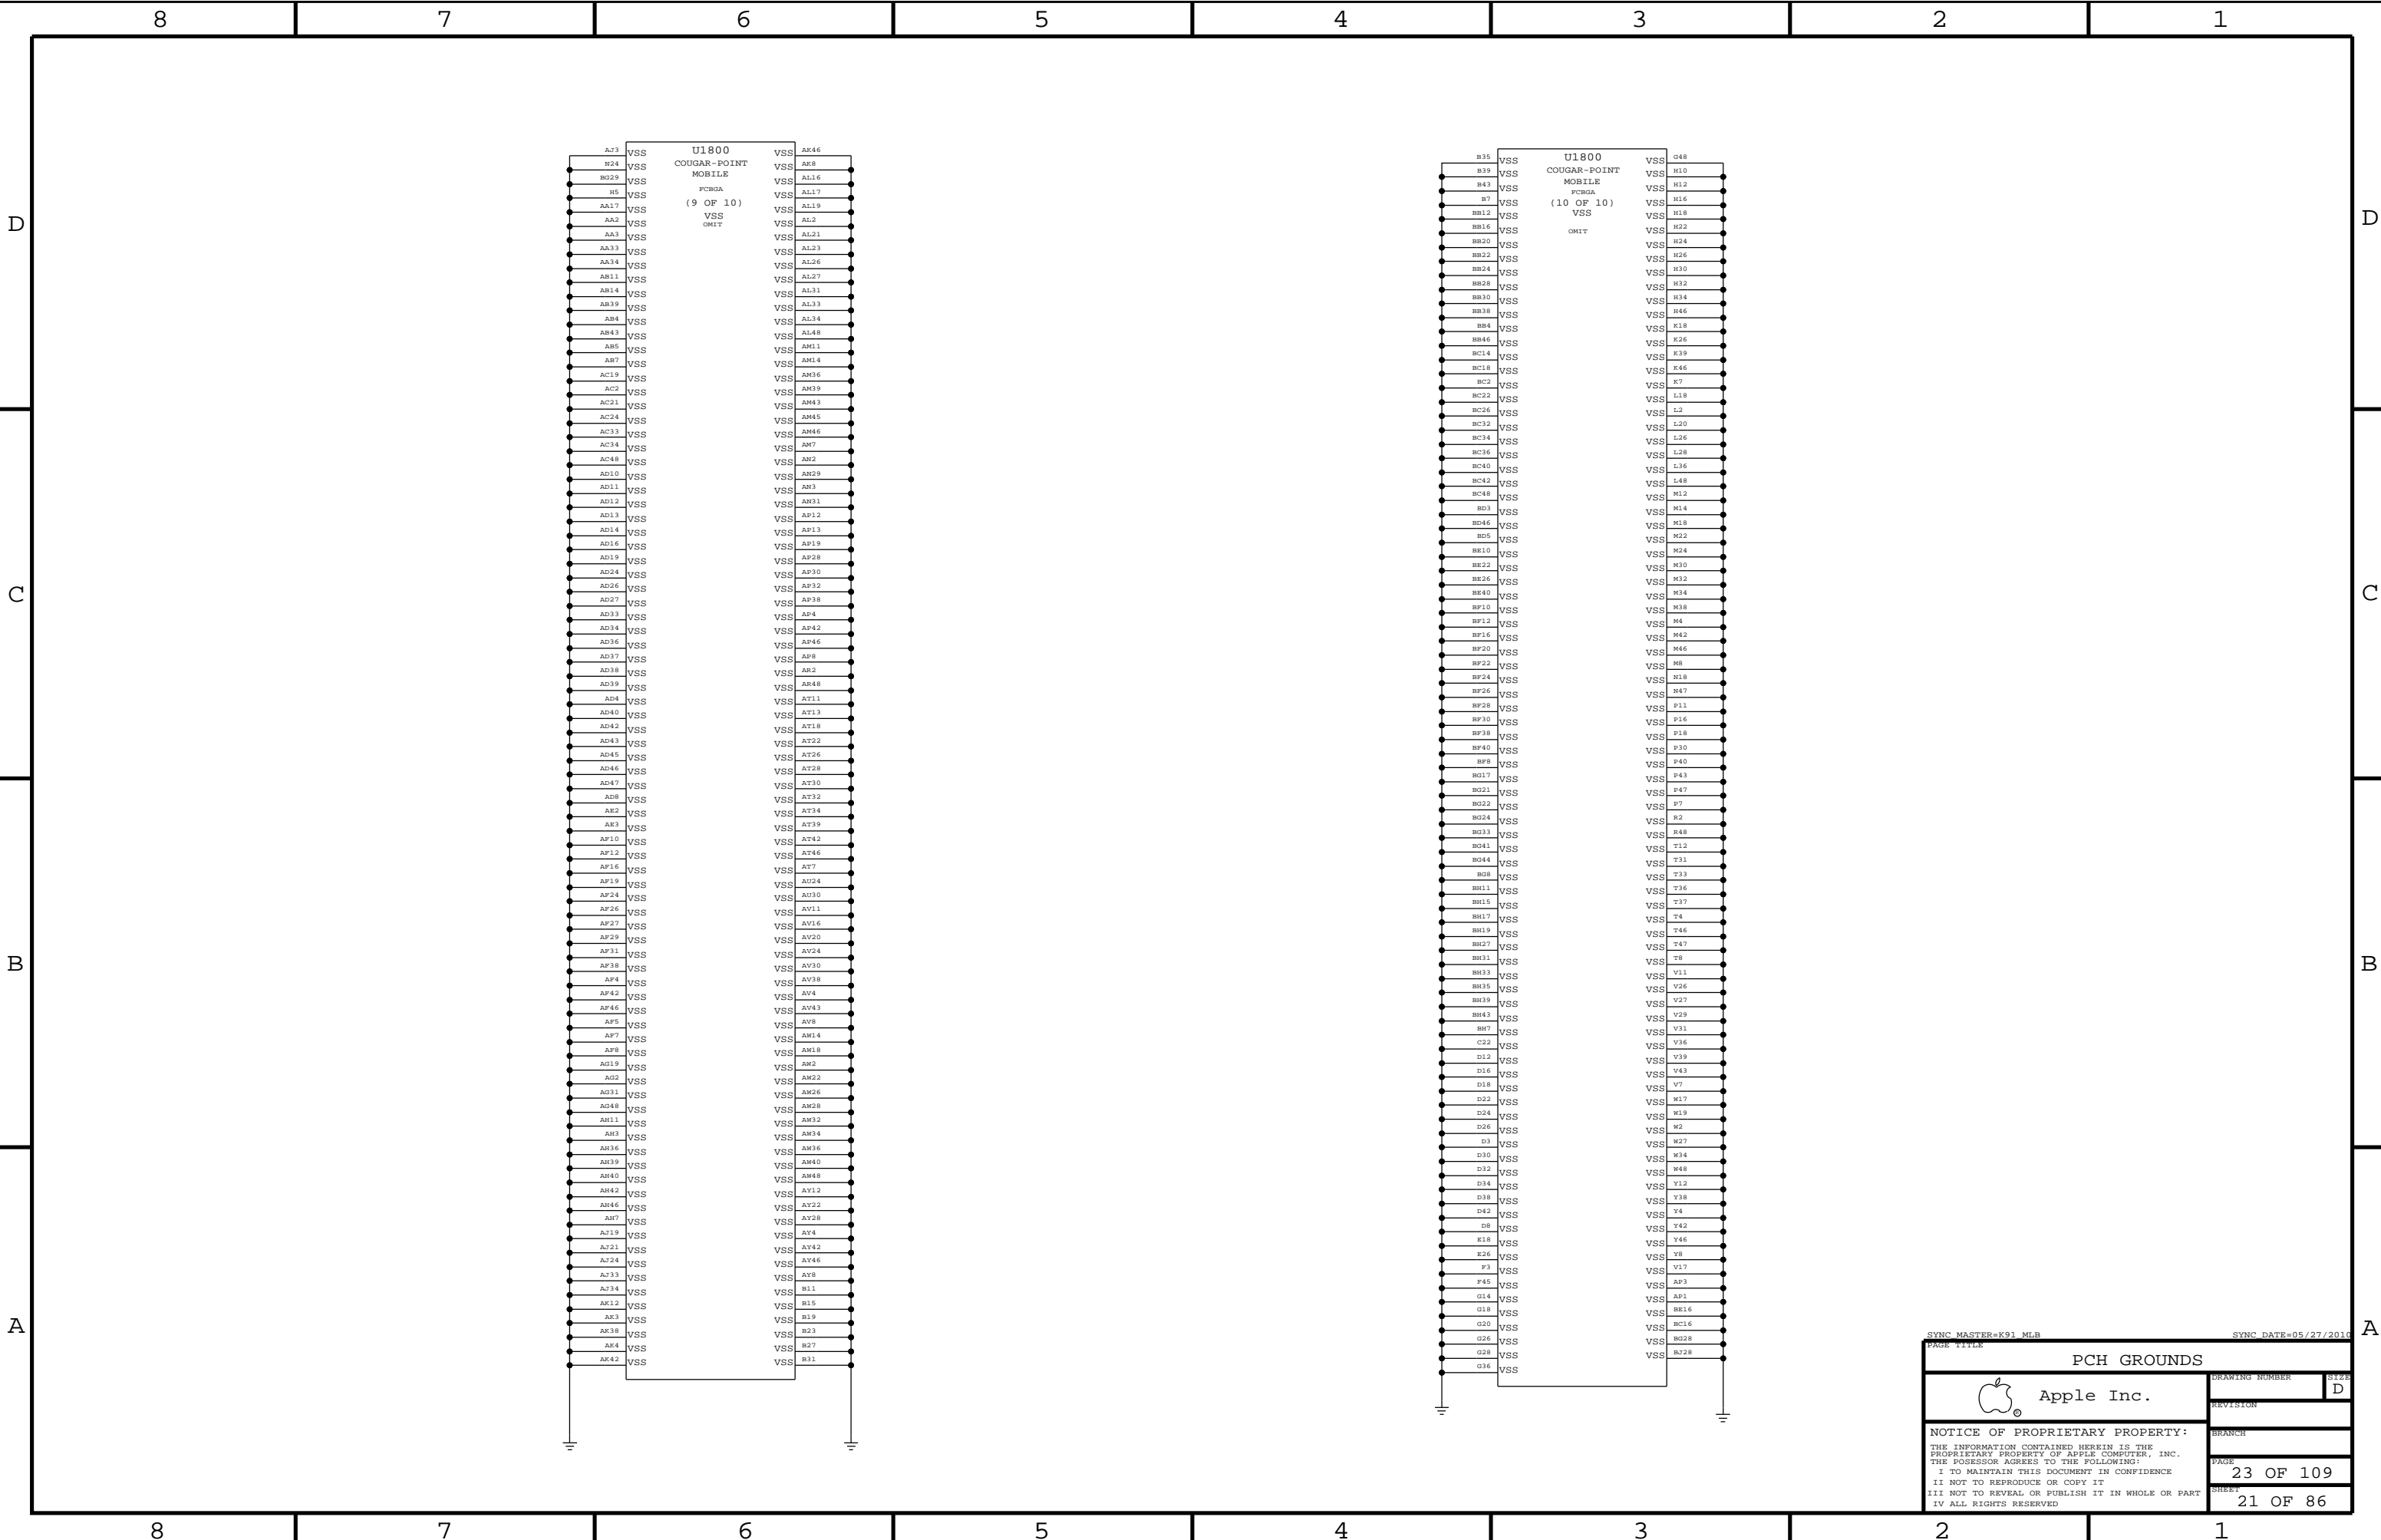



SYNC MASTER=K91 MLB SYNC DATE=05/27/2010

PCH GROUNDS	
Apple Inc.	DRAWING NUMBER: D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED	
REVISION	BRANCH
PAGE	23 OF 109
SHEET	21 OF 86

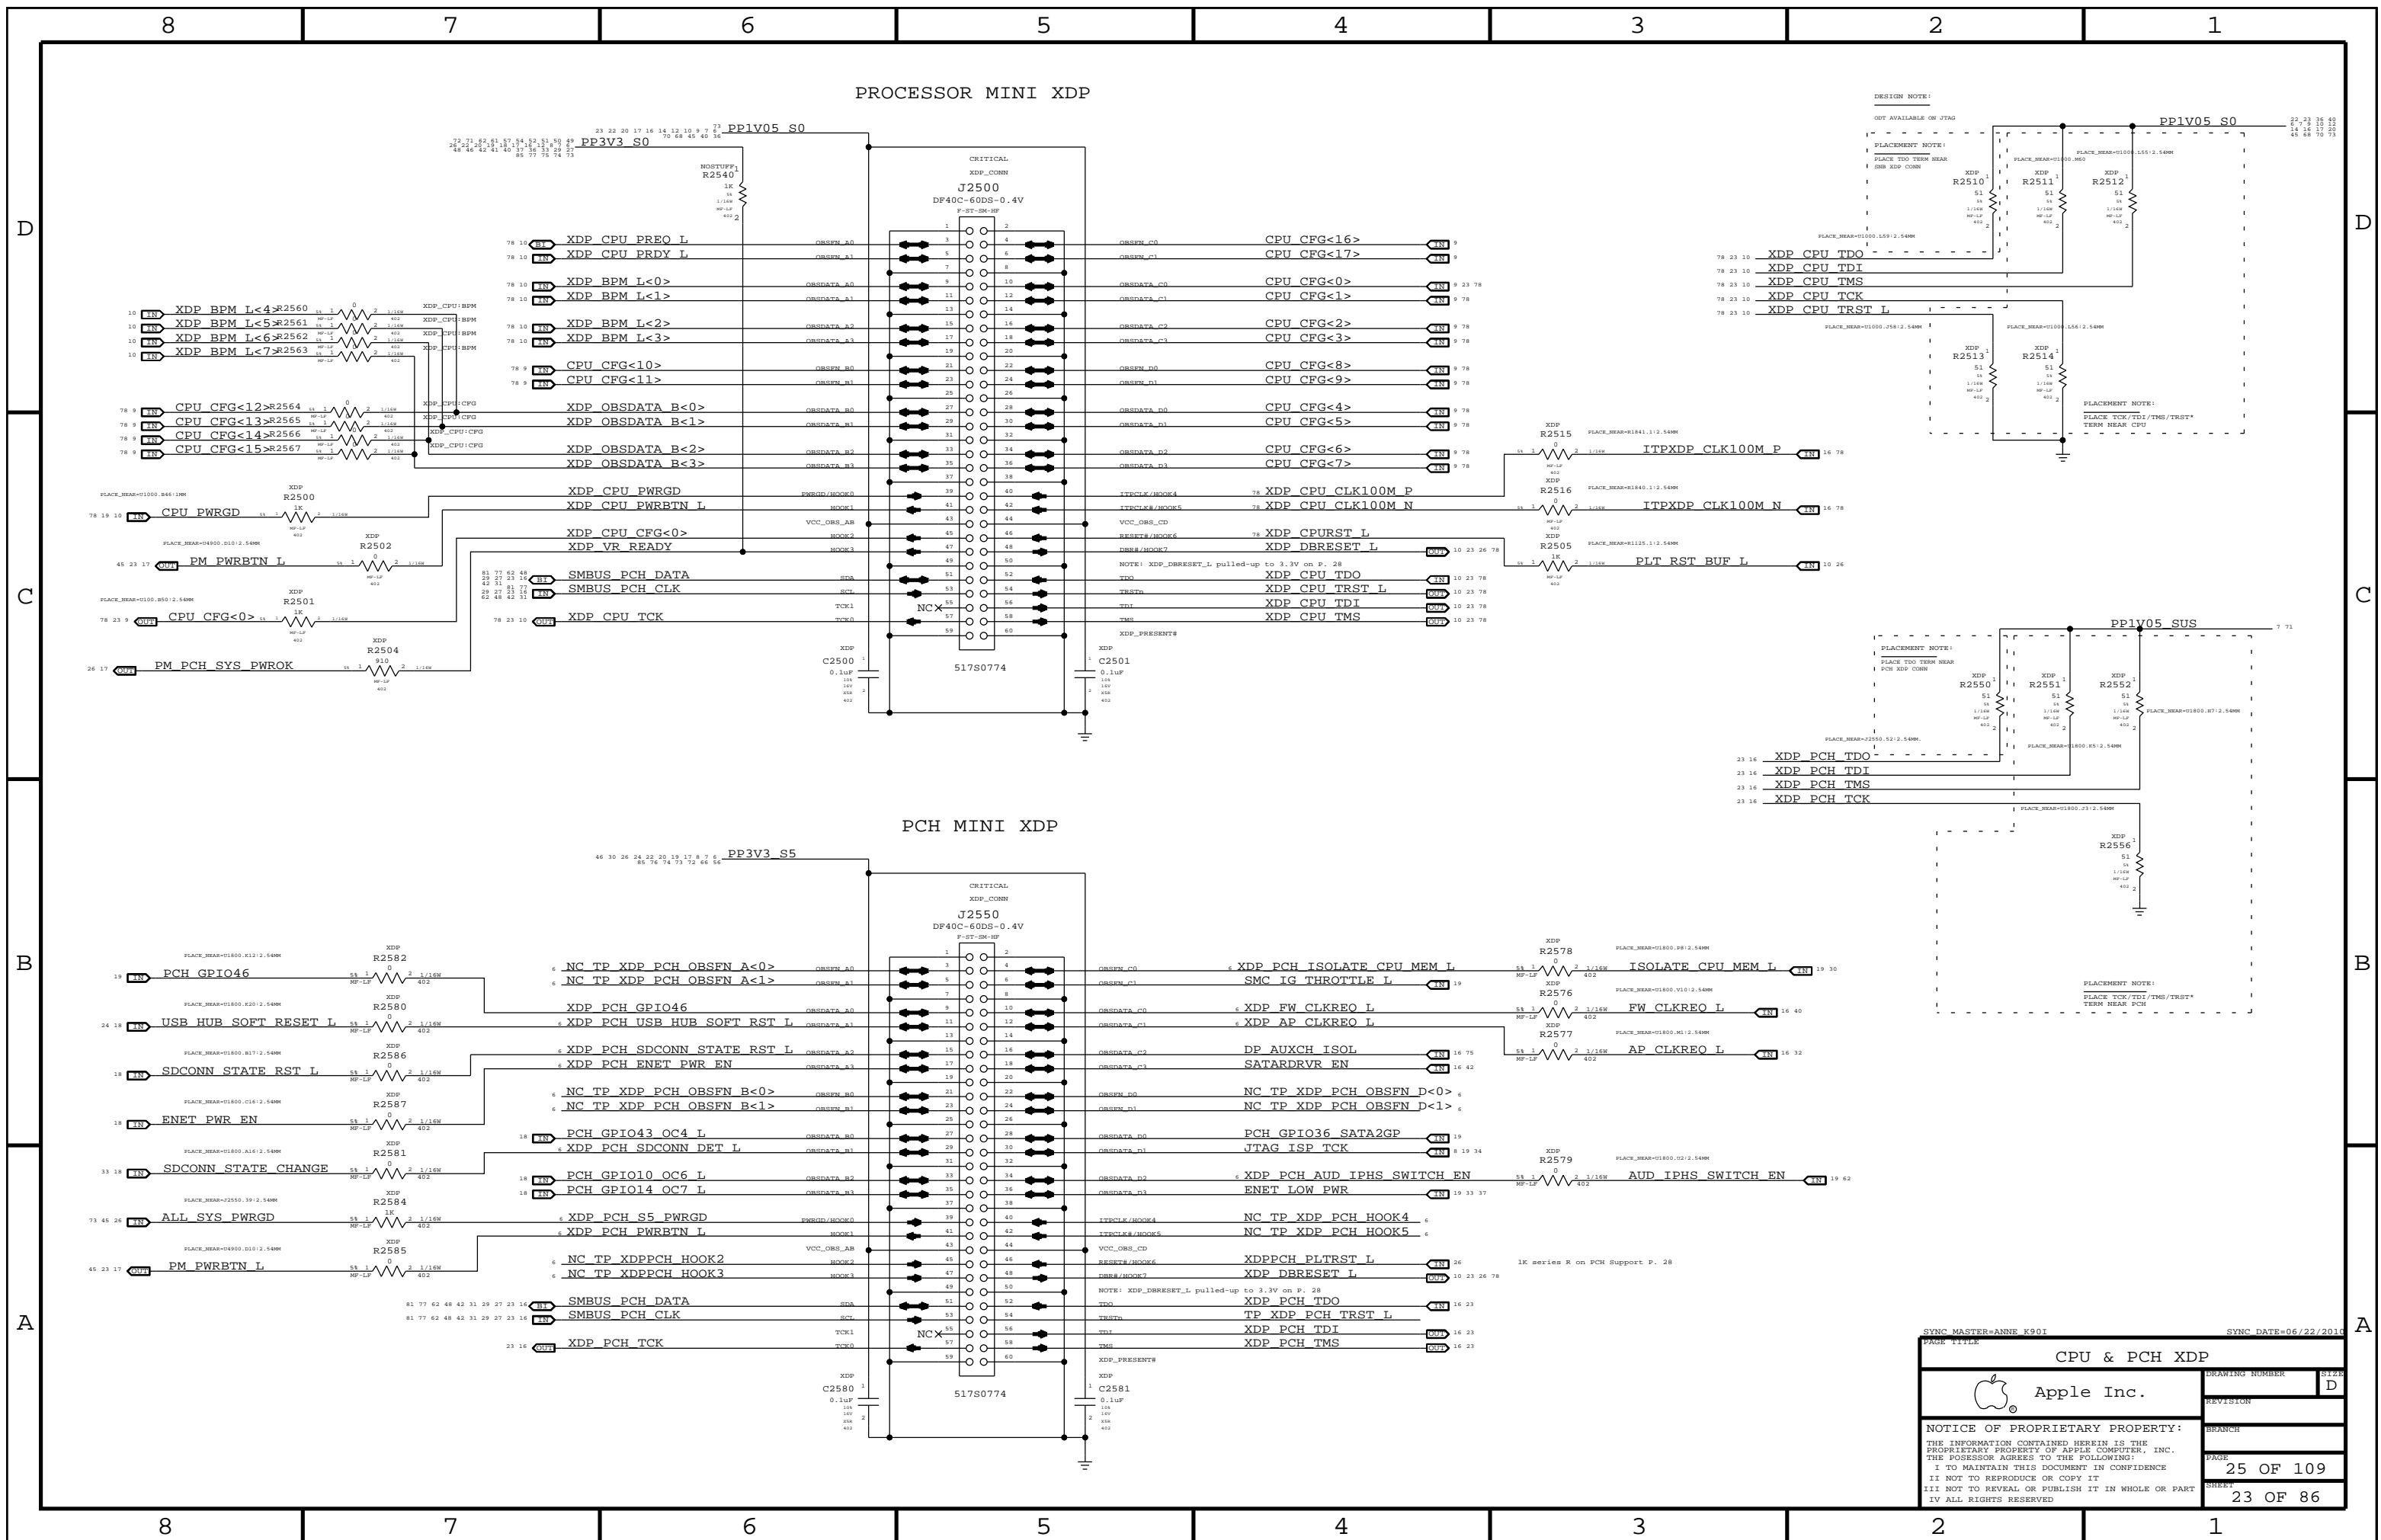


PROCESSOR MINI XDP

PCH MINI XDP

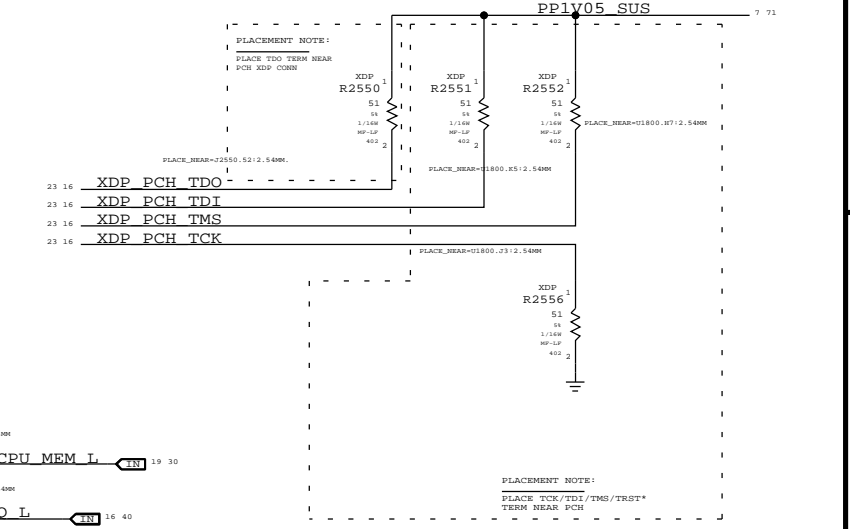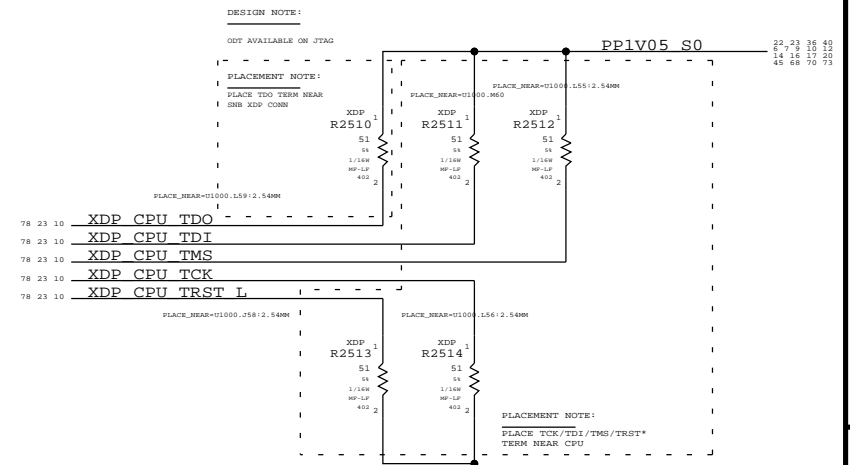

SYNC MASTER=ANNE K901 SYNC DATE=06/22/2011

CPU & PCH XDP		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	PAGE
		25 OF 109	SHEET
		23 OF 86	

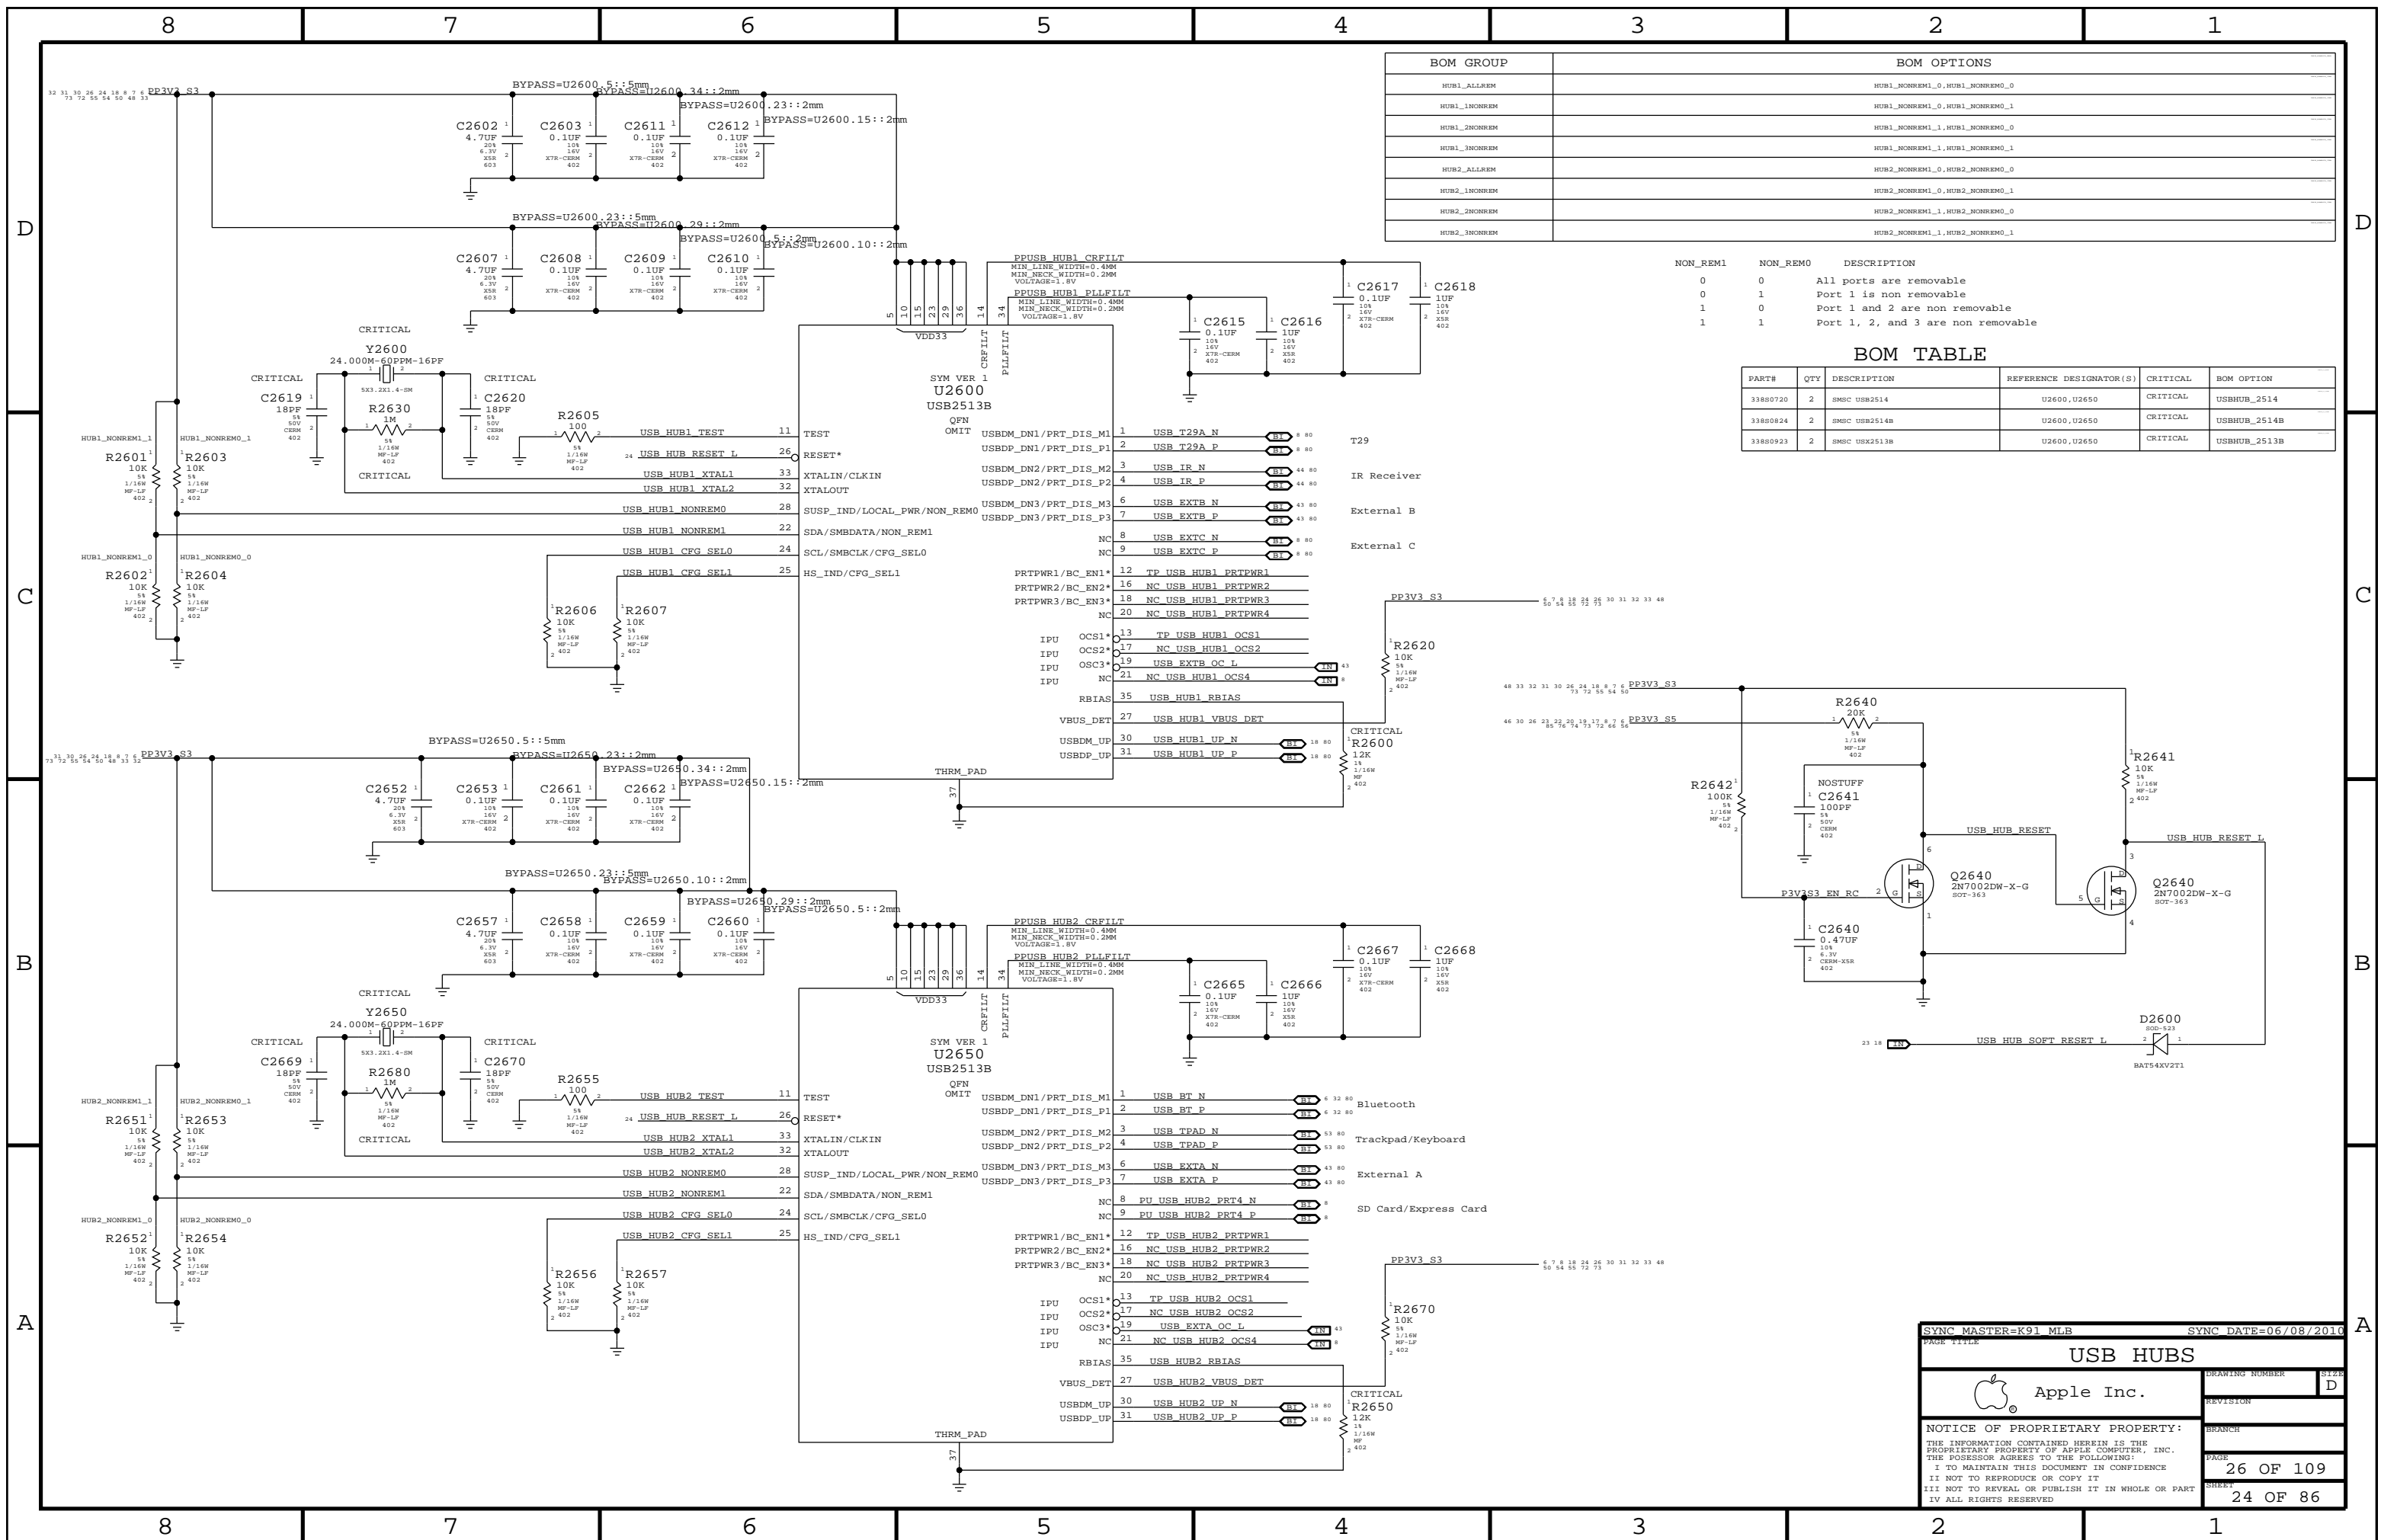

BOM GROUP	BOM OPTIONS
HUB1_ALLREM	HUB1_NONREM0_0, HUB1_NONREM0_1
HUB1_1NONREM	HUB1_NONREM1_0, HUB1_NONREM1_1
HUB1_2NONREM	HUB1_NONREM1_1, HUB1_NONREM1_0
HUB1_3NONREM	HUB1_NONREM1_1, HUB1_NONREM1_0
HUB2_ALLREM	HUB2_NONREM0_0, HUB2_NONREM0_1
HUB2_1NONREM	HUB2_NONREM1_0, HUB2_NONREM1_1
HUB2_2NONREM	HUB2_NONREM1_1, HUB2_NONREM1_0
HUB2_3NONREM	HUB2_NONREM1_1, HUB2_NONREM1_0

NON_REM1	NON_REM0	DESCRIPTION
0	0	All ports are removable
0	1	Port 1 is non removable
1	0	Port 1 and 2 are non removable
1	1	Port 1, 2, and 3 are non removable

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
33880720	2	SMSC USB2514	U2600, U2650	CRITICAL	USBHUB_2514
33880824	2	SMSC USB2514H	U2600, U2650	CRITICAL	USBHUB_2514H
33880923	2	SMSC USB2513B	U2600, U2650	CRITICAL	USBHUB_2513B


SYNC MASTER=K91 MLB SYNC DATE=06/08/2010

USB HUBS

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
IV ALL RIGHTS RESERVED

DRAWING NUMBER: D
REVISION:
BRANCH:
PAGE: 26 OF 109
SHEET: 24 OF 86

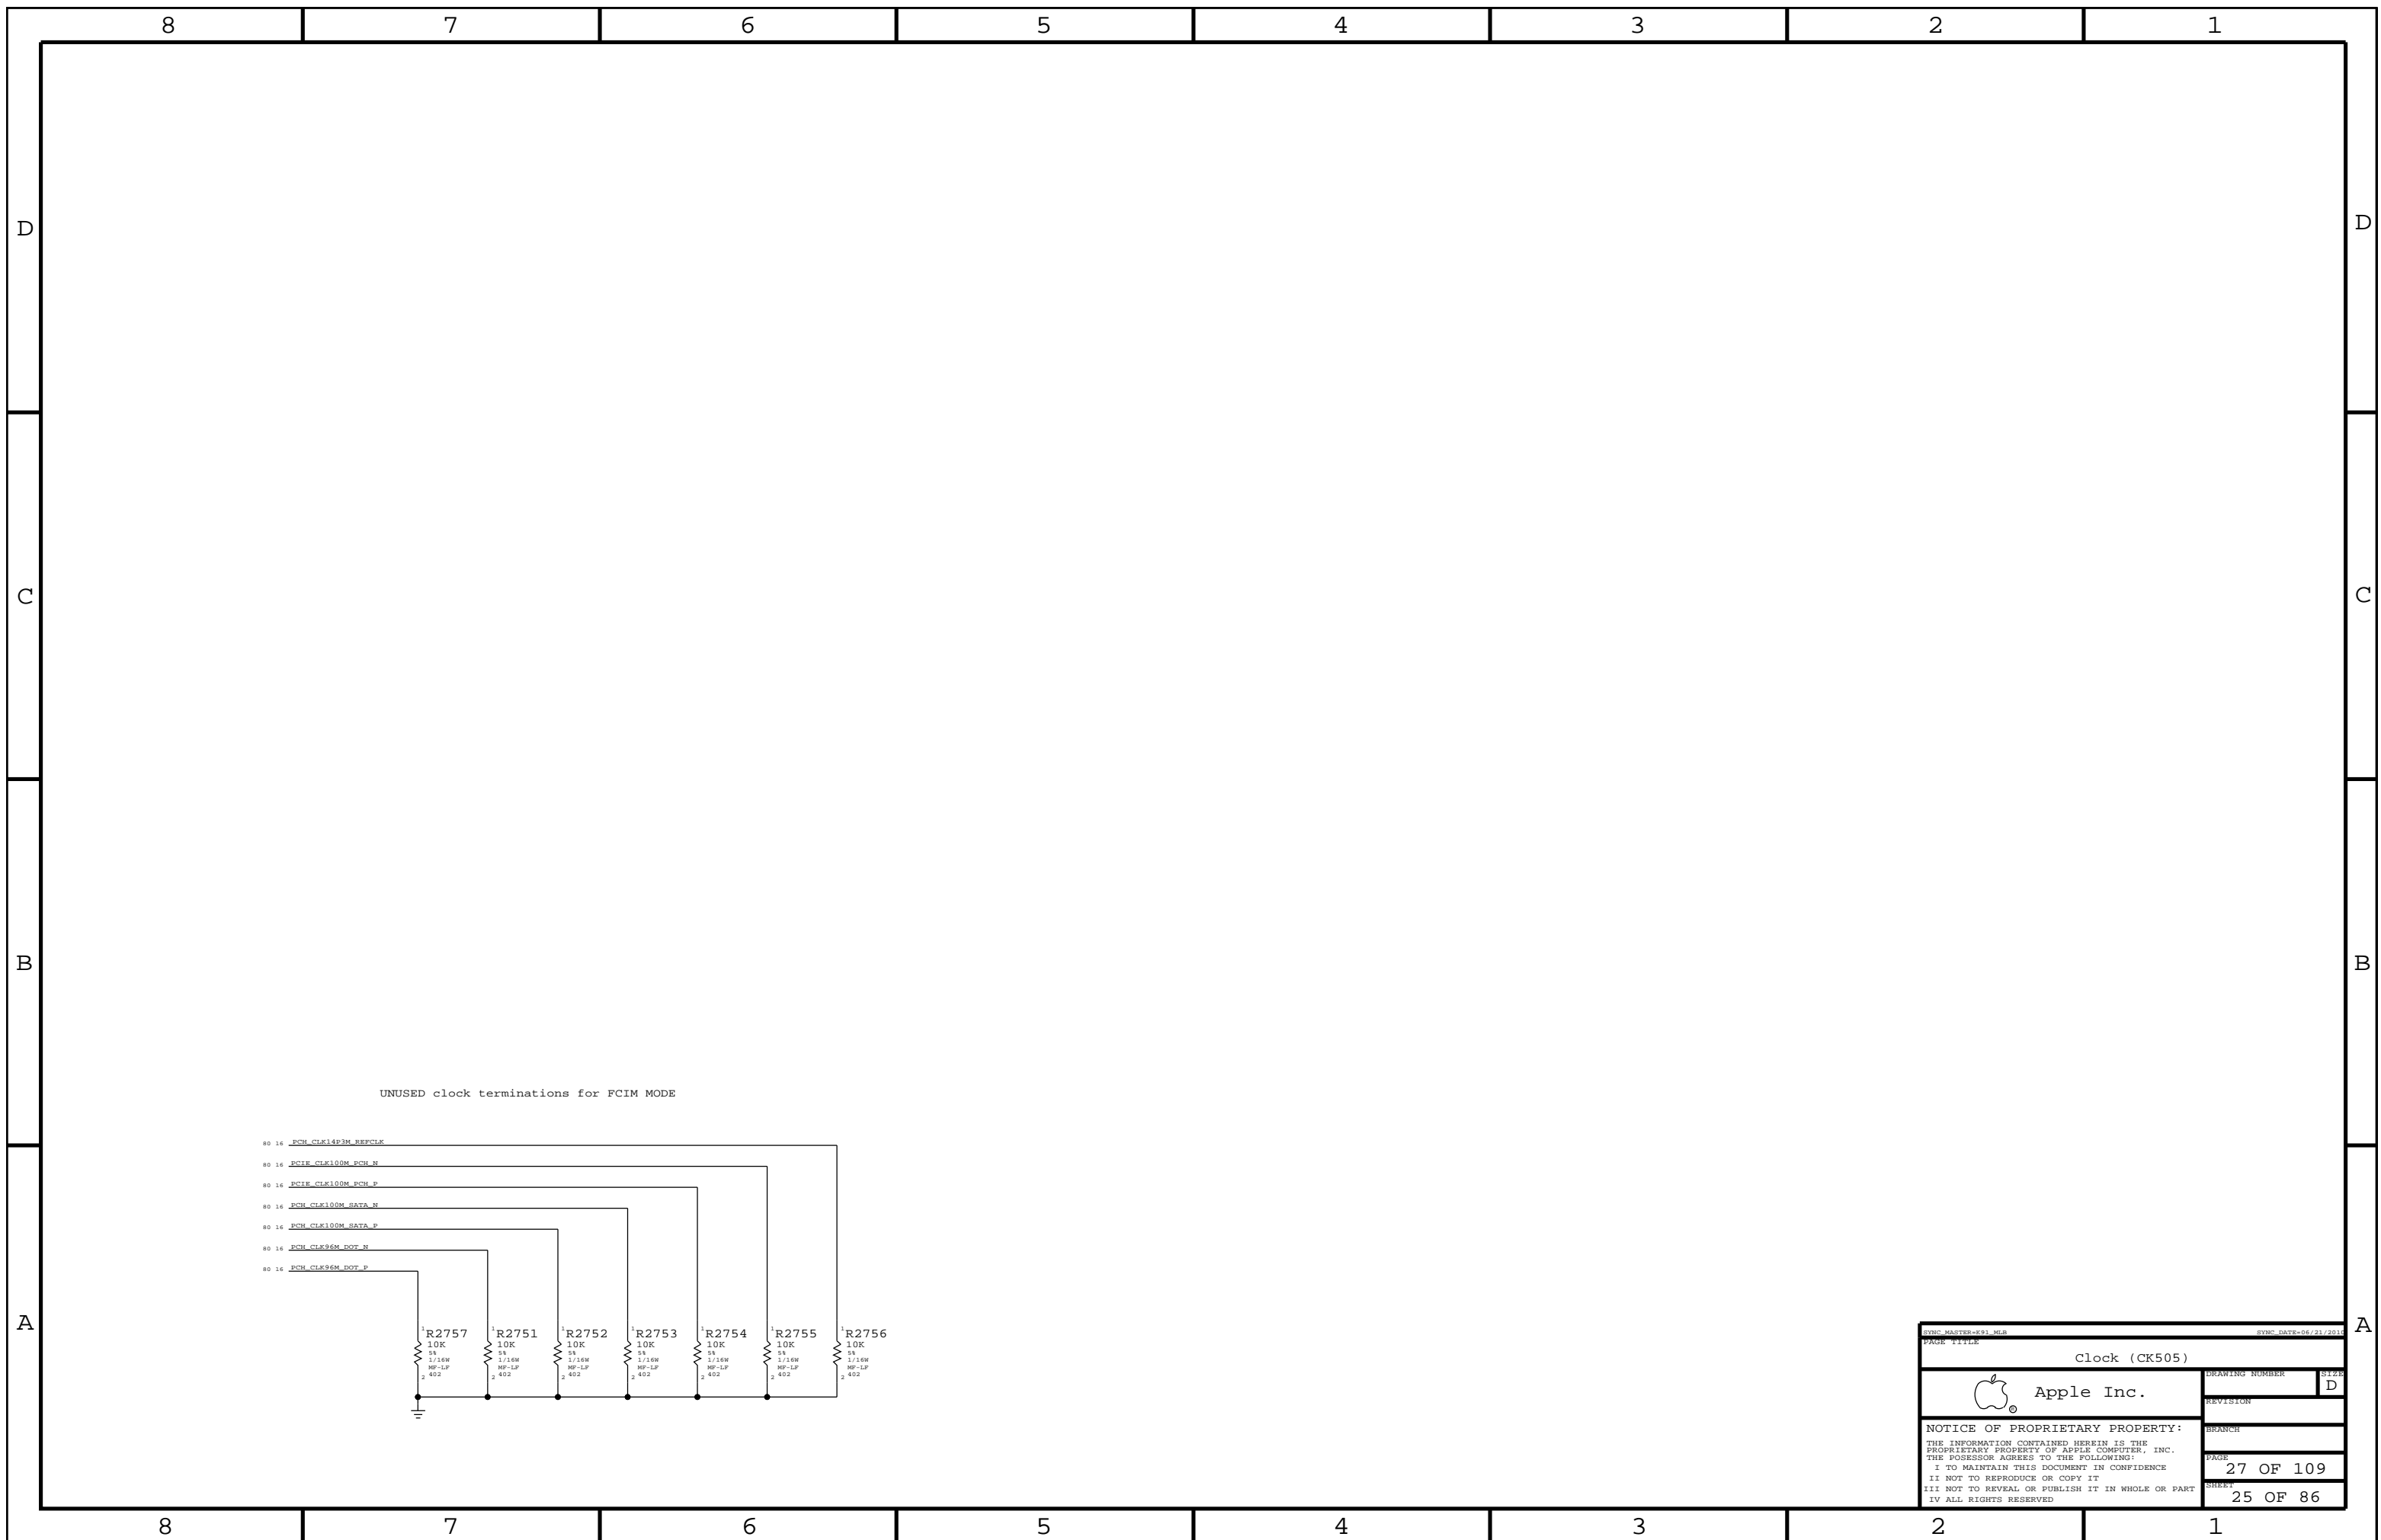

SYMC_MASTER=CK1_MCB		SYMC_DATE=06/21/2011	
PAGE TITLE			
Clock (CK505)			SIZE D
Apple Inc.		DRAWING NUMBER	REVISION
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	PAGE 27 OF 109
		SHEET	25 OF 86


Page Notes

Power aliases required by this page:
 - *PP1V5_S3_MEM_A
 - *PP1V5_S3_MEM_A
 - *PP0V75_S3_MEM_VTT_A
 - *PP0V75_S3_MEM_VTT_A
 - *PP0V75_S3_MEM_A (2.5 - 3.3V)

Signal aliases required by this page:
 - *I2C_SDDIMMA_SCL
 - *I2C_SDDIMMA_SDA

SDM options provided by this page:
 (NONE)


DDR3 DECOUPLING AND GND RETURN CAPS (SPACE EVENLY AT CONNECTOR)

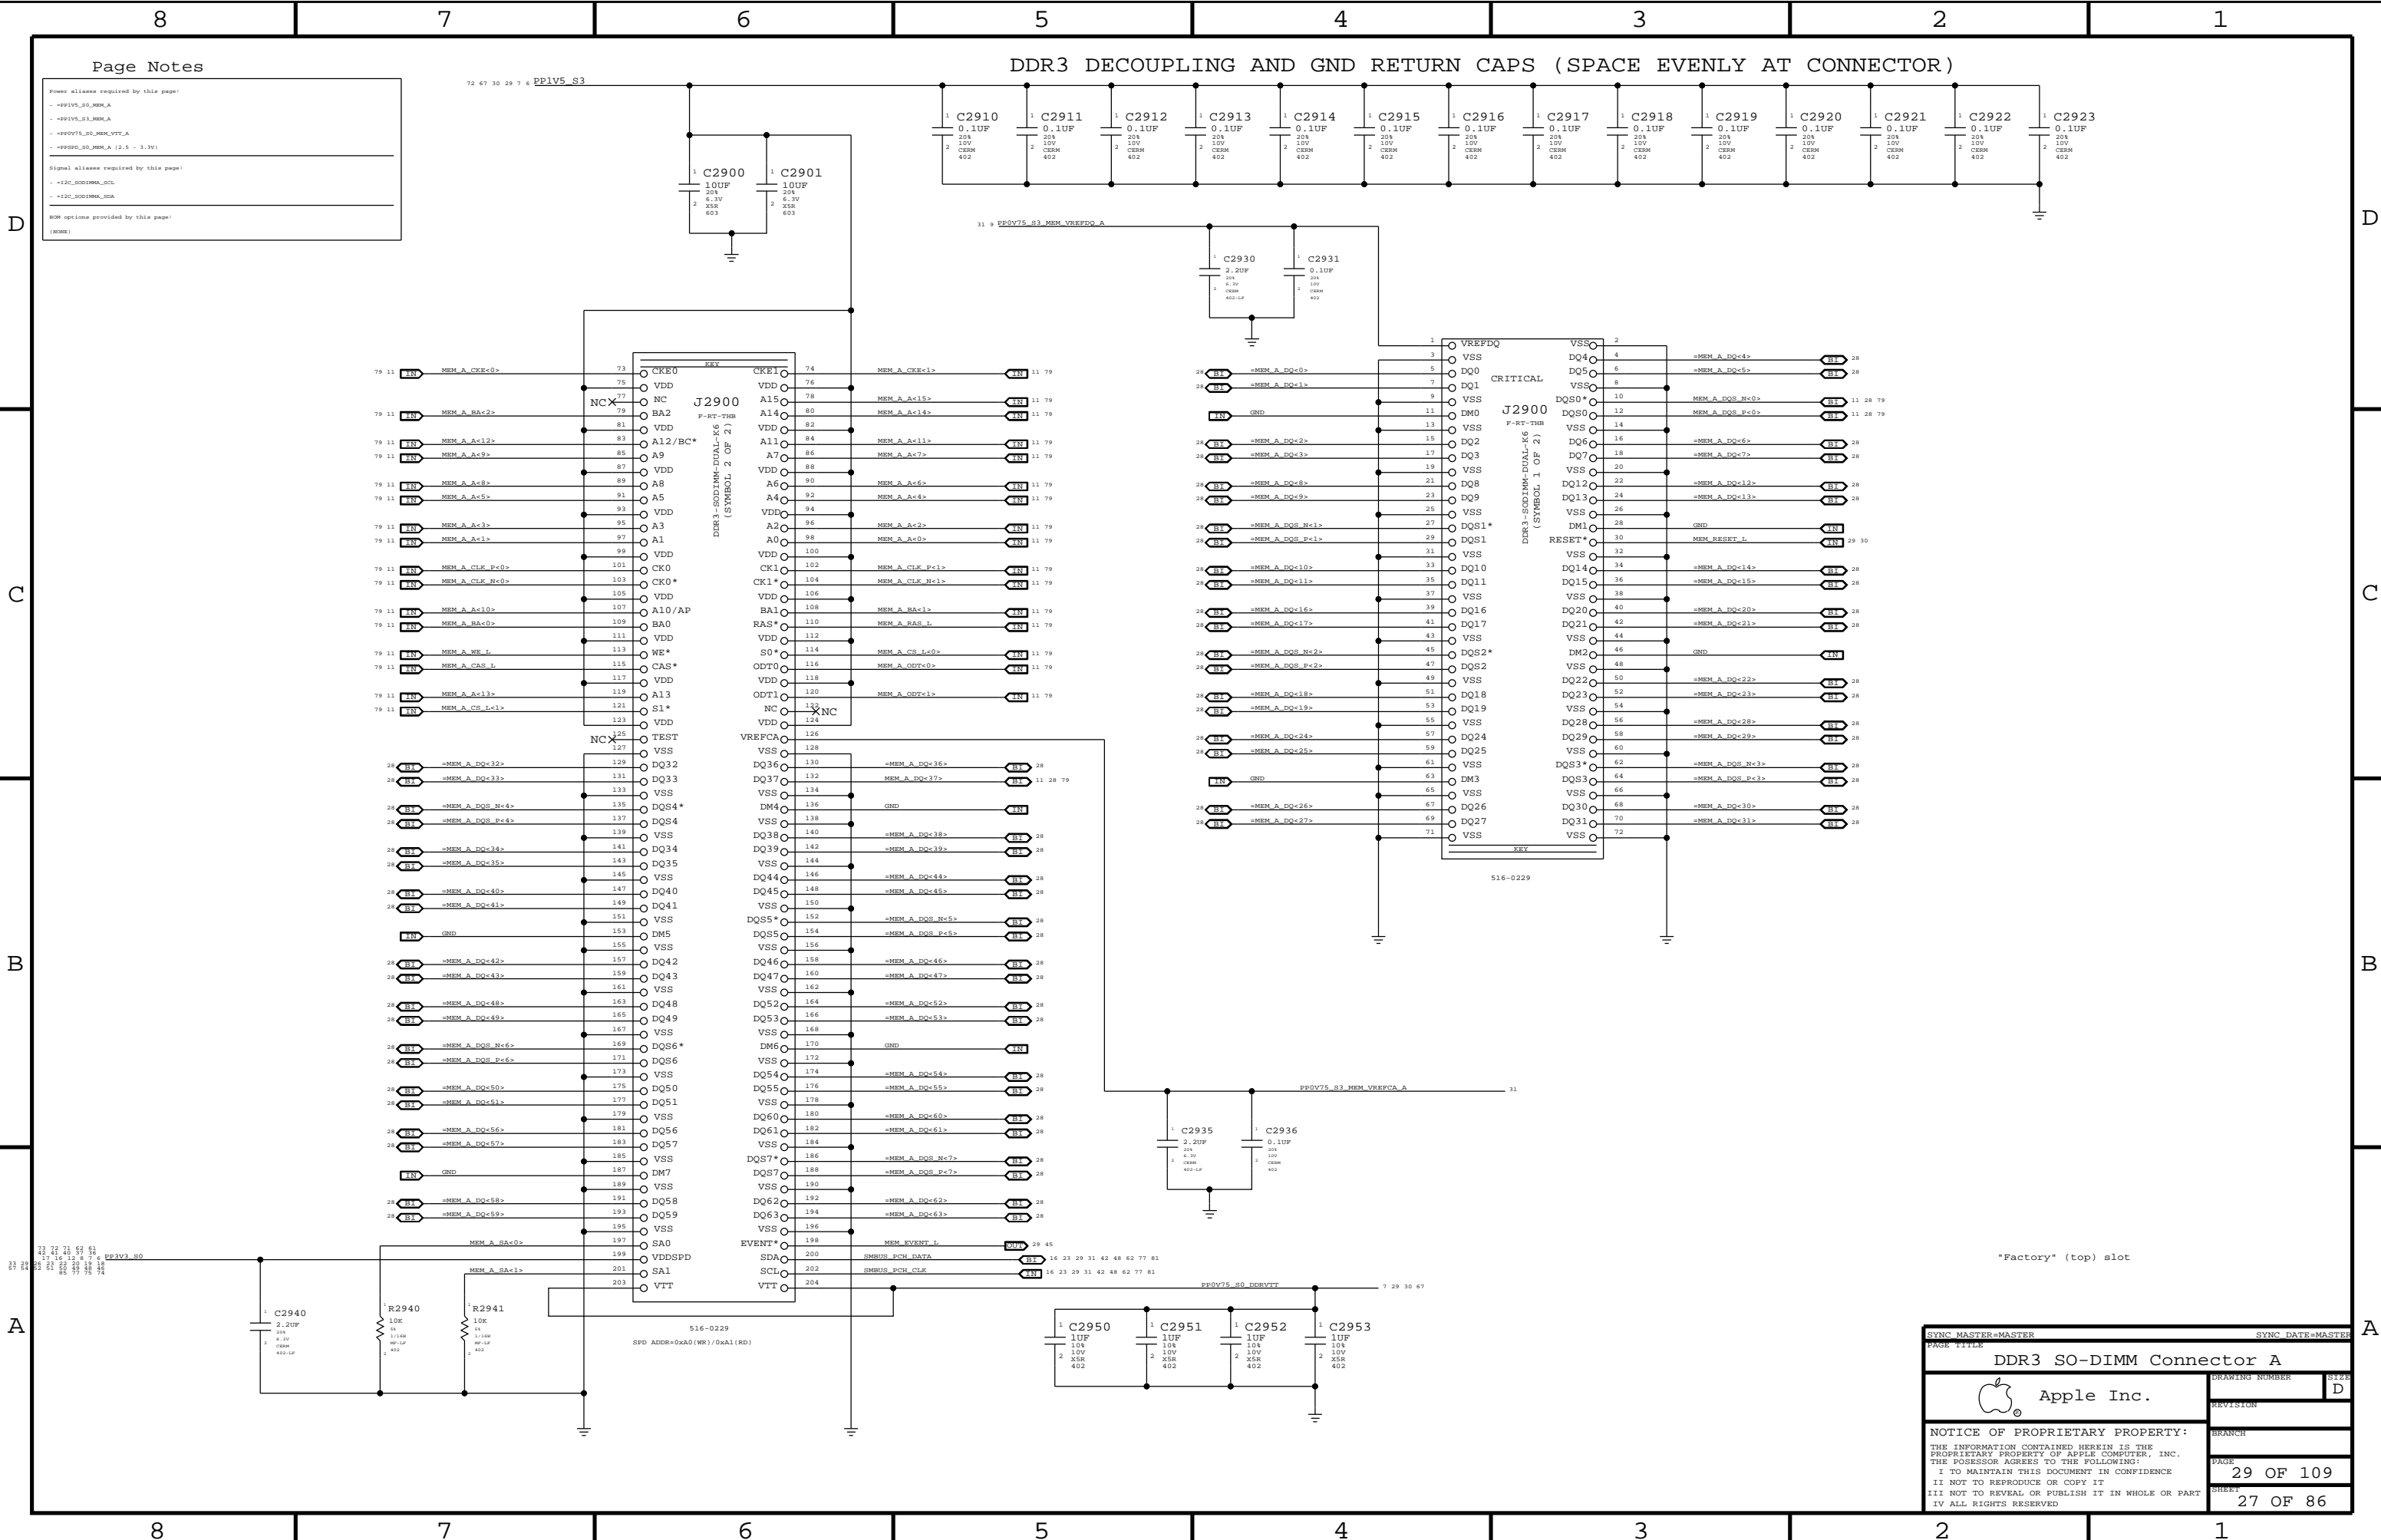

SYNC MASTER=MASTER		SYNC DATE=MASTER	
PAGE TITLE			
DDR3 SO-DIMM Connector A			
DRAWING NUMBER		SIZE	
D		D	
REVISION		BRANCH	
PAGE		PAGE	
29 OF 109		29 OF 109	
SHEET		SHEET	
27 OF 86		27 OF 86	

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

"Factory" (top) slot

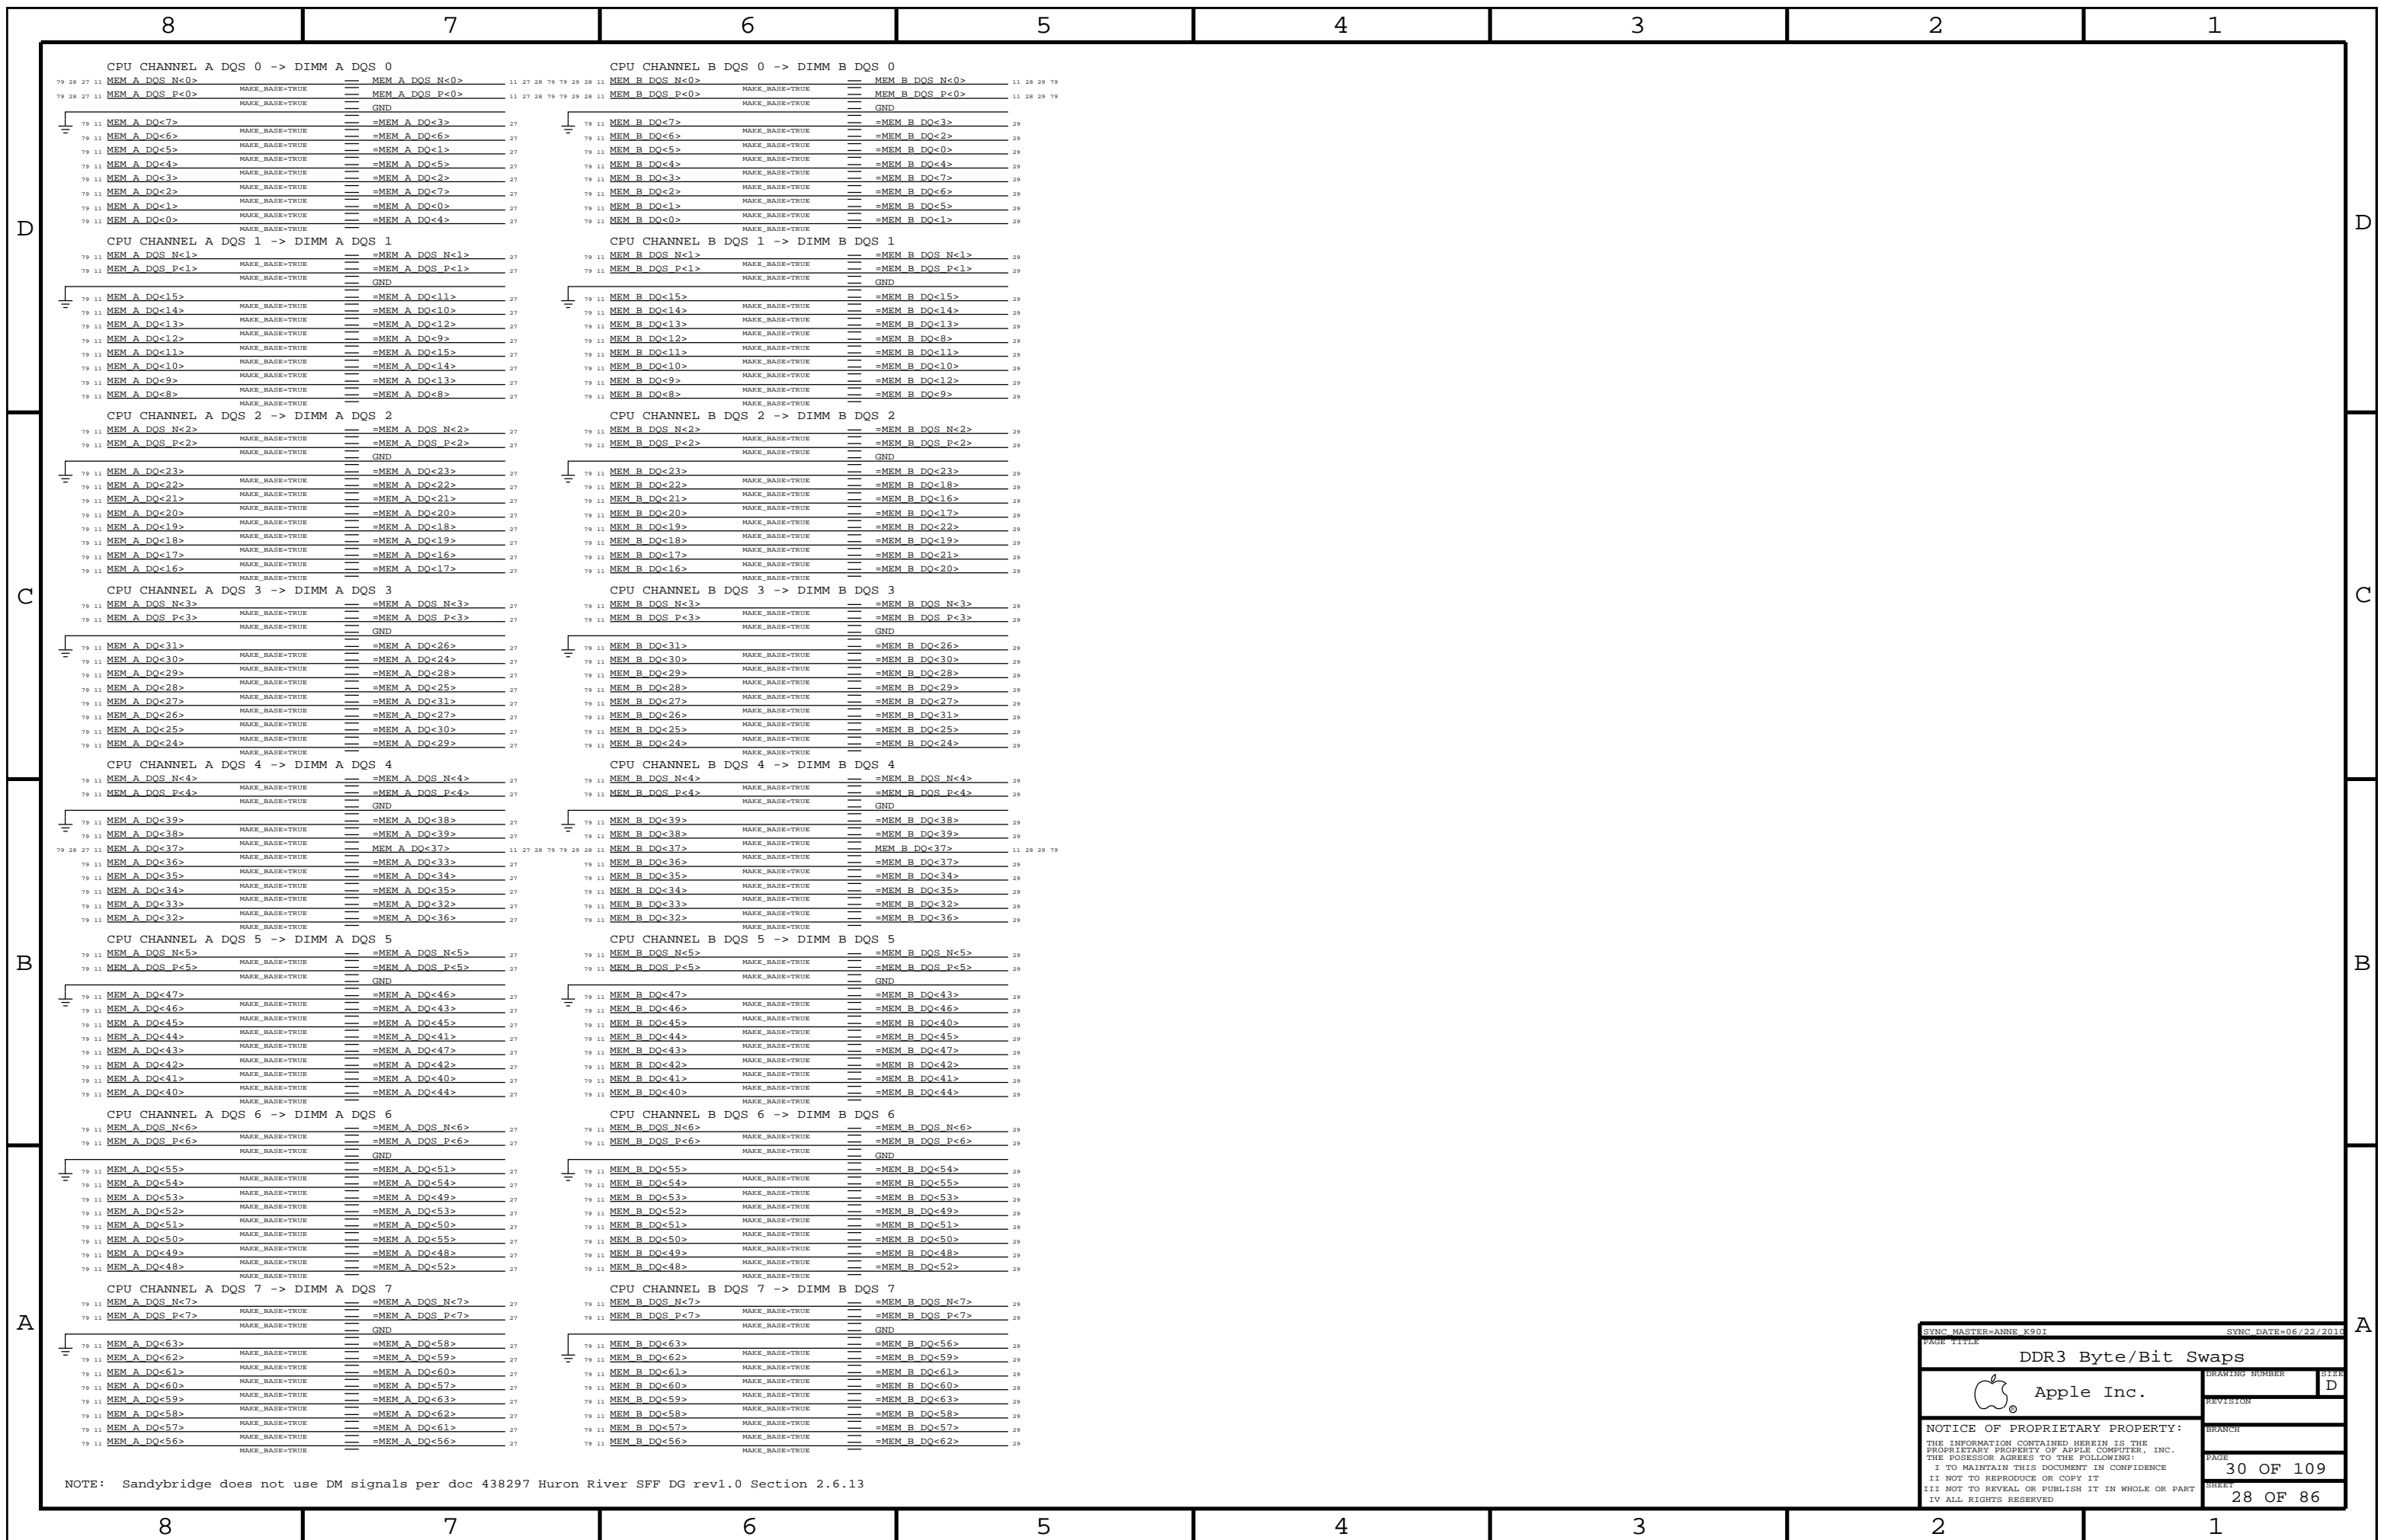

NOTE: Sandybridge does not use DM signals per doc 438297 Huron River SFF DG rev1.0 Section 2.6.13

SYNC MASTER=ANNE K901		SYNC DATE=06/22/2011	
PAGE TITLE			
DDR3 Byte/Bit Swaps		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:			
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		BRANCH	
II NOT TO REPRODUCE OR COPY IT		PAGE	30 OF 109
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART		SHEET	28 OF 86
IV ALL RIGHTS RESERVED			


Page Notes

Power aliases required by this page:
 ->PPIV5_S3_MEM_B
 ->PPIV5_S3_MEM_B
 ->PPIV5_S3_MEM_VTT_B
 ->PPIV5_S3_MEM_B (2.5 - 3.3V)

Signal aliases required by this page:
 ->I2C_S0D0MMB_SCL
 ->I2C_S0D0MMB_SDA

MEM options provided by this page:
 (NONE)

DDR3 DECOUPLING AND GND RETURN CAPS (SPACE EVENLY AT CONNECTOR)

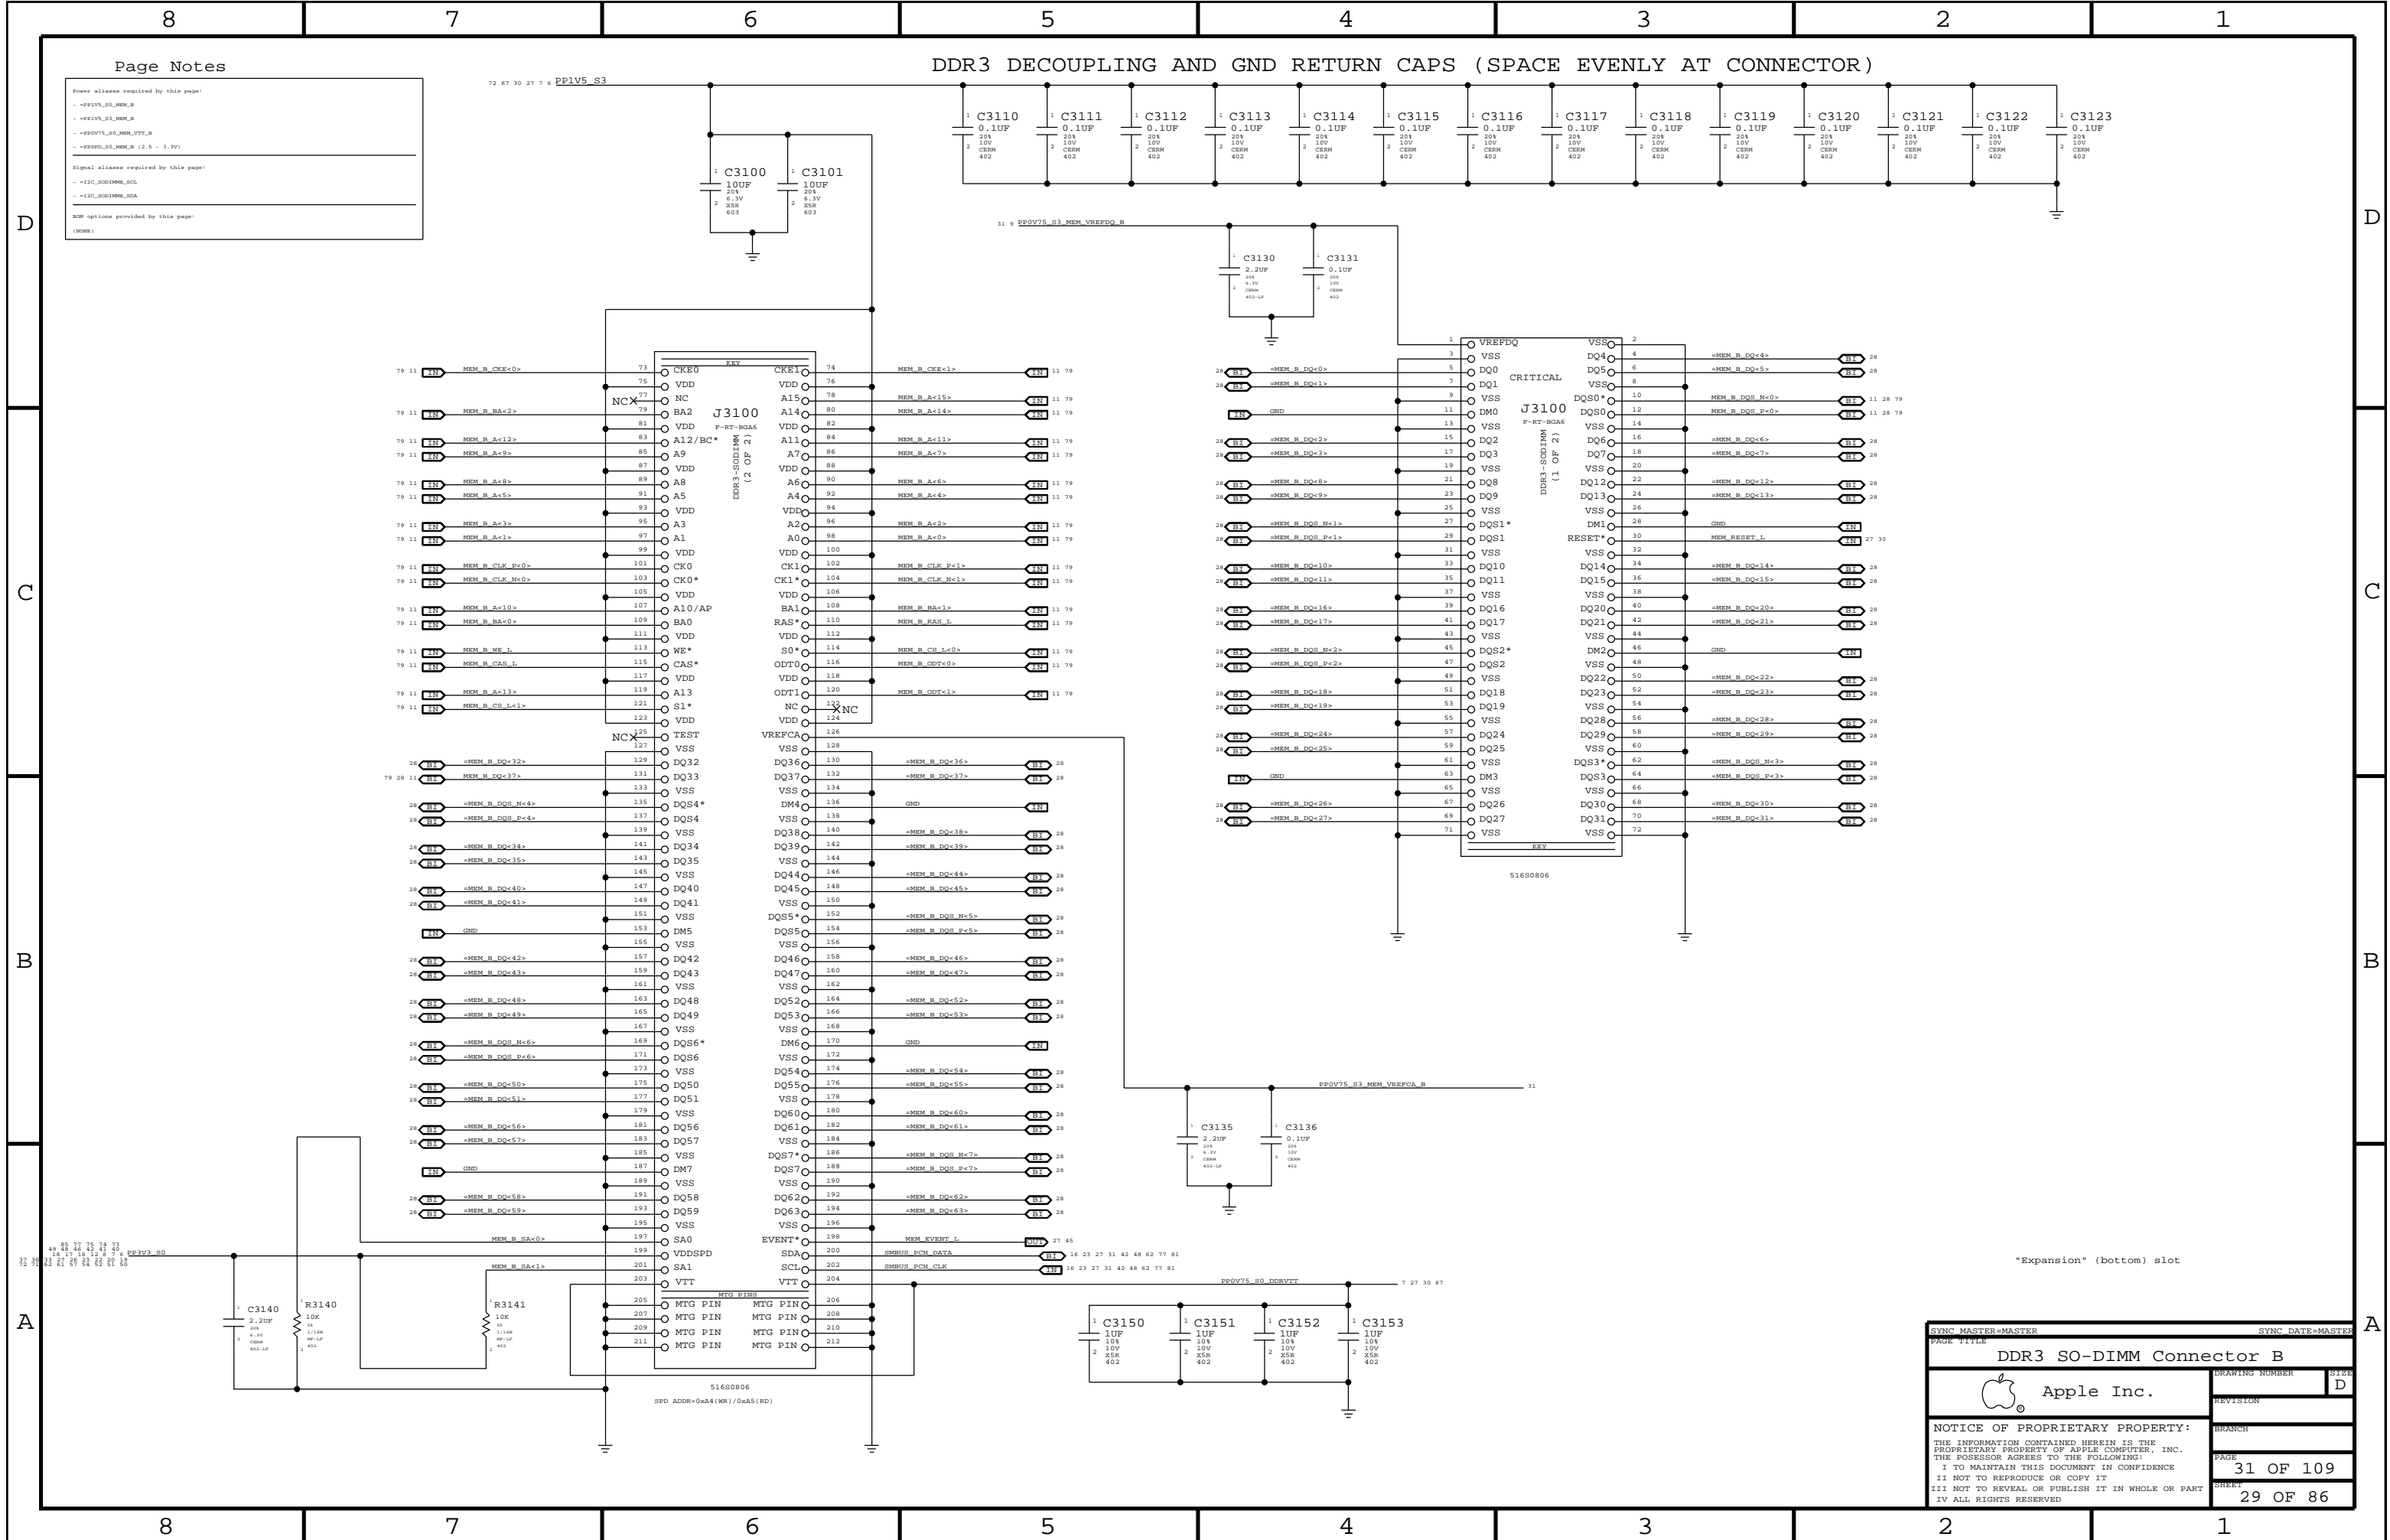

"Expansion" (bottom) slot

SYNC MASTER=MASTER		SYNC DATE=MASTER	
PAGE TITLE			
DDR3 SO-DIMM Connector B			
DRAWING NUMBER		SIZE	
Apple Inc.		D	
REVISION			
BRANCH			
PAGE			
31 OF 109			
SHEET			
29 OF 86			
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED			

The circuit below handles CPU and VTT power during S0->S3->S0 transitions, as well as isolating the CPU's SM_DRAMRST# output from the SO-DIMMs when necessary.

ISOLATE_CPU_MEM_L GPIO state during S3->S0 transitions determines behavior of signals.


WHEN HIGH: CPU 1.5V remains powered in S3, VTT follows S0 rails, MEM_RESET_L not isolated.

WHEN LOW: CPU 1.5V follows S0 rails, VTT ensures clean CKE transition, MEM_RESET_L isolated.


$$P1V5CPU_EN = (ISOLATE_CPU_MEM_L + PM_SLP_S3_L) * PM_SLP_S4_L$$

$$MEMVTT_EN = (ISOLATE_CPU_MEM_L + PLT_RST_L) * PM_SLP_S3_L$$

$$MEM_RESET_L = !ISOLATE_CPU_MEM_L + CPU_MEM_RESET_L$$

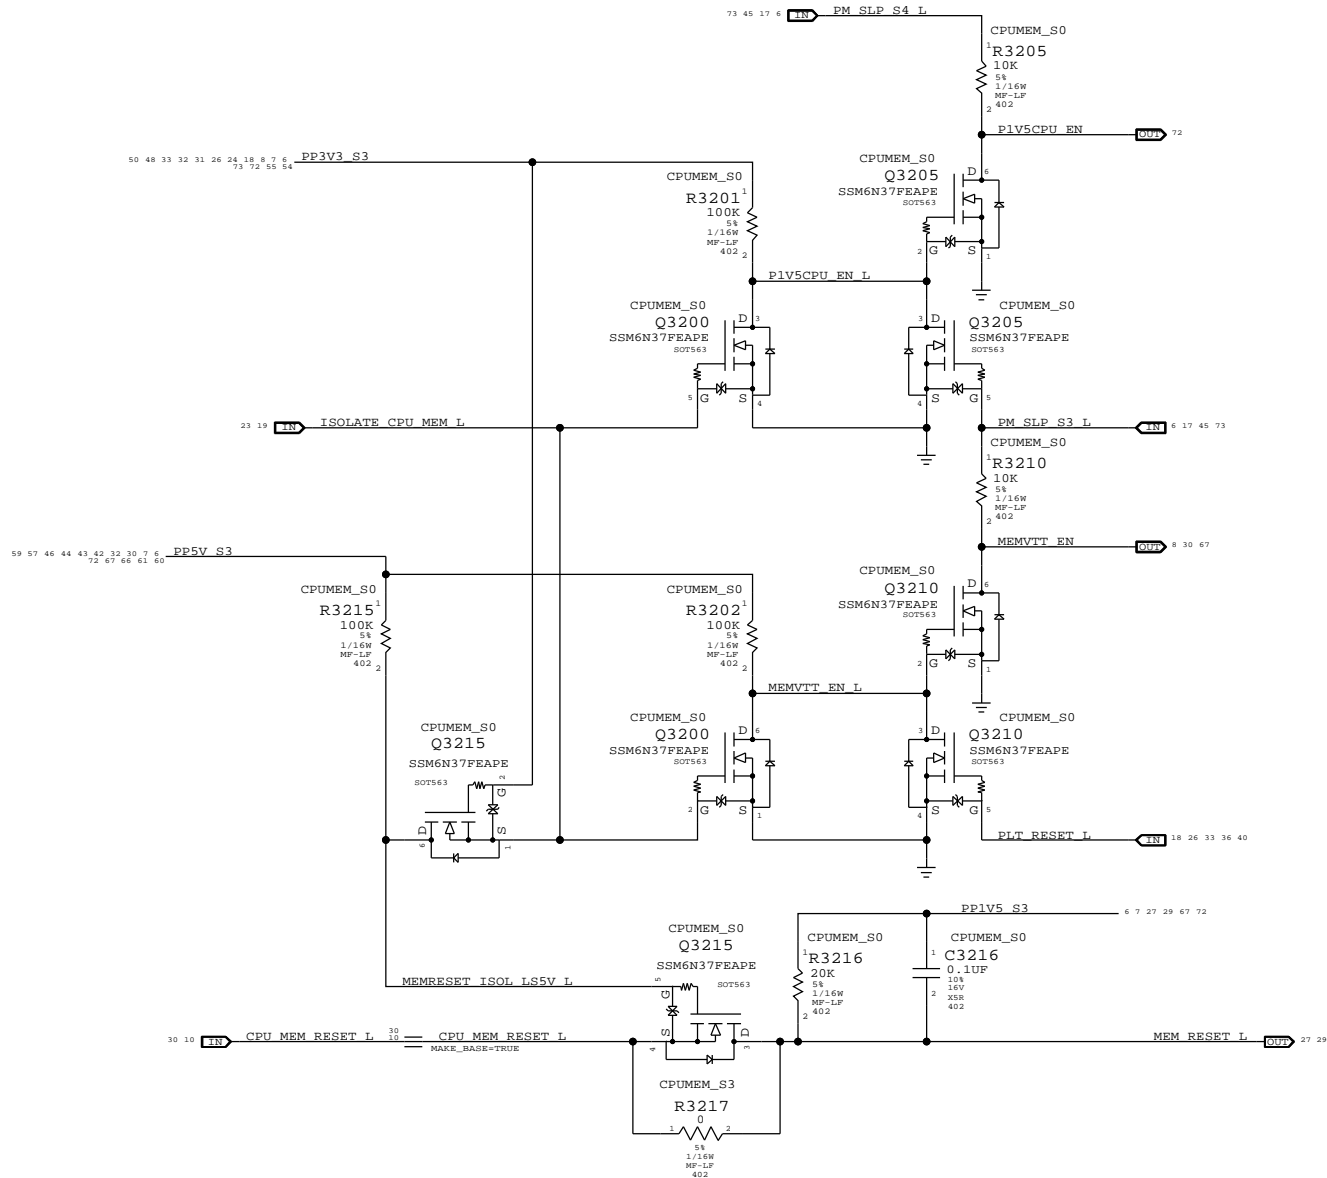


1V5 S0 "PGOOD" for CPU

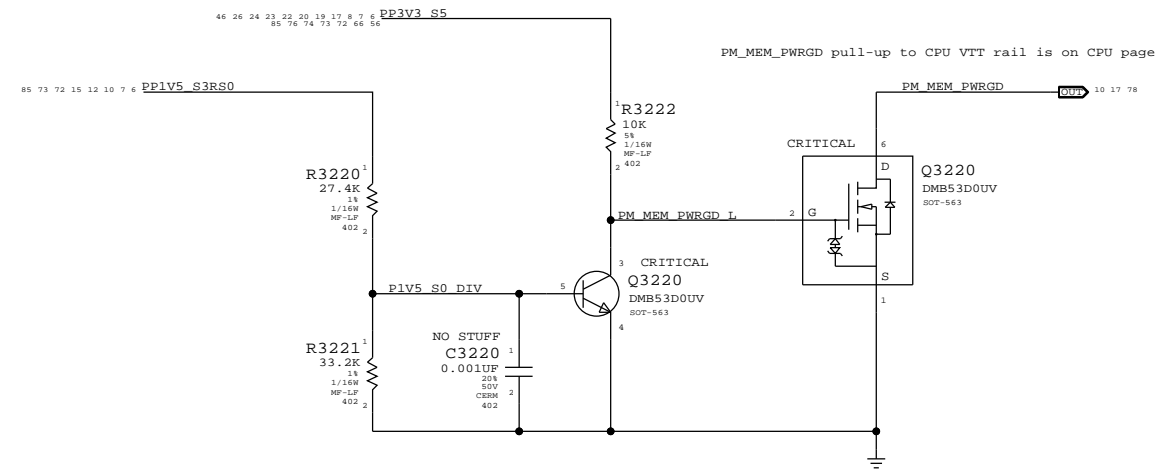

MEMVTT Clamp

Ensures CKE signals are held low in S3

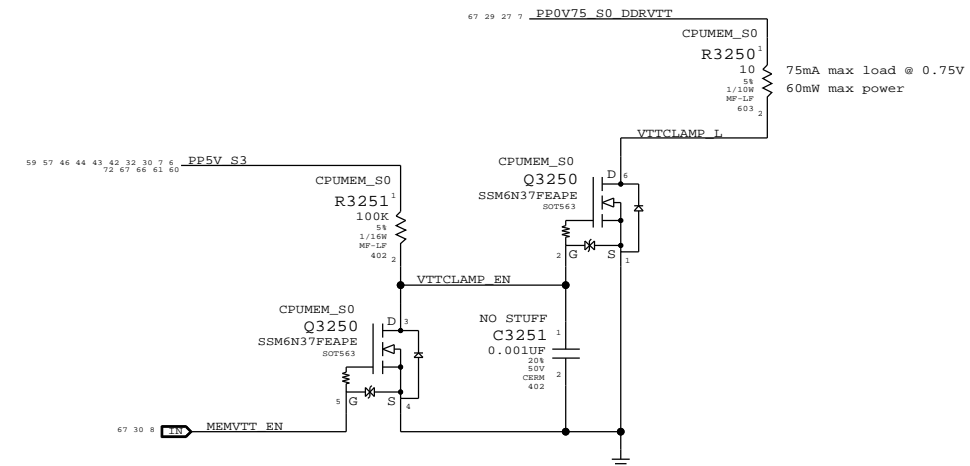

Step	ISOLATE_CPU_MEM_L	PLT_RESET_L	PM_SLP_S3_L	PM_SLP_S4_L	CPU_MEM_RESET_L	MEM_RESET_L	MEMVTT_EN	P1V5CPU_EN
S0	0	1	1	1	1	CPU_MEM_RESET_L	1	1
1	0	1	1	1	1	1	1	1
2	0	0	1	1	1	1	0	1
3	0	0	0	1	X	1	0	0
4	0	0	1	1	X	1	0	1
5	0	1	1	1	0 (*)	1	1	1
6	0	1	1	1	1	1	1	1
S0	1	1	1	1	1	CPU_MEM_RESET_L	1	1

(*) CPU_MEM_RESET_L asserts due to loss of PM_MEM_PWRGD, must wait for software to clear before deasserting ISOLATE_CPU_MEM_L GPIO.

NOTE: In the event of a S3->S5 transition ISOLATE_CPU_MEM_L will still be asserted on next S5->S0 transition. Rails will power-up as if from S3, but MEM_RESET_L will not properly assert. Software must deassert ISOLATE_CPU_MEM_L and then generate a valid reset cycle on CPU_MEM_RESET_L.

SYNC MASTER=ANNE K901 SYNC DATE=06/22/2011

CPU Memory S3 Support

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
IV ALL RIGHTS RESERVED

DRAWING NUMBER: SIZE D


REVISION

BRANCH

PAGE: 32 OF 109

SHEET: 30 OF 86

NOTE: Must not enable more than two SO-DIMM margining buffers at once or VRef source may be overloaded.

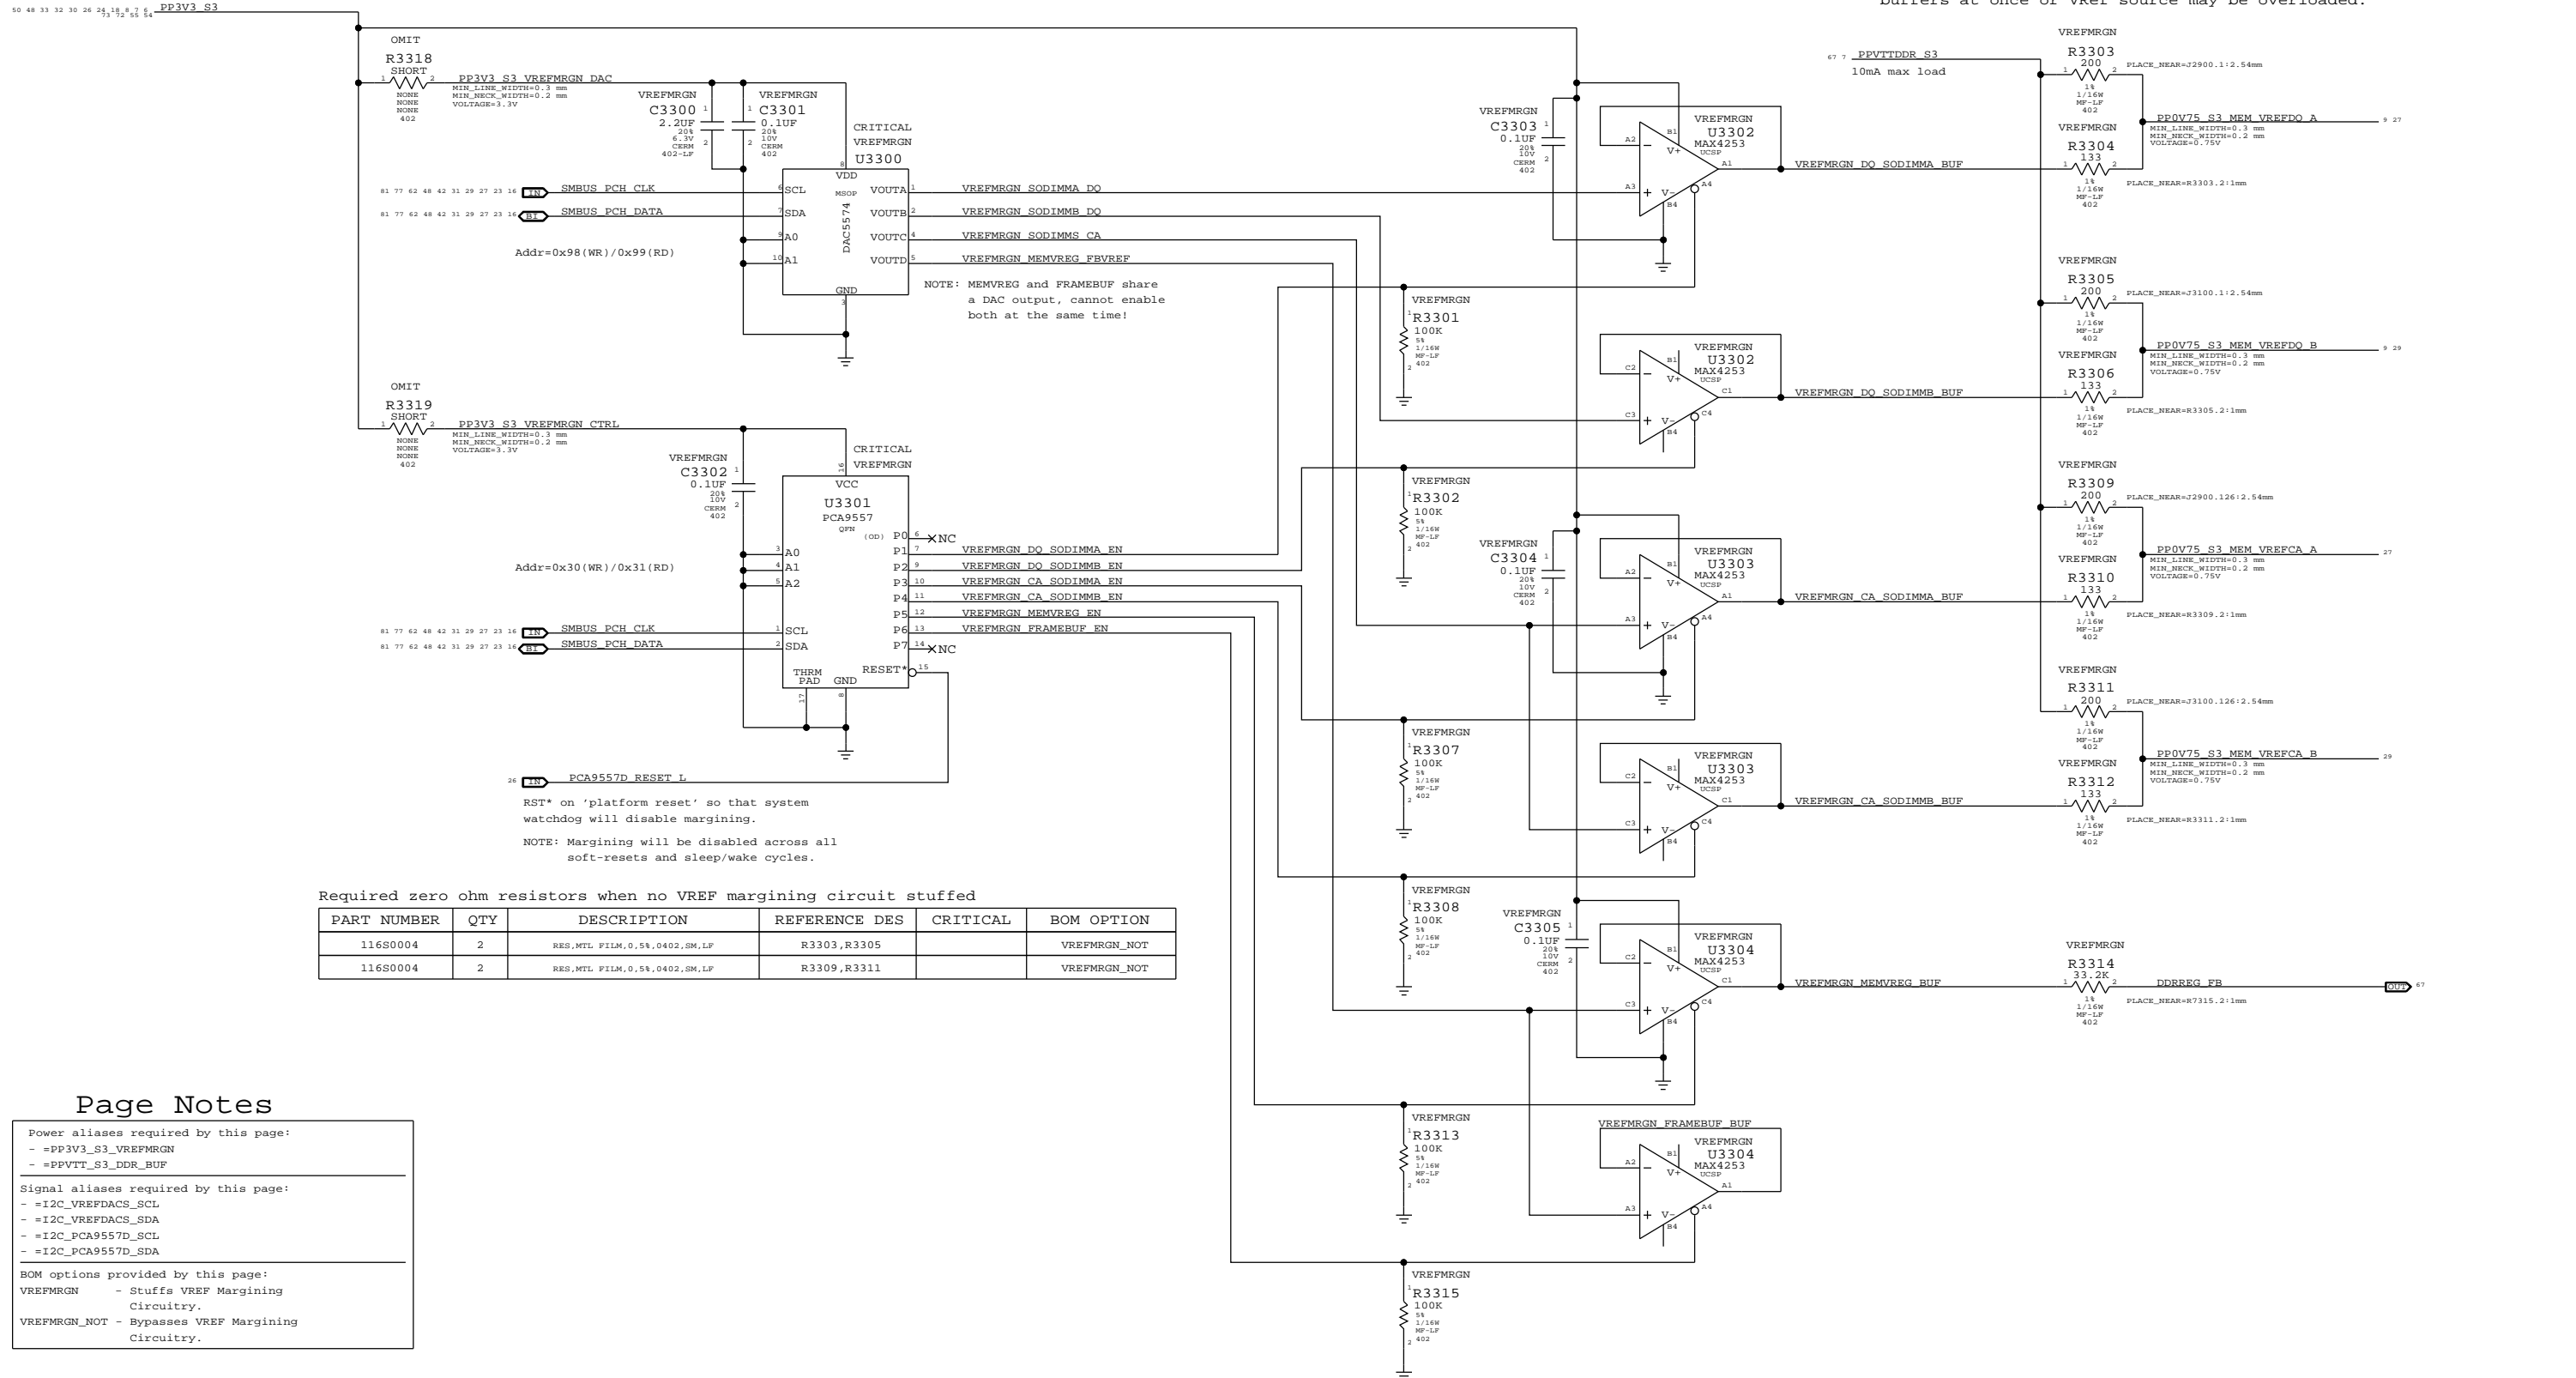

NOTE: MEMVREG and FRAMEBUF share a DAC output, cannot enable both at the same time!

RST* on 'platform reset' so that system watchdog will disable margining.
NOTE: Margining will be disabled across all soft-resets and sleep/wake cycles.

Required zero ohm resistors when no VREF margining circuit stuffed

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
116S0004	2	RES,MTL FILM,0.5%,0402,SM,LF	R3303,R3305		VREFMGRN_NOT
116S0004	2	RES,MTL FILM,0.5%,0402,SM,LF	R3309,R3311		VREFMGRN_NOT

Page Notes

- Power aliases required by this page:
 - PP3V3_S3_VREFMGRN
 - PVPVT_S3_DDR_BUF
- Signal aliases required by this page:
 - I2C_VREFDACS_SCL
 - I2C_VREFDACS_SDA
 - I2C_PCA9557D_SCL
 - I2C_PCA9557D_SDA
- BOM options provided by this page:
 - VREFMGRN - Stuffs VREF Margining Circuitry.
 - VREFMGRN_NOT - Bypasses VREF Margining Circuitry.

	MEM A VREF DQ	MEM B VREF DQ	MEM A VREF CA	MEM B VREF CA	MEM VREG	GPU Frame Buffer (1.8V, 70% Vref)
DAC Channel:	A	B	C	C	D	D
PCA9557D Pin:	1	2	3	4	5	6
Nominal value		0.75V (DAC: 0x3A)			1.5V (DAC: 0x3A)	1.267V (DAC: 0x8B)
Margined target:		0.300V - 1.200V (+/- 45mV)			1.998V - 1.002V (+/- 498mV)	1.056V - 1.442V (+/- 180mV)
DAC range:		0.000V - 1.501V (0x00 - 0x74)			0.000V - 1.501V (0x00 - 0x74)	0.000V - 3.300V (0x00 - 0xFF)
Vref current:		+3.4mA - -3.4mA (- = sourced)			+33uA - -33uA (- = sourced)	+6.0mA - -5.0mA (- = sourced)
DAC step size:		7.69mV / step @ output			8.59mV / step @ output	1.51mV / step @ output


SYNC MASTER=K91_MLB SYNC DATE=06/01/2011

FSB/DDR3/FB/FRAMEBUF Vref Margining

Apple Inc.


NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE I NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED

DRAWING NUMBER: 33 OF 109
REVISION: 31 OF 86

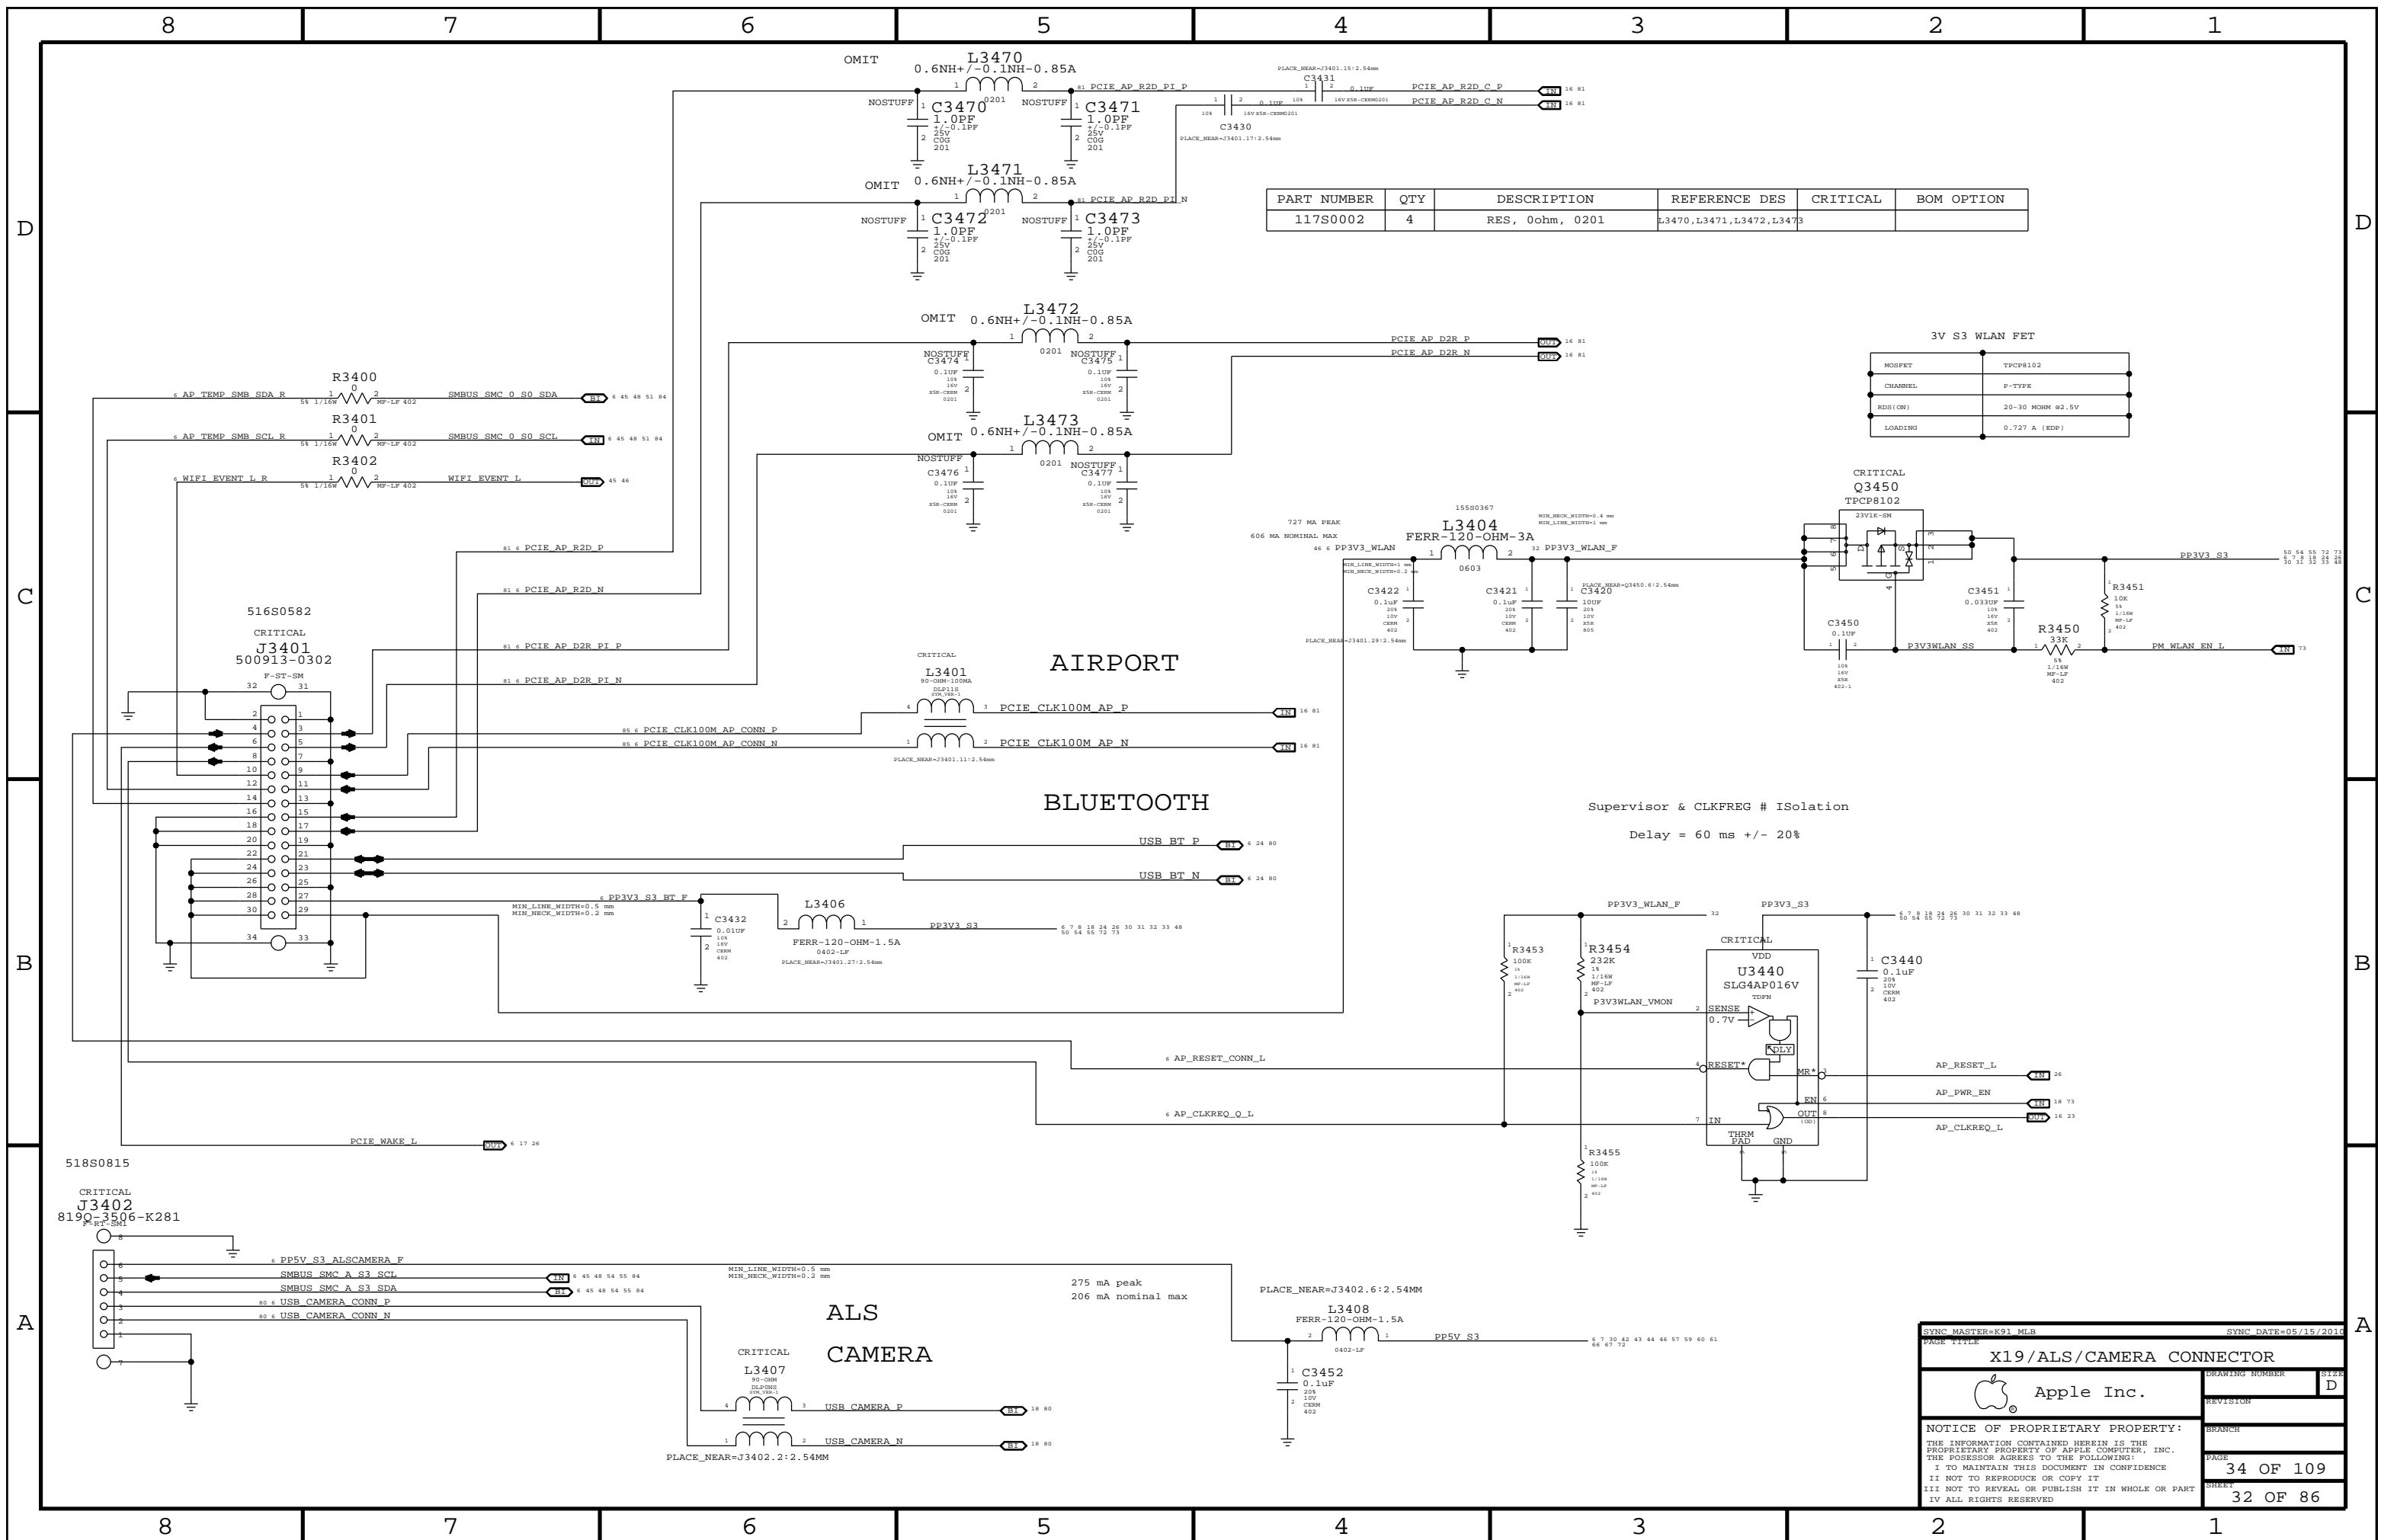


PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
117S0002	4	RES, 0ohm, 0201	L3470, L3471, L3472, L3473		

3V S3 WLAN FET	
MOSFET	TPCP8102
CHANNEL	P-TYPE
RDS(ON)	20-30 MOHM @2.5V
LOADING	0.727 A (RDP)

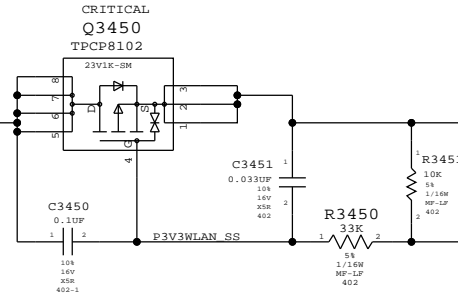

Supervisor & CLKFREQ # ISolation
Delay = 60 ms +/- 20%

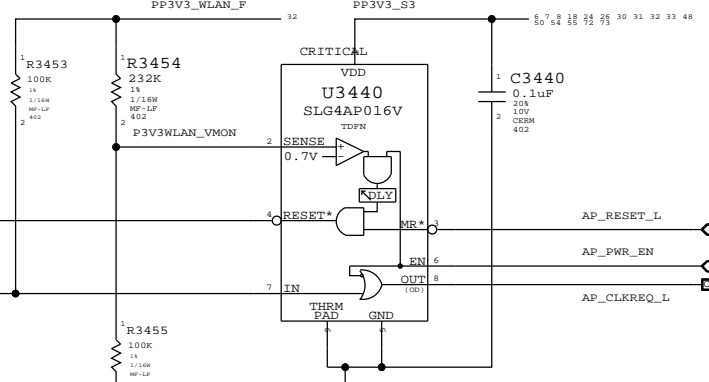

SYNC MASTER=K91_MLB		SYNC DATE=05/15/2011	
PAGE TITLE			
X19/ALS/CAMERA CONNECTOR			
Apple Inc.		DRAWING NUMBER	SIZE
		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:			
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE			
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			
		PAGE	34 OF 109
		SHEET	32 OF 86

D

D

C

C

B


B

A


A

SD CARD 3.3V OVERCURRENT PROTECTION CHIP WITH ACTIVE LOAD DISCHARGE


TPS2065-1 (1.0A limit) has active load discharge so R4810 is NOSTUFF.

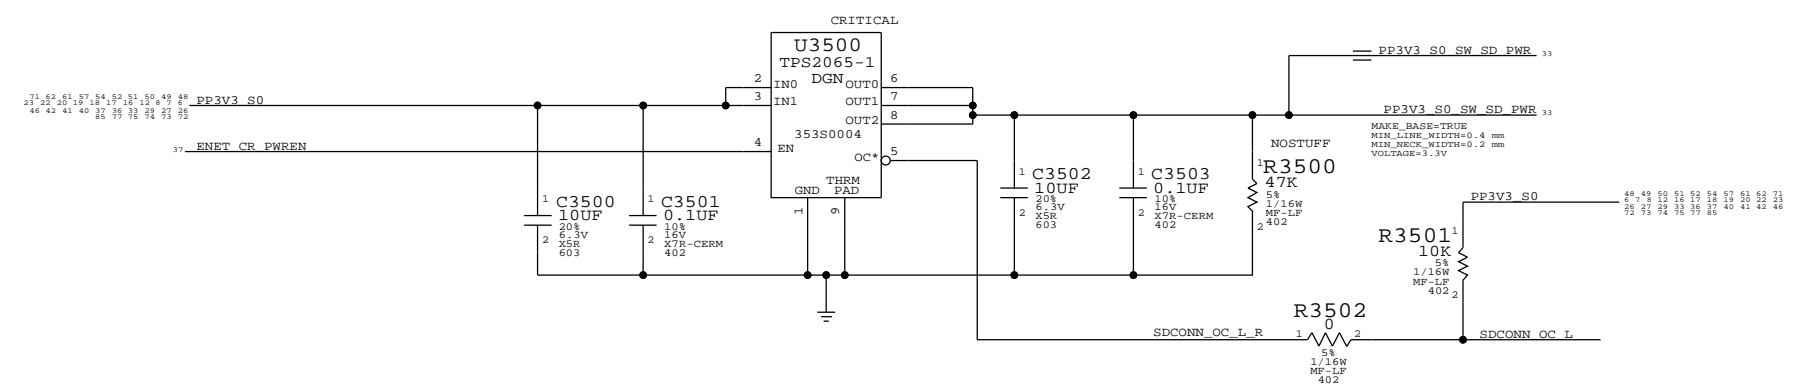


SDCONN DETECT DEBOUNCE. ENET_RESET AND DETECT-CHANGED PCH GPIO PULSE GENERATION.

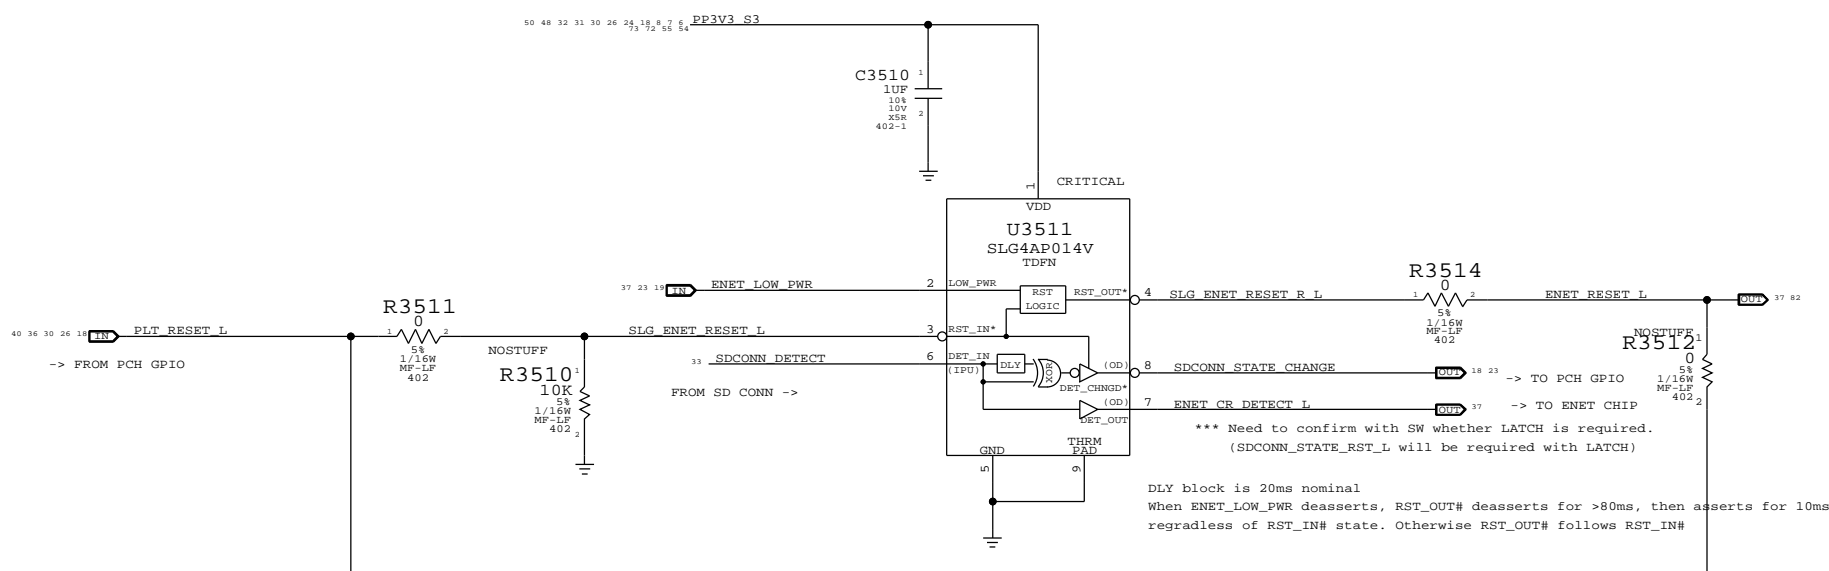

SD CARD CONNECTOR

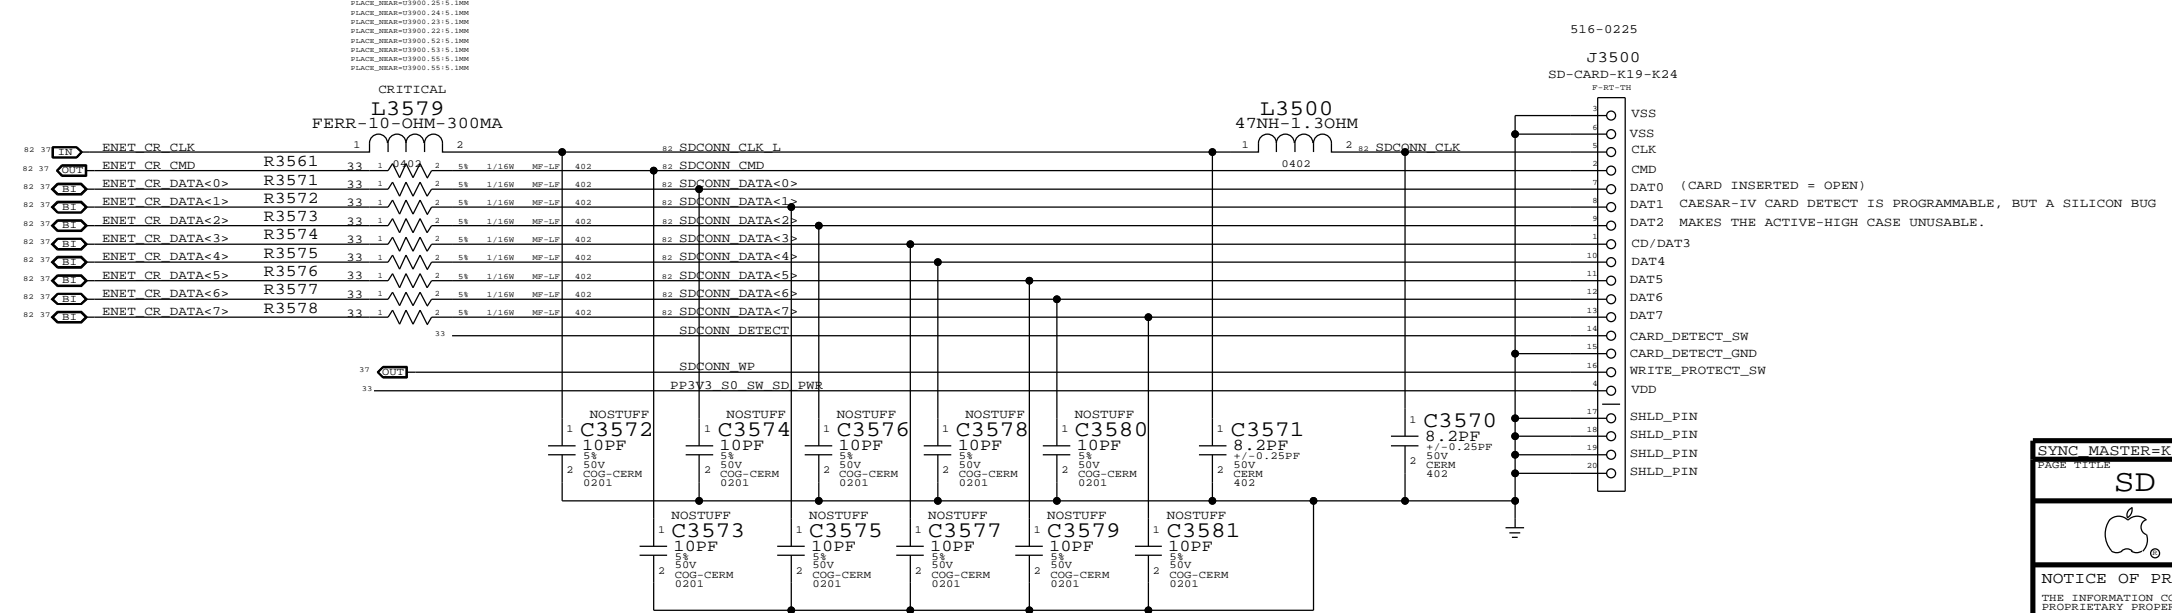

PAGE TITLE		SYNC MASTER=K91 MLB		SYNC DATE=05/26/2010	
SD READER CONNECTOR				DRAWING NUMBER	SIZE
Apple Inc.				REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED				BRANCH	
				PAGE	35 OF 109
				SHEET	33 OF 86

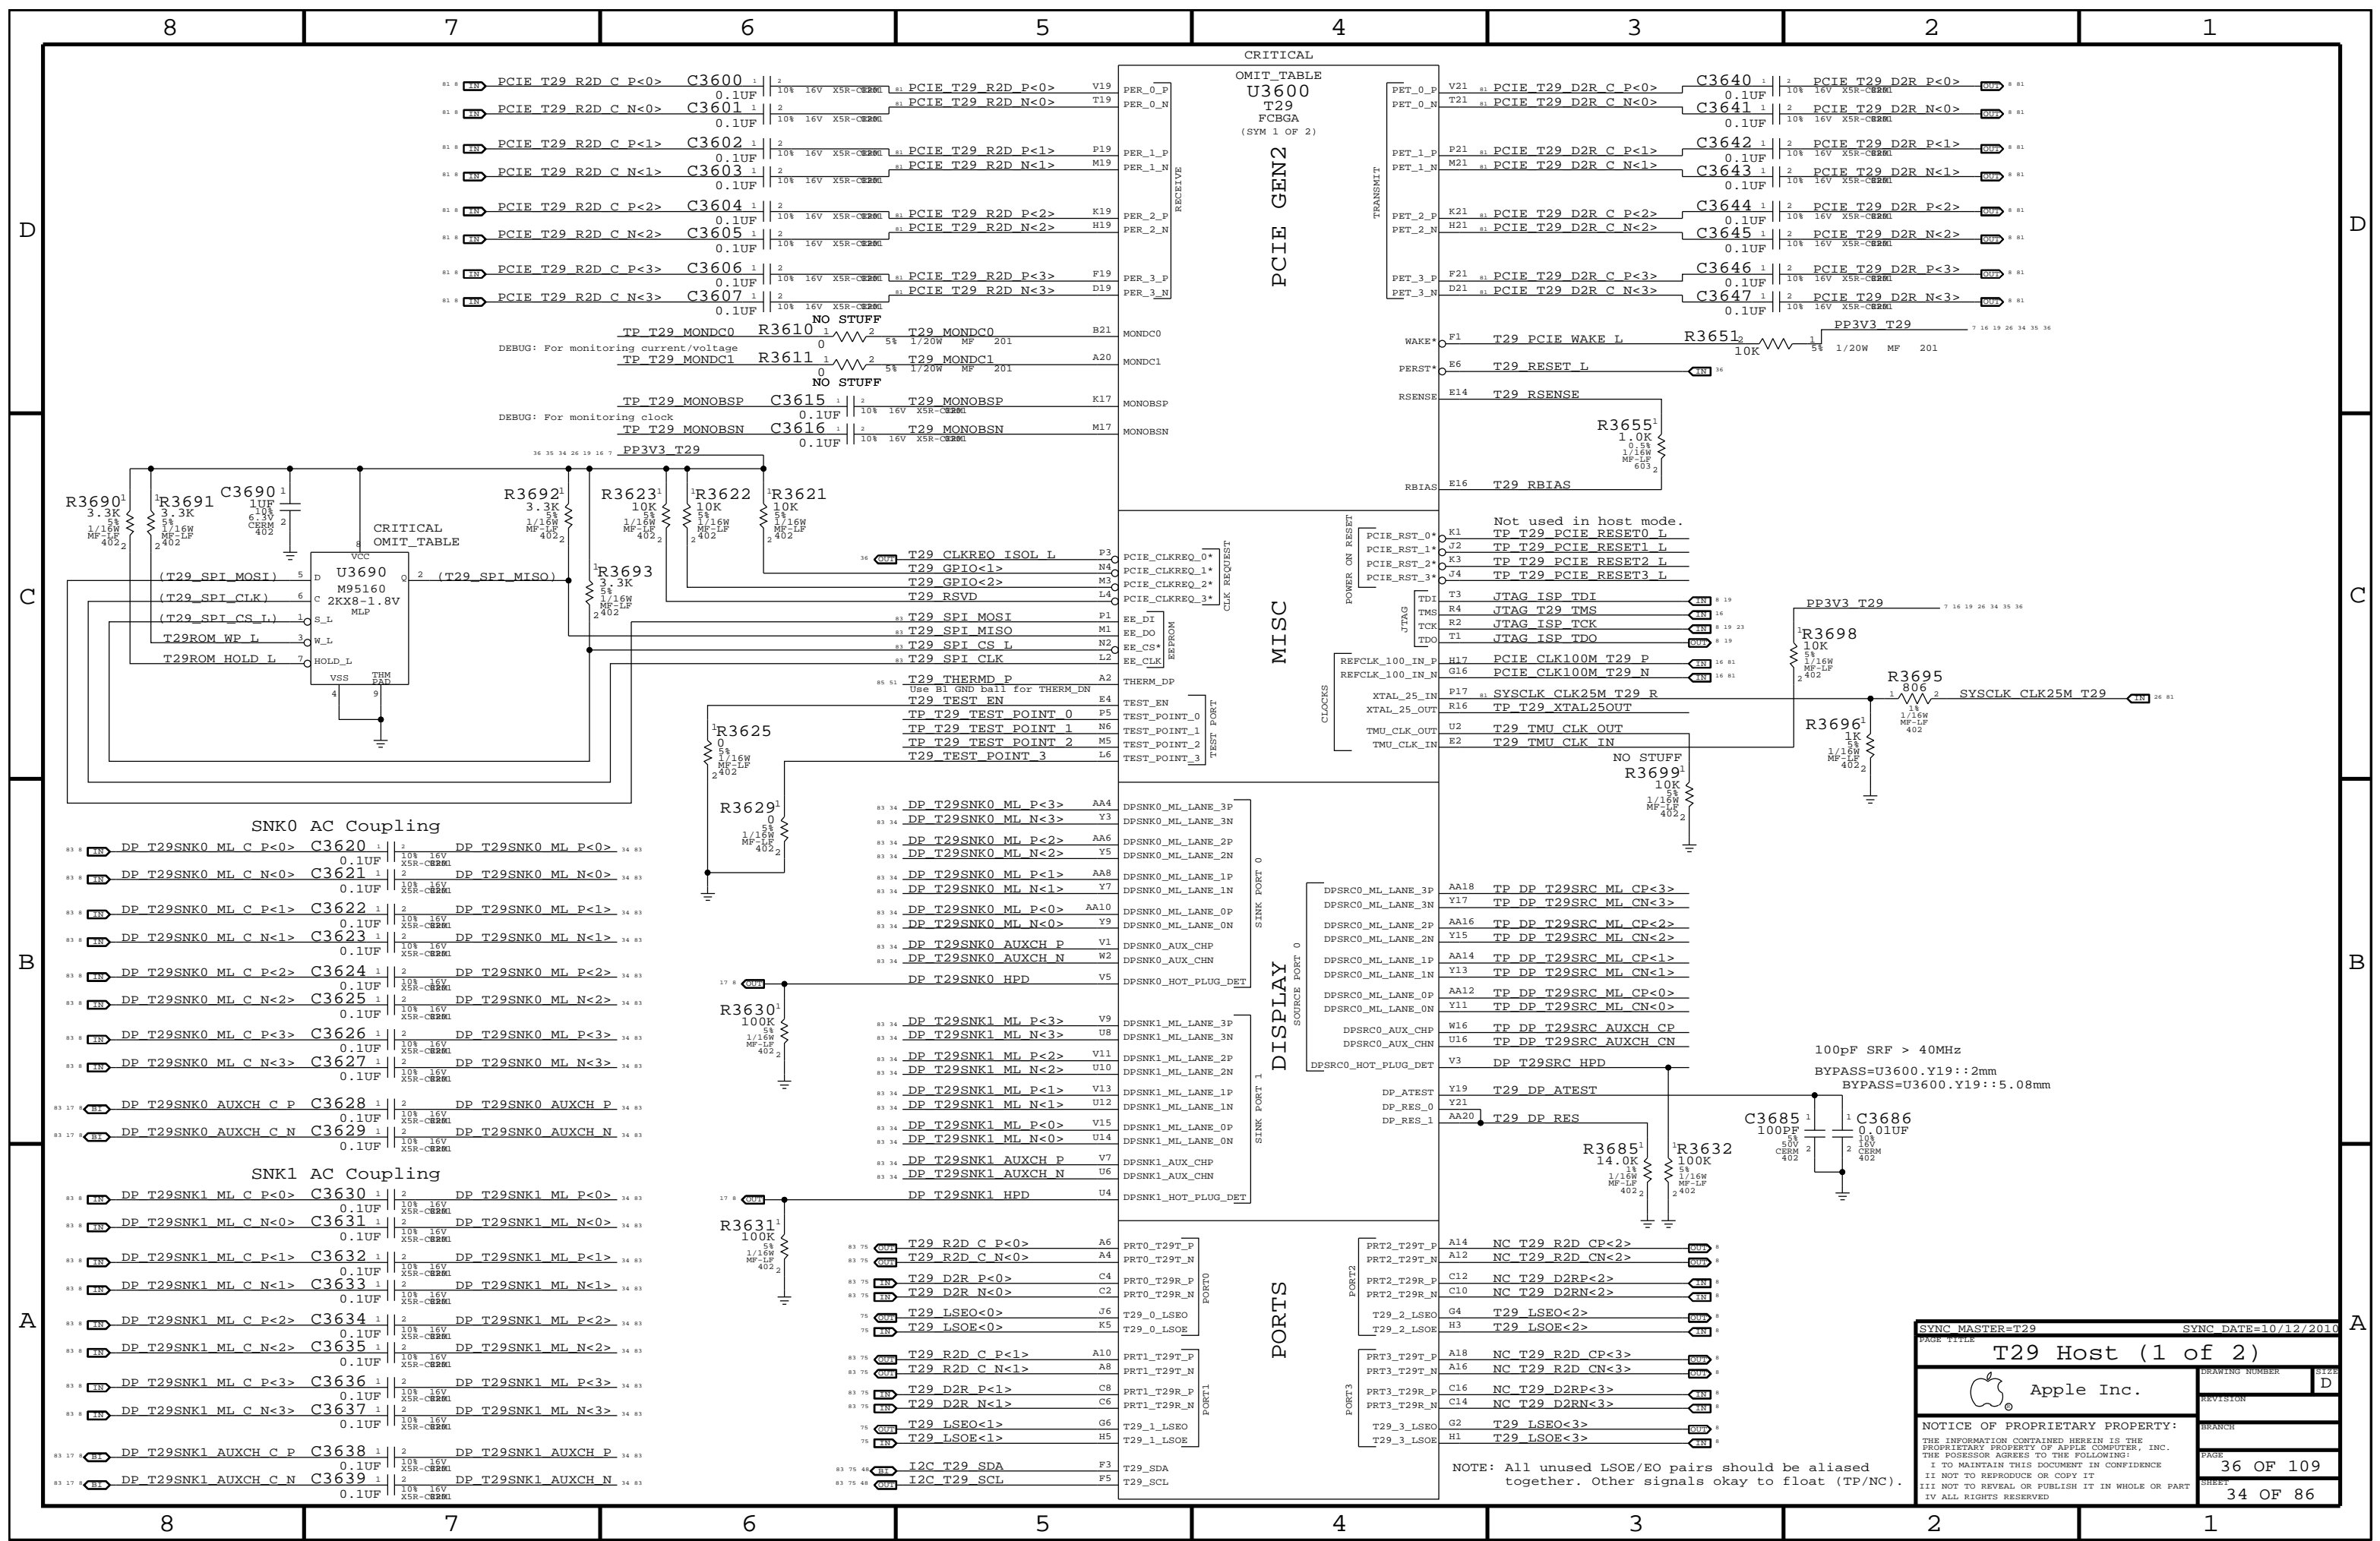

SYNC MASTER=T29 SYNC DATE=10/12/2010


T29 Host (1 of 2)

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 I NOT TO REPRODUCE OR COPY IT
 I NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 I ALL RIGHTS RESERVED

DRAWING NUMBER: D
 REVISION:
 BRANCH:
 PAGE: 36 OF 109
 SHEET: 34 OF 86

NOTE: All unused LSOE/EO pairs should be aliased together. Other signals okay to float (TP/NC).

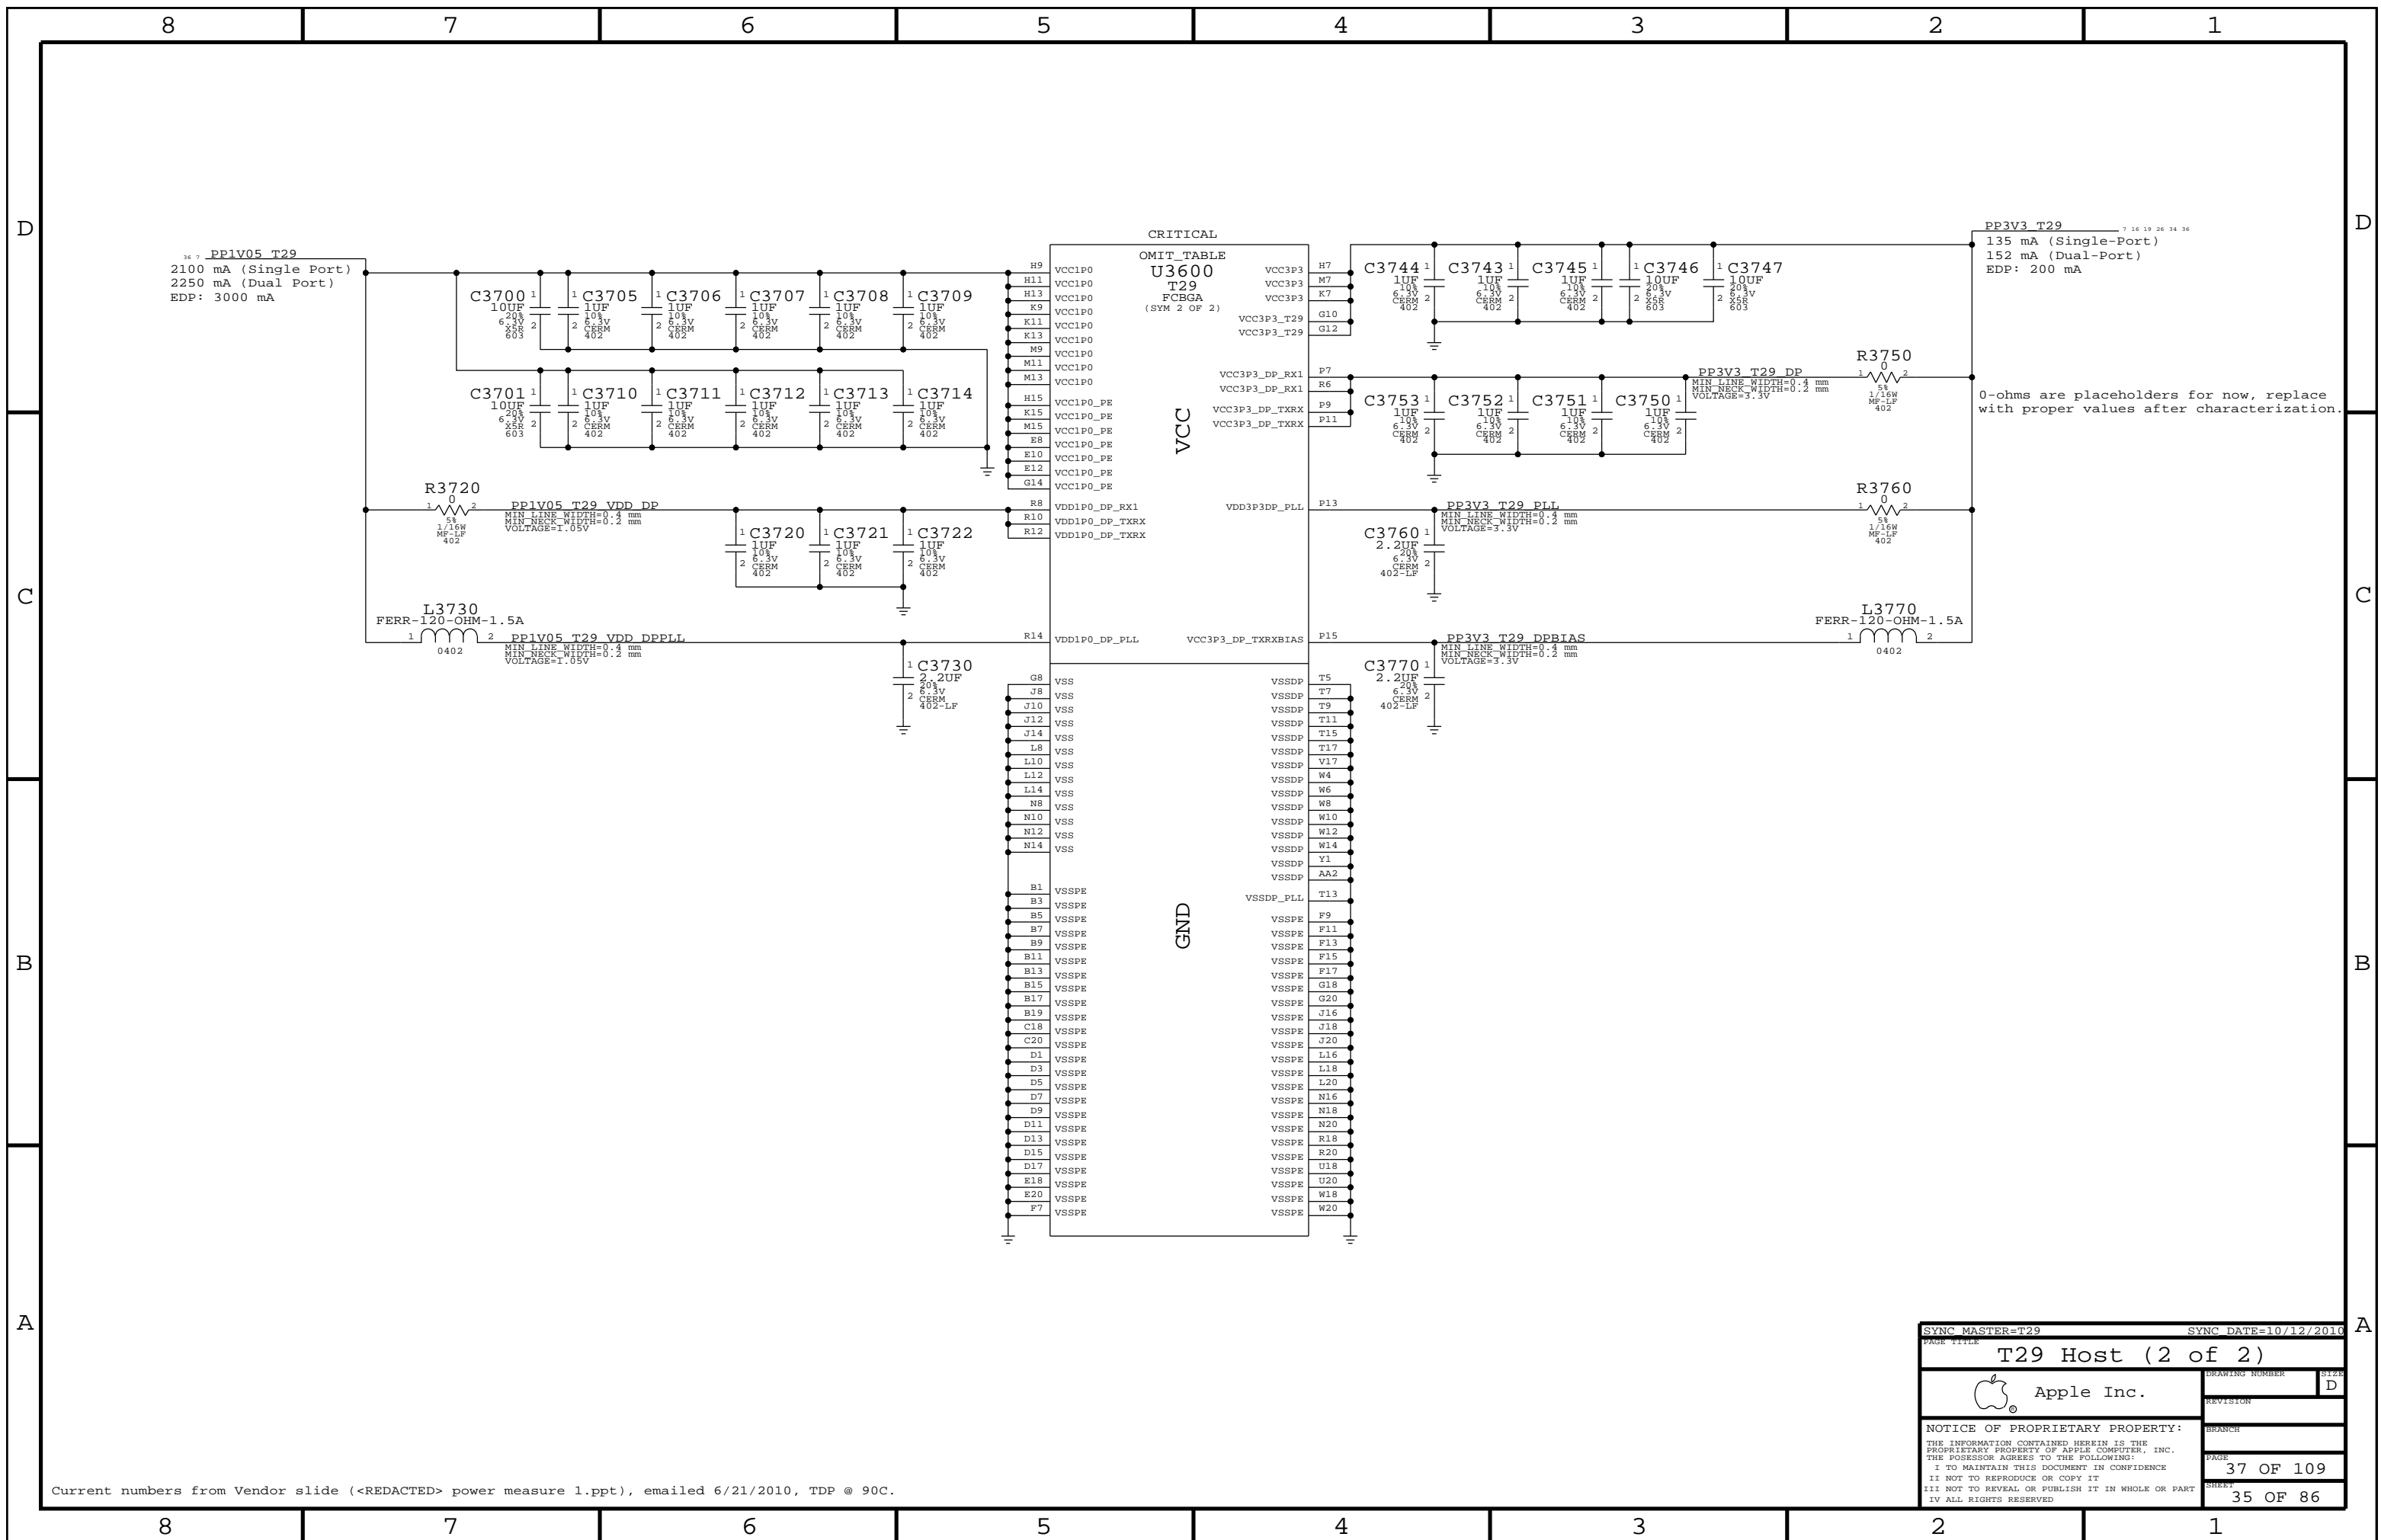

8 7 6 5 4 3 2 1

D

D

C

C

B

B

A

A

SYNC MASTER=T29		SYNC DATE=10/12/2010	
PAGE TITLE T29 Host (2 of 2)			
Apple Inc.		DRAWING NUMBER	SIZE D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		REVISION	BRANCH
		PAGE 37 OF 109	SHEET 35 OF 86

Current numbers from Vendor slide (<REDACTED> power measure 1.ppt), emailed 6/21/2010, TDP @ 90C.

8 7 6 5 4 3 2 1

BCM57765 ENET SR pins are internal 1.2V switching regulator. See note for SR_DISABLE below.
 If disabled: Okay to float VDD, VDDP & LX pin. VFB must always connect to =PP1V2_S3_ENET_PHY.
 If enabled: VDD/VDDP connect to =PP3V3_S3_ENET_PHY (add bypassing), LX connects to inductor.
 Special Star routing needed on these pins. Decoupling on Pg 37.

73 71 37 26 7 6 PP3V3 ENET
 281mA (1000base-T max power, Caesar IV)

PP1V2 S3 ENET INTREG 6 71
 ???mA (1000base-T, Caesar V)

D

D

C


C

B


B

A

A

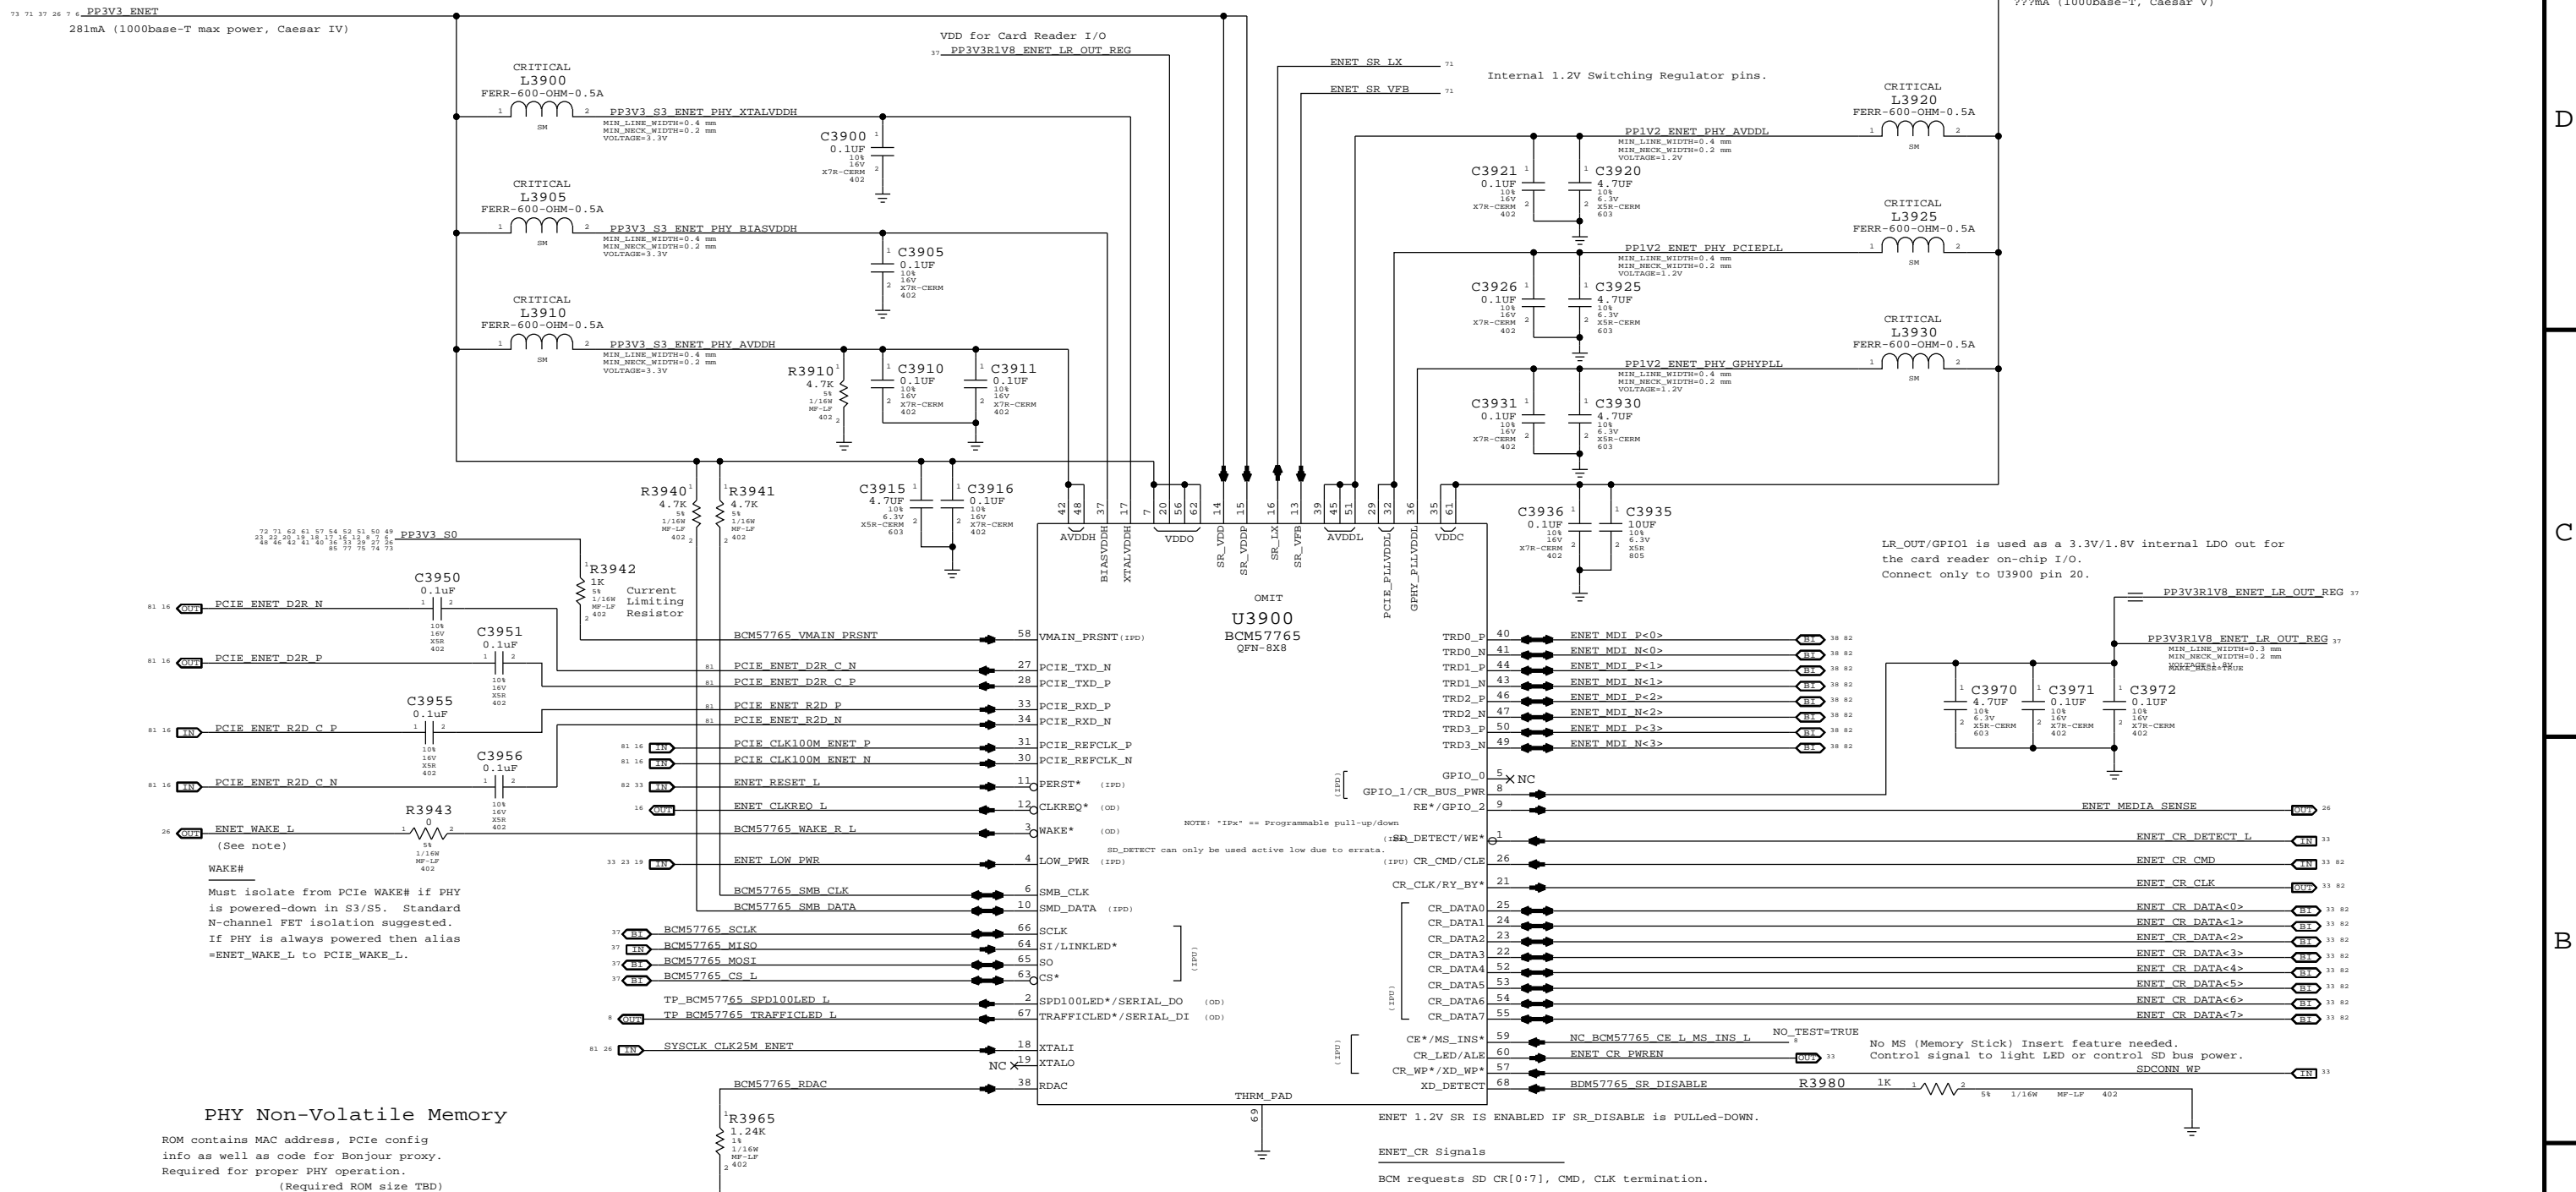

73 71 37 26 7 6 PP3V3 ENET

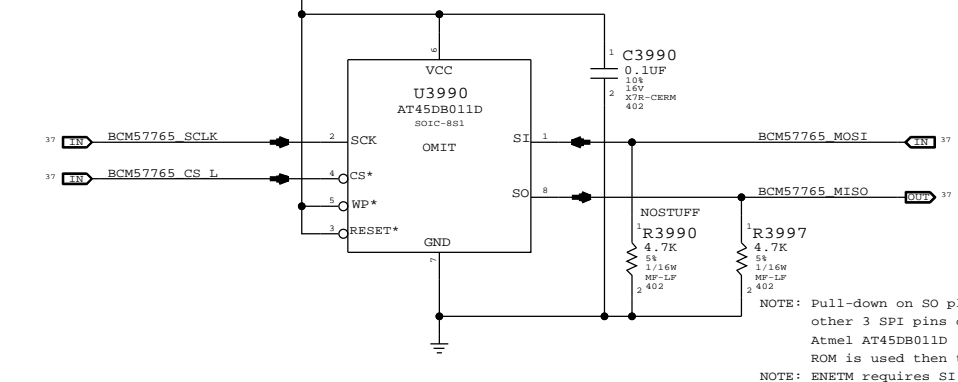


SYNC MASTER=K91 MLB		SYNC DATE=05/26/2011	
PAGE TITLE			
ETHERNET PHY (CAESAR IV)			
Apple Inc.		DRAWING NUMBER	SIZE
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		REVISION	D
		BRANCH	
		PAGE	39 OF 109
		SHEET	37 OF 86

Page Notes


Power aliases required by this page:
(NONE)

Signal aliases required by this page:
(NONE)

BOM options provided by this page:
(NONE)

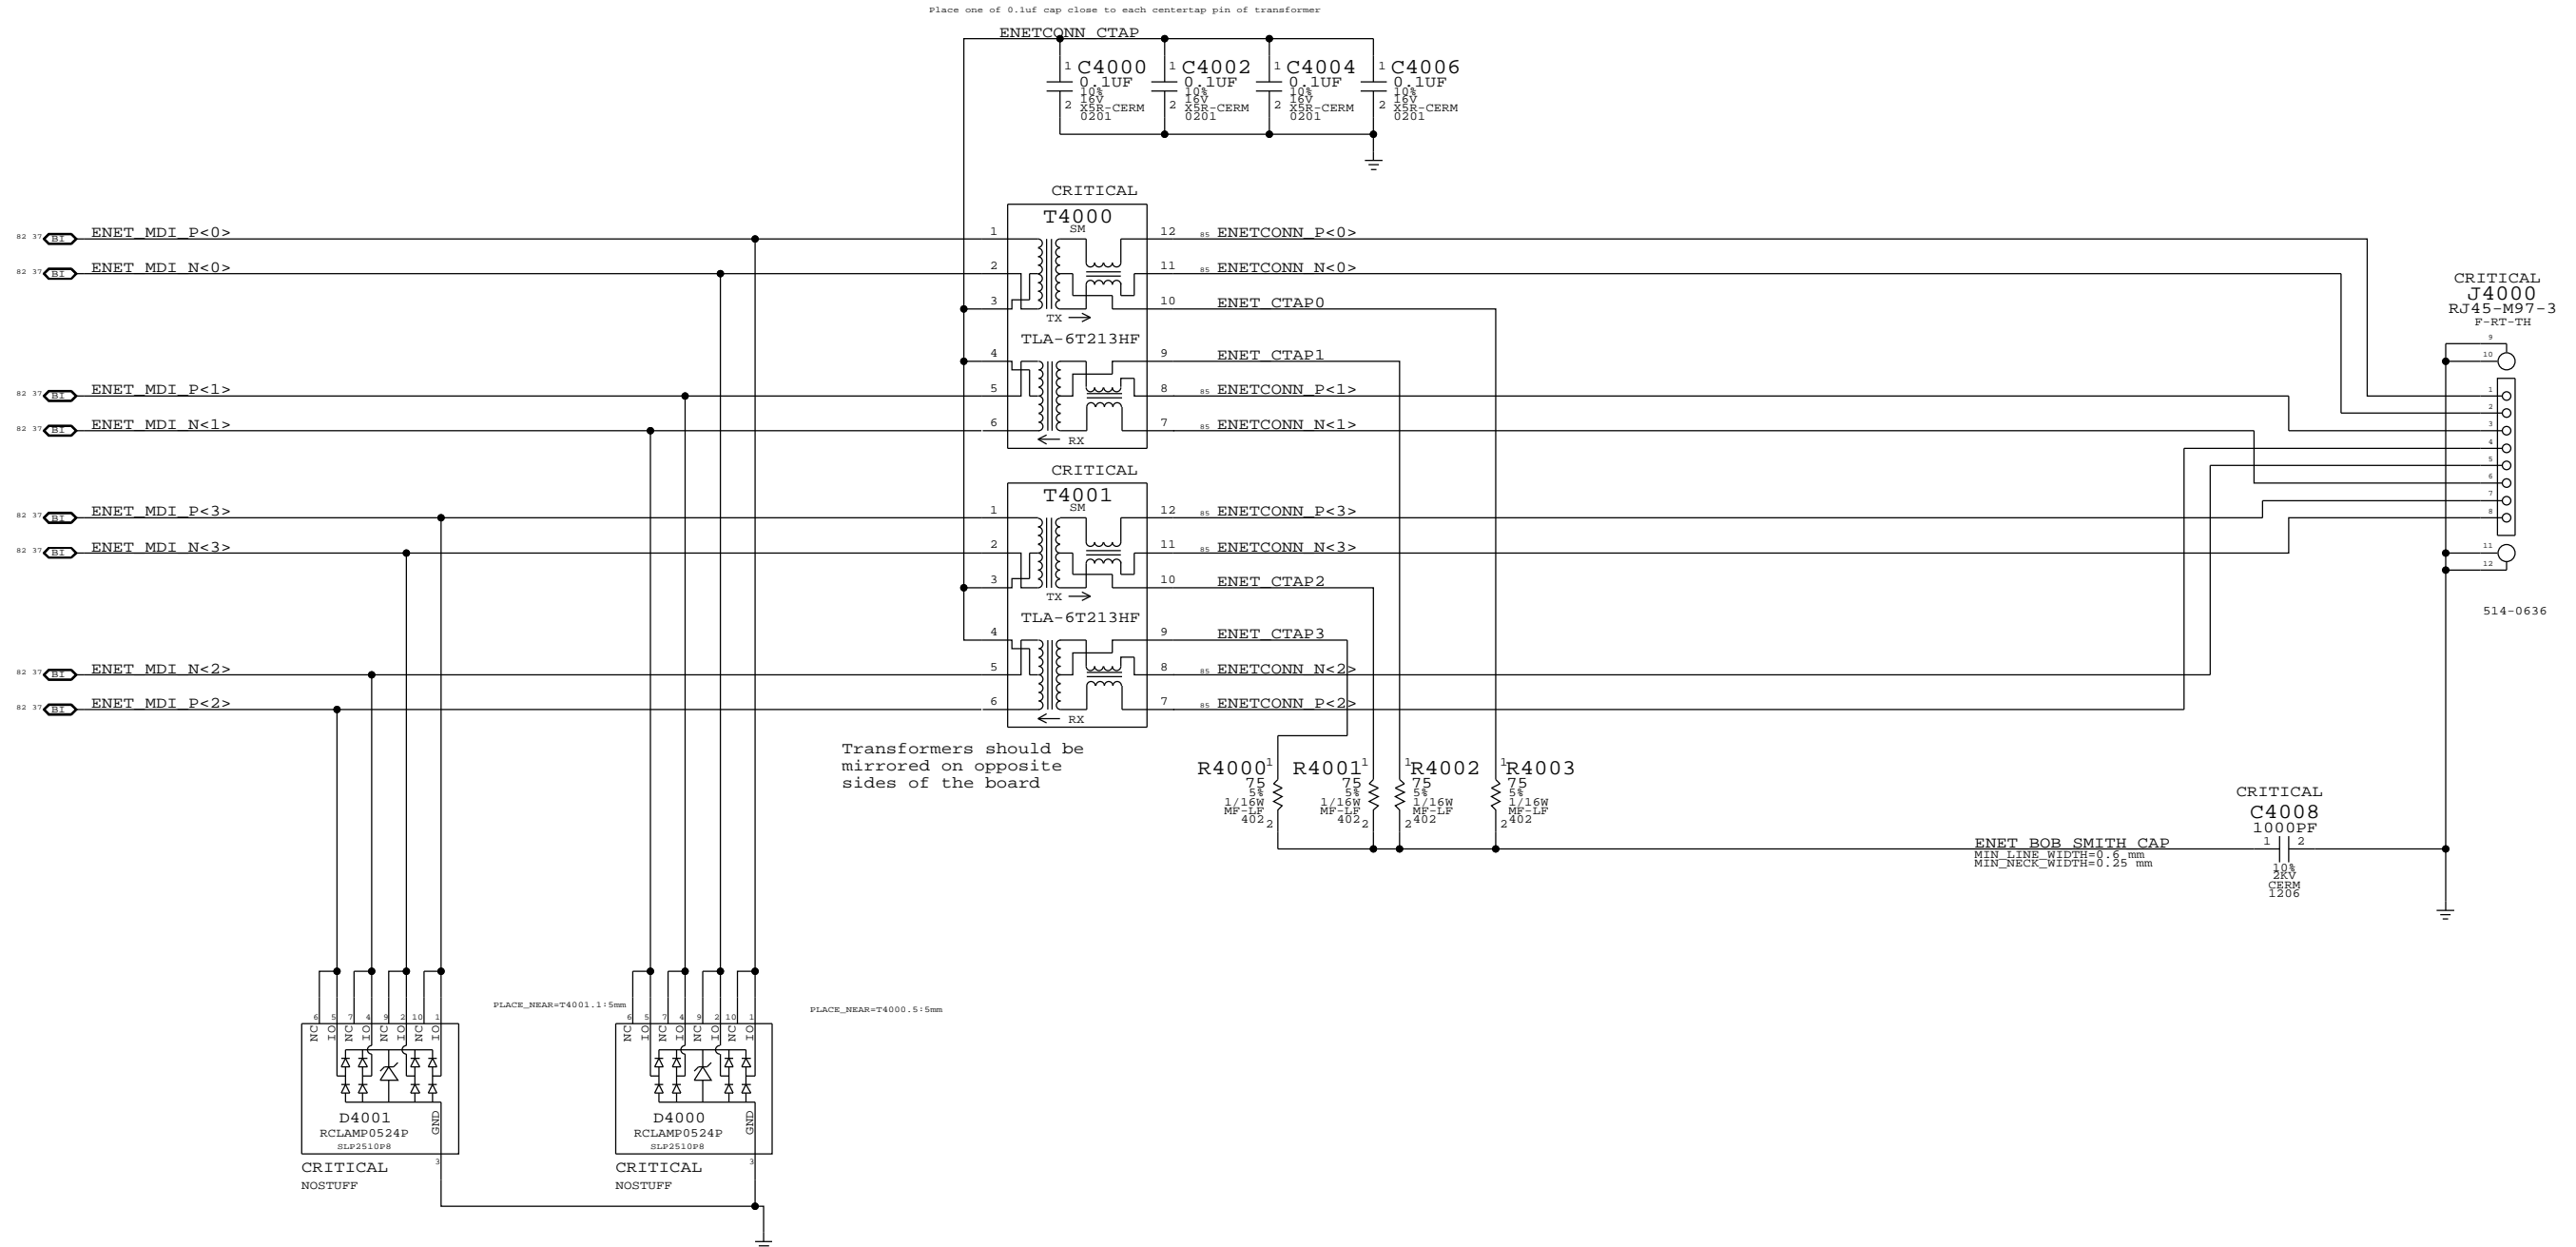

SYNC MASTER=K91_MLB		SYNC DATE=05/26/2011	
PAGE TITLE Ethernet Connector			
Apple Inc.		DRAWING NUMBER	SIZE D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		REVISION	BRANCH
		PAGE	40 OF 109
		SHEET	38 OF 86

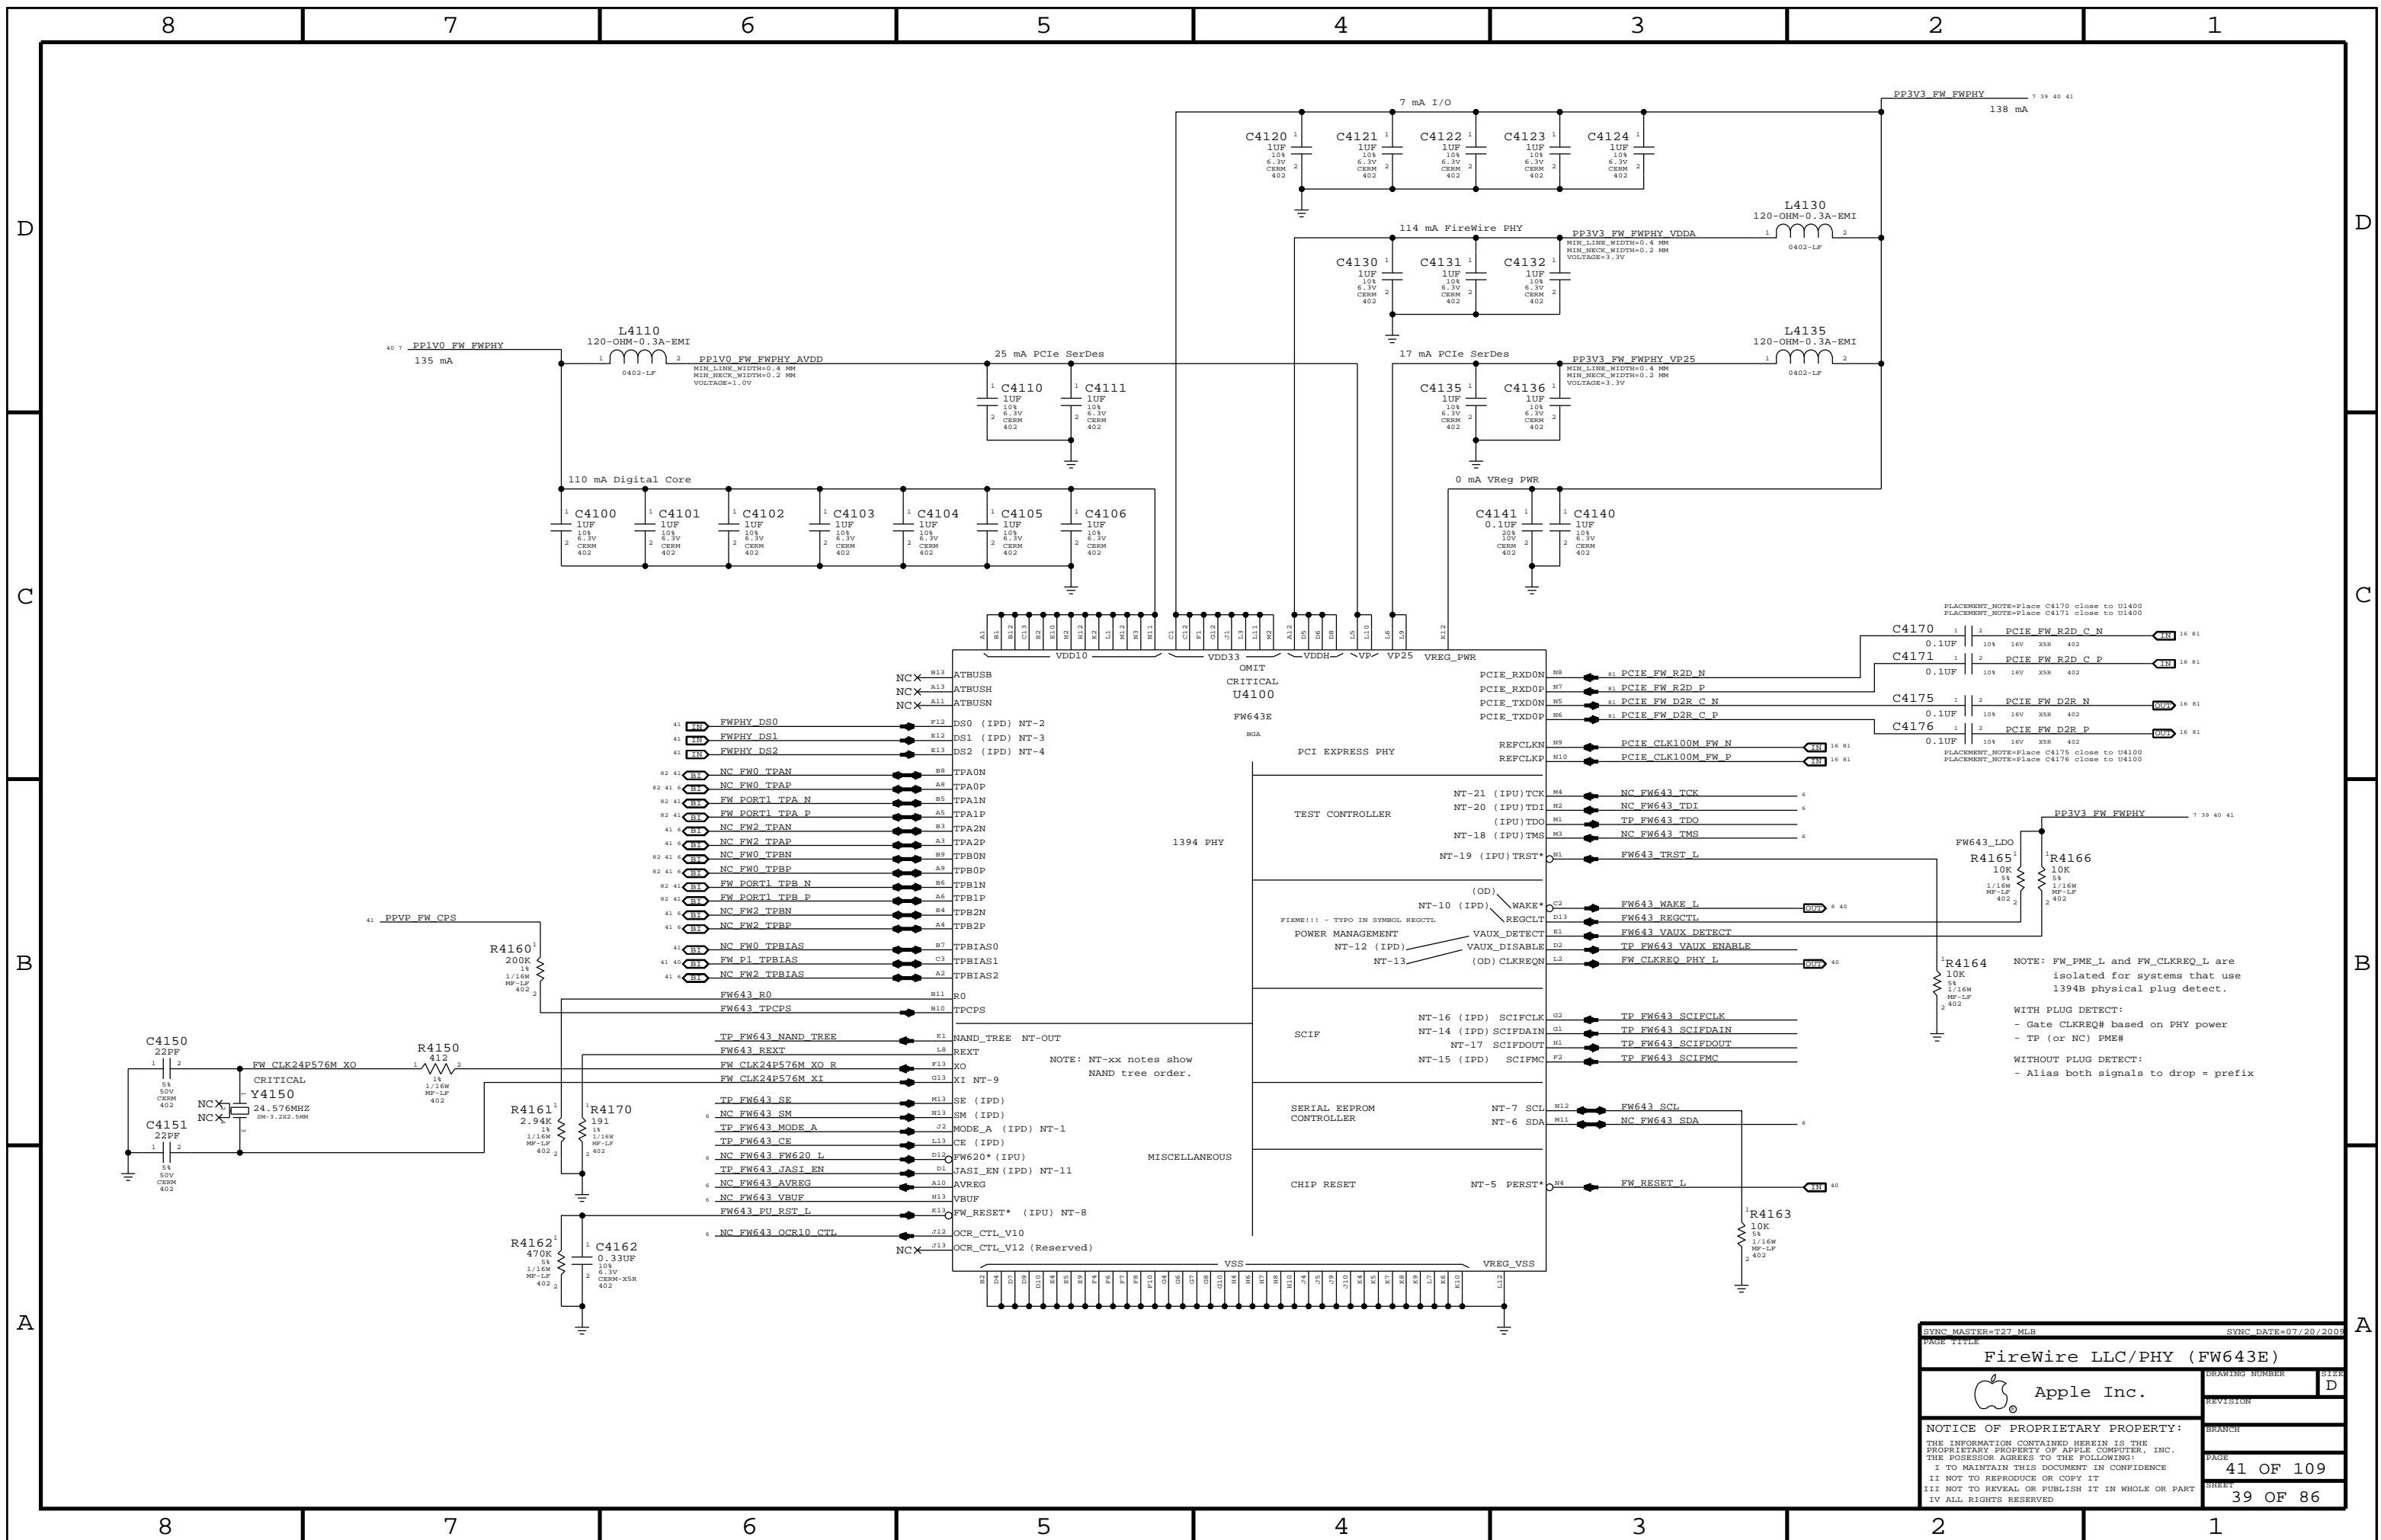

SYNC MASTER=T27_MLB		SYNC DATE=07/20/2005	
PAGE TITLE			
FireWire LLC/PHY (FW643E)			
Apple Inc.		DRAWING NUMBER	SIZE
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		REVISION	D
		BRANCH	
		PAGE	41 OF 109
		SHEET	39 OF 86


Page Notes

Power aliases required by this page:
 - =PPBUS_S5_FWPWRSW (FW VP FET Input)
 - =PPBUS_FW_FET (FW VP FET Output)
 - =PP3V3_FW_P3V3FWFET (3.3V FET Input)
 - =PP3V3_FW_FET (3.3V FET Output)
 - =PP3V3_FW_FWPHY (PHY 3.3V Power)
 - =PP3V3_S0_FWLATEVG
 - =PP3V3_S0_FWPWRCTL (5KPD Bias Rail)
 - =PP1V05_S0_FWPWRCTL (5KPD Bias Rail)
 - =PP1V05_FW_P1V05FWFET (1.0V FET Input)
 - =PP1V0_FW_FET_R (1.0V FET Output)
 - =PP1V0_FW_FWPHY (PHY 1.0V)


Signal aliases required by this page:
 - =FW_CLKREQ_L
 - =FW_PME_L

BOM options provided by this page:
 (NONE)

FireWire Port Power Switch

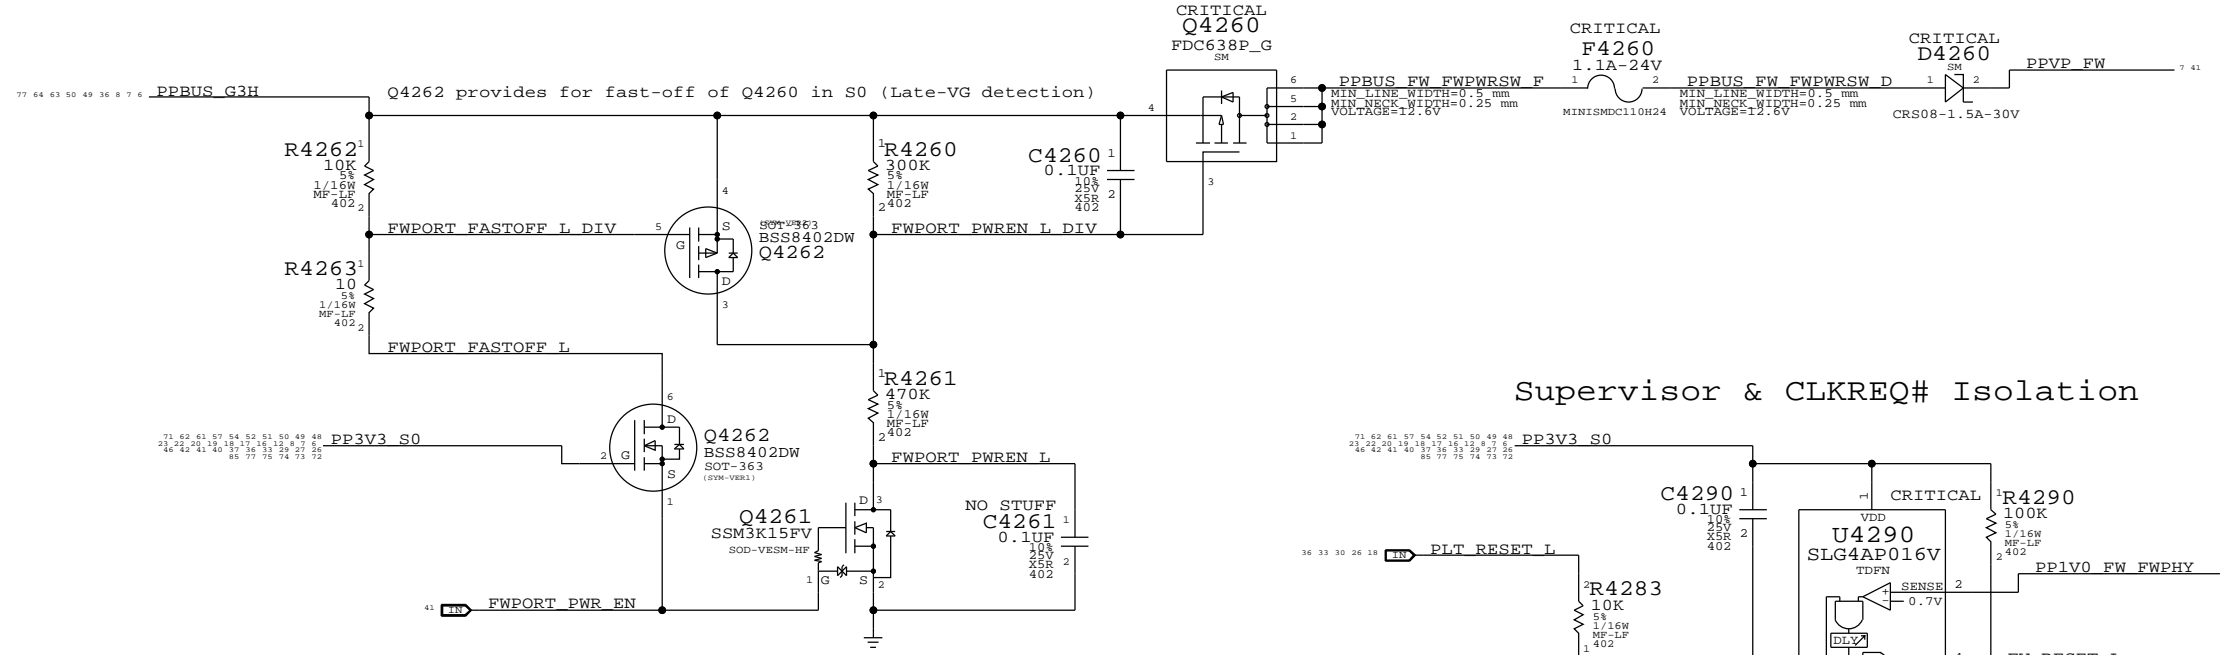


Supervisor & CLKREQ# Isolation

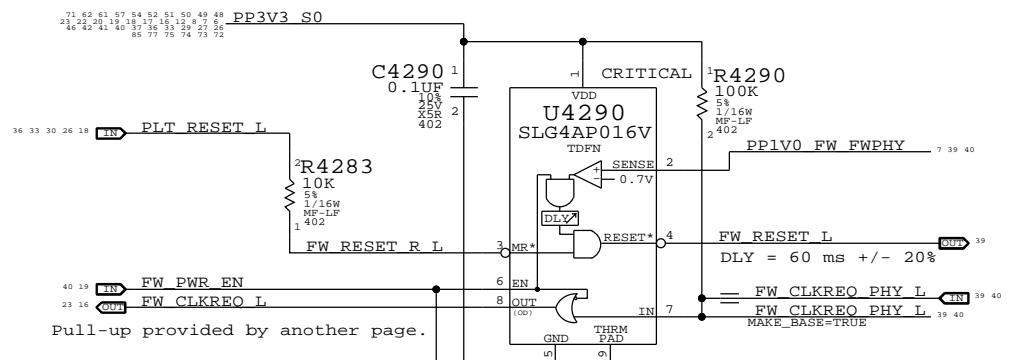


FireWire Port 5K Pull-Down Detect

All FireWire devices require 5K pull-down on TPB pair. Host can detect as load on TPBIAS signal. Current source only active when FW_PWR_EN is low.

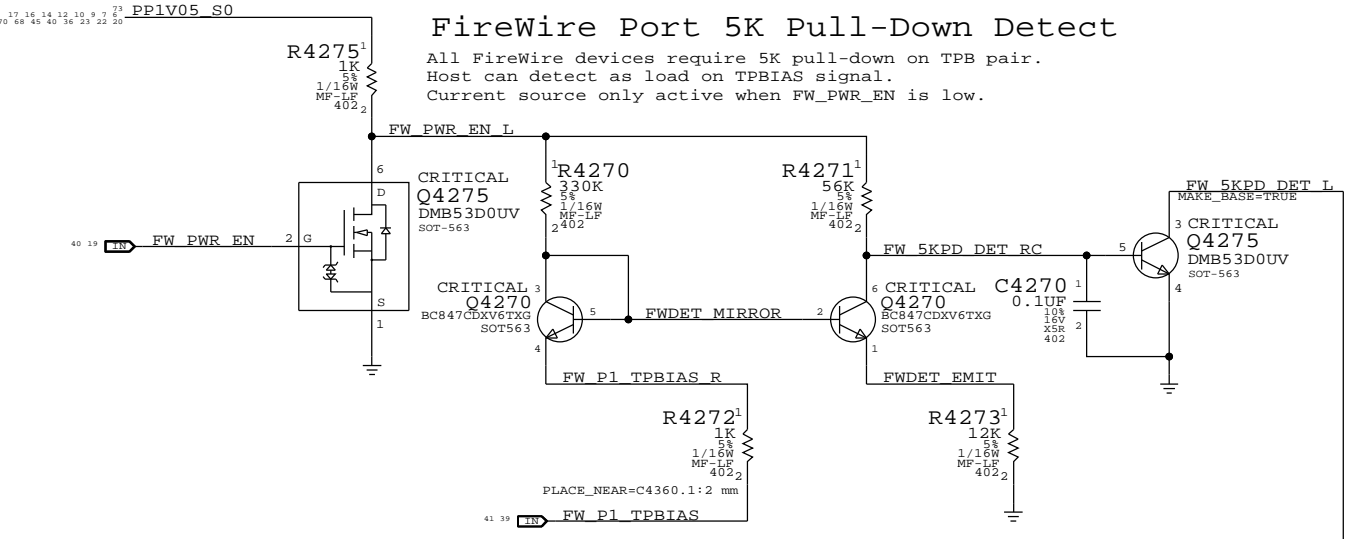


FireWire PHY WAKE# Support

When PHY is powered, FW_5KPD_DET_L acts as legacy PME# signal.

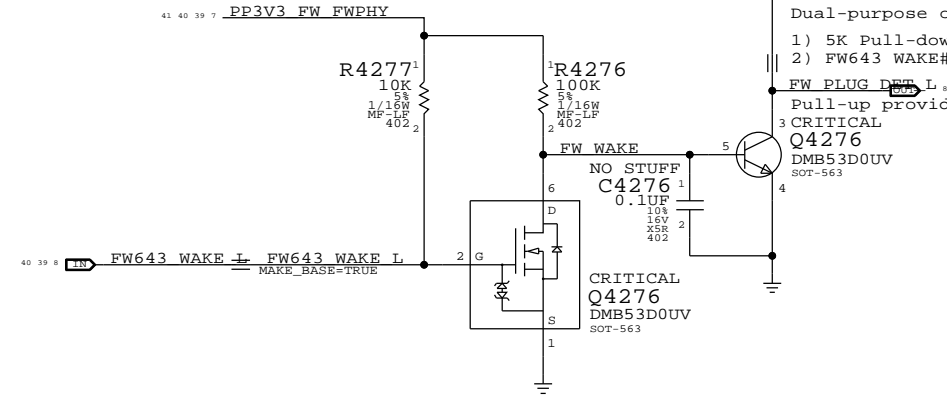


- Dual-purpose output:
- 1) 5K Pull-down Detect when FW_PWR_EN is low.
 - 2) FW643 WAKE# (PME#) when PHY is powered.
- Pull-up provided on another page.

3.3V FW Switch

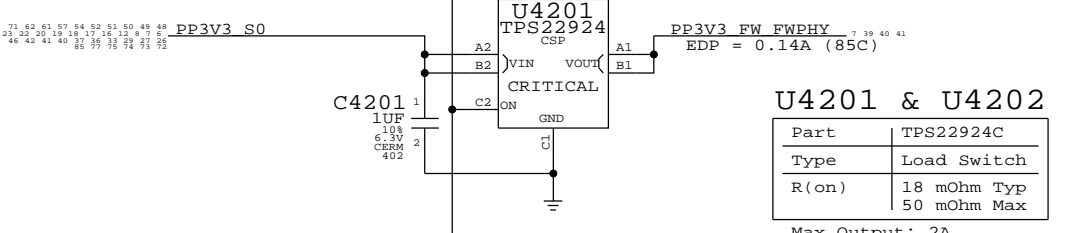

1.0V FW Switch

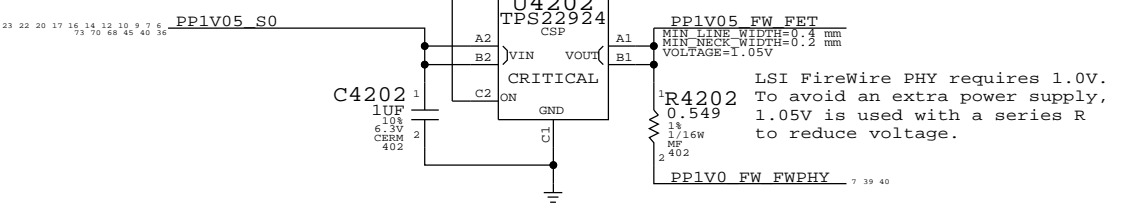

TEXT NOTE FOR 3.3V RAIL CURRENT CHANGED TO EDP NUMBER.

PAGE TITLE		SYNC DATE=12/15/2009	
FireWire Port & PHY Power		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	42 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	40 OF 86
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

Page Notes

Power aliases required by this page:
 - =PPVP_FW_PORT1
 - =PPVP_FW_PHY_CPS_FET (From Port)
 - =PPVP_FW_PHY_CPS (To PHY)
 - =PP3V3_FW_FWPHY
 - =PP3V3_S0_FWLATEVG

Signal aliases required by this page:
 - =FW_PHY_DS0
 - =FW_PHY_DS1
 - =FW_PHY_DS2


NOTE: This page is expected to contain the necessary aliases to map the FireWire TPA/TPB pairs to their appropriate connectors and/or to properly terminate unused signals.

BOM options provided by this page:
 (NONE)

1394b implementation based on Apple FireWire Design Guide (FWDG 0.6, 5/14/03)


FW643 TPCPS Leakage Protection

FW643 has internal leakage path from TPCPS pin to VDD33.
 FET blocks current to TPCPS until VDD33 is powered.

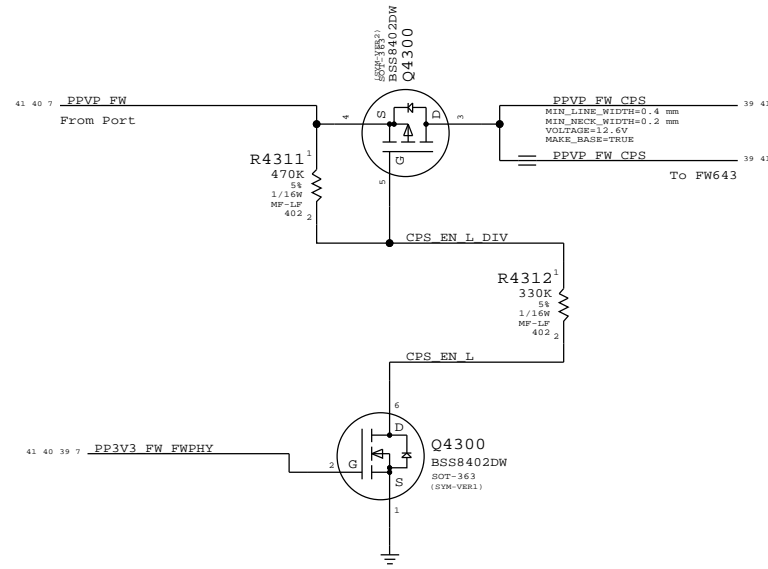


Unused FireWire Ports

Disabled per LSI instructions
 (All unused port signals TP/NC)

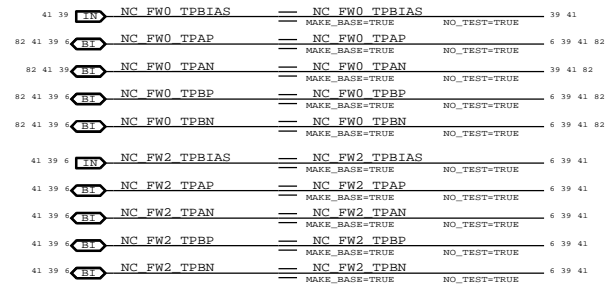


FireWire PHY Config Straps

Configures PHY for:
 - Port "1" Bilingual (1394B)

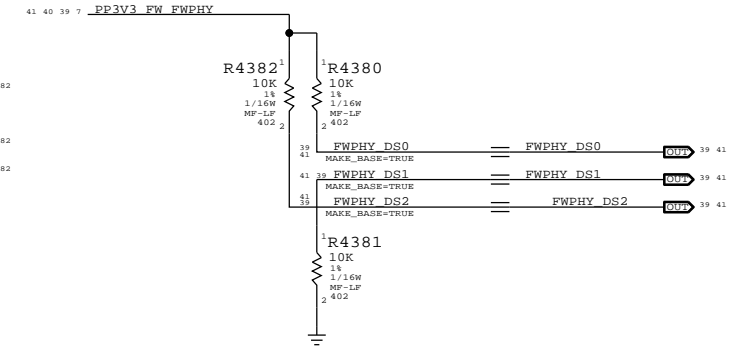

Termination


Place close to FireWire PHY

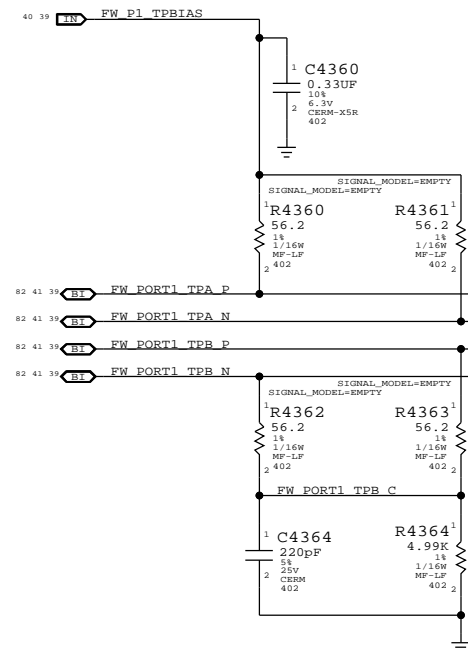


Cable Power

CRITICAL
 L4310
 FERR-250-OHM

Note: Trace PPVP_FW_PORT1 must handle up to 5A

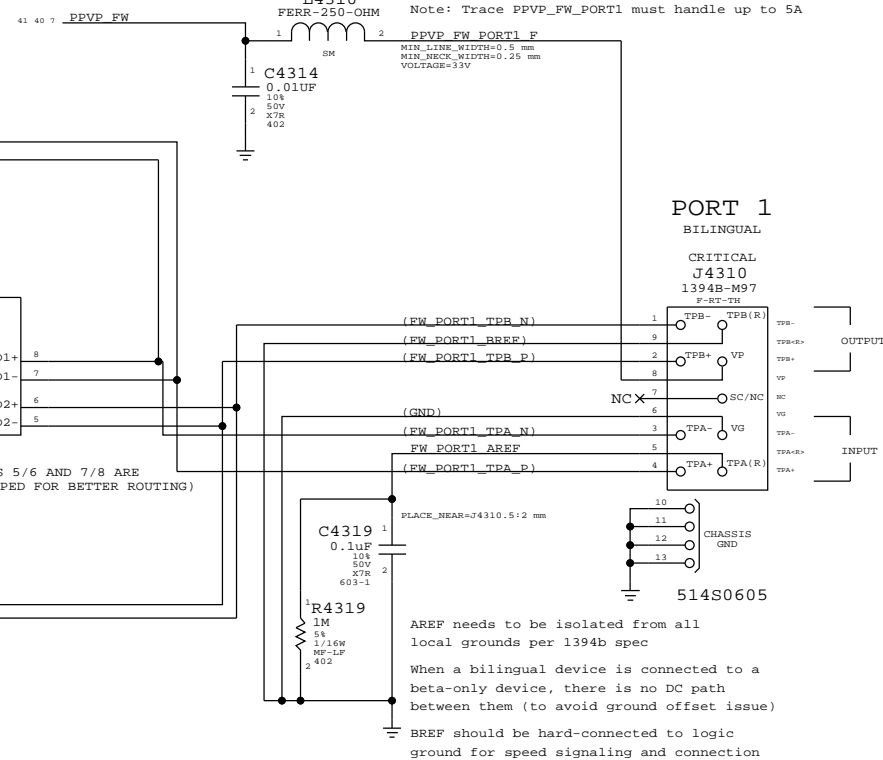

"Snapback" & "Late VG" Protection

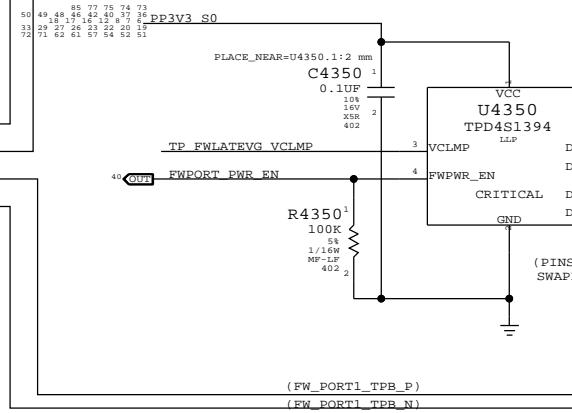

PORT 1


BILINGUAL

CRITICAL

J4310

1394B-M97

F-RT-TH





AREF needs to be isolated from all local grounds per 1394b spec
 When a bilingual device is connected to a beta-only device, there is no DC path between them (to avoid ground offset issue)
 BREF should be hard-connected to logic ground for speed signaling and connection

CANNOT SYNC THIS PAGE FROM T27, TPA AND TPB FOR U4350 IS SWAPPED

SYNC MASTER=T27_MLB		SYNC DATE=07/28/2005	
PAGE TITLE			
FireWire Connector		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	43 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	41 OF 86
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

ODD Power Control


SATA ODD Connector

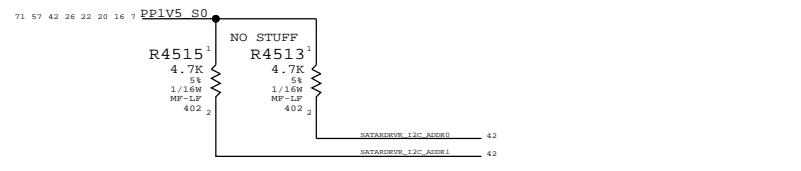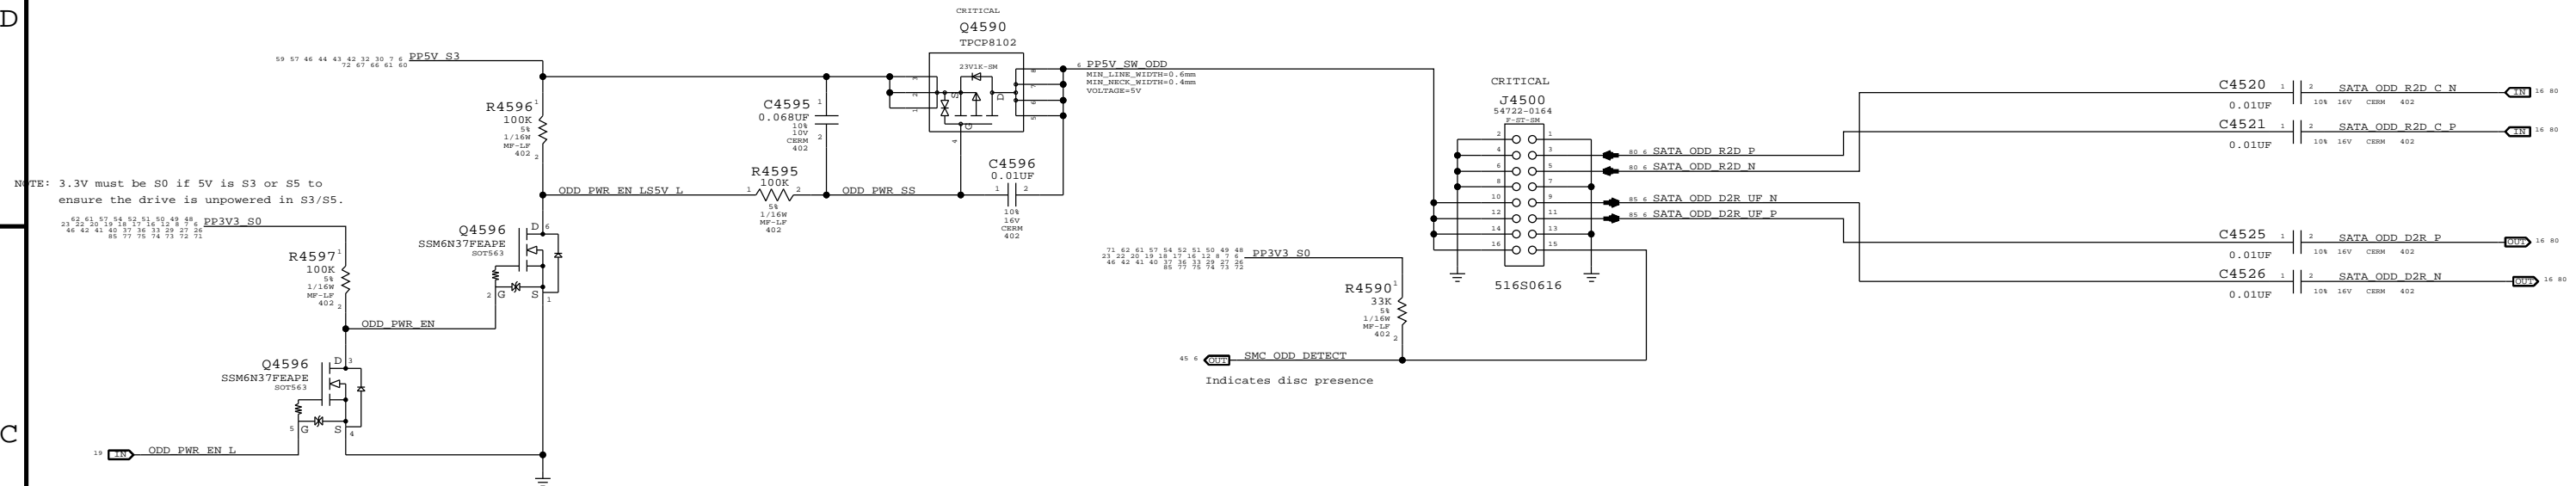

Internally PD ~150K
Write: 0xB6 Read: 0xB7

ADDR1	ADD0	Address (W/R)
L	L	0x96/0x97
L	H	0x98/0x99
H	L	0xB6/0xB7
H	H	0xB8/0xB9

SATA HDD / IR / SIL Connector

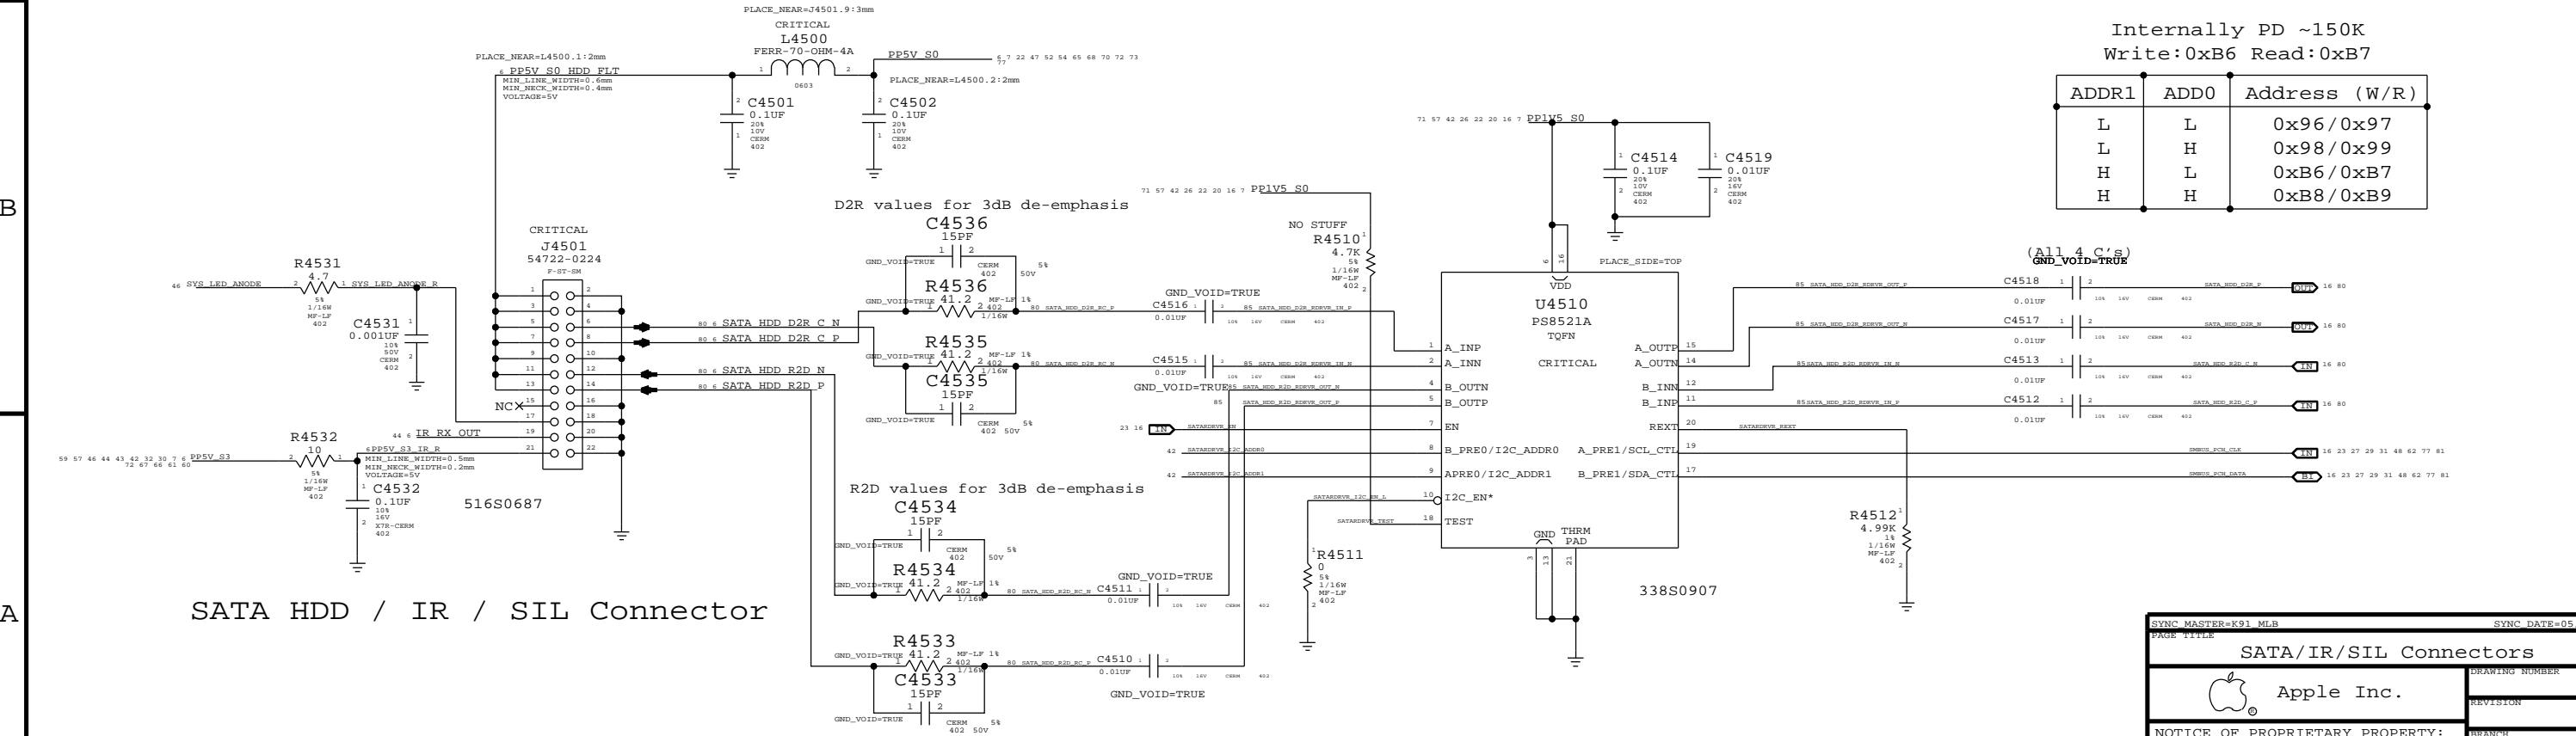

SYNC MASTER=K91_MLB SYNC DATE=05/15/2011

SATA/IR/SIL Connectors

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
IV ALL RIGHTS RESERVED

DRAWING NUMBER: **D**


REVISION: _____

BRANCH: _____

PAGE: **45 OF 109**


SHEET: **42 OF 86**

USB Port Power Switch

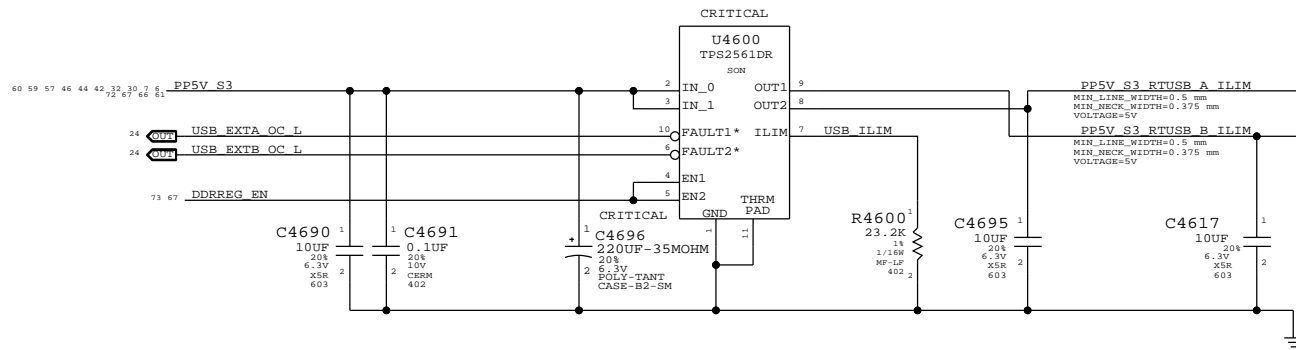


Current limit per port (R4600): 2.18A min / 2.63A max

Left USB Port A

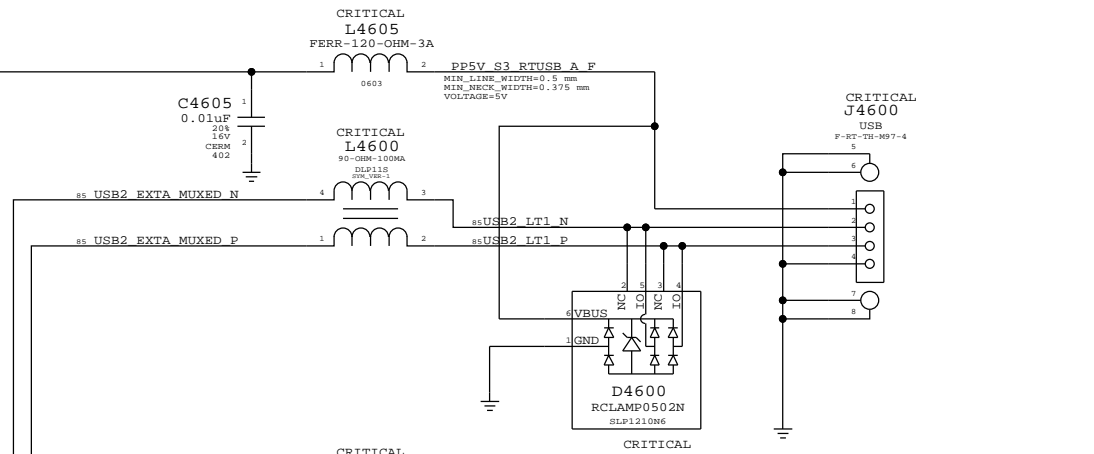


We can add protection to 5V if we want, but leaving NC for now
Place L4605 and L4615 at connector pin

USB/SMC Debug Mux

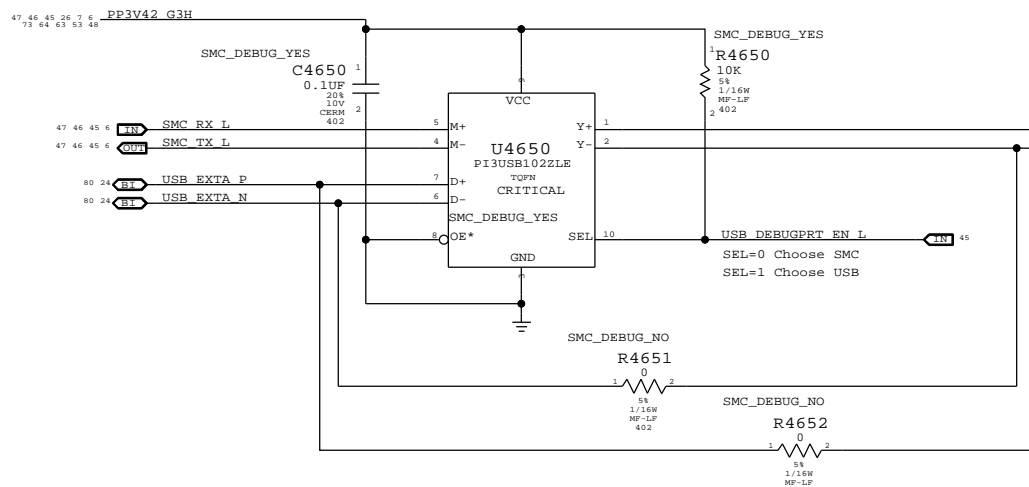


Left USB Port B

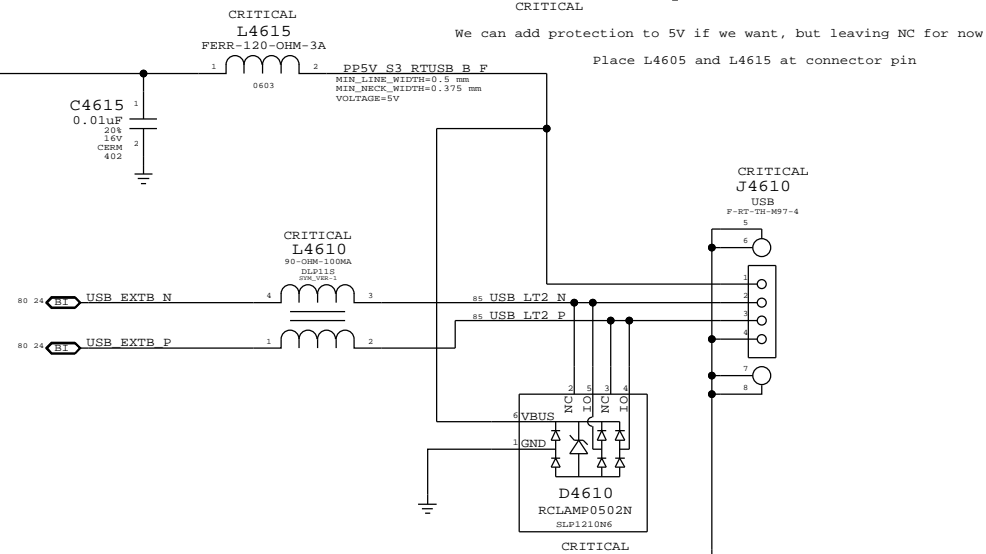




SYNC MASTER=K91_MLB		SYNC DATE=06/01/2011	
External USB Connectors			
Apple Inc.		DRAWING NUMBER	SIZE
		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	
		PAGE	46 OF 109
		SHEET	43 OF 86

IR SUPPORT

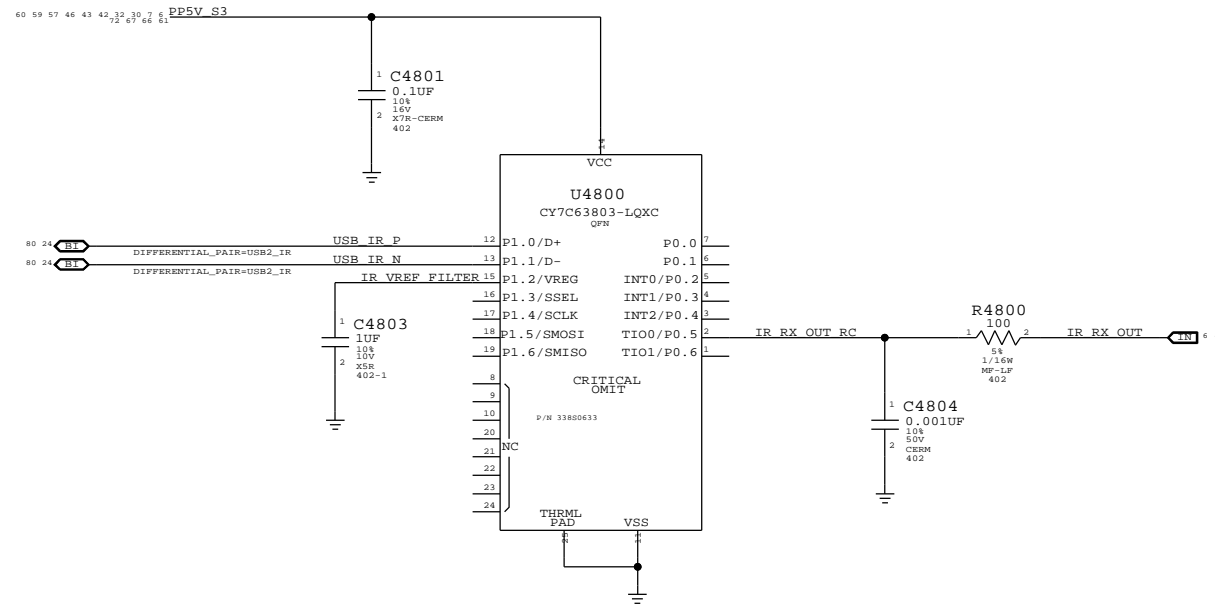


SYNC MASTER=K91_MLB		SYNC DATE=05/15/2010	
PAGE TITLE			
Front Flex Support			
DRAWING NUMBER		SIZE	
		D	
REVISION			
BRANCH			
NOTICE OF PROPRIETARY PROPERTY:			
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE			
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			
PAGE		48 OF 109	
SHEET		44 OF 86	

NOTE: Unused pins have "SMC_Pxx" names. Unused pins designed as outputs can be left floating, those designated as inputs require pull-ups.

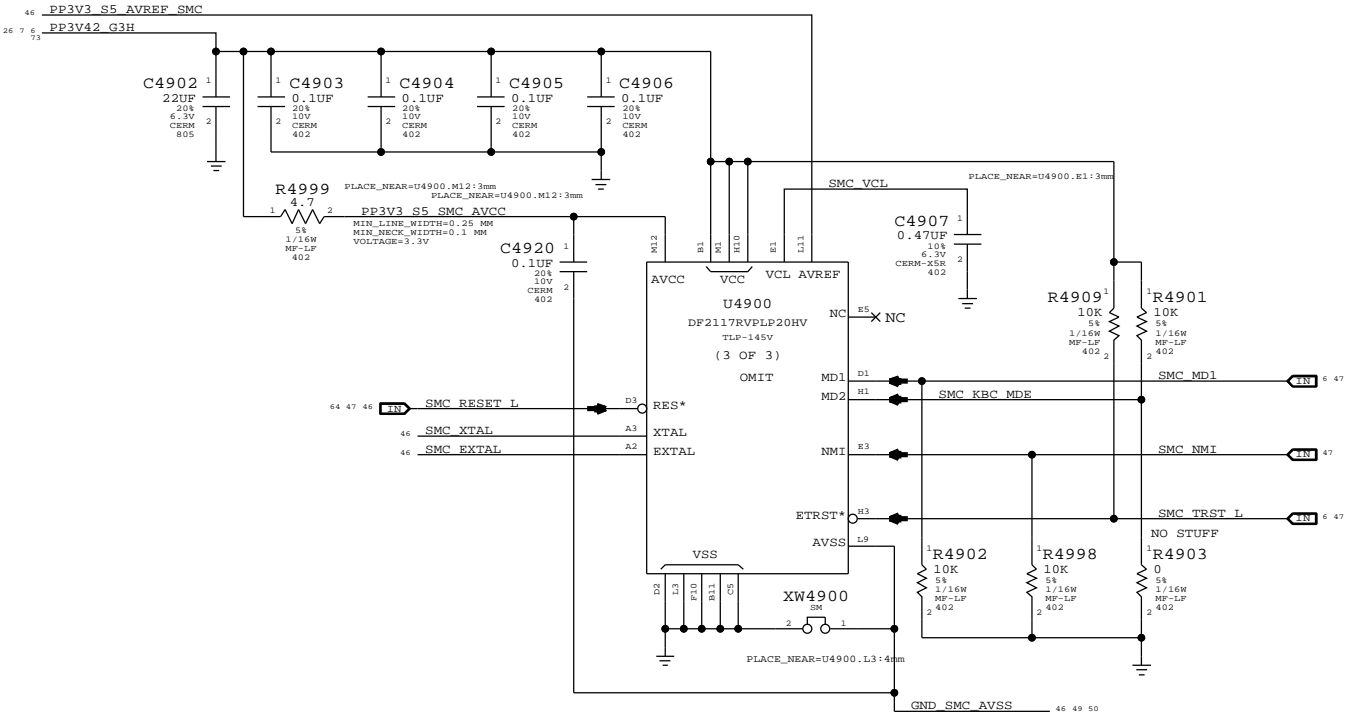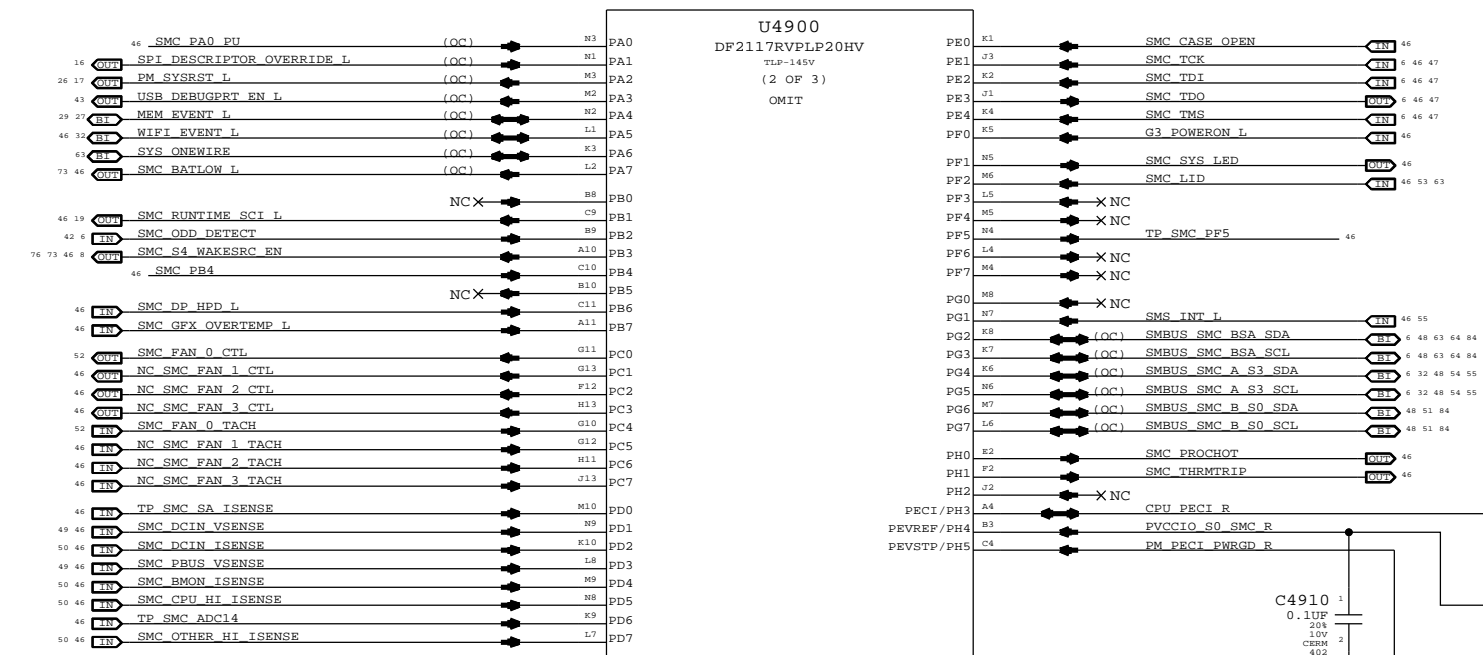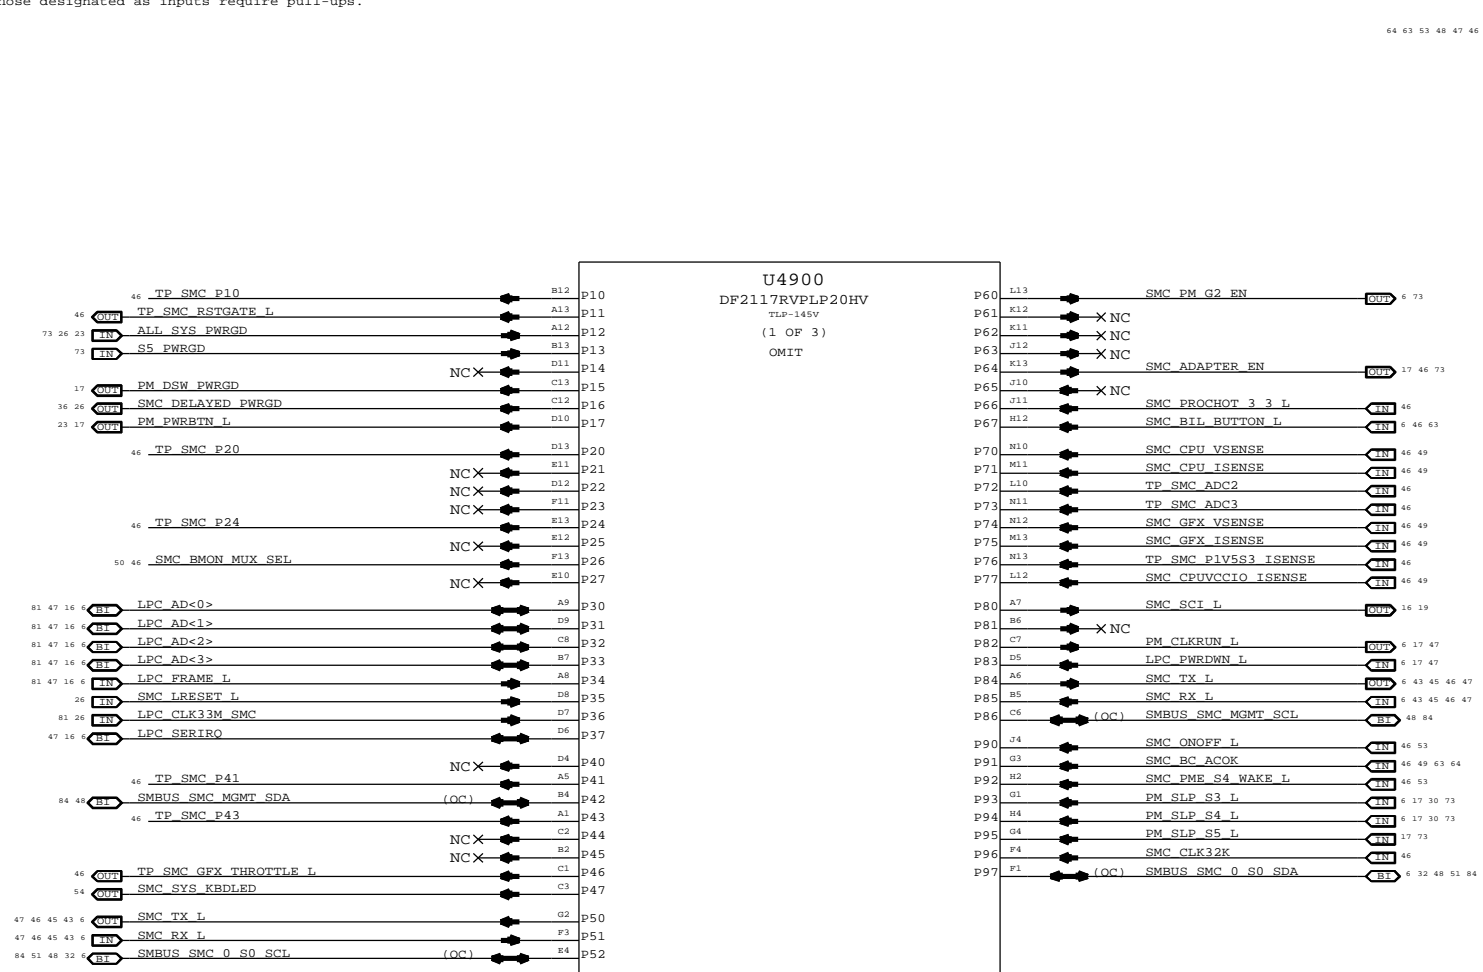

NOTE: SMS interrupt can be active high or low, rename net accordingly. If SMS interrupt is not used, pull up to SMC rail.

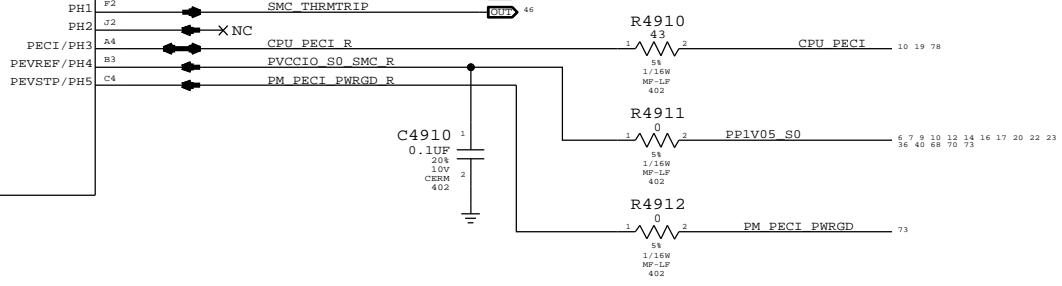


SYNC MASTER=LINDA_K901		SYNC DATE=07/07/2011	
PAGE TITLE		SMC	
Apple Inc.		DRAWING NUMBER	SIZE
NOTICE OF PROPRIETARY PROPERTY:		D	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		REVISION	
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		BRANCH	
II NOT TO REPRODUCE OR COPY IT		PAGE	
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART		49 OF 109	
IV ALL RIGHTS RESERVED		SHEET	
		45 OF 86	

D

D


LPC+SPI Connector

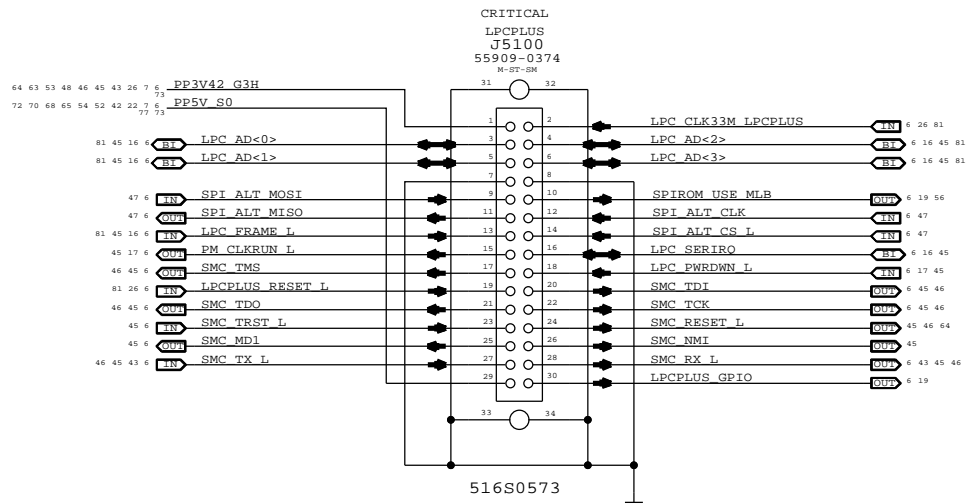

C

C

SPI Bus Series Termination

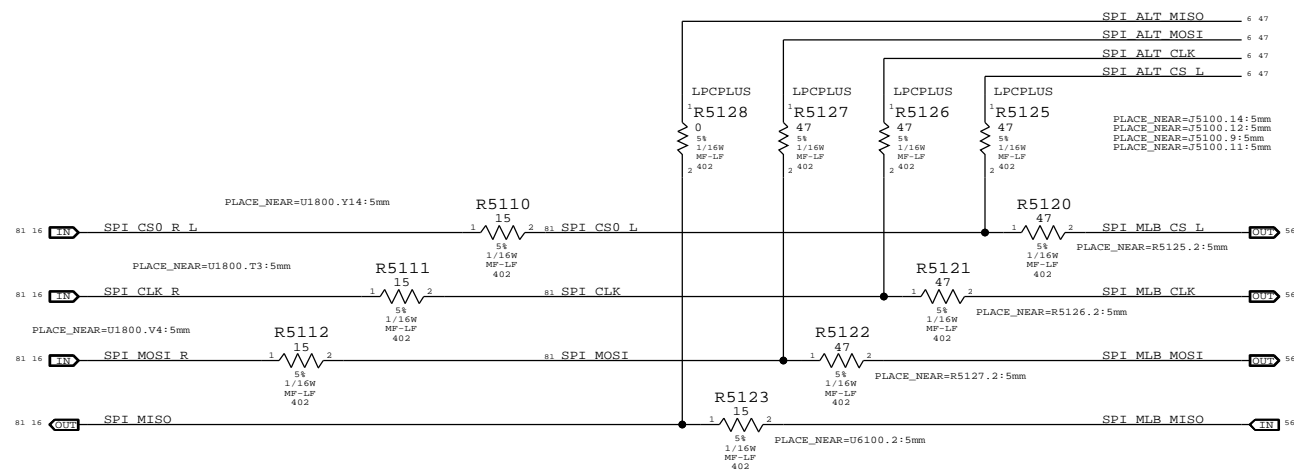


B

B

A


A

SYNC MASTER=K91 MLB		SYNC DATE=05/15/2010	
LPC+SPI Debug Connector			
Apple Inc.		DRAWING NUMBER	SIZE
			D
		REVISION	
		BRANCH	
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED			
		PAGE	51 OF 109
		SHEET	47 OF 86

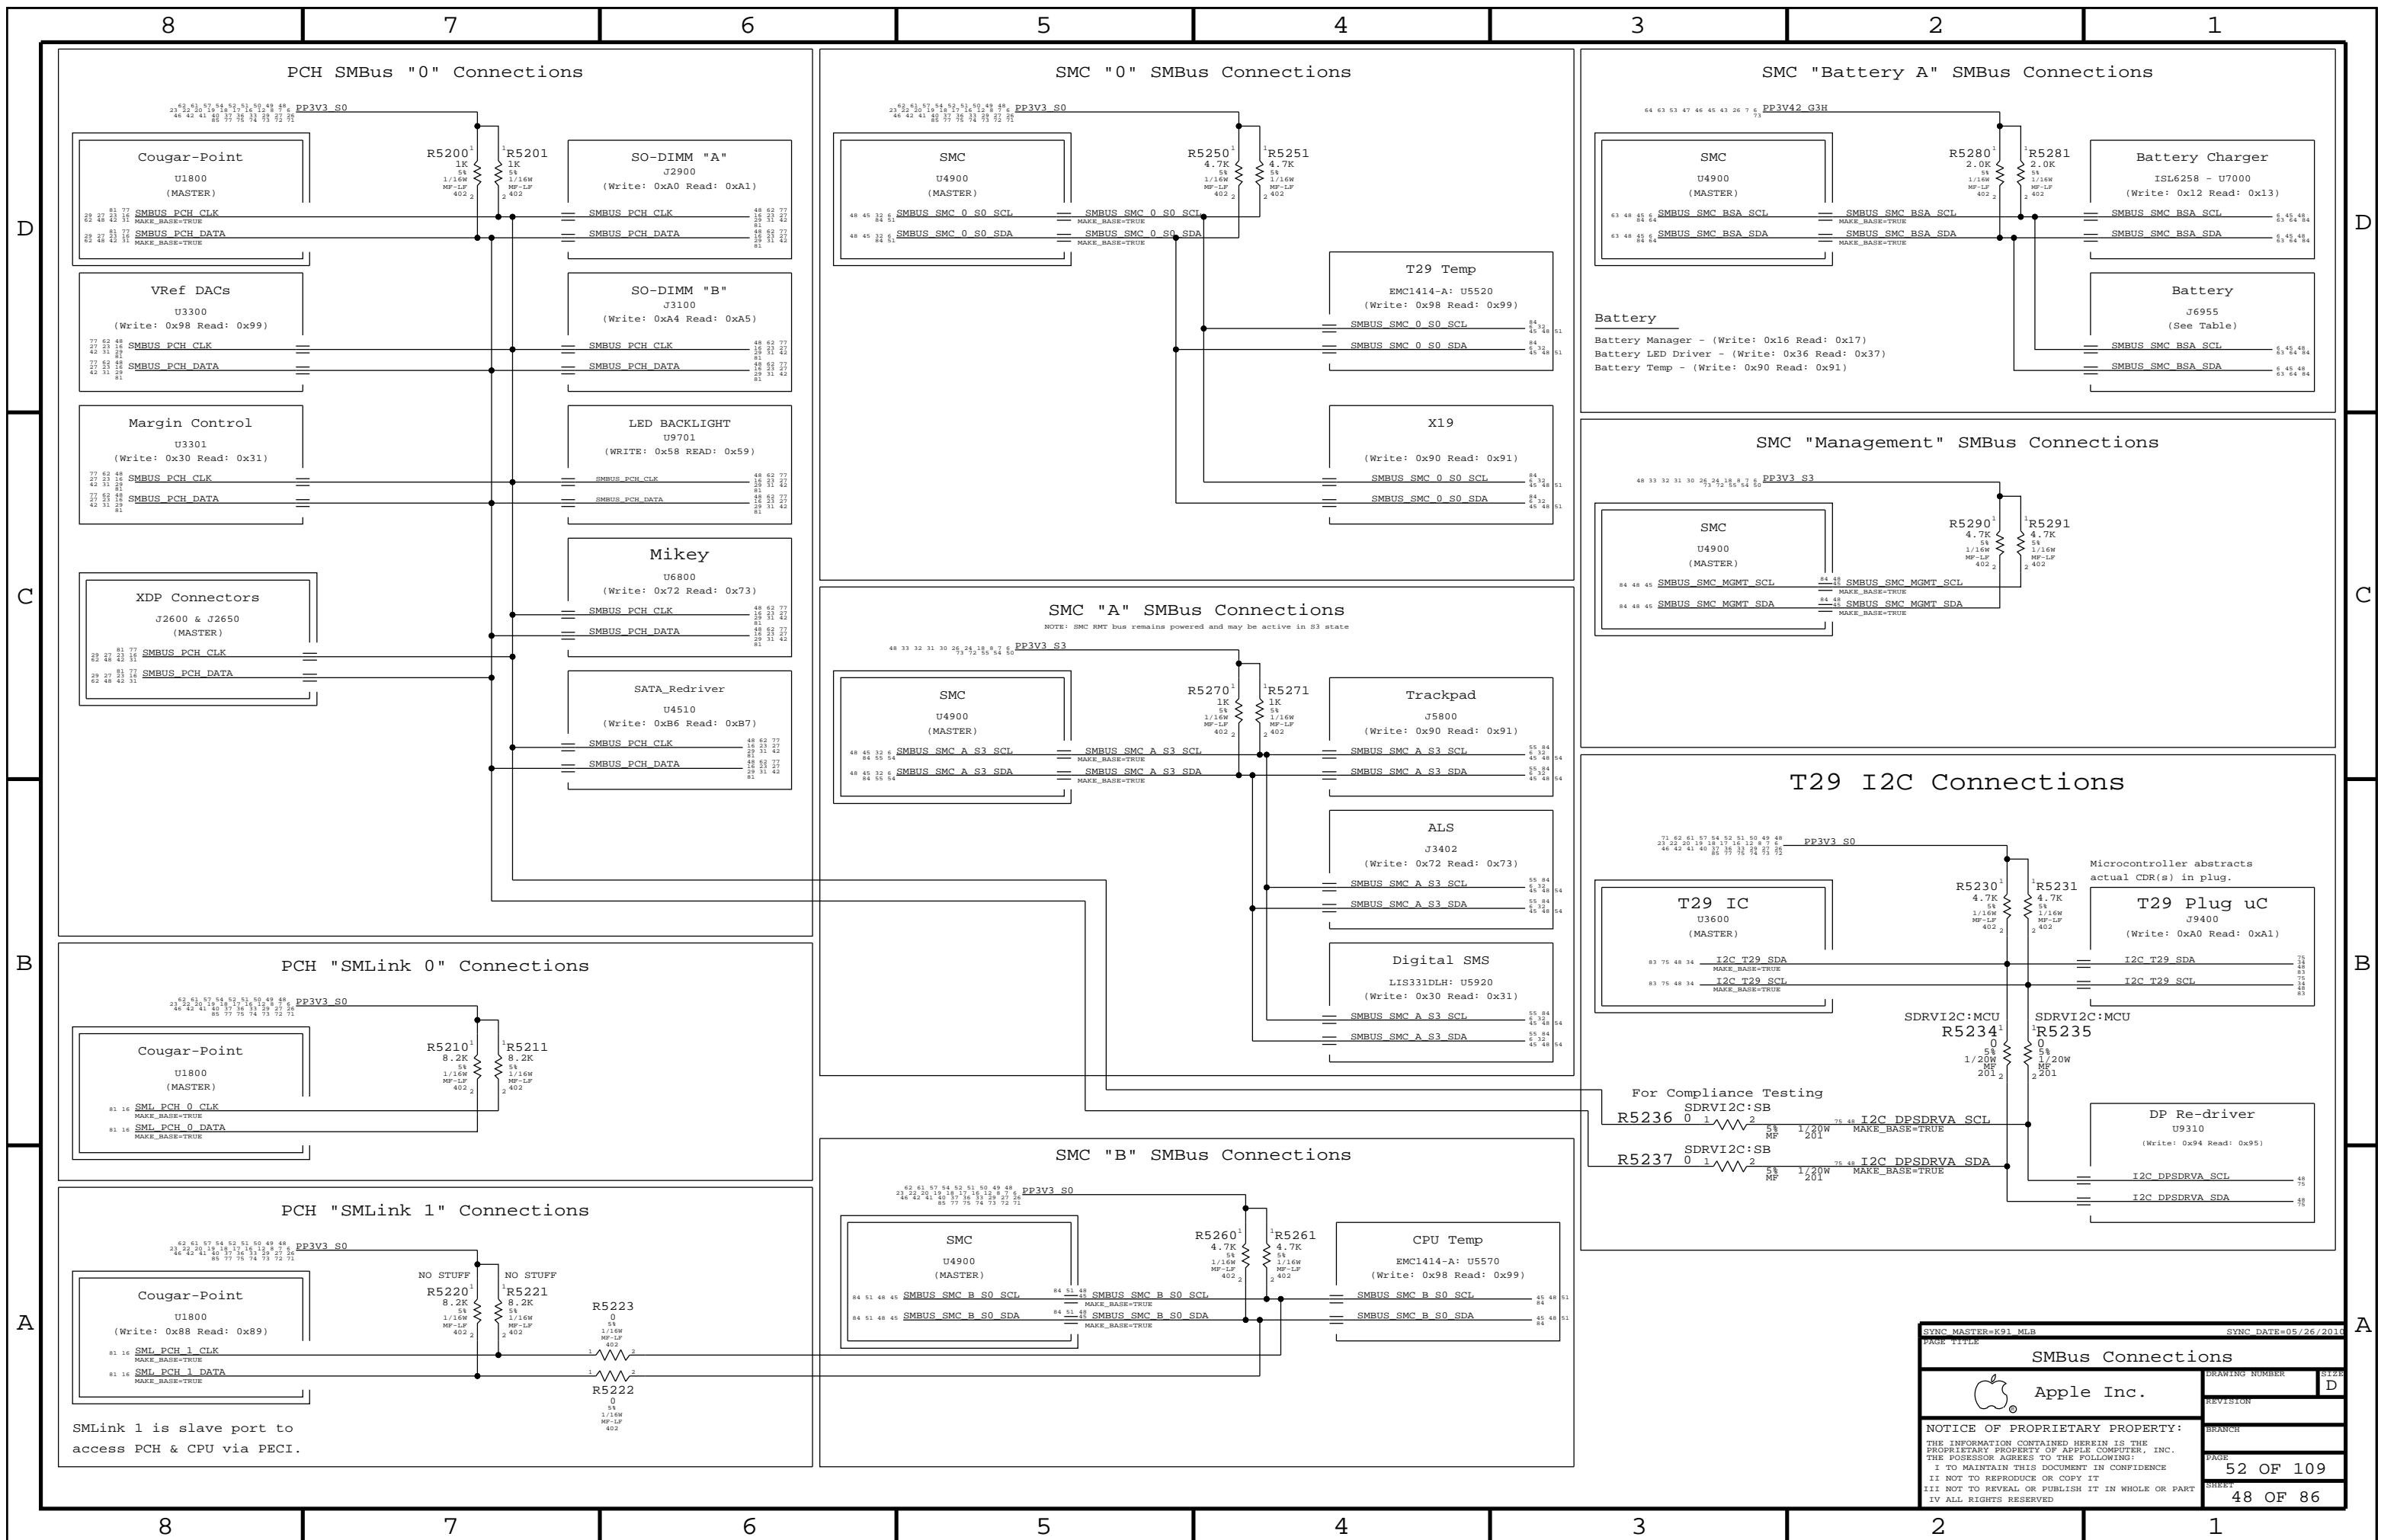


SYNC MASTER=K91_MLB		SYNC DATE=05/26/2011	
PAGE TITLE			
SMBus Connections		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	52 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	48 OF 86
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

PBUS Voltage Sense Enable & Filter

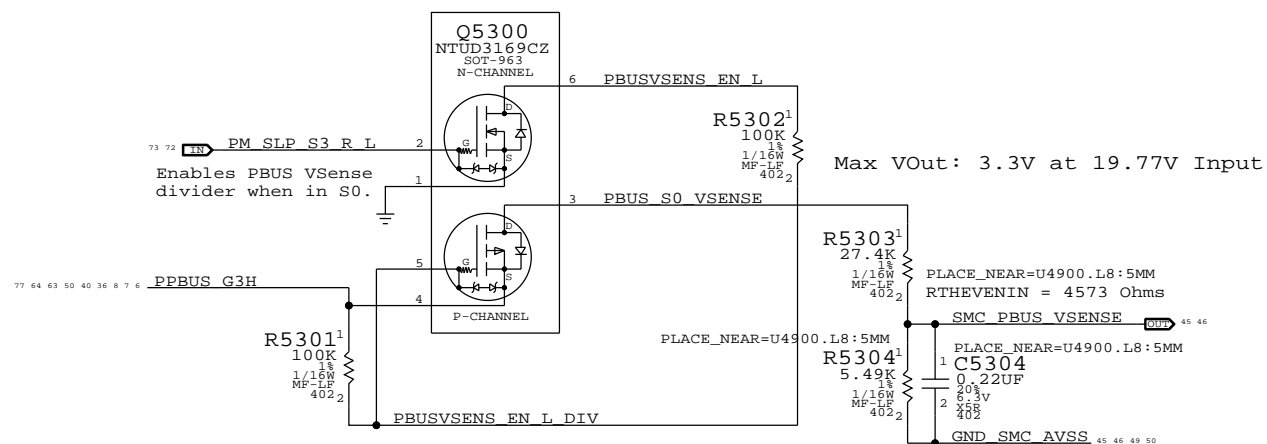

Max VOut: 3.3V at 19.77V Input


CPU VCore Load Side Current Sense / Filter

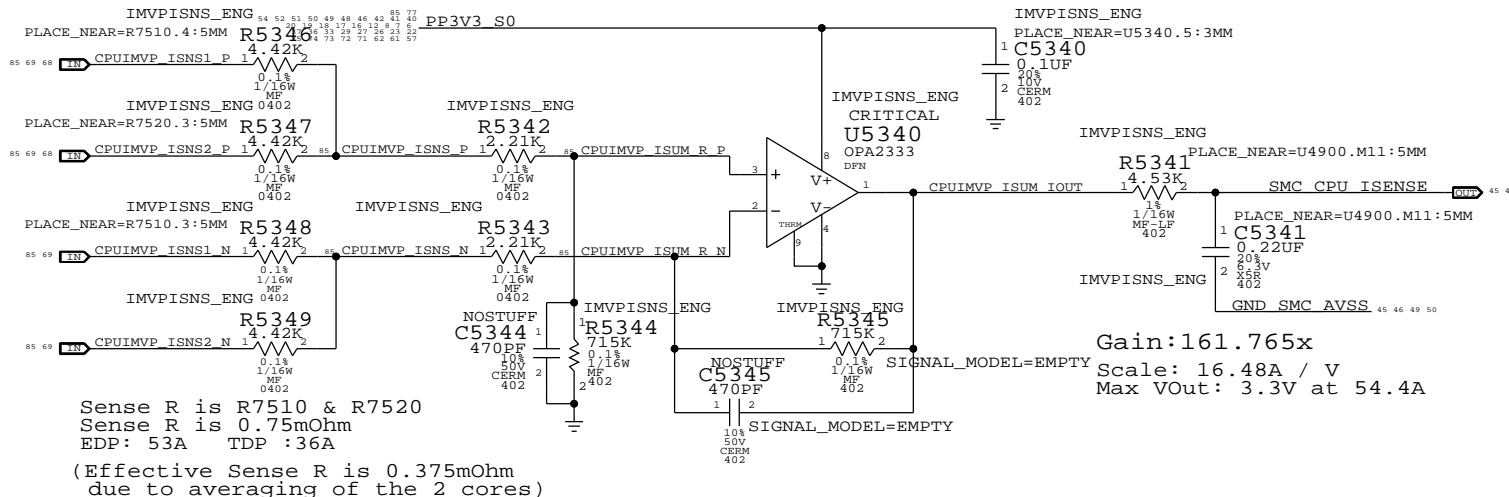

Sense R is R7510 & R7520
Sense R is 0.75mOhm
EDP: 53A TDP :36A
(Effective Sense R is 0.375mOhm due to averaging of the 2 cores)


Gain: 161.765x
Scale: 16.48A / V
Max VOut: 3.3V at 54.4A

DC-In Voltage Sense Enable & Filter

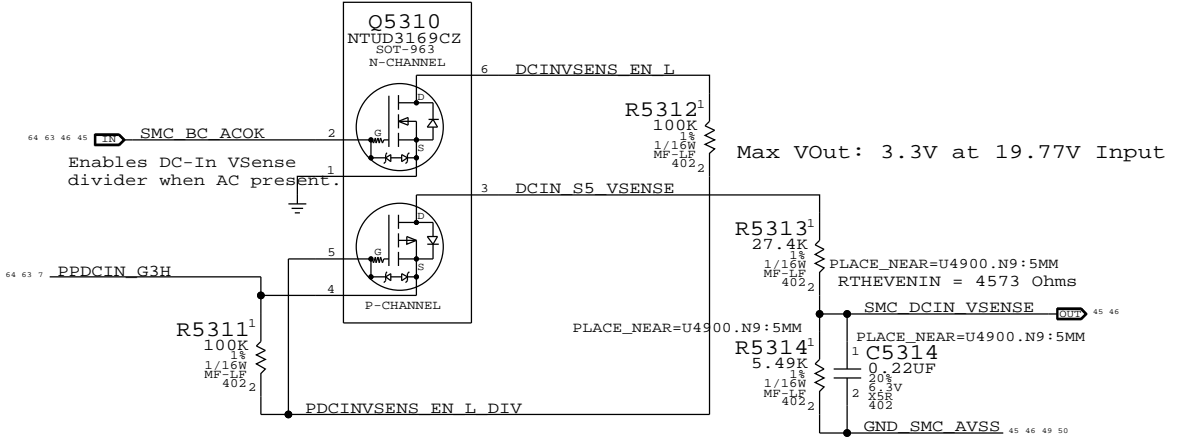

Max VOut: 3.3V at 19.77V Input


GFX/IG VCore Load Side Current Sense / Filter

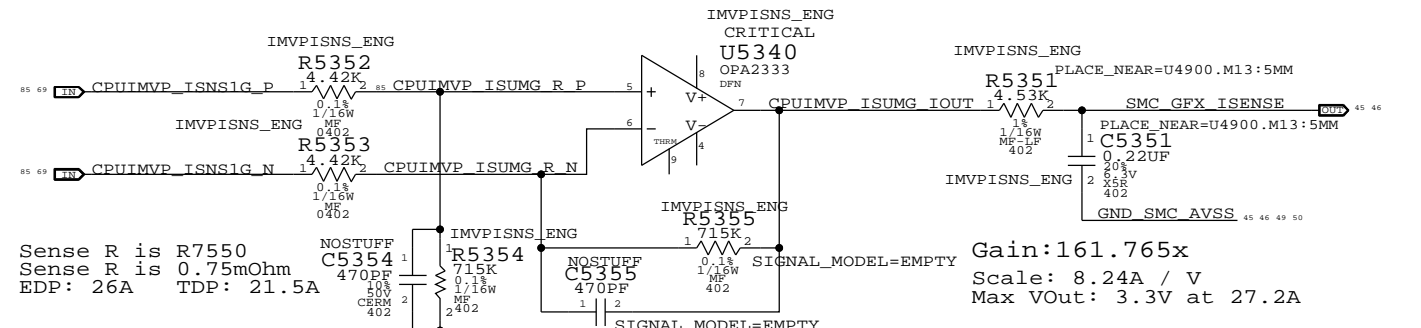


Sense R is R7550
Sense R is 0.75mOhm
EDP: 26A TDP: 21.5A

Gain: 161.765x
Scale: 8.24A / V
Max VOut: 3.3V at 27.2A

CPU Vcore Voltage Sense / Filter

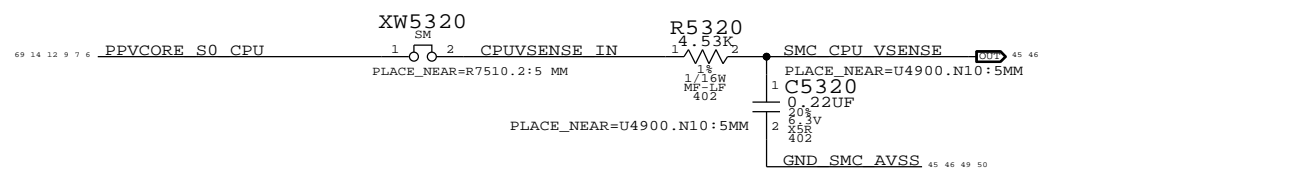


CPU 1.05V VCCIO Current Sense / Filter

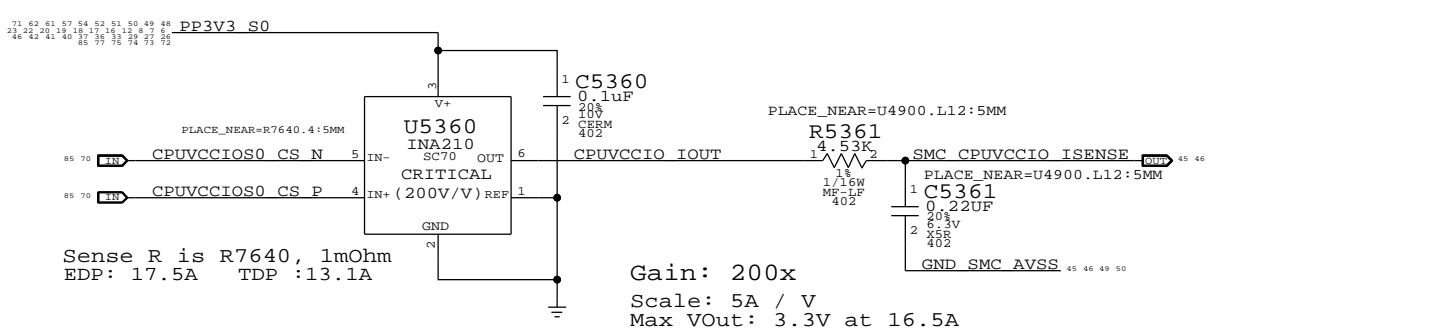

Sense R is R7640, 1mOhm
EDP: 17.5A TDP :13.1A

Gain: 200x
Scale: 5A / V
Max VOut: 3.3V at 16.5A


GFX/IG Vcore Voltage Sense / Filter

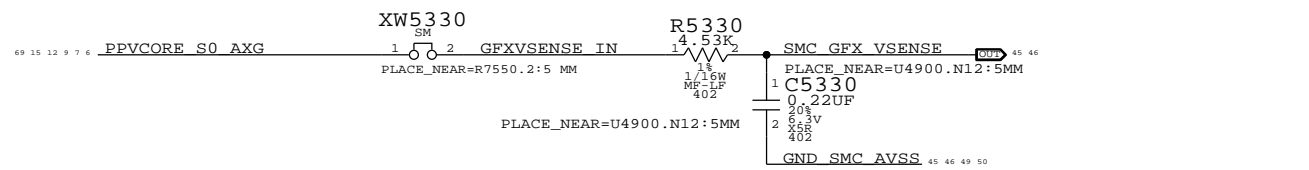


SYNC MASTER=LINDA K90I		SYNC DATE=10/22/2010	
Voltage & Load Side Current Sensing			
Apple Inc.		DRAWING NUMBER	SIZE
		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	53 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	49 OF 86
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

8 7 6 5 4 3 2 1


COMPUTING High Side Current Sense / Filter

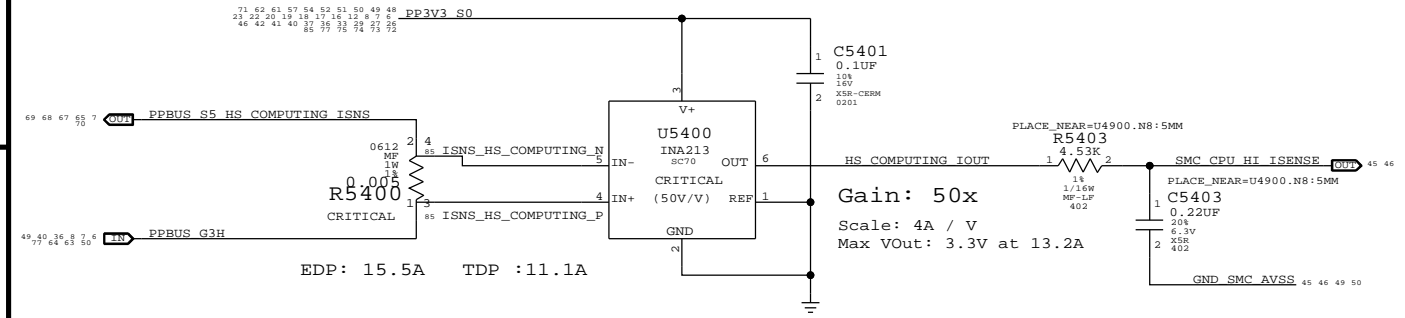

OTHER High Side Current Sense / Filter

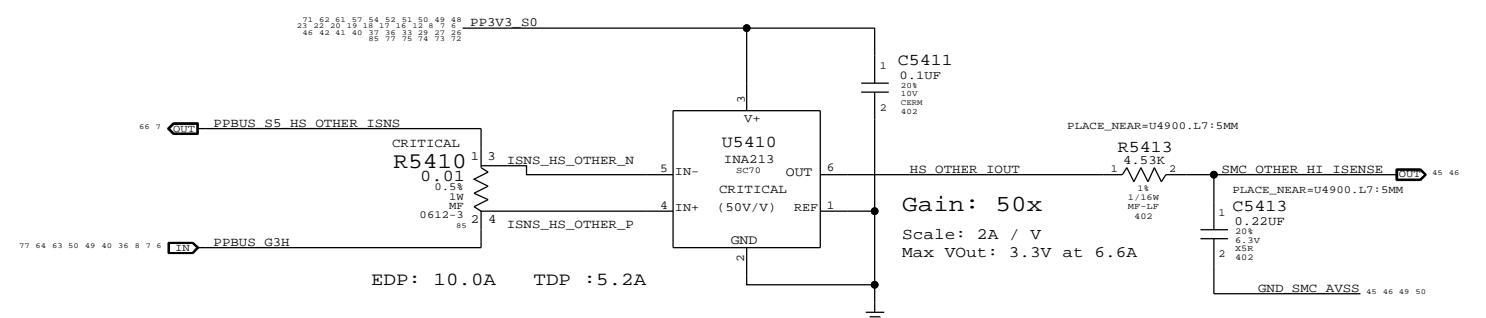


CHARGER BMON High Side (BATTERY DISCHARGE) Current Sense, MUX & Filter

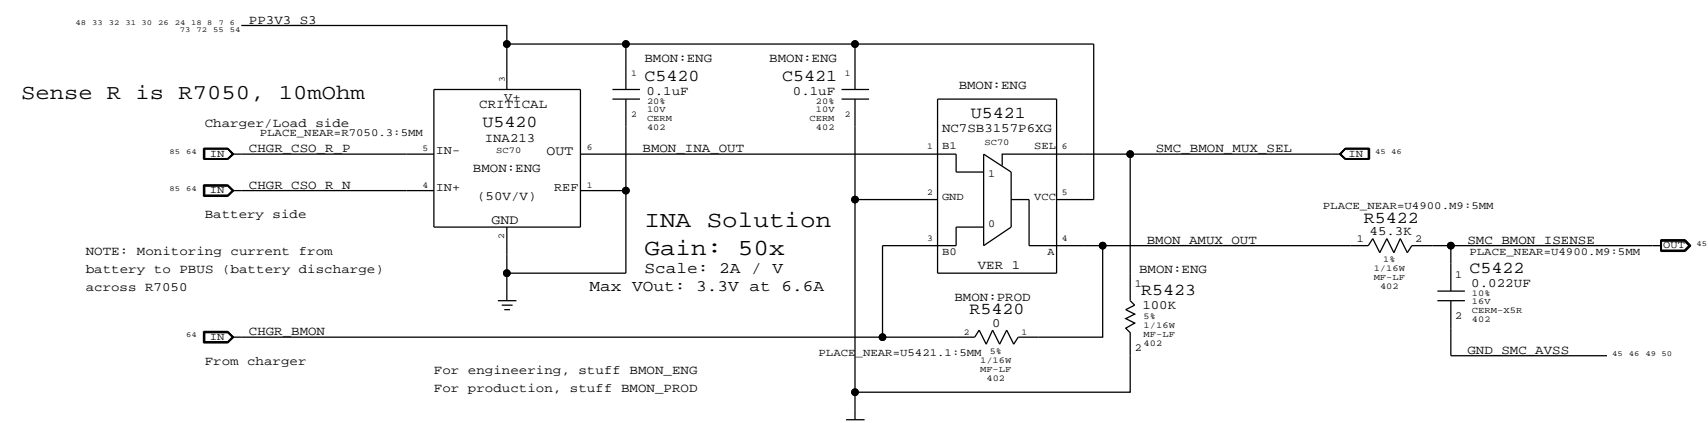

INA (Engineering) Solution
Gain: 50x
Scale: 2A / V
Max VOut: 3.3V at 6.6A

Charger BMON (Production) Solution
ISL6259 Gain: 36x
Scale: 2.78A / V
Max VOut: 3.3V at 9.167A

DC-IN (AMON) Current Sense Filter

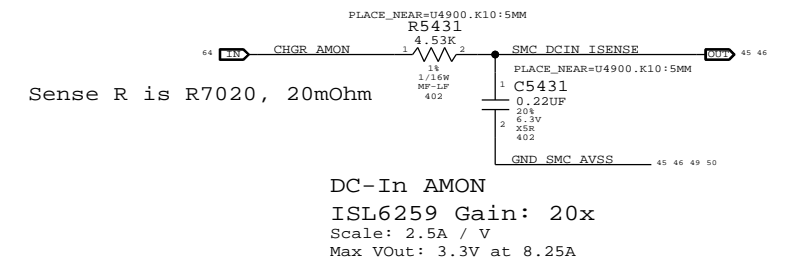

D

D

C

C

B


B

A

A

8 7 6 5 4 3 2 1

SYNC MASTER=LINDA.K901	SYNC DATE=10/22/2011
High Side Current Sensing	DRAWING NUMBER SIZE
Apple Inc.	REVISION
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED	BRANCH
	PAGE
	54 OF 109
SHEET	
50 OF 86	

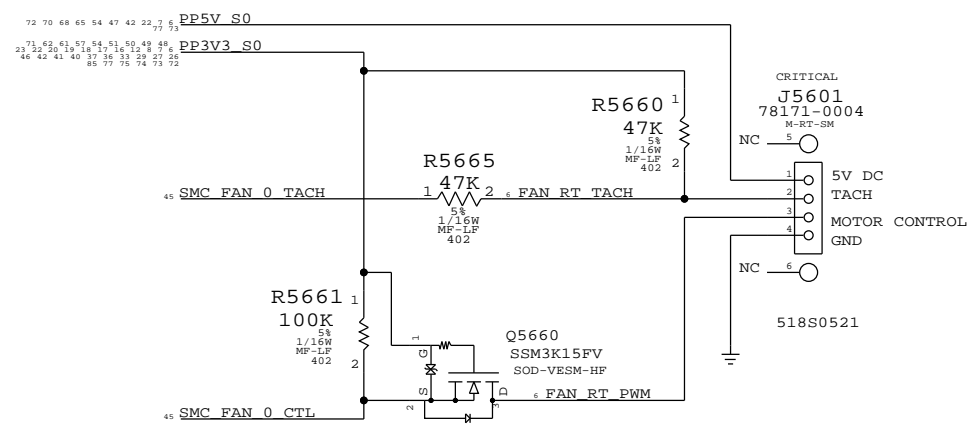


SYNC MASTER=K24_MLB		SYNC DATE=07/20/2005	
PAGE TITLE Fan			
Apple Inc.		DRAWING NUMBER	SIZE D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		REVISION	BRANCH
		PAGE 56 OF 109	SHEET 52 OF 86

PSOC USB CONTROLLER

- USB INTERFACES TO MLB
- SPI HOST TO Z2
- TRACKPAD PICK BUTTONS
- KEYBOARD SCANNER


IC	PIN NAME	CURRENT	R_SNS	V_SNS	POWER
TMP102	V+	10UA	2.55 KOHM	0.0255 V	0.255E-6 W
	80UA			0.204 V	16.32E-6 W
3V3 LDO	VDD	60MA (MAX)	10 OHM	0.6 V	36E-3 W
	VOUT	60MA (MAX)	0.2 OHM	0.012 V	0.72E-3 W
PSOC	VDD	8MA (TYP)	1.5 OHM	0.012 V	96E-6 W
	14MA (MAX)			0.021 V	294E-6 W
18V BOOSTER	VIN	4MA (MAX)	4.7 OHM	0.0188 V	75.2E-6 W

Keyboard Connector

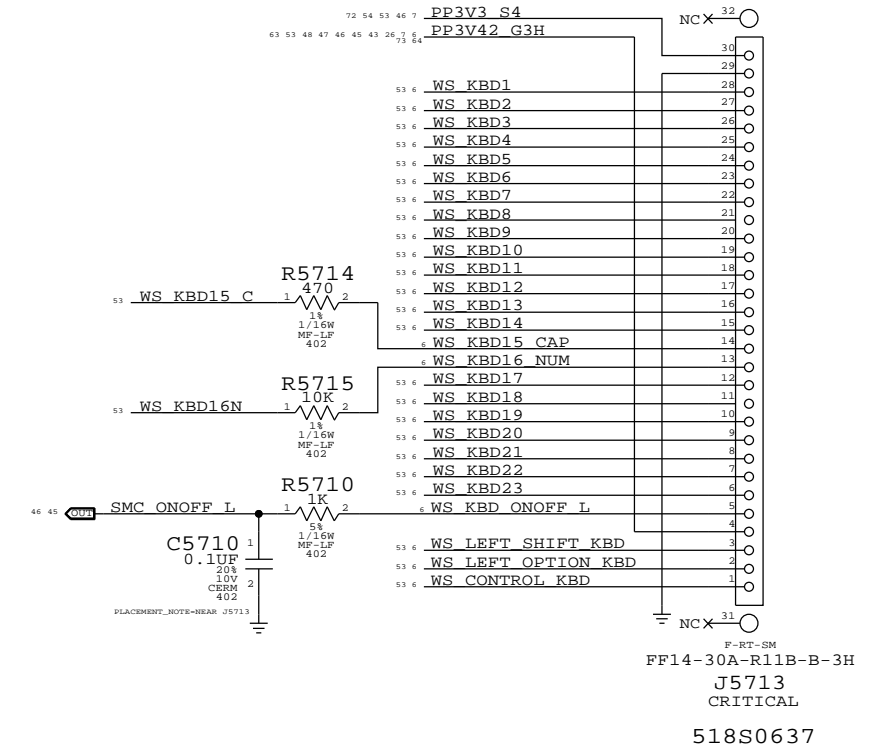


SMC Manual Reset & Isolation

Left shift, option & control keys combined with power button cause SMC RESET# assertion. Keys ANDed with PSOC power to isolate when PSOC is not powered.

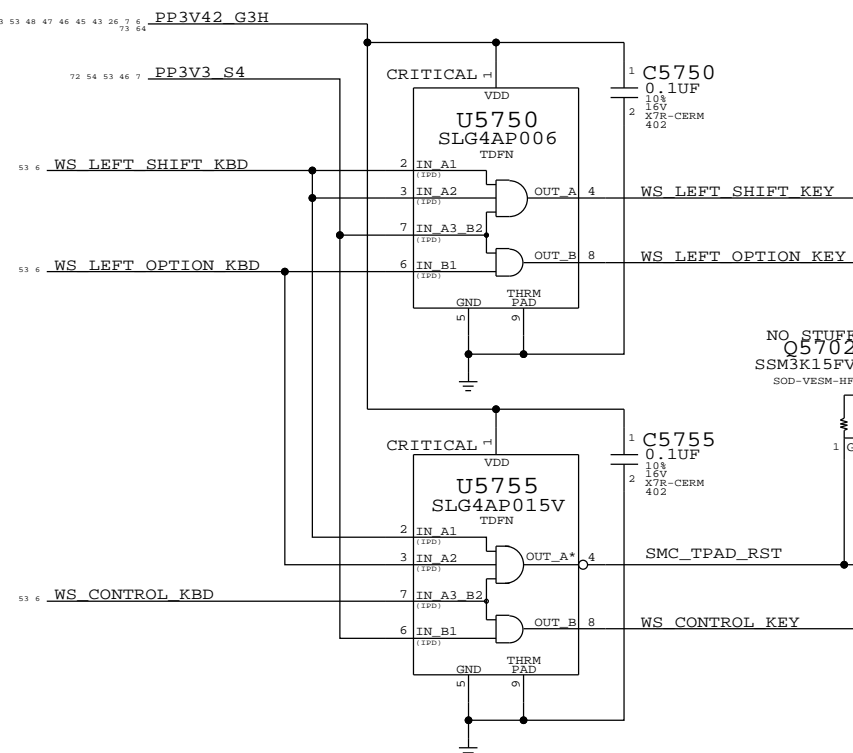


TPAD Buttons Disable

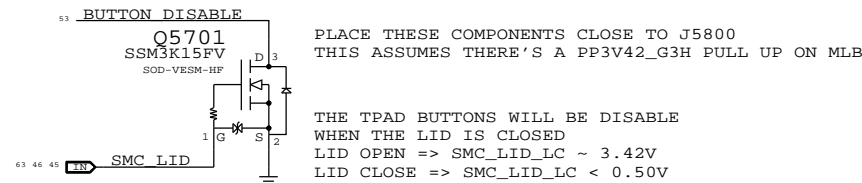


PAGE TITLE		SYNC DATE=07/12/2010	
WELLSPRING 1		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	57 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	53 OF 86
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

BOOSTER +18.5VDC FOR SENSORS


- BOOSTER DESIGN CONSIDERATION:
- POWER CONSUMPTION
 - DROOP LINE REGULATION
 - RIPPLE TO MEET ERS
 - 100-300 KHZ CLEAN SPECTRUM
 - STARTUP TIME LESS THAN 2MS
 - R5812,R5813,C5818 MODIFIED

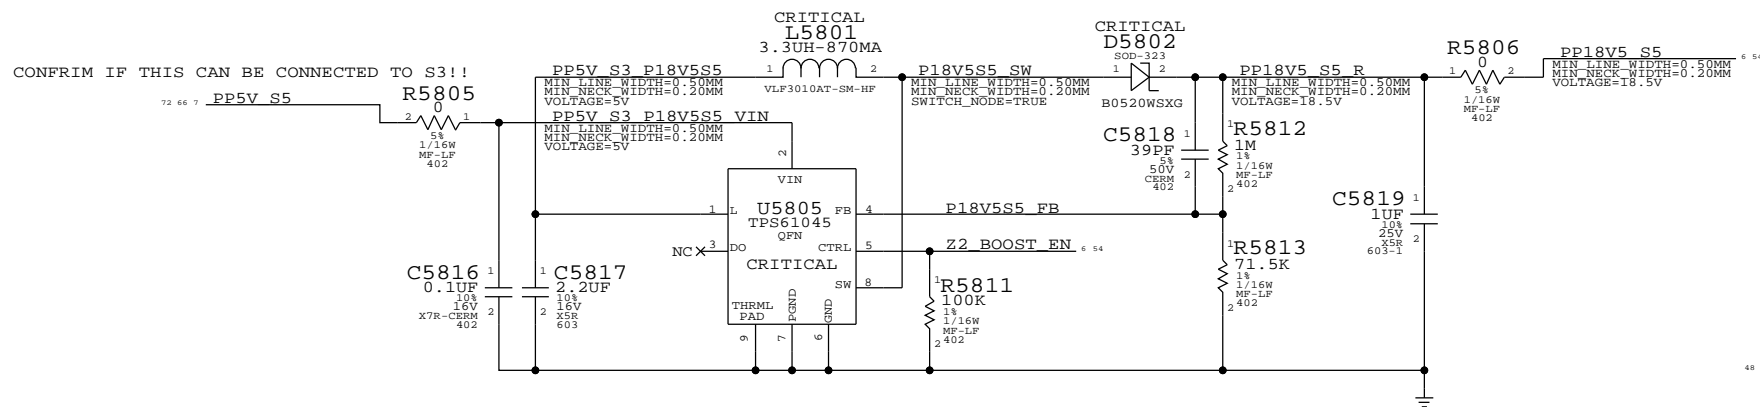


IPD Flex Connector

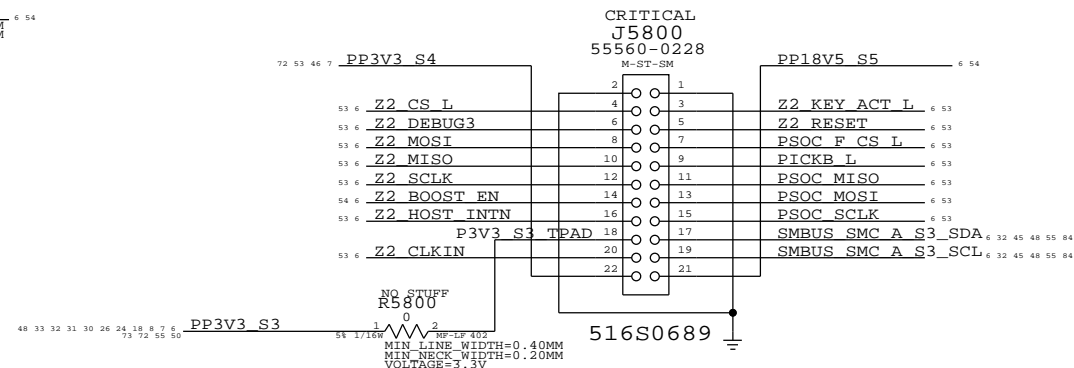

Keyboard Backlight Driver & Detection

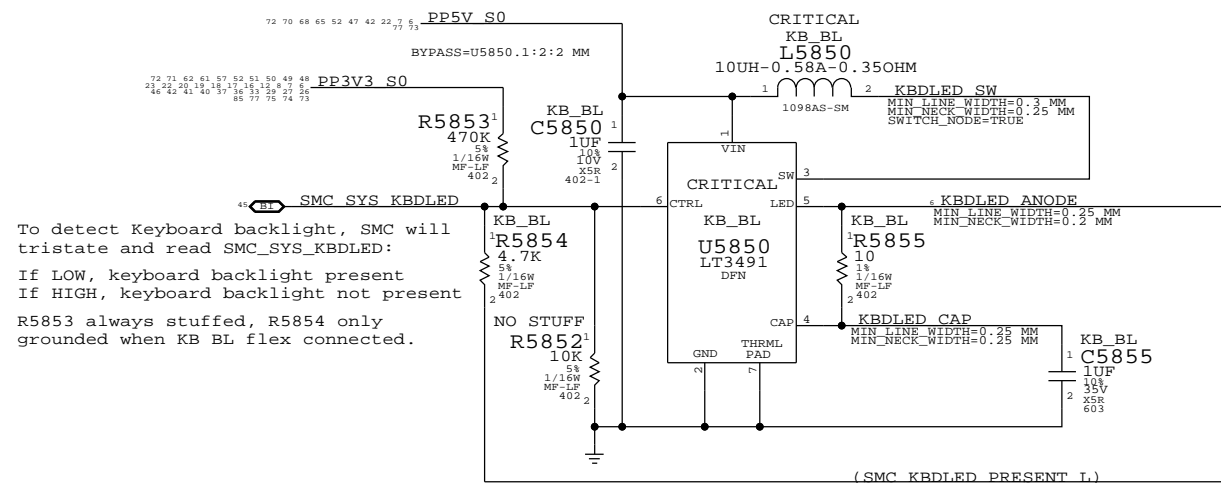


Keyboard Backlight Connector

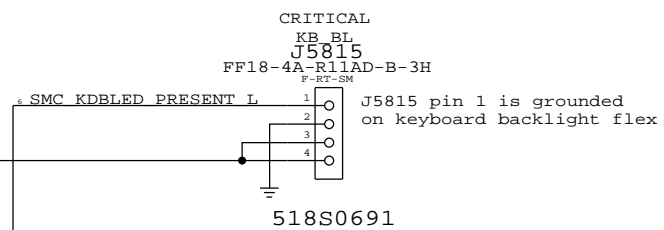


K6 NOTES : C5850 HAS BYPASS PROPERTY, SHOULD BE ADDED INCASE THIS PAGE IS SYNC'ED FROM T27

SYNC MASTER=LINDA K901		SYNC DATE=07/12/2010	
PAGE TITLE WELLSPRING 2			
Apple Inc.		DRAWING NUMBER	SIZE D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		REVISION	BRANCH
		PAGE	58 OF 109
		SHEET	54 OF 86

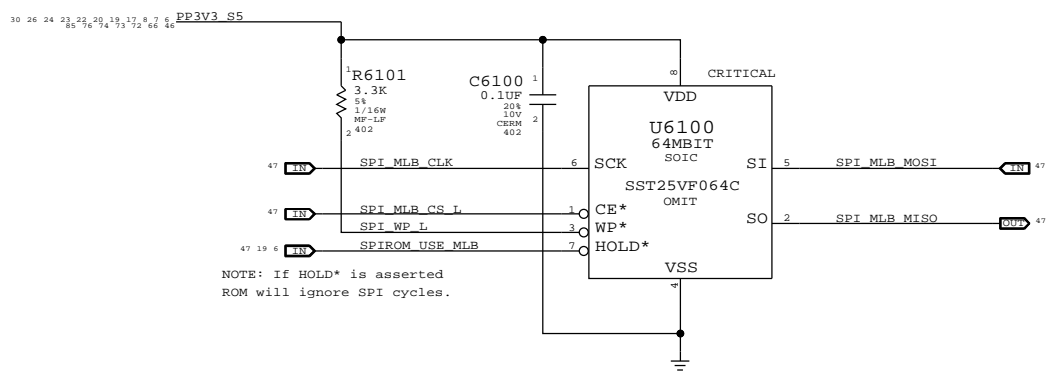

SYNC MASTER=K91_MLB		SYNC DATE=05/15/2011	
PAGE TITLE SPI ROM			
Apple Inc.		DRAWING NUMBER	SIZE D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		REVISION	BRANCH
		PAGE 61 OF 109	SHEET 56 OF 86

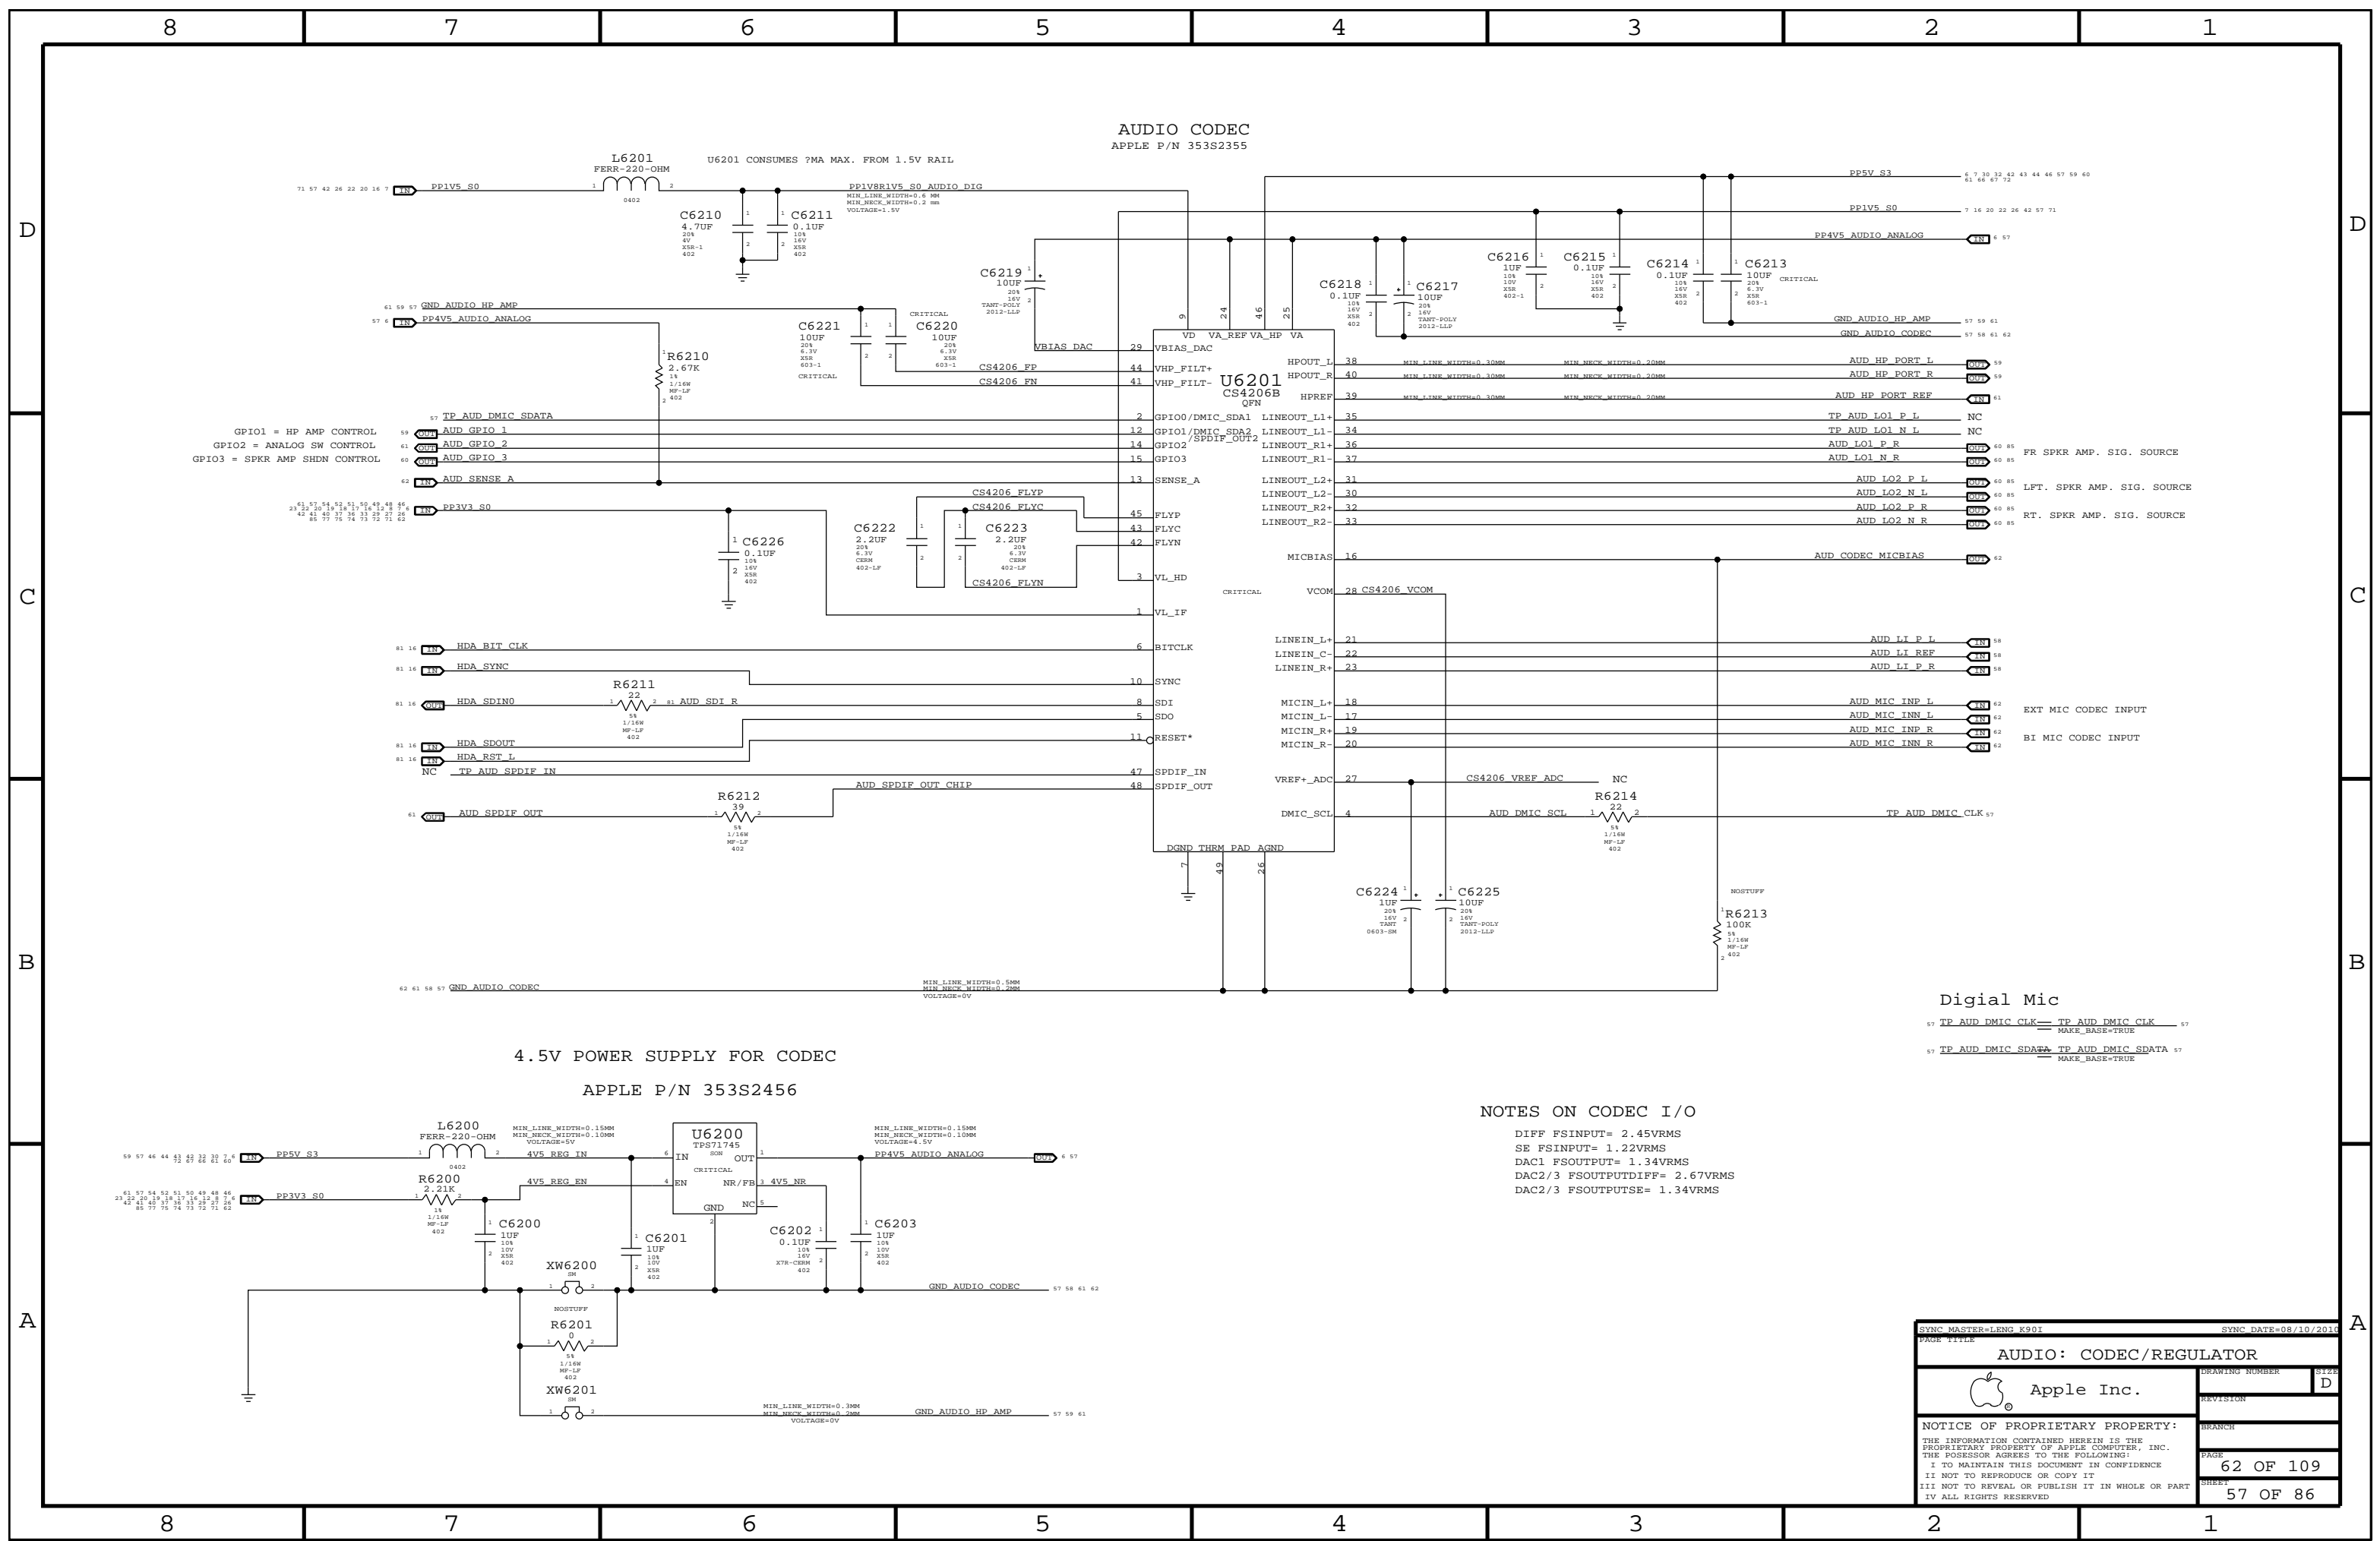

AUDIO CODEC
APPLE P/N 353S2355

4.5V POWER SUPPLY FOR CODEC
APPLE P/N 353S2456

NOTES ON CODEC I/O

DIFF FSINPUT= 2.45VRMS
SE FSINPUT= 1.22VRMS
DAC1 FSOUTPUT= 1.34VRMS
DAC2/3 FSOUTPUTDIFF= 2.67VRMS
DAC2/3 FSOUTPUTSE= 1.34VRMS


Digital Mic

57 TP AUD DMIC CLK TP AUD DMIC CLK 57
MAKE_BASE=TRUE
57 TP AUD DMIC SDATA TP AUD DMIC SDATA 57
MAKE_BASE=TRUE

SYNC MASTER=LENG K901		SYNC DATE=08/10/2011	
PAGE TITLE			
AUDIO: CODEC/REGULATOR		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	PAGE
			62 OF 109
		SHEET	57 OF 86

LINE INPUT VOLTAGE DIVIDER

CODEC RIN = 20K OHMS
 NET RIN = 10.36K OHMS (INCLUDING PULL-DOWNS AT ANALOG SWITCH COM PINS)
 FC_HP = 3.6 HZ
 FC_LP = 43KHZ
 VIN = 2VRMS, CODEC VIN = 1.14 VRMS

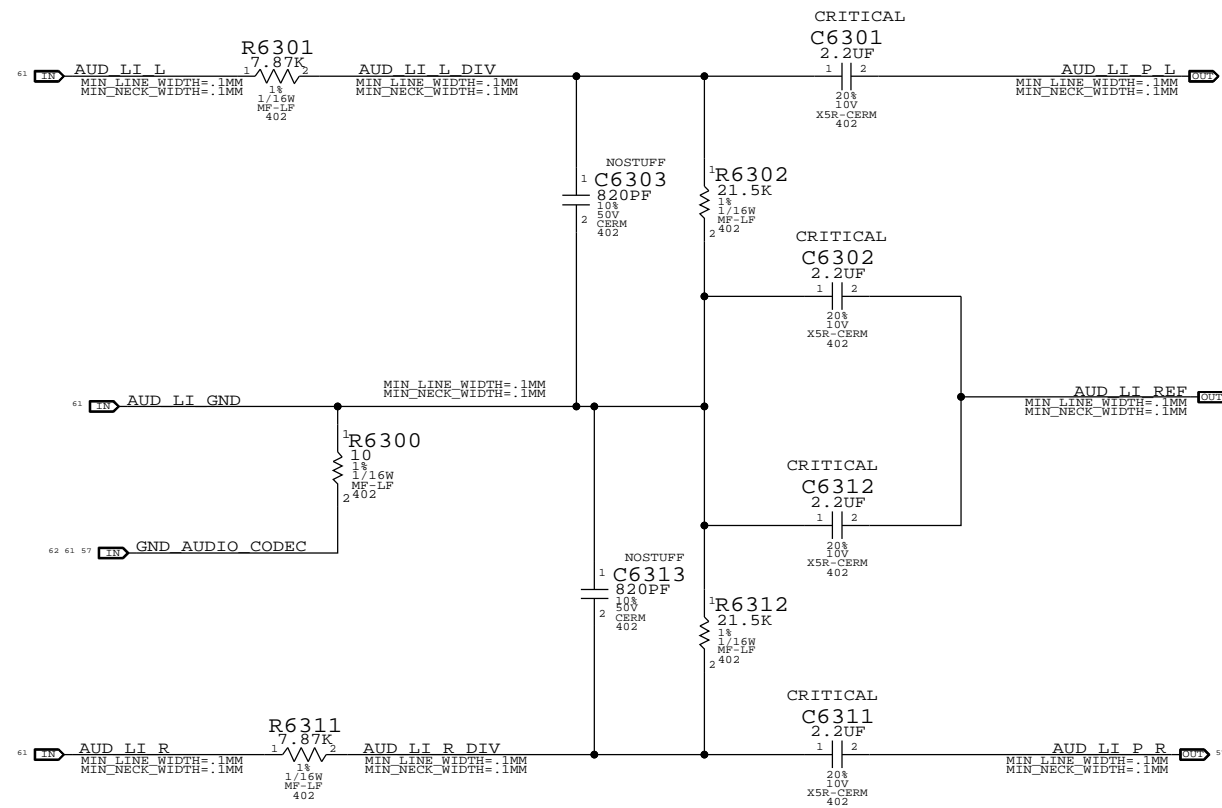

PAGE TITLE		DRAWING NUMBER		SIZE
AUDIO: LINE INPUT FILTER				D
Apple Inc.		REVISION		
NOTICE OF PROPRIETARY PROPERTY:		BRANCH		
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE		63 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET		58 OF 86
II NOT TO REPRODUCE OR COPY IT				
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART				
IV ALL RIGHTS RESERVED				

8

7

6

5

4

3

2

1

D

D

C

C

B



B

A

A


FOR PROTO2, STUFF R6521 AND NO STUFF R6520 AND R6522 UNTIL RE-TASKABLE IO SW SUPPORT AVAILABLE (FORCES IO INTO OUTPUT MODE).

ZOBEL NETWORK & 1ST ORDER DAC FILTER PLACEHOLDER

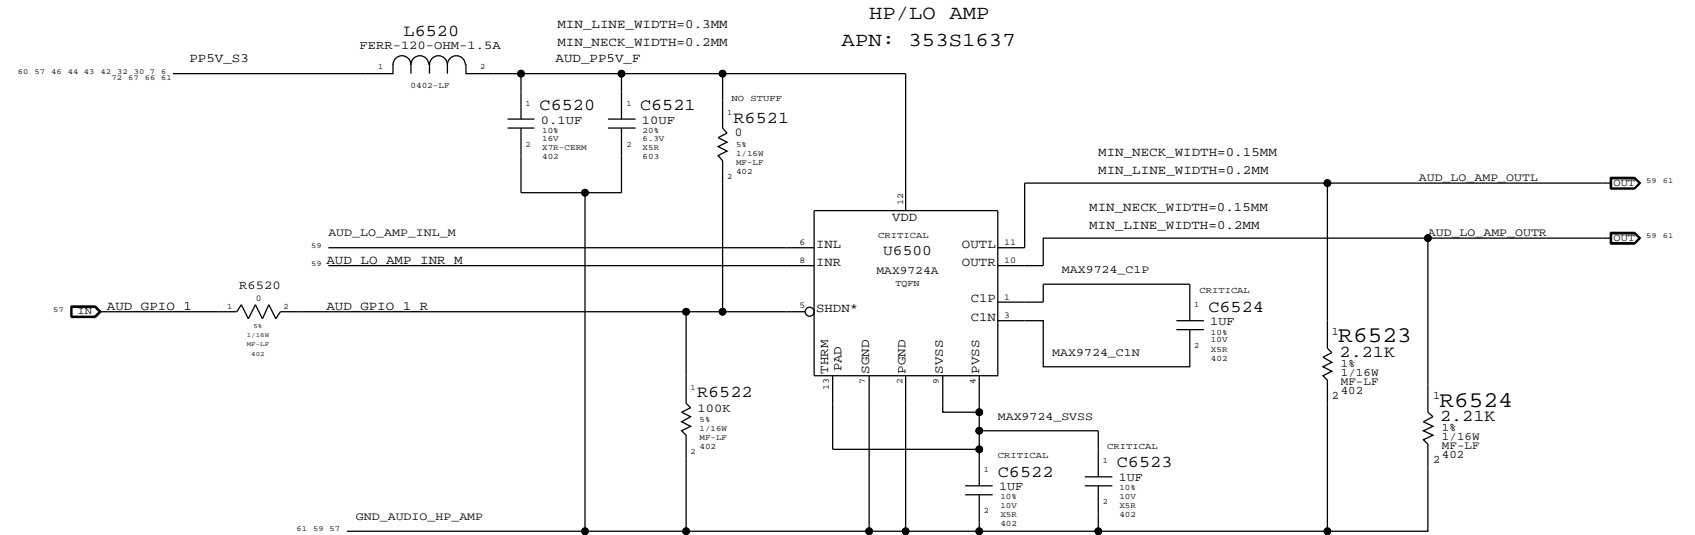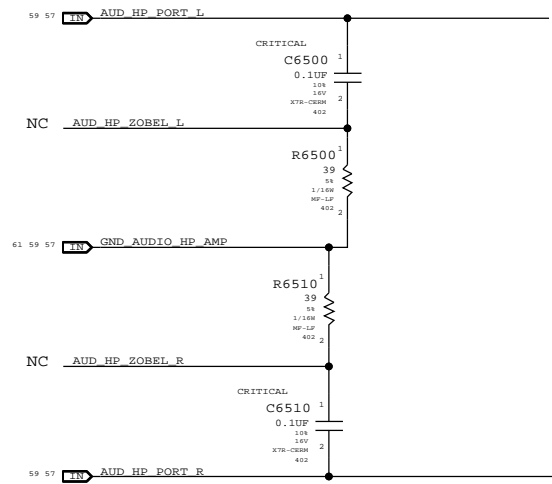

MAX9724 GAIN/FILTER COMPONENTS

AV_PB = -1V/V, FC_LPF = 35.2KHZ

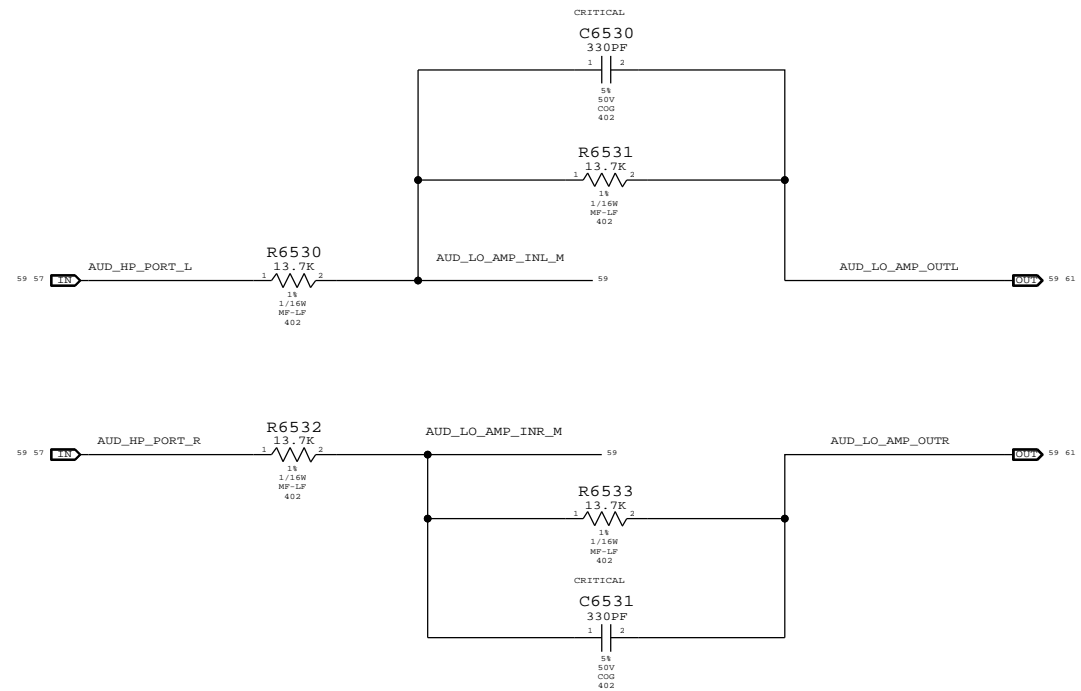

SYNC MASTER=LENG K901		SYNC DATE=08/10/2011	
PAGE TITLE			
AUDIO: HEADPHONE FILTER			
DRAWING NUMBER		SIZE	
Apple Inc.		D	
REVISION		BRANCH	
NOTICE OF PROPRIETARY PROPERTY:			
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE			
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			
PAGE		SHEET	
65 OF 109		59 OF 86	

8

7

6

5

4

3


2

1

SATELLITE & SUB TWEETER AMPLIFIER


APN: 353S2888

SATELLITE 169 HZ < FC < 282 HZ
 SUB 80 HZ < FC < 132 HZ
 GAIN 3DB

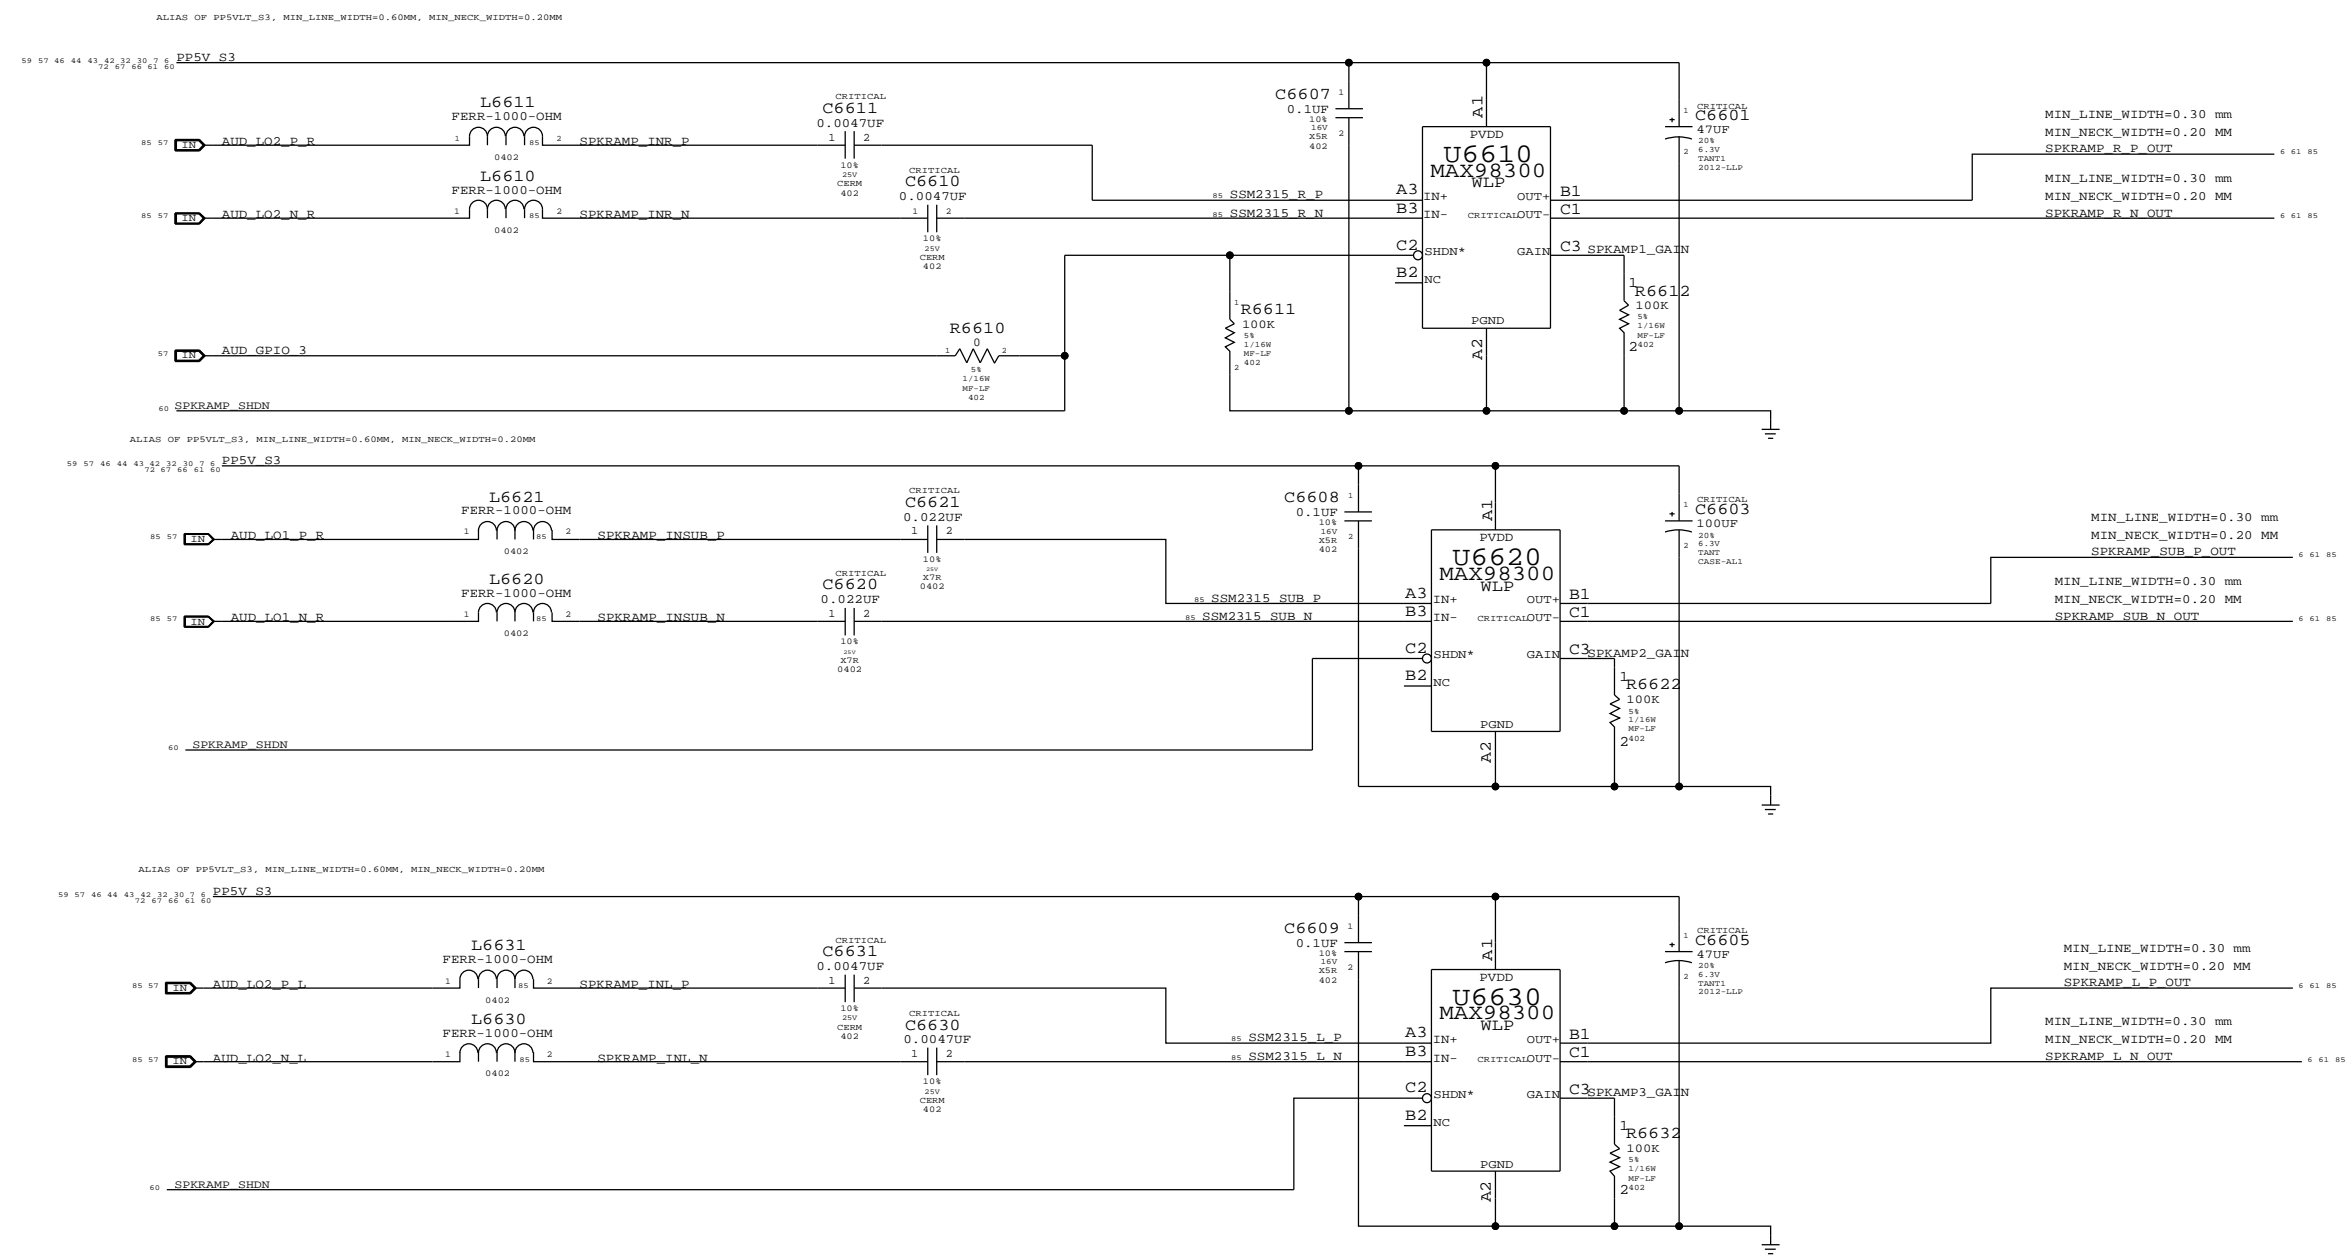


SYNC MASTER=LENG K901		SYNC DATE=08/10/2011	
PAGE TITLE			
AUDIO: SPEAKER AMP			
Apple Inc.		DRAWING NUMBER	SIZE
			D
NOTICE OF PROPRIETARY PROPERTY:		REVISION	BRANCH
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		PAGE	66 OF 109
II NOT TO REPRODUCE OR COPY IT		SHEET	60 OF 86
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			


AUDIO JACK: LI/LO/HP CONNECTOR, SPDIF TX

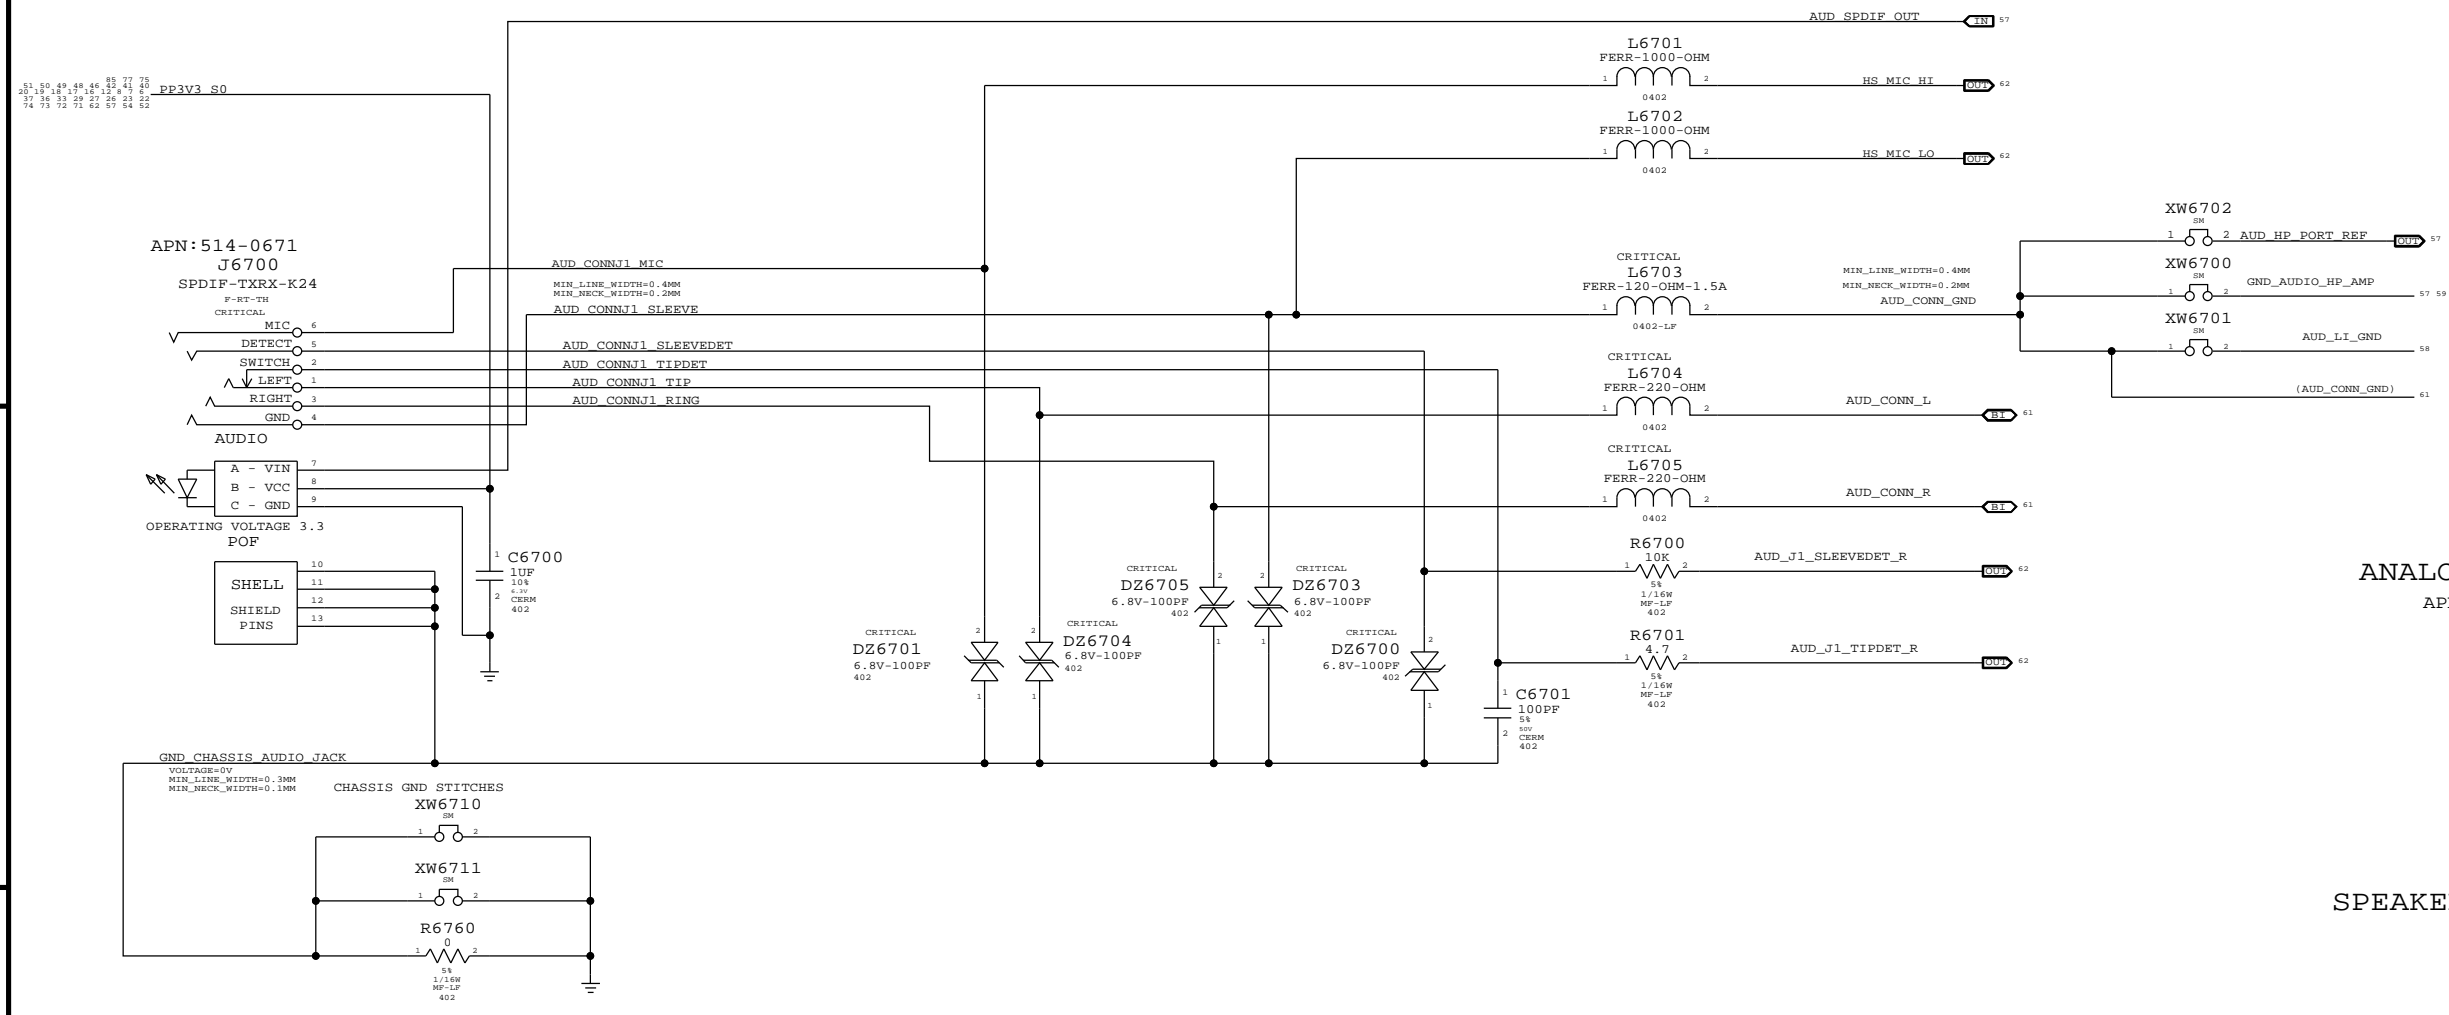


ANALOG MIC CONNECTOR
APN: 518S0520

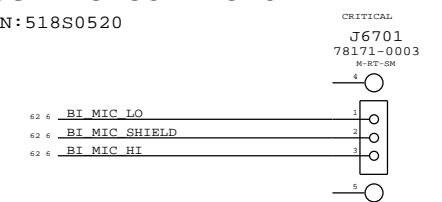

SPEAKER CONNECTOR

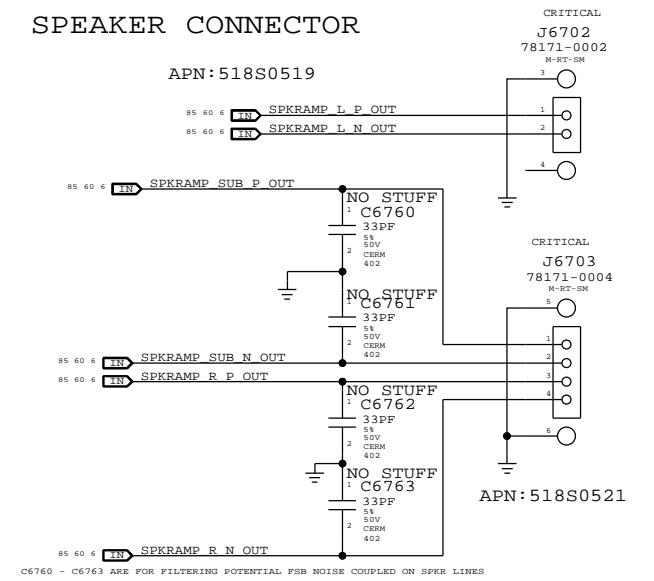

ANALOG AUDIO IO SWITCH

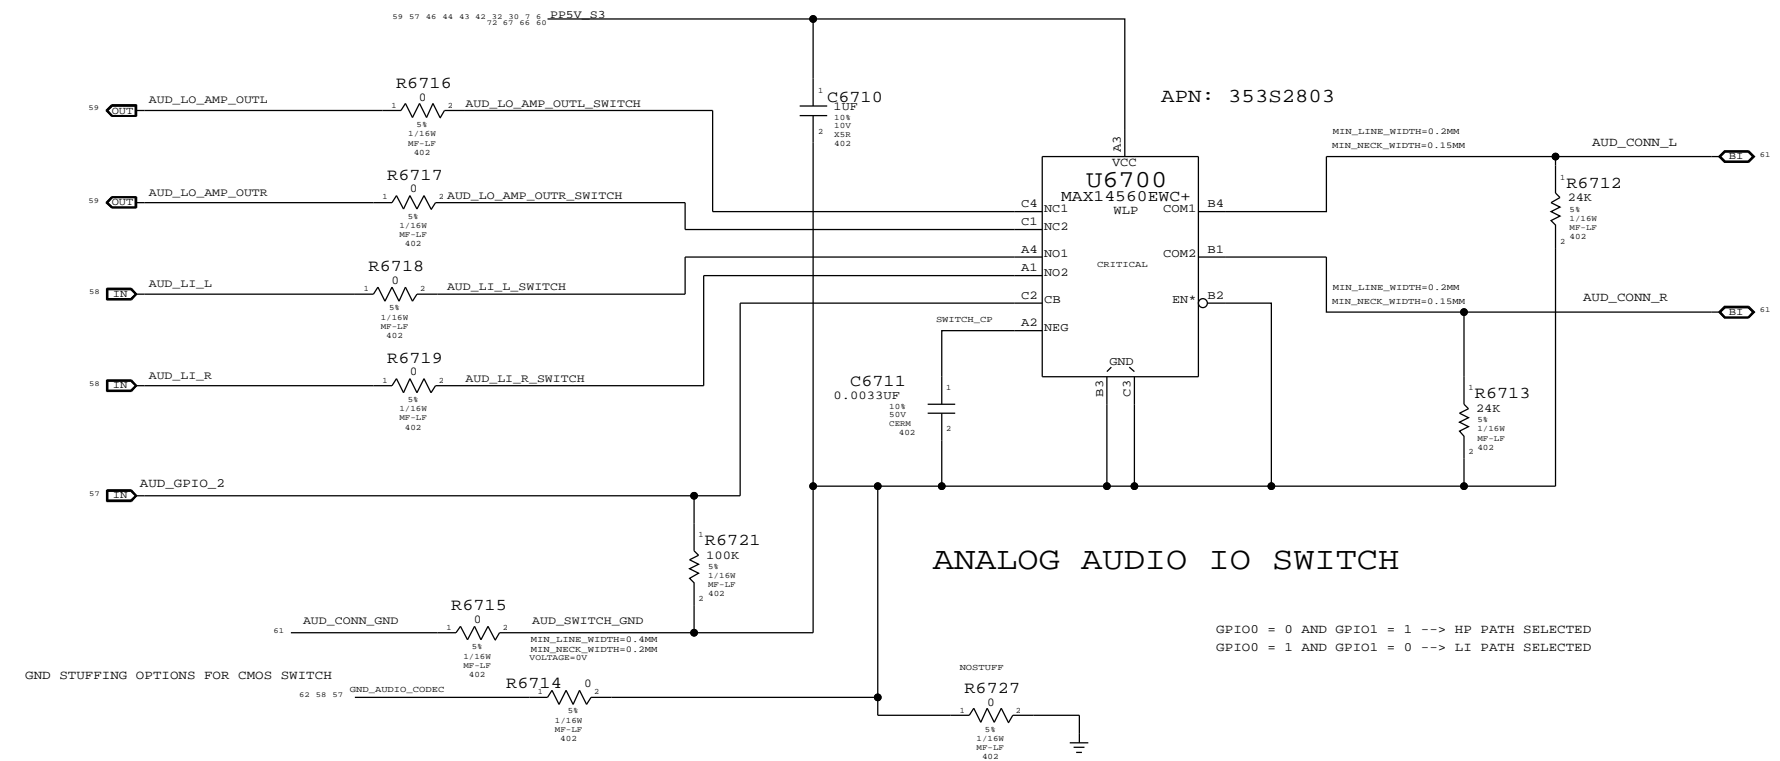

SYNC MASTER=LENG K901		SYNC DATE=08/10/2011	
PAGE TITLE			
AUDIO: JACK		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	PAGE
		67 OF 109	SHEET
		61 OF 86	

CODEC OUTPUT SIGNAL PATHS

FUNCTION	VOLUME	CONVERTER	PIN COMPLEX	MUTE CONTROL	DET ASSIGNMENT
HP/LINE OUT	0X02 (2)	0X02 (2)	0X09 (9,A)	GPIO_2 AND GPIO_1	0X09 (A)
LINE IN	0X05 (5)	0X05 (5)	0X0C (12)	GPIO_2 AND GPIO_1	0X09 (A) AND UI ELEMENT
SATELLITES	0X04 (4)	0X04 (4)	0X0B (11)	GPIO_3	N/A
SUB	0X03 (3)	0X03 (3)	0X0A (10)	GPIO_3	N/A
SPDIF OUT	N/A	0X08 (8)	0X10 (16)	N/A	0X0D (B)

CODEC INPUT SIGNAL PATHS


FUNCTION	CONVERTER	PIN COMPLEX	VREF	DET ASSIGNMENT
BUILT-IN MIC	0X06 (6)	0X0D (13,B,RIGHT)	MIC_BIAS (804)	N/A
HEADSET MIC	0X06 (6)	0X0D (13,V22,B,LEFT)	MIKEY	MIKEY

SOUTHBRIDGE RESOURCES


FUNCTION	SYSTEM GPIO	SYSTEM INTERRUPT
AUD_IPHS_SWITCH_EN	COUGAR_POINT GPIO16	N/A
AUD_I2C_INT_L	N/A	COUGAR_POINT GPIO5/PIRQH
AUD_IP_PERIPHERAL_DET	N/A	COUGAR_POINT GPIO3/PIRQH

PORT A DETECT (HEADPHONES)

PORT B DETECT (SPDIF DELEGATE)

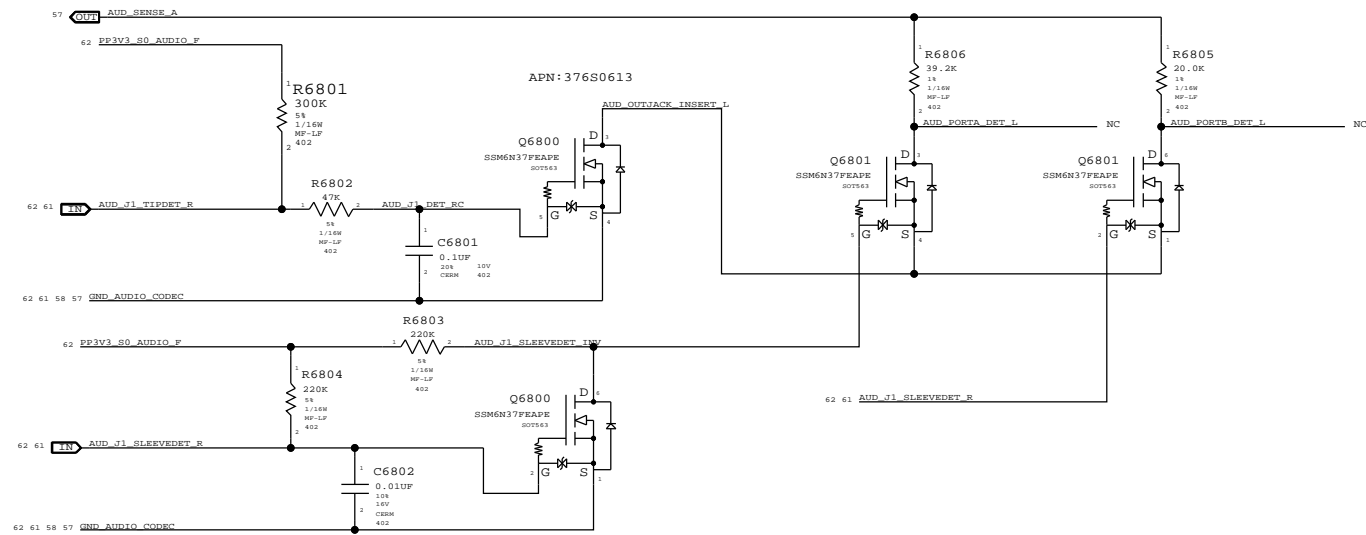


EXTRACTION NOTIFICATION CKT

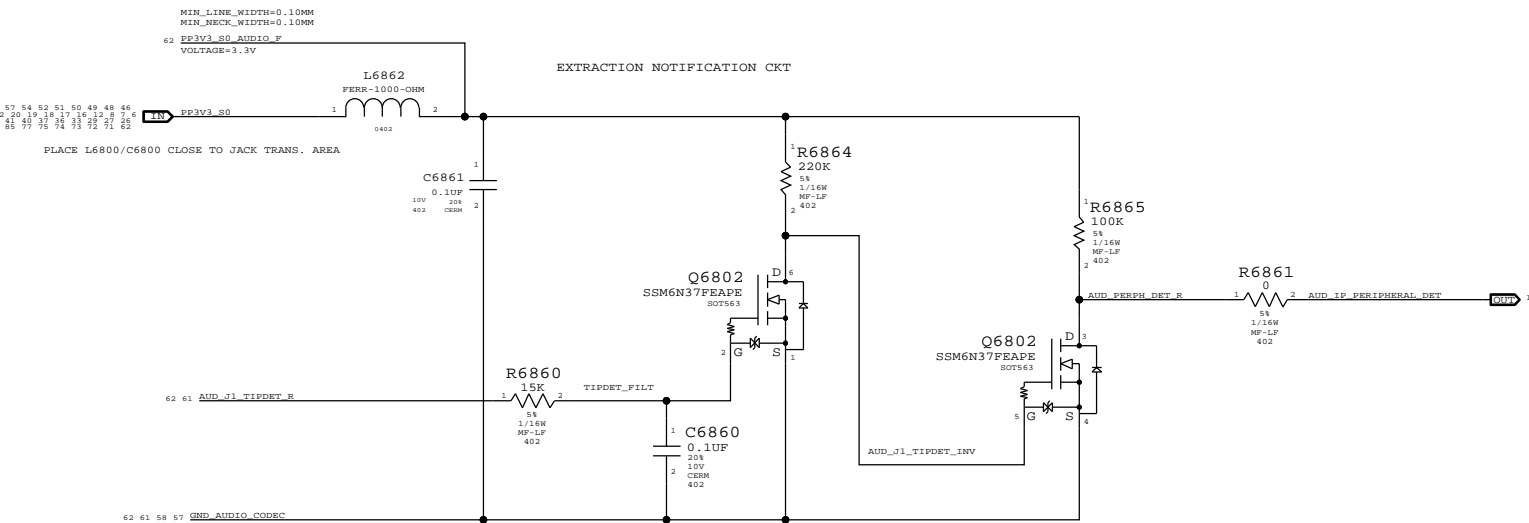


PORT B LEFT (HEADSET MIC)

HP=80HZ, LP=8.82KHZ

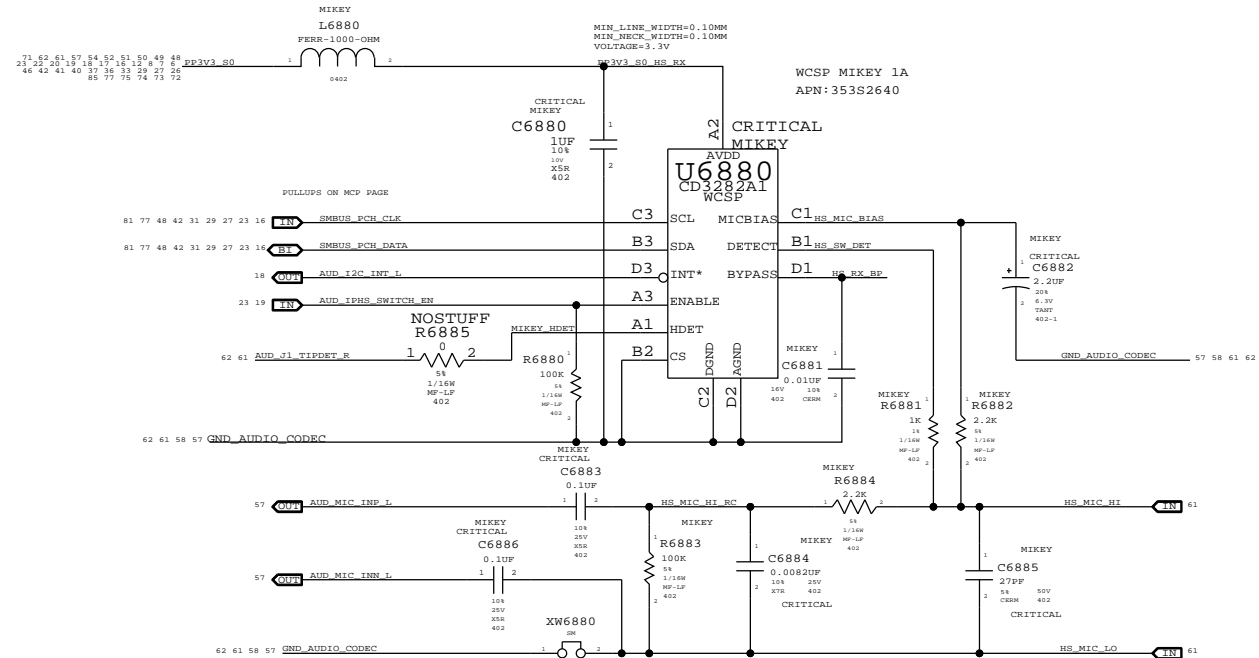


PORT B RIGHT (BUILT-IN MIC)

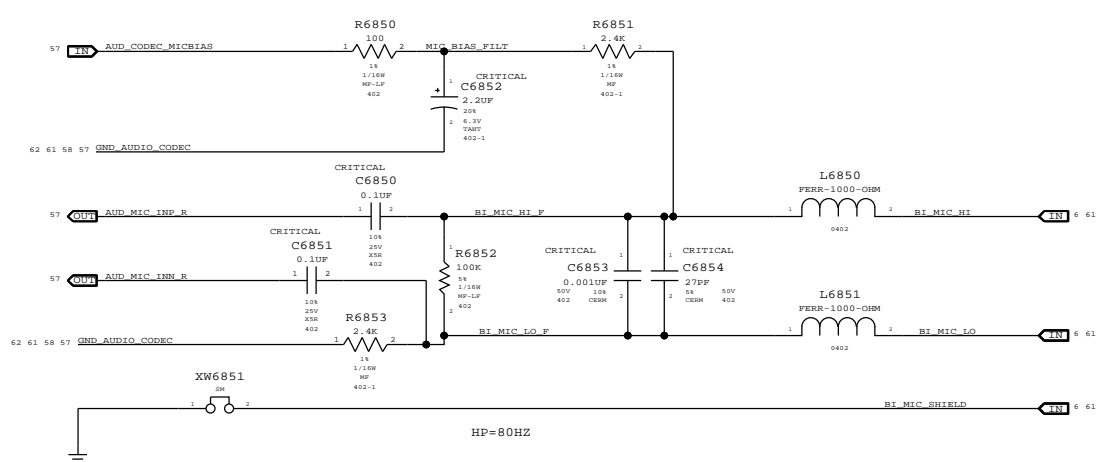


SYNC MASTER=LENG K901		SYNC DATE=08/10/2011	
PAGE TITLE			
AUDIO: JACK TRANSLATORS		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	68 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	62 OF 86
III NOT TO REPRODUCE OR COPY IT			
IV ALL RIGHTS RESERVED			

MagSafe DC Power Jack

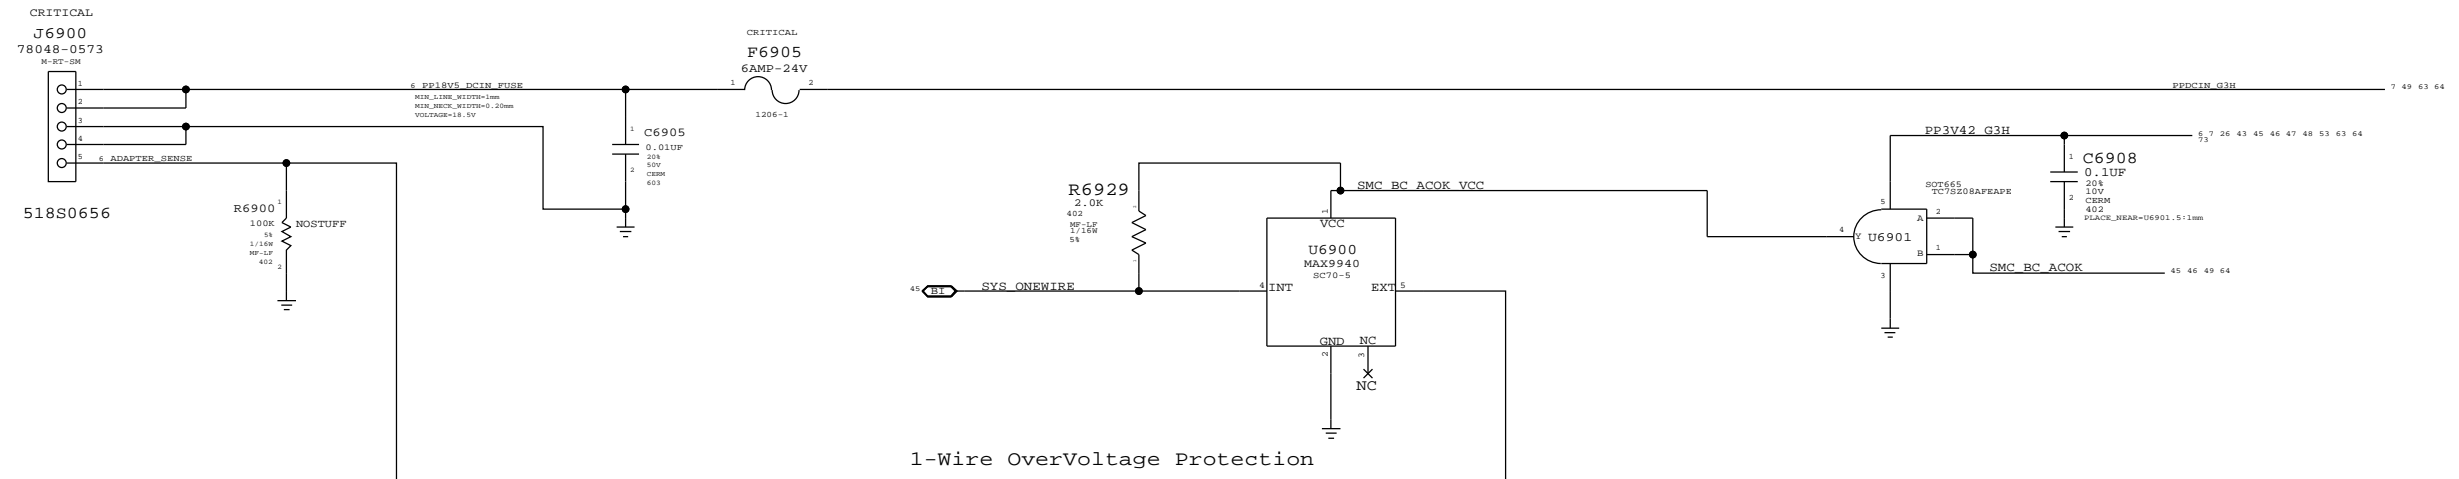


3.425V "G3Hot" Supply


Supply needs to guarantee 3.31V delivered to SMC VRef generator

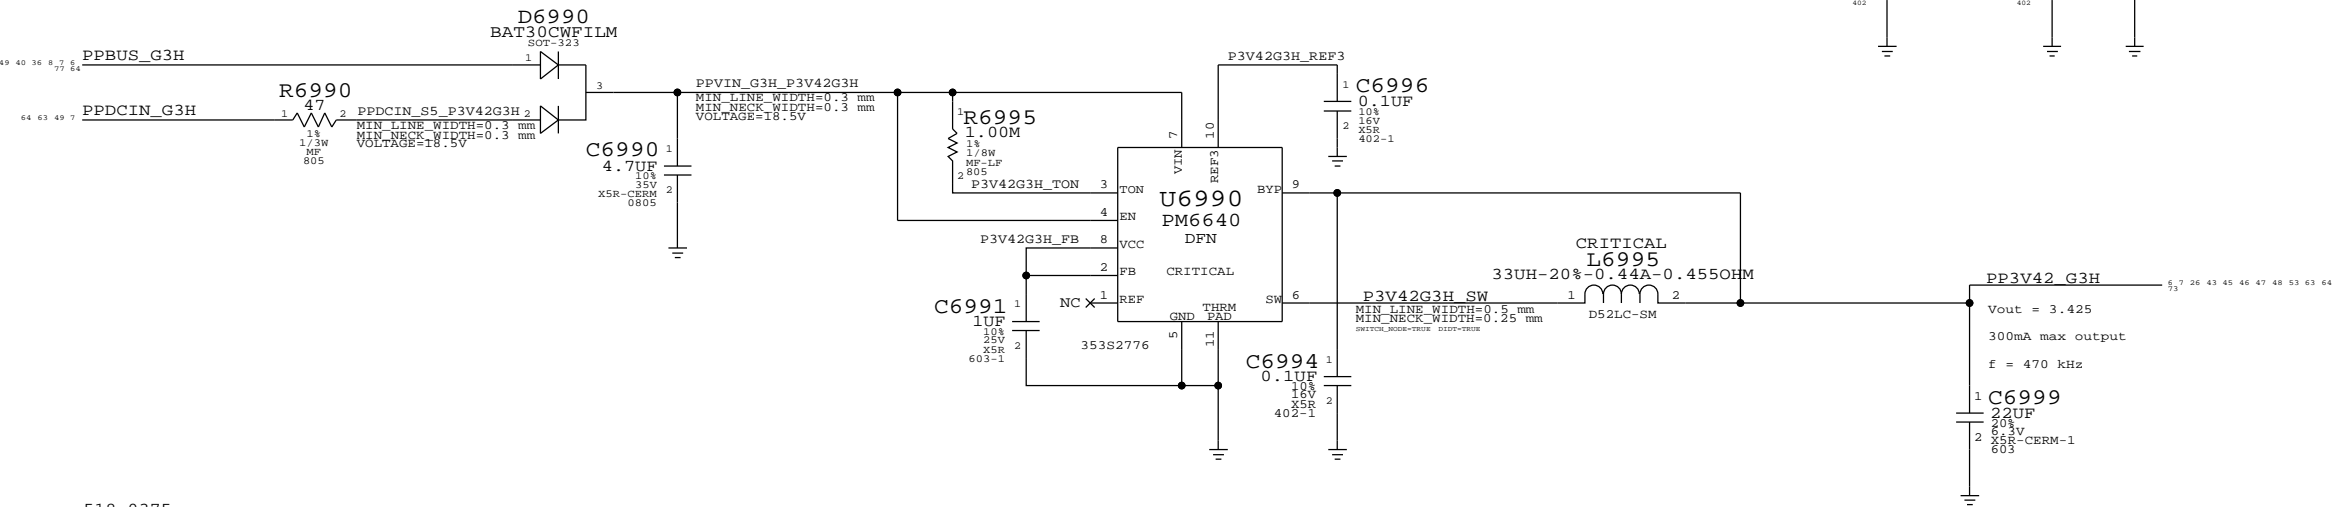

BIL CONNECTOR

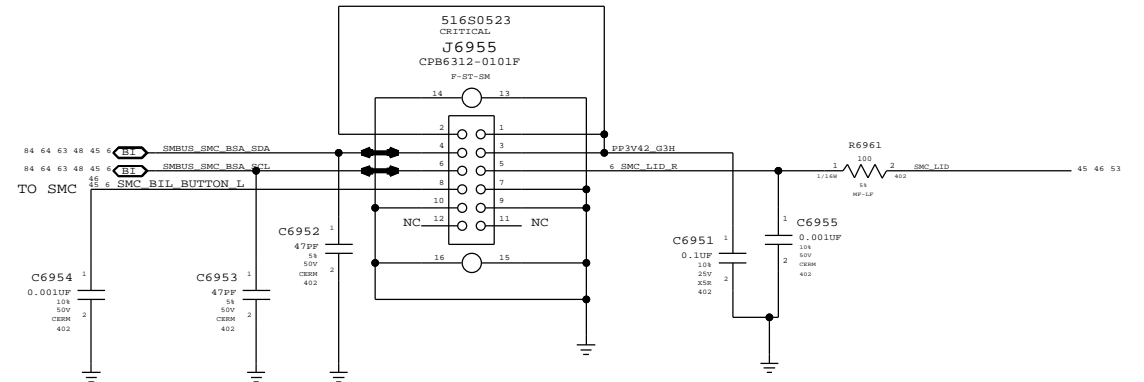


BATTERY CONNECTOR

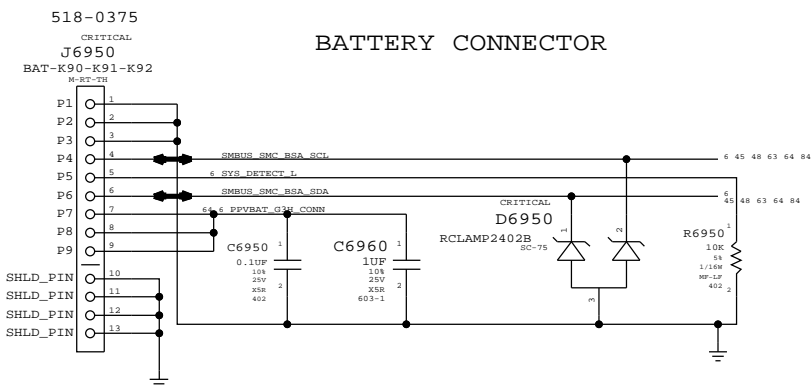

SYNC MASTER=JACK_K901		SYNC DATE=08/20/2011	
PAGE TITLE			
DC-In & Battery Connectors		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	69 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	63 OF 86
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

Inrush Limiter Reverse-Current Protection

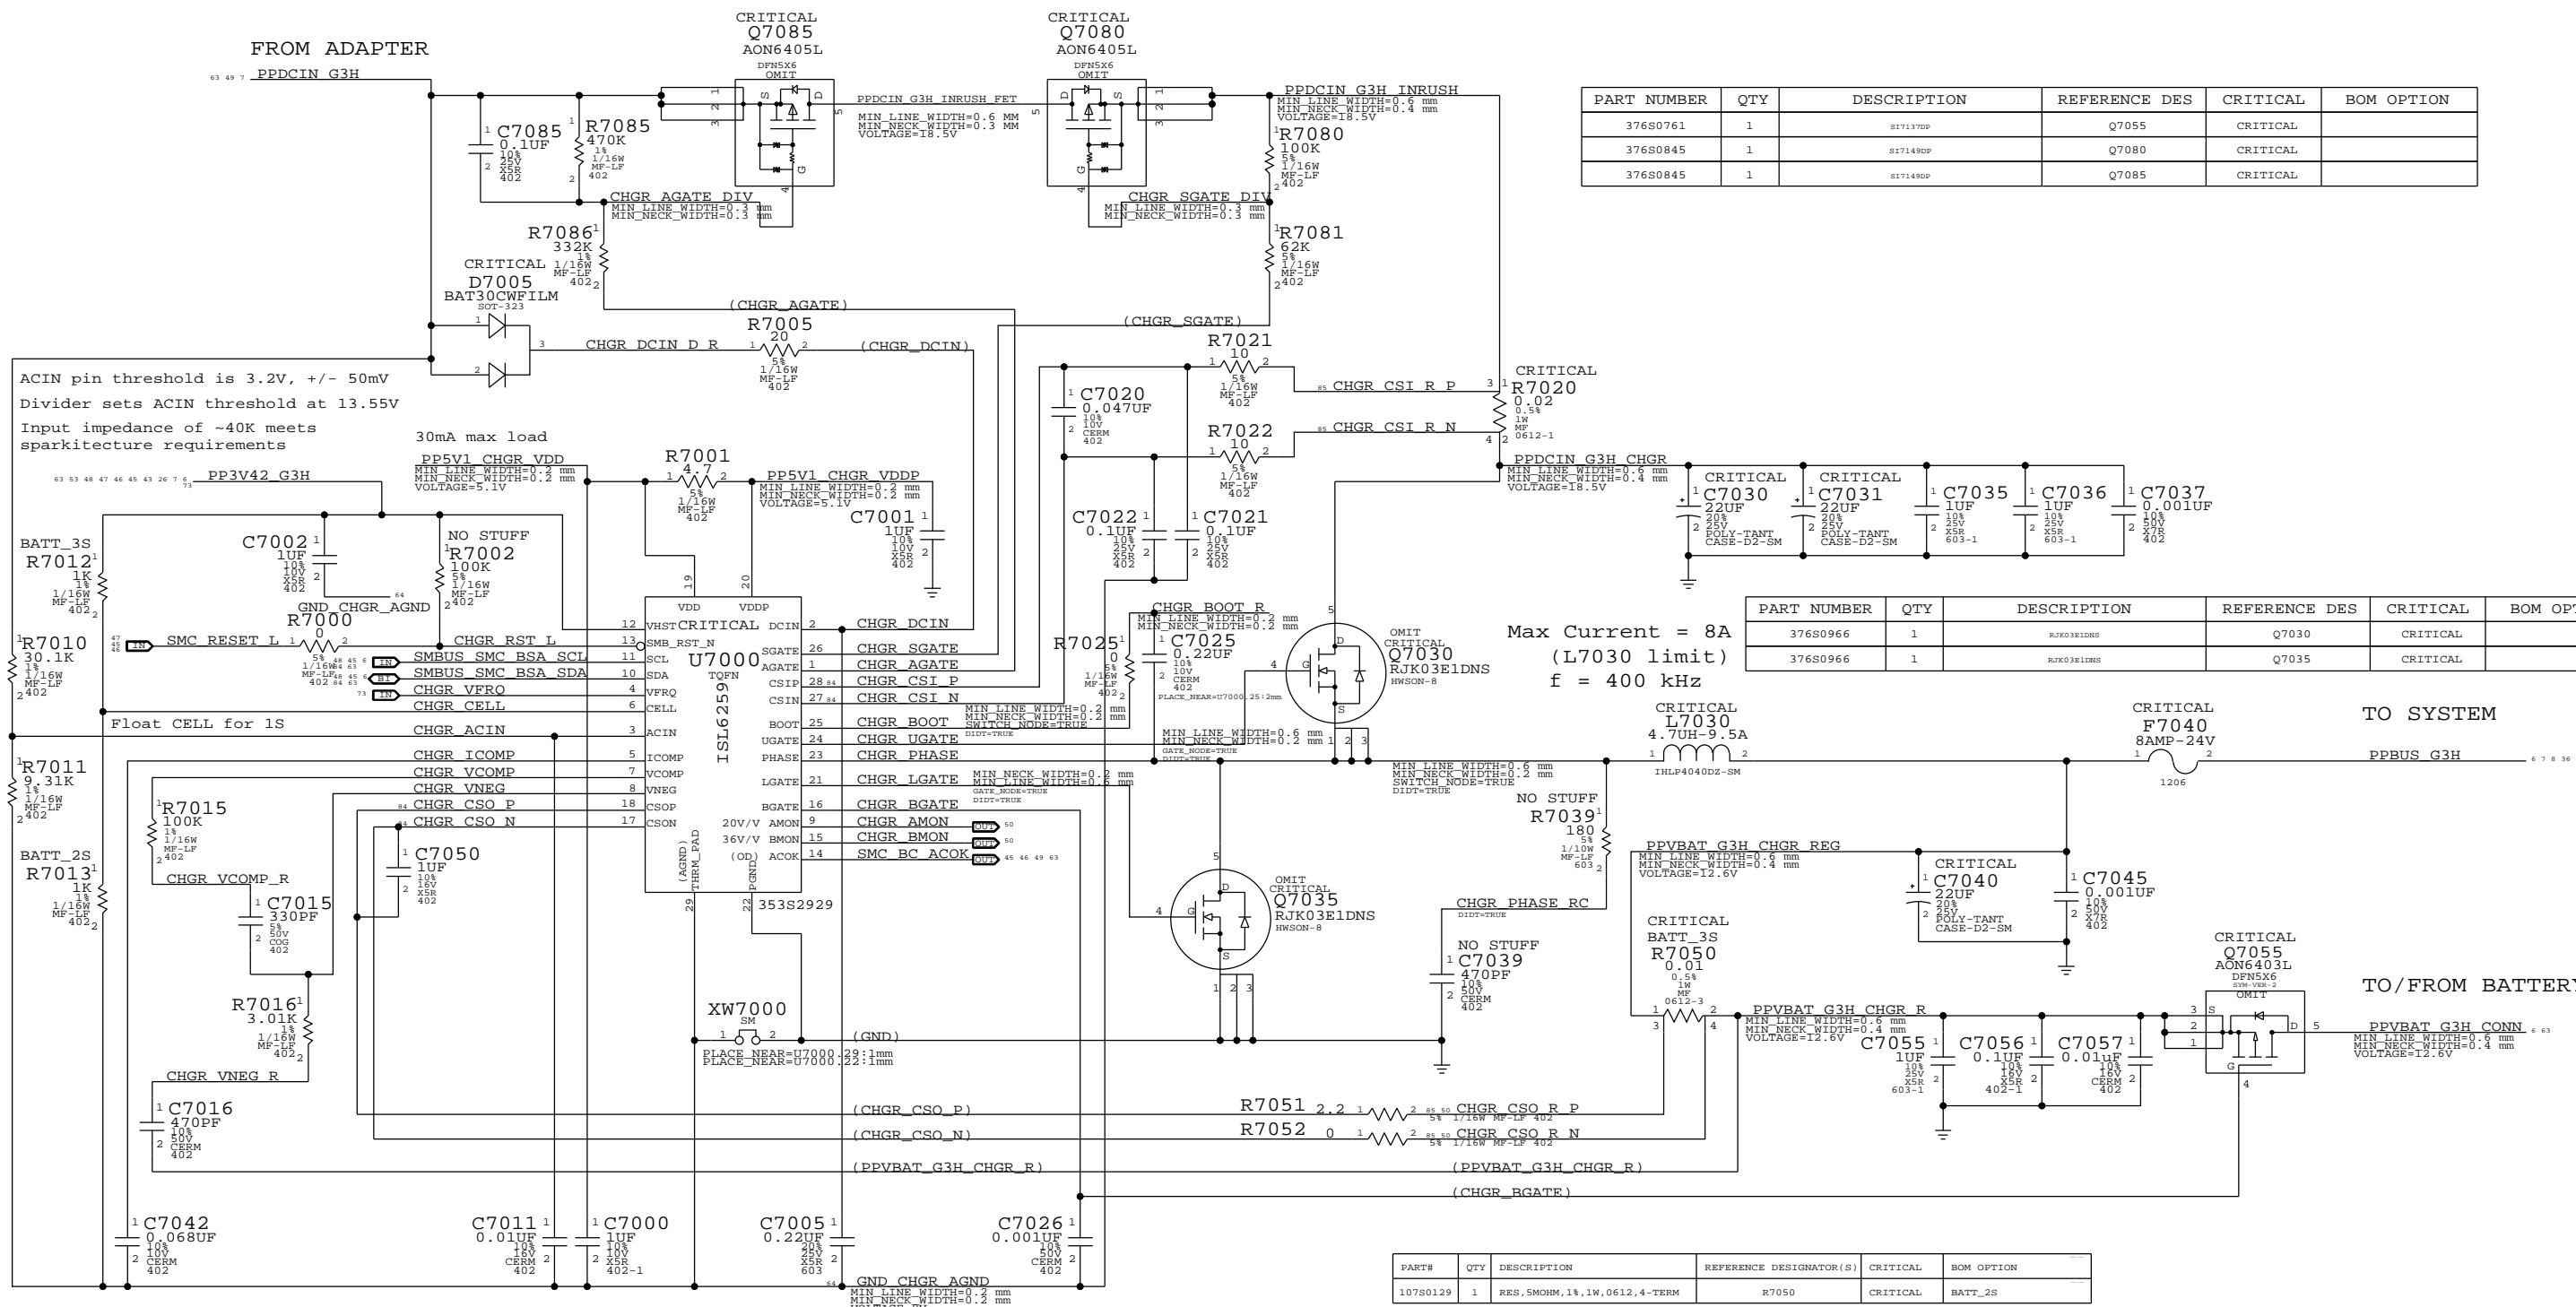

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
376S0761	1	S27137DP	Q7055	CRITICAL	
376S0845	1	S27149DP	Q7080	CRITICAL	
376S0845	1	S27149DP	Q7085	CRITICAL	

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
376S0966	1	RJK03E1DNS	Q7030	CRITICAL	
376S0966	1	RJK03E1DNS	Q7035	CRITICAL	

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
10780129	1	RES, 5MOHM, 1%, 1W, 0612, 4-TERM	R7050	CRITICAL	BATT_2S

K6 NOTES : L7030 CHANGED BACK TO K24 IND DUE TO LAYOUT

SYNC MASTER=JACK_K901 SYNC DATE=10/11/2011


PAGE TITLE: PBus Supply & Battery Charger

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

DRAWING NUMBER: D
 REVISION:
 BRANCH:
 PAGE: 70 OF 109
 SHEET: 64 OF 86

System Agent Power Supply

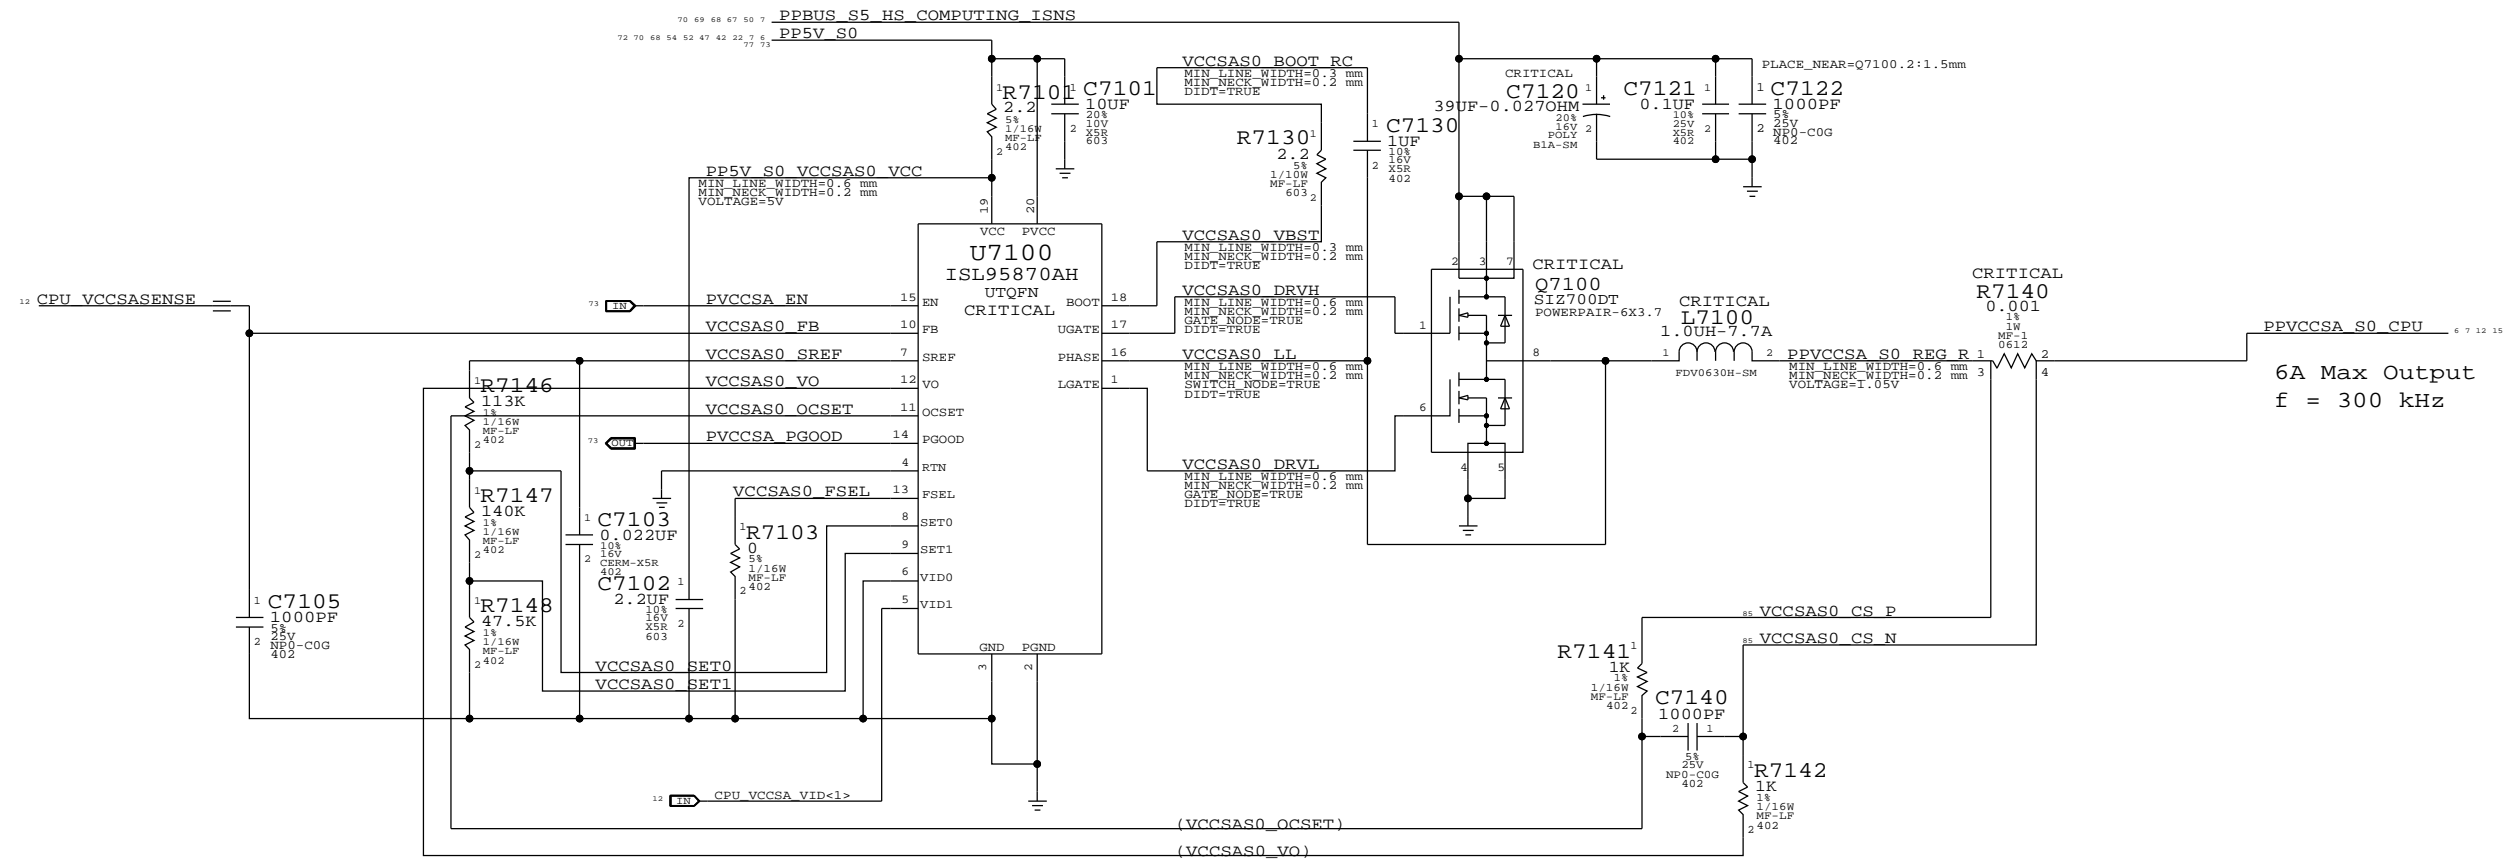


6A Max Output
f = 300 kHz

SYNC MASTER=JACK_K901		SYNC DATE=08/19/2010	
System Agent Supply			
Apple Inc.		DRAWING NUMBER	SIZE
			D
NOTICE OF PROPRIETARY PROPERTY:		REVISION	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		BRANCH	
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		PAGE	71 OF 109
II NOT TO REPRODUCE OR COPY IT		SHEET	65 OF 86
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

5V_S3 / 3.3V_S5 POWER SUPPLY

$$V_{OUT} = (2 * R_A / R_B) + 2$$

$$V_{OUT} = (2 * R_C / R_D) + 2$$

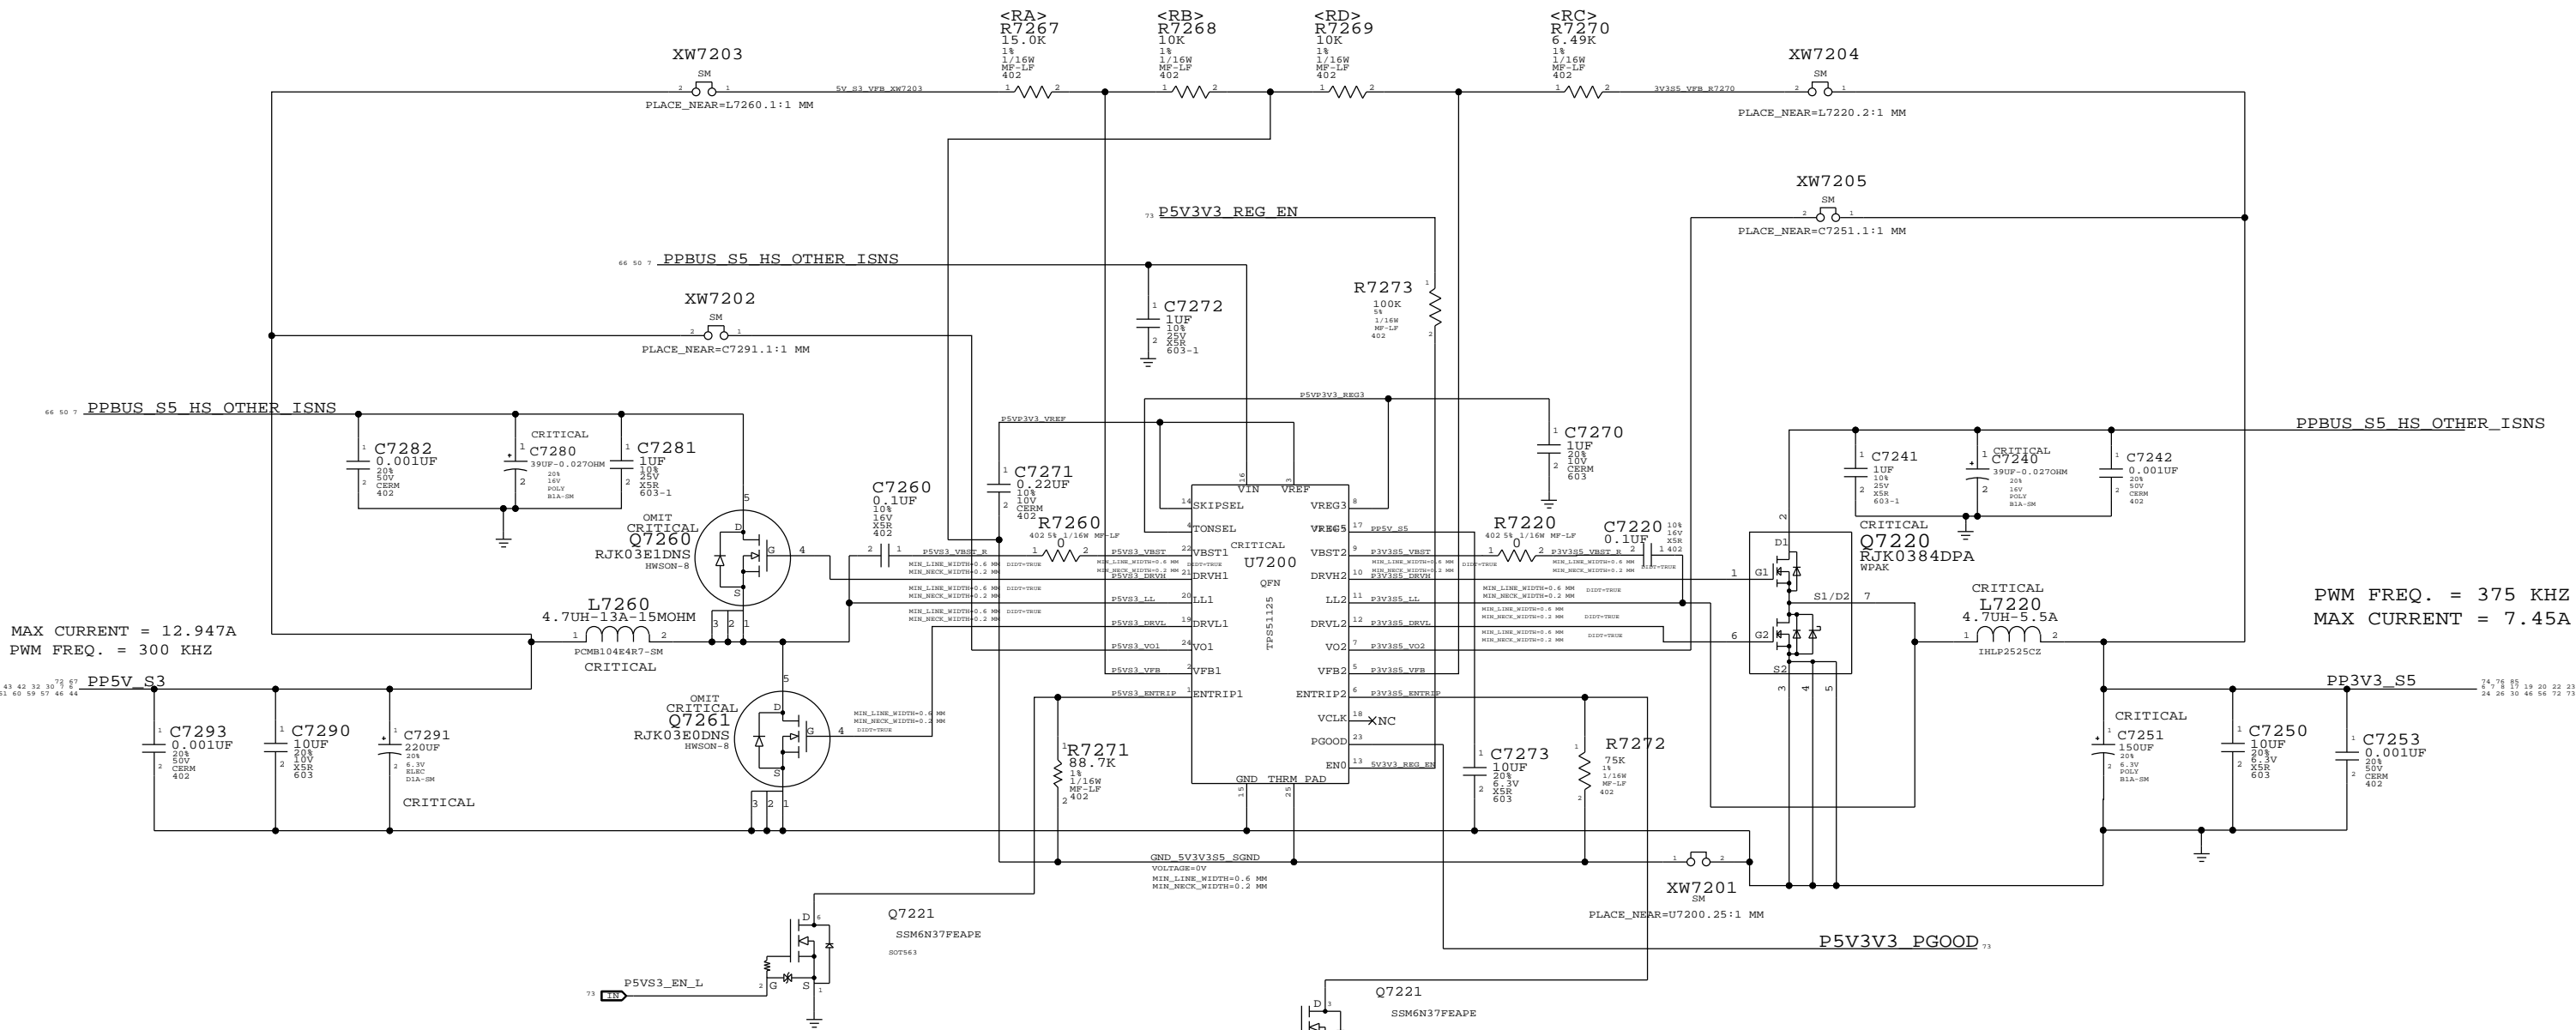

MAX CURRENT = 12.947A
PWM FREQ. = 300 KHZ

PWM FREQ. = 375 KHZ
MAX CURRENT = 7.45A

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
376S0966	1	RJK03E1DNS	Q7260	CRITICAL	
376S0895	1	RJK03E0DNS	Q7261	CRITICAL	

SYNC MASTER=JACK_K901 SYNC DATE=10/04/2011


5V/3.3V SUPPLY

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
IV ALL RIGHTS RESERVED

DRAWING NUMBER: D
REVISION:
BRANCH:
PAGE: 72 OF 109
SHEET: 66 OF 86

SEPARATED MASTER PG0OD FOR BOTH 5V AND 3V3.

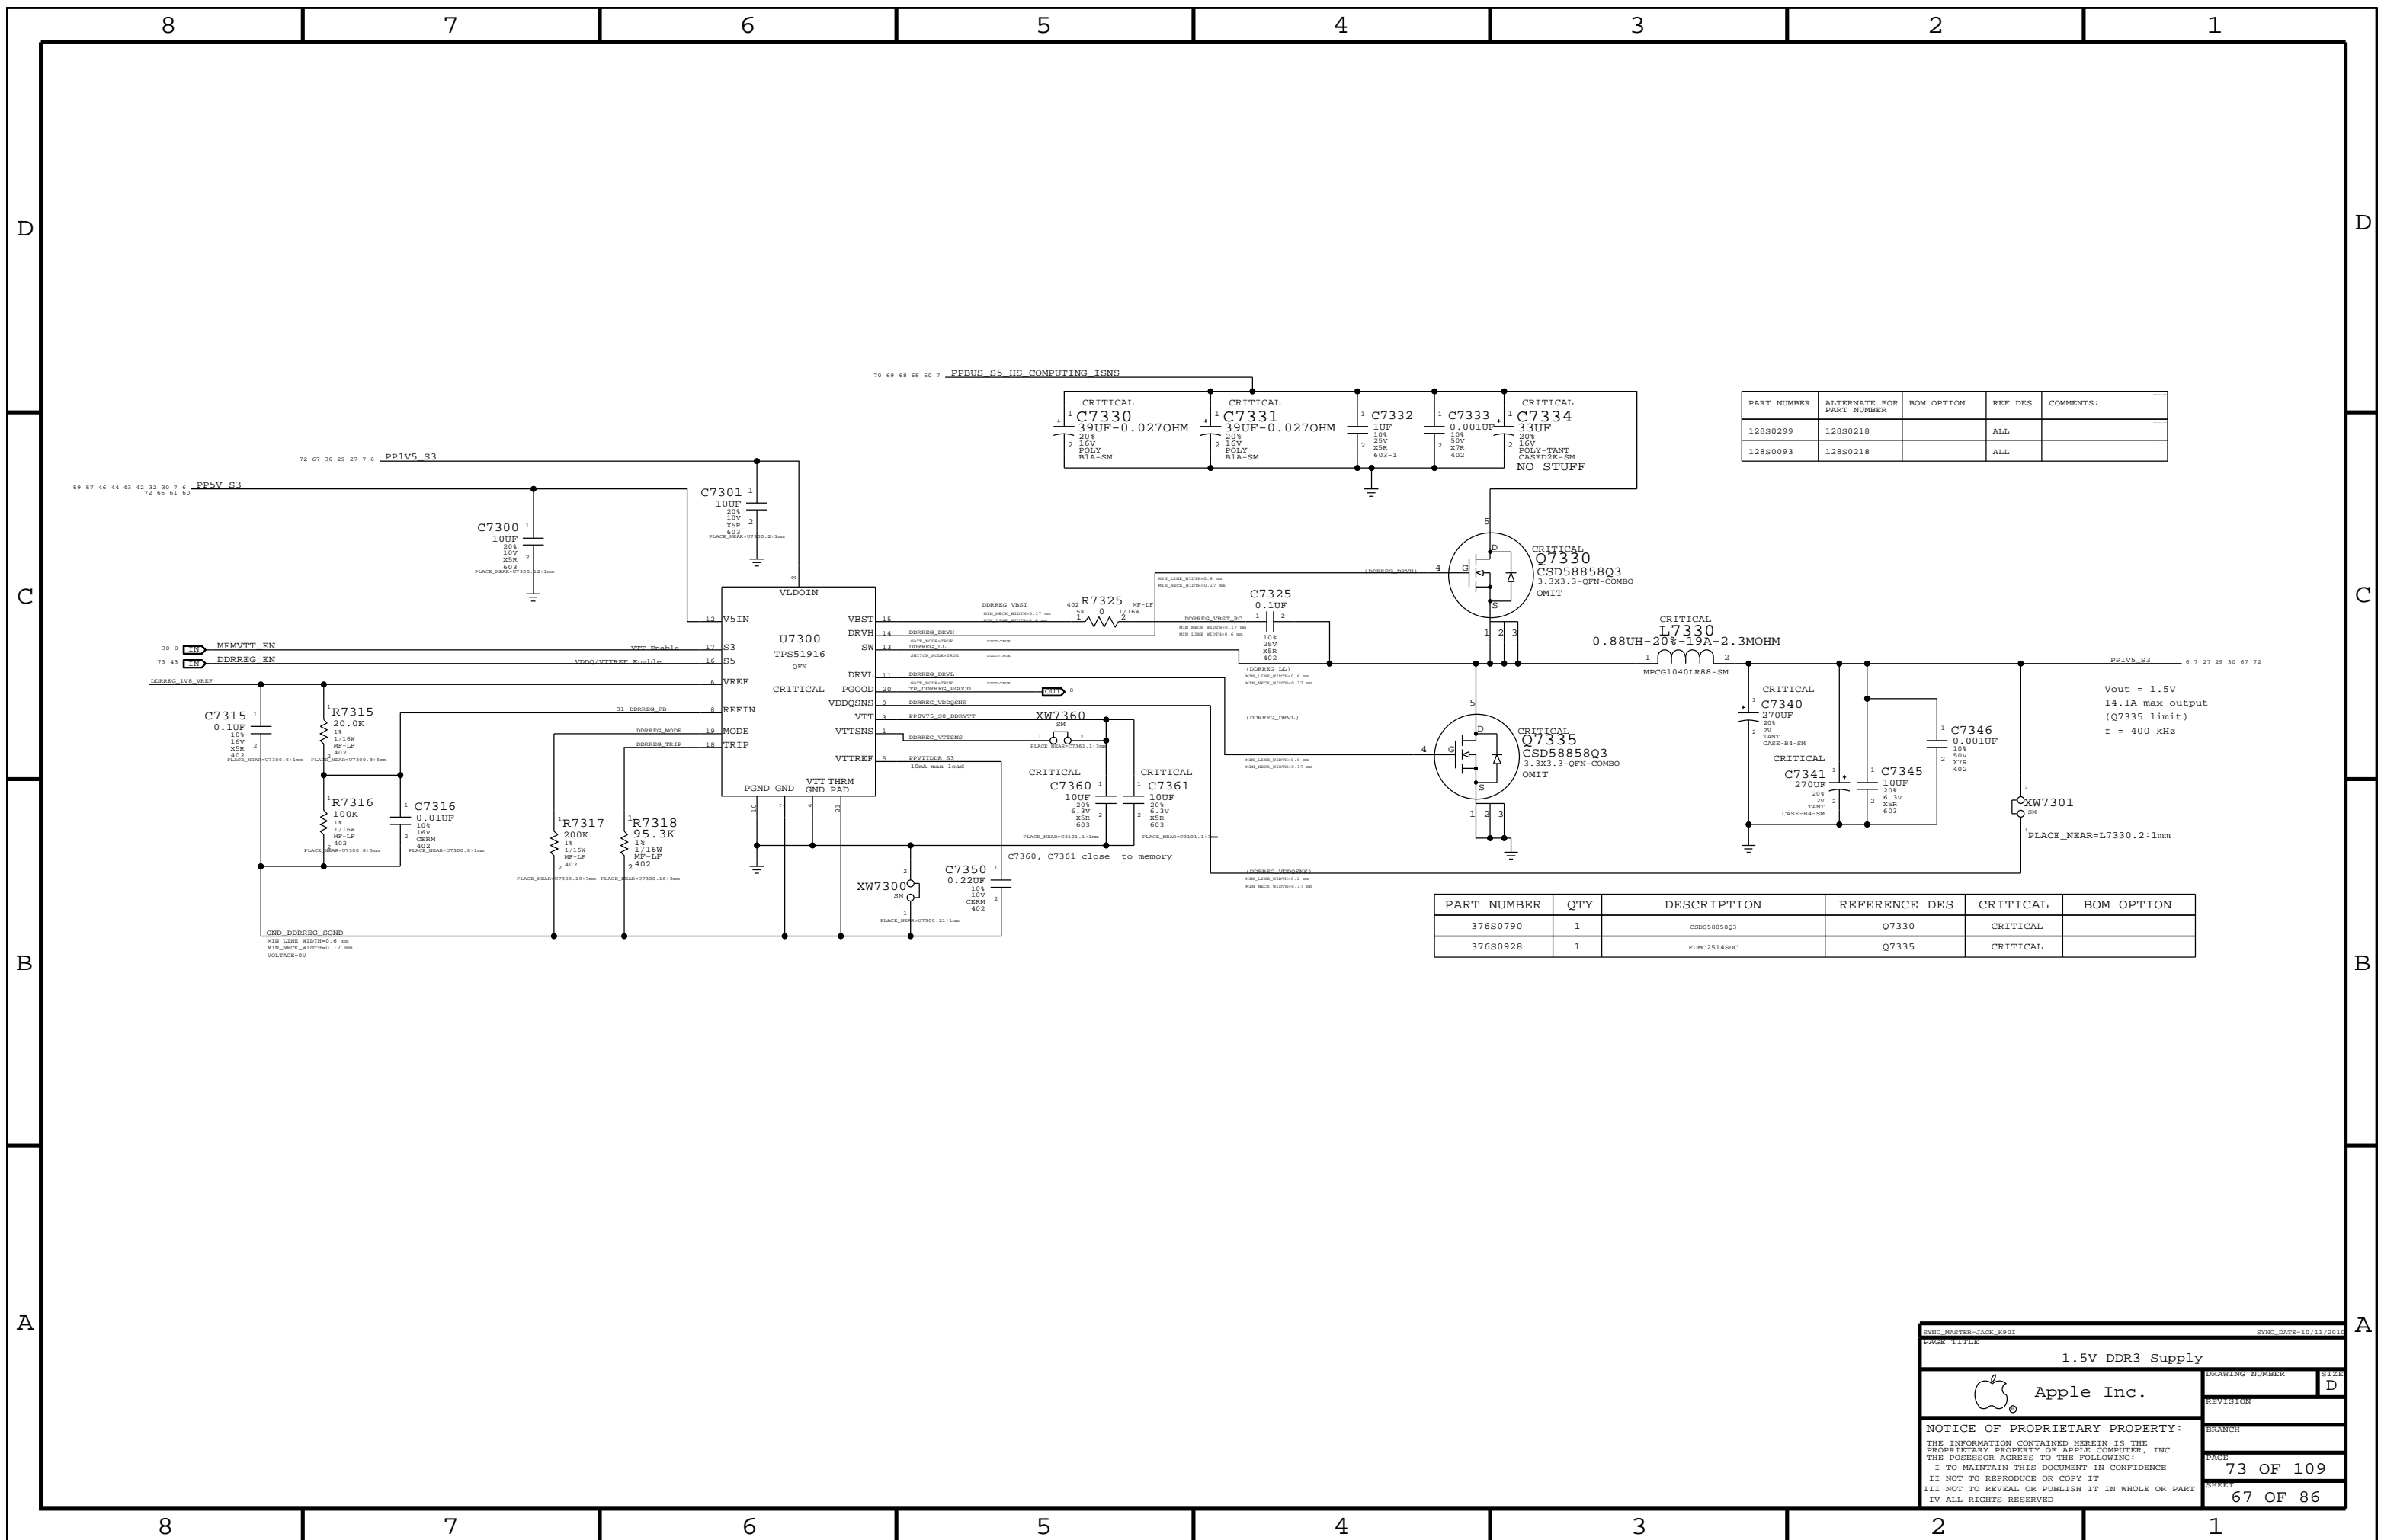

PART NUMBER	ALTERNATE FOR PART NUMBER	BOM OPTION	REF DES	COMMENTS:
128S0299	128S0218		ALL	
128S0093	128S0218		ALL	

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
376S0790	1	CSD58858Q3	Q7330	CRITICAL	
376S0928	1	FDMC25148DC	Q7335	CRITICAL	

Vout = 1.5V
14.1A max output
(Q7335 limit)
f = 400 kHz

SYMC MASTER-ACK_X801 SYMC_DATE=10/11/2016

1.5V DDR3 Supply


Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
IV ALL RIGHTS RESERVED


DRAWING NUMBER: D
REVISION:
BRANCH:
PAGE: 73 OF 109
SHEET: 67 OF 86

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
353S3259	1	IC, MAX15092, 3+1PH CPU REG, 1MVP7, 5X5QFN40	U7400	CRITICAL	

Need symbol to be re-drawn to clean up this page

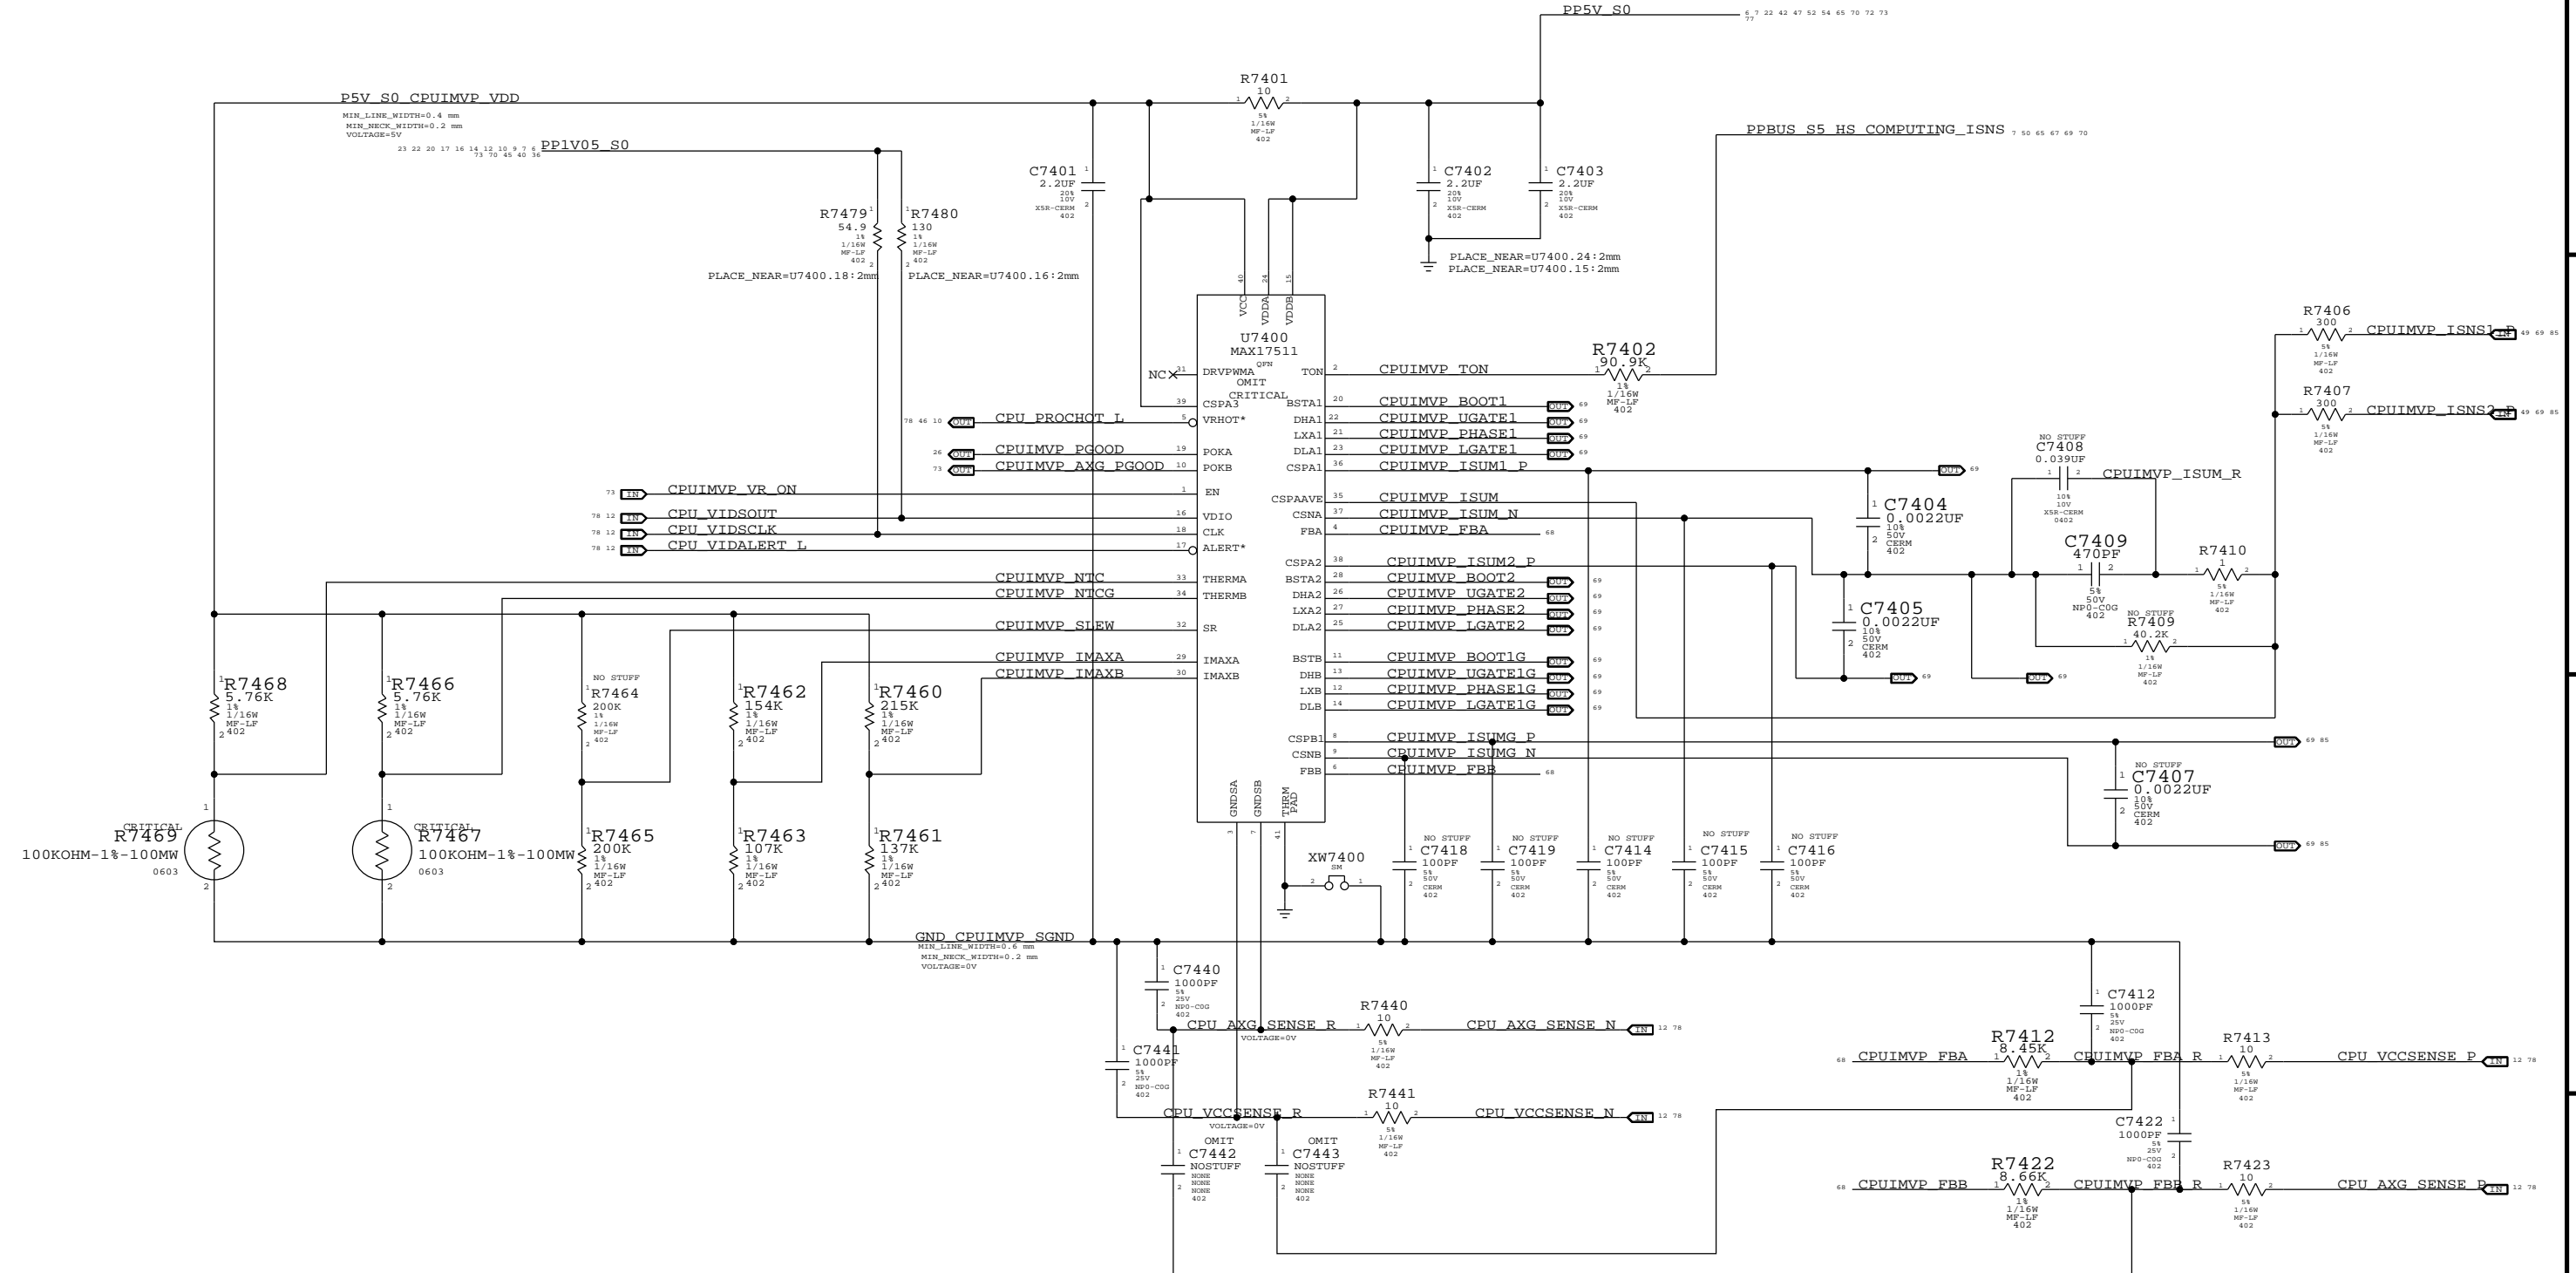


PAGE TITLE		DRAWING NUMBER	
CPU IMVP7 & AXG VCore Regulator		D	
Apple Inc.		REVISION	
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		74 OF 109	
II NOT TO REPRODUCE OR COPY IT		SHEET	
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART		68 OF 86	
IV ALL RIGHTS RESERVED			

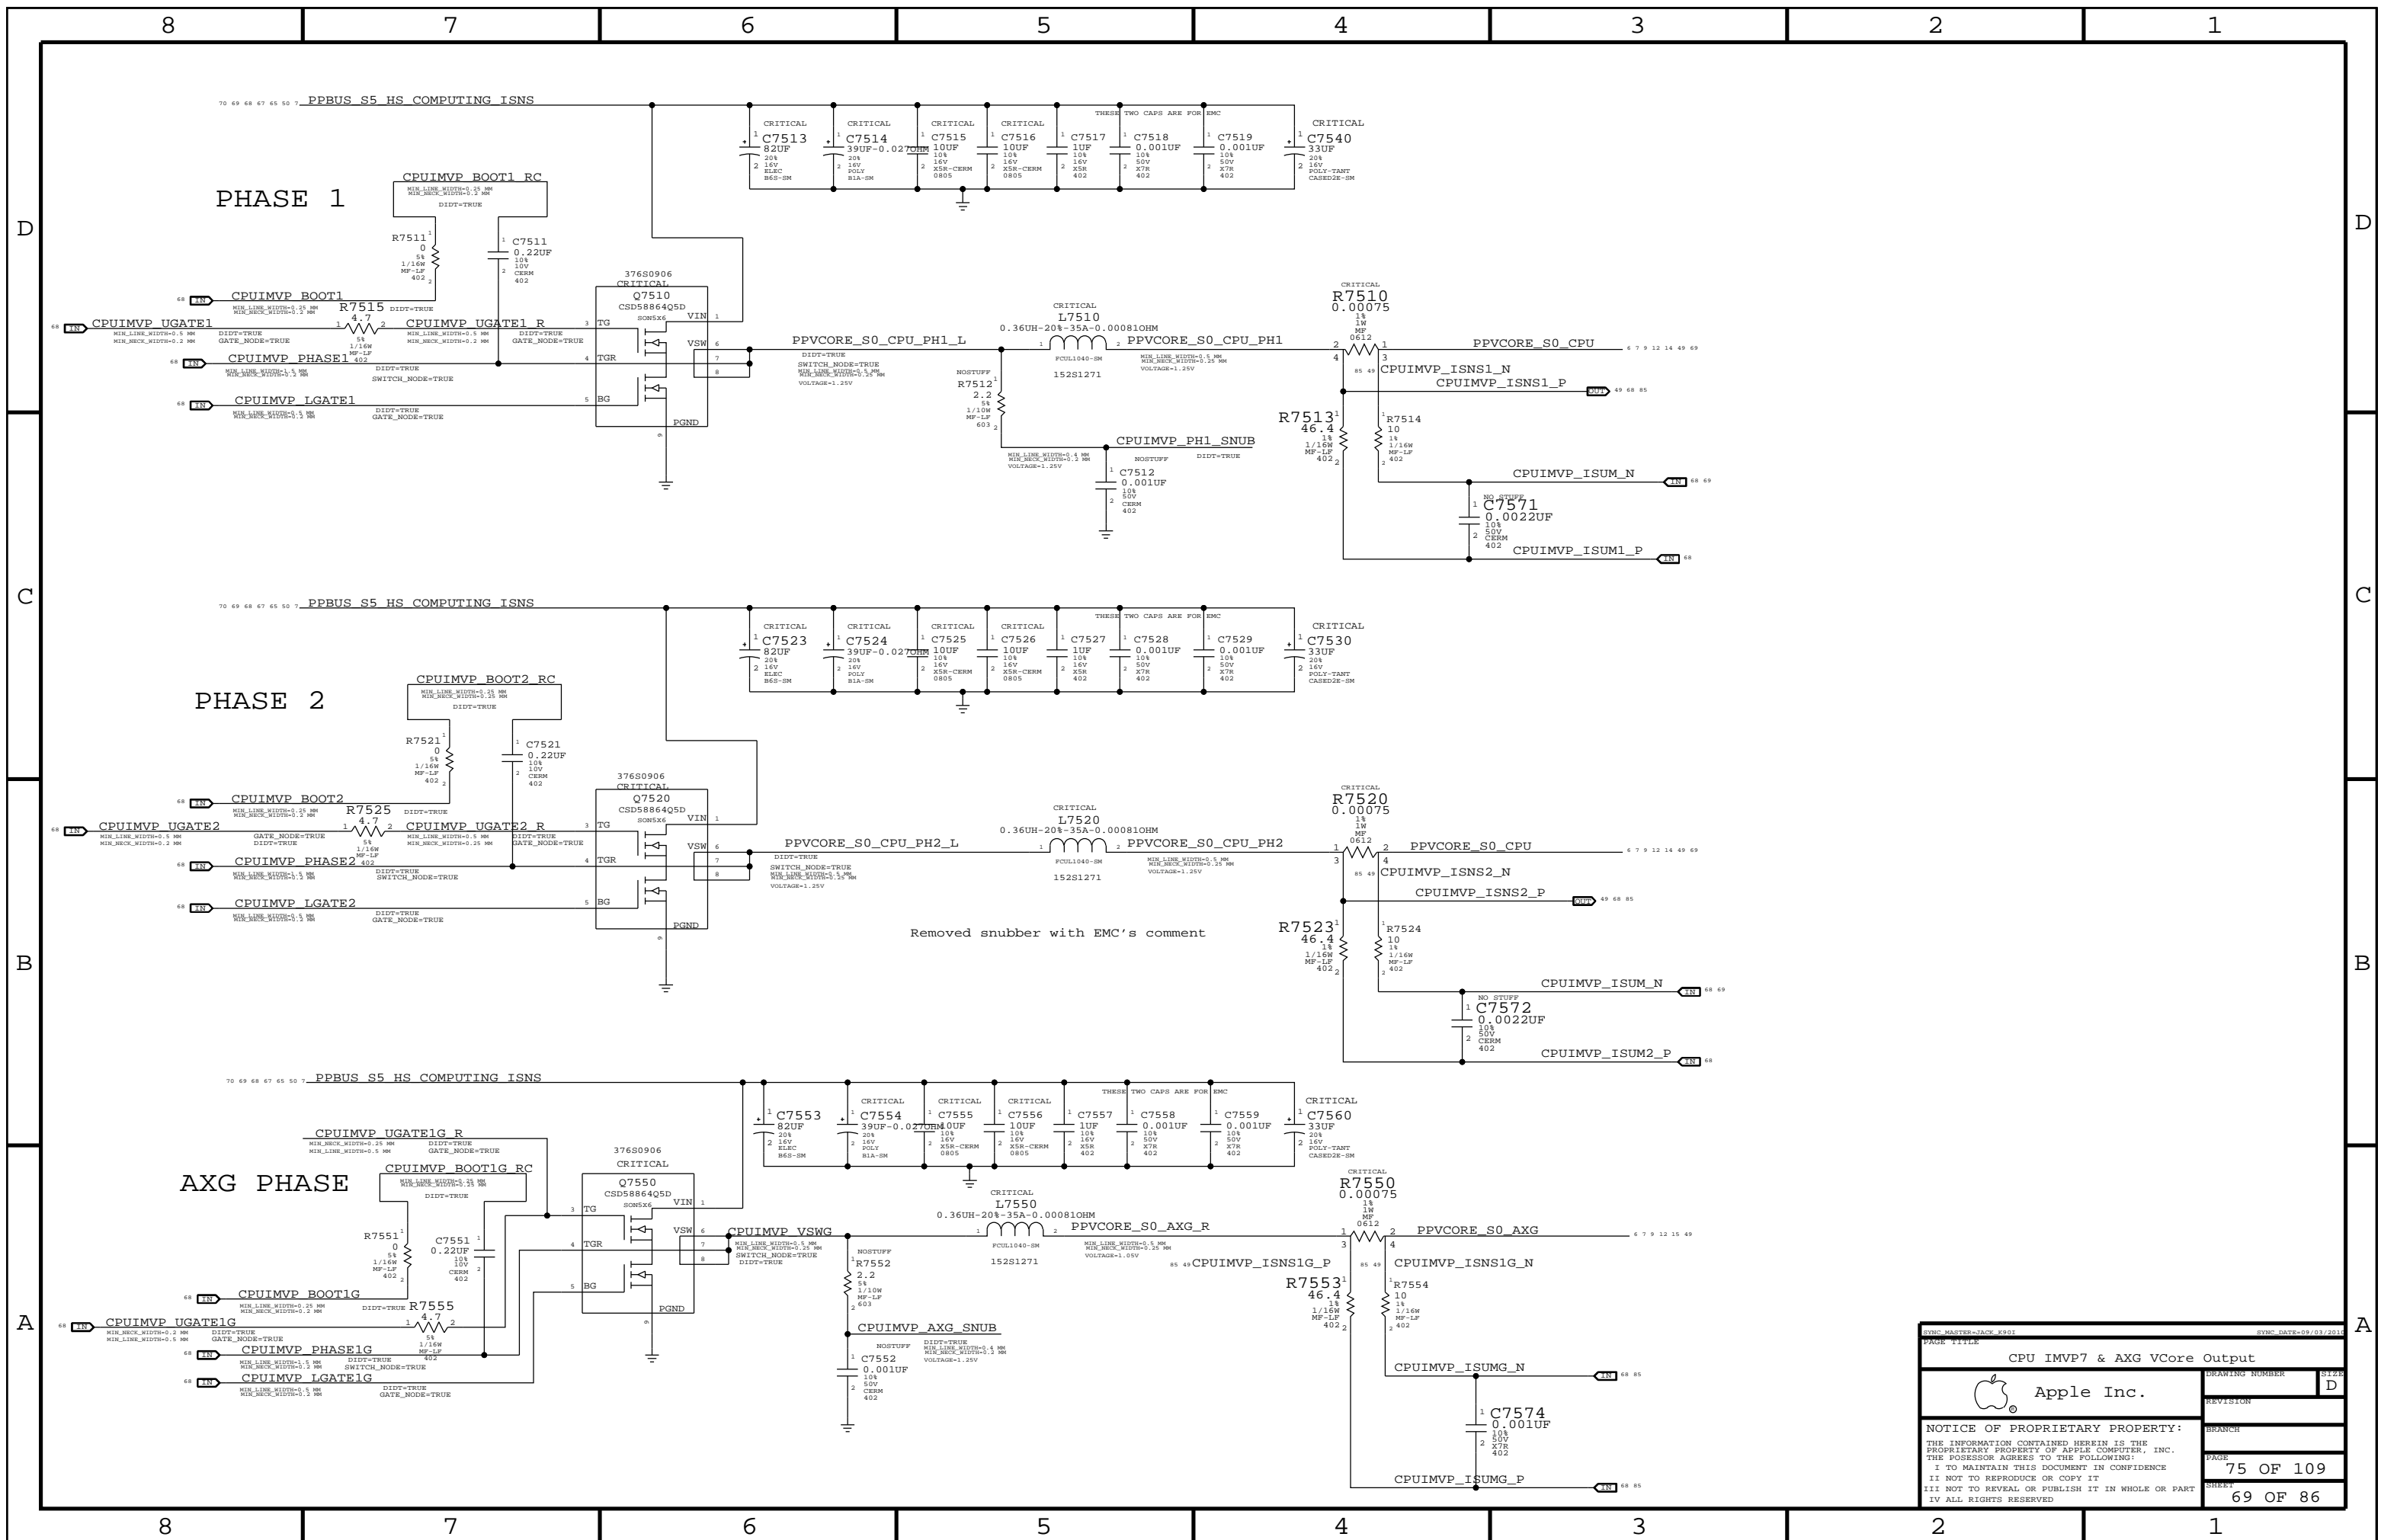

CPU IMVP7 & AXG VCore Output		DRAWING NUMBER	D
Apple Inc.		REVISION	
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	
		PAGE	75 OF 109
		SHEET	69 OF 86


CPU VCCIO (1.05V S0) Regulator

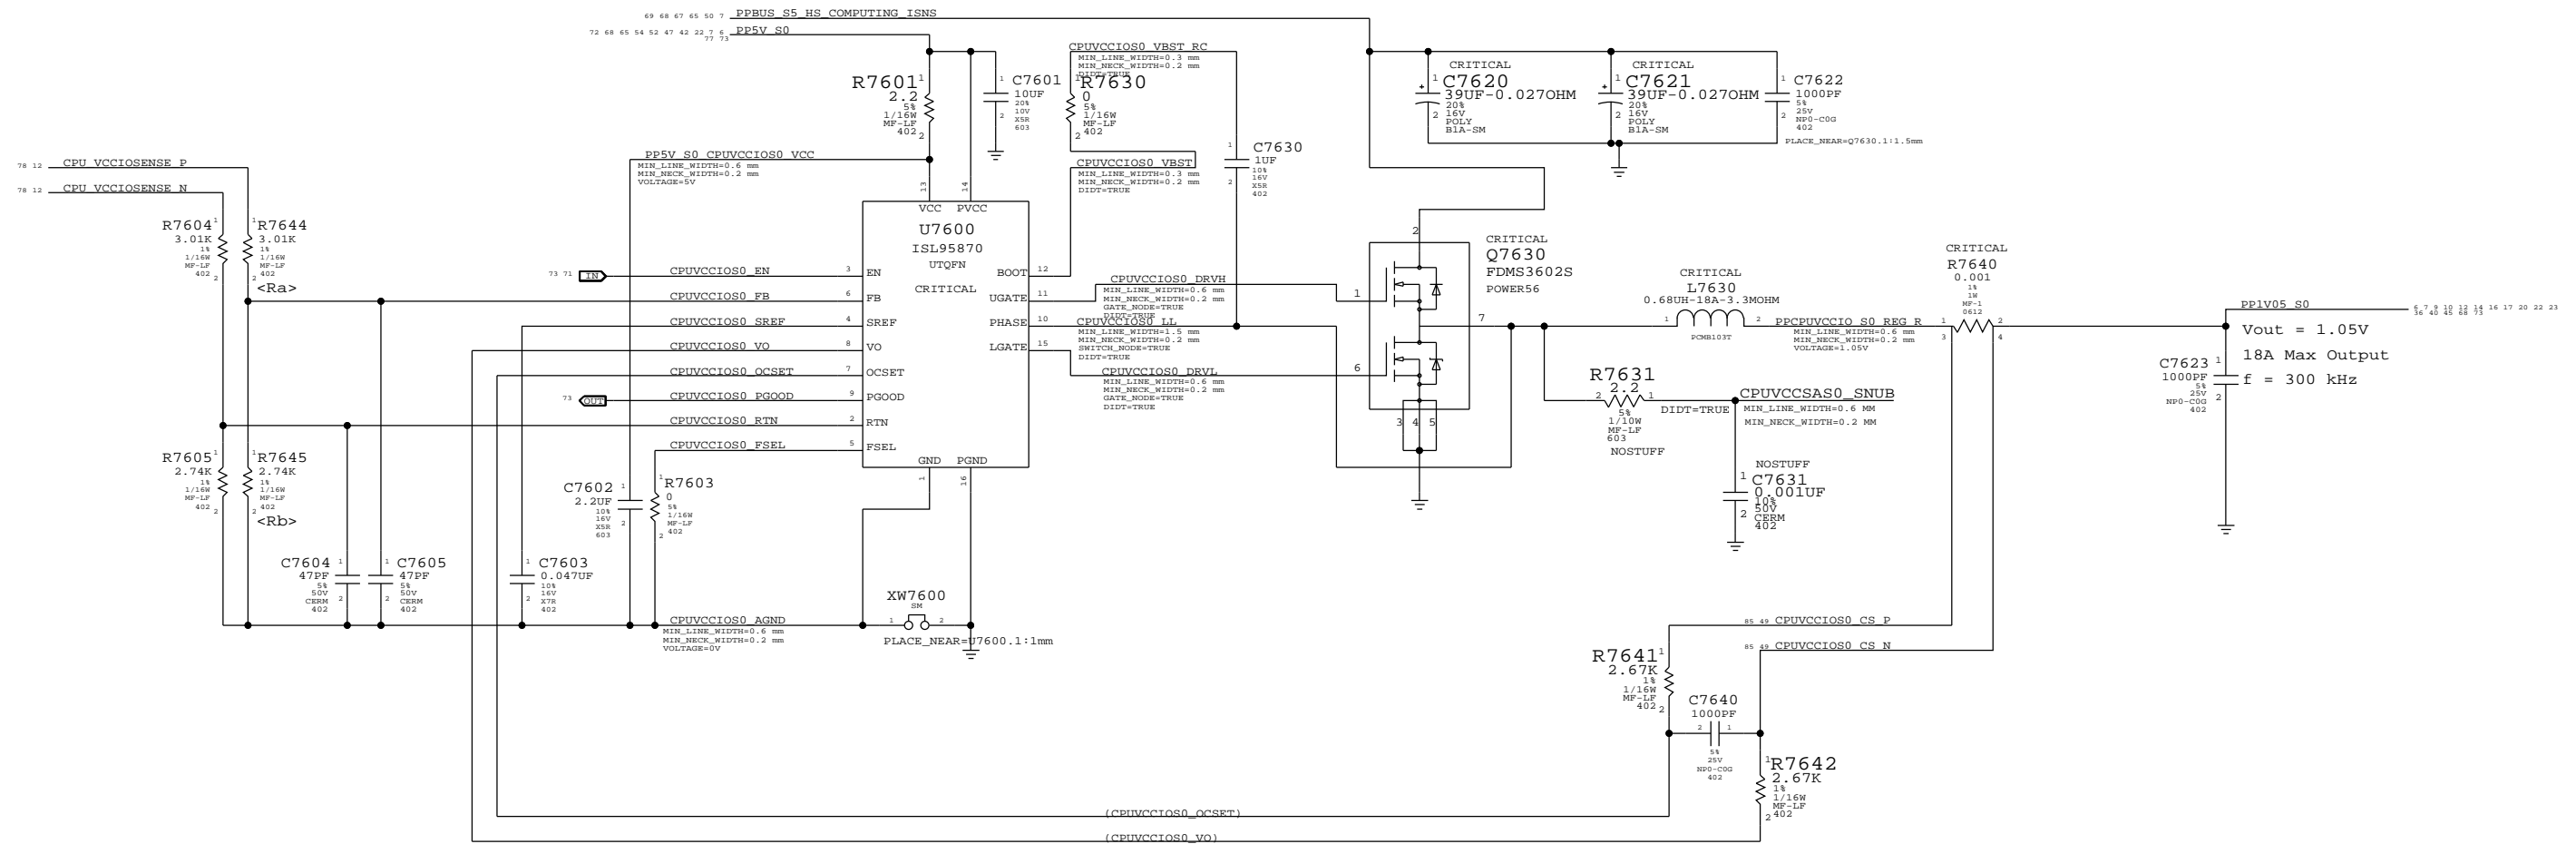

$OCP = R7641 \times 8.5\mu A / R7640$
 $OCP = 22.695A$
 $V_{out} = 0.5V * (1 + R_a / R_b)$


SYNC MASTER=JACK_K901		SYNC DATE=08/19/2011	
PAGE TITLE			
CPUVCCIO (1.05V) Power Supply			
Apple Inc.		DRAWING NUMBER	SIZE
			D
NOTICE OF PROPRIETARY PROPERTY:		REVISION	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		BRANCH	
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		PAGE	76 OF 109
II NOT TO REPRODUCE OR COPY IT		SHEET	70 OF 86
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

CAESAR IV 1.2V INT.VR CMPTS

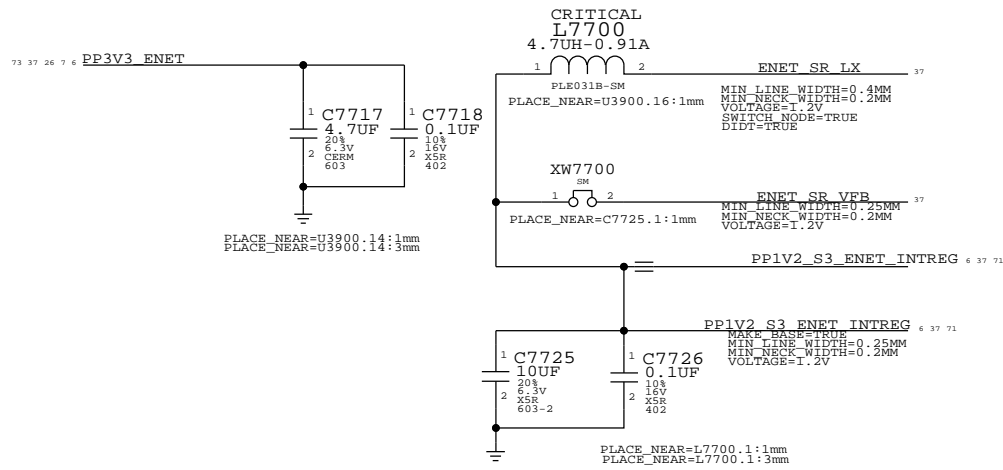


1.05V S5 LDO

Cougar Point requires JTAG pull-ups to be powered at 1.05V in S5. Pull-ups (3) must be 51 ohms to support XDP (not required in production). 70mA is required to support pull-ups. Alternative is strong voltage dividers (200/100) to 3.3V S5, which burns 100mW in all S-states.

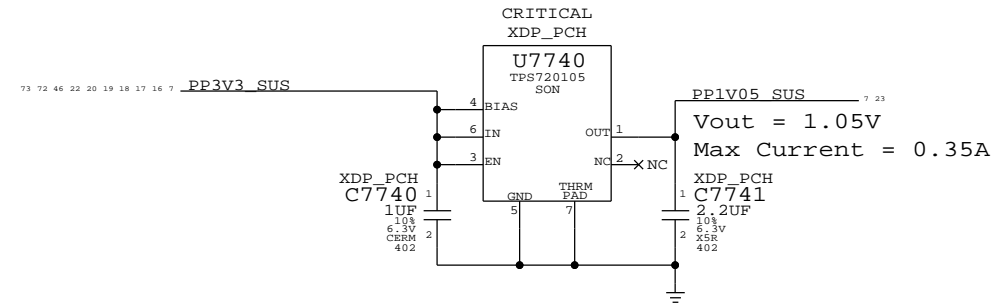


1.8V S0 Switcher

Vout = 1.8V
MAX CURRENT = 2A
F = 1MHZ

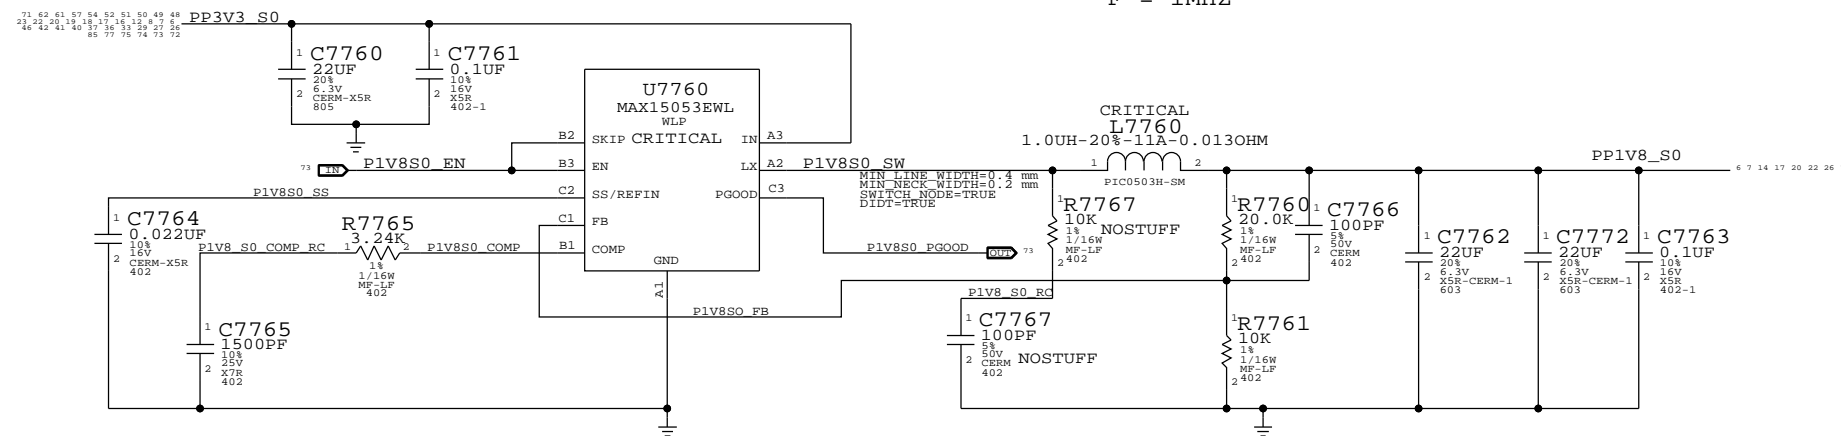


1.5V S0 Switcher

Vout = 1.5V
MAX CURRENT = 0.3A
F = 1MHZ

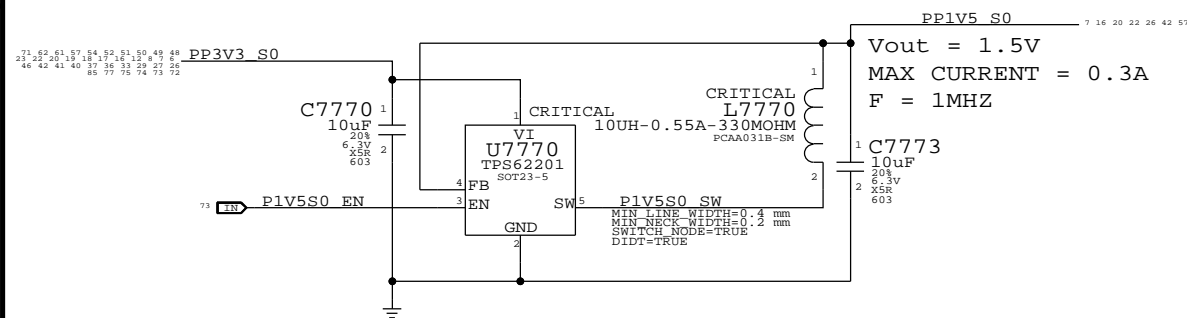


1.05V S0 LDO

Vout = 1.05V
Max Current = 0.35A

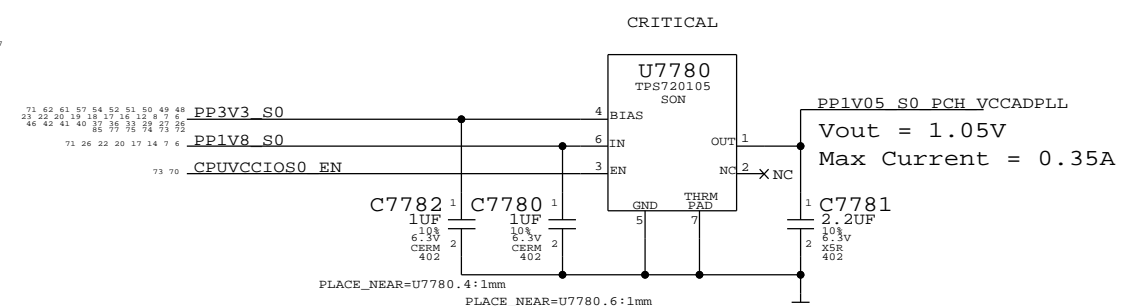

SYNC MASTER=JACK_K901		SYNC DATE=08/19/2010	
PAGE TITLE			
Misc Power Supplies			SIZE
Apple Inc.			D
NOTICE OF PROPRIETARY PROPERTY:			
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		PAGE	
II NOT TO REPRODUCE OR COPY IT		77 OF 109	
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART		SHEET	
IV ALL RIGHTS RESERVED		71 OF 86	

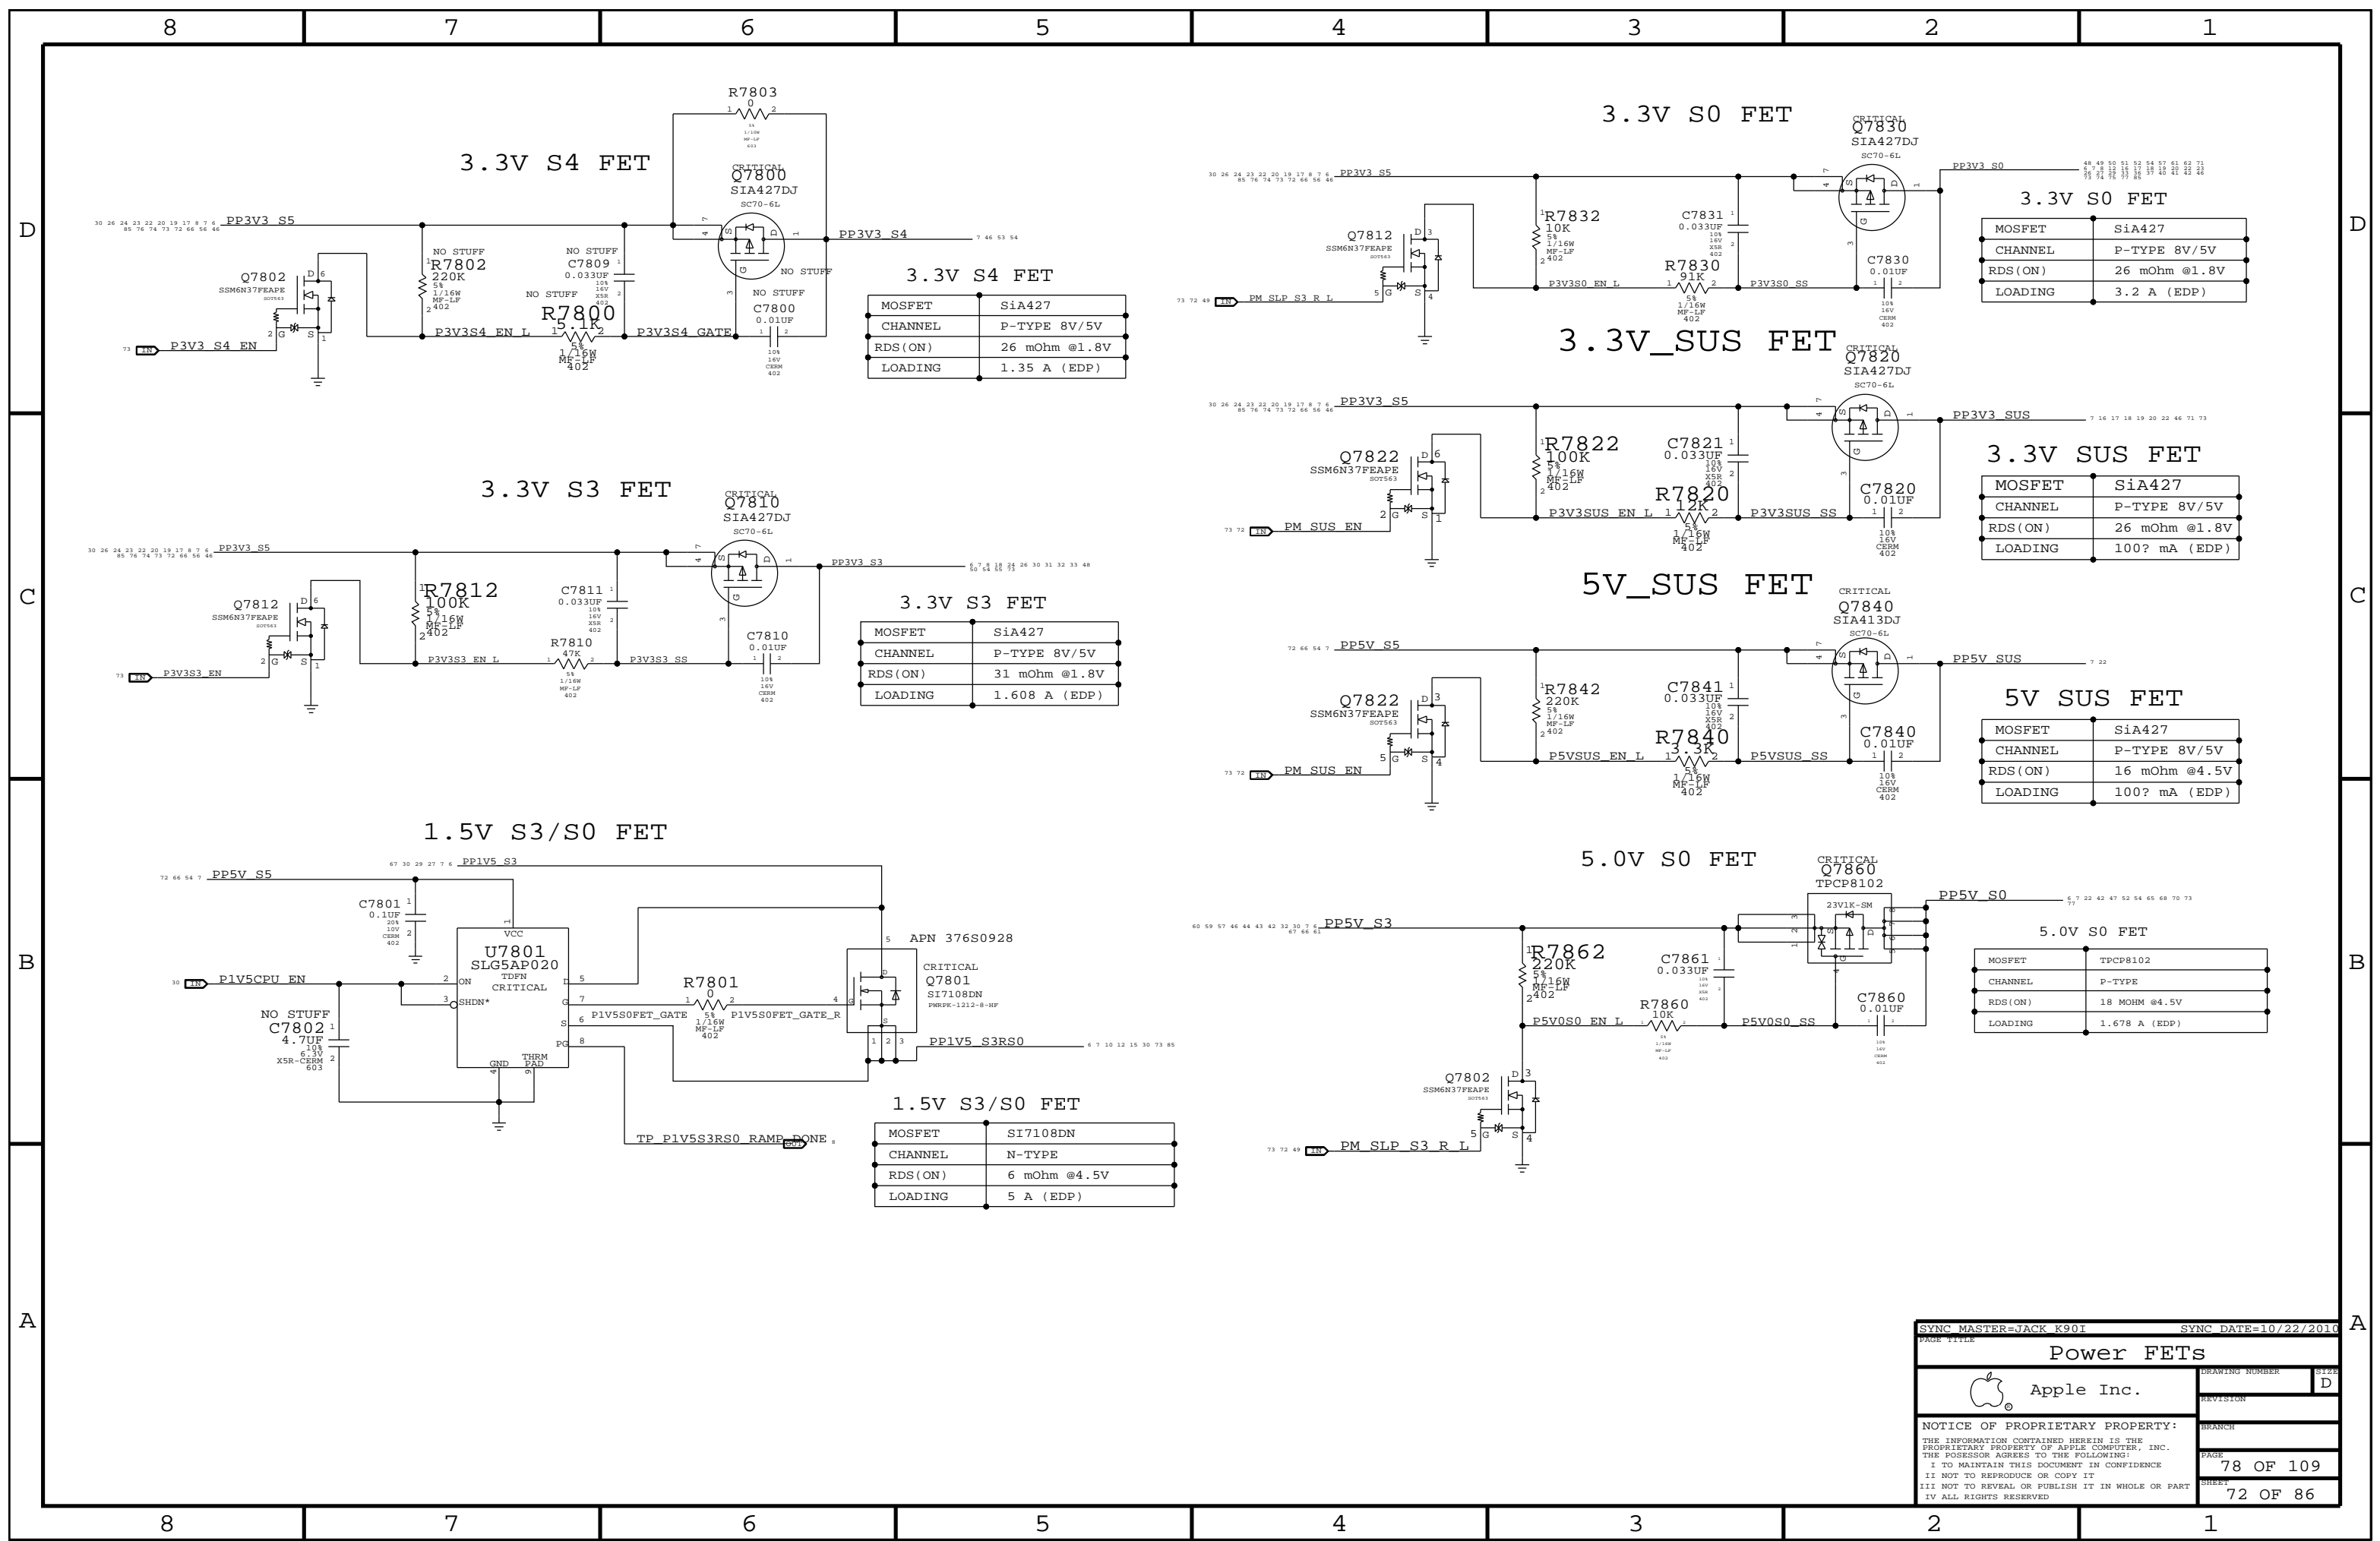

3.3V S4 FET

MOSFET	SiA427
CHANNEL	P-TYPE 8V/5V
RDS(ON)	26 mOhm @1.8V
LOADING	1.35 A (EDP)

3.3V S0 FET

MOSFET	SiA427
CHANNEL	P-TYPE 8V/5V
RDS(ON)	26 mOhm @1.8V
LOADING	3.2 A (EDP)

3.3V SUS FET

MOSFET	SiA427
CHANNEL	P-TYPE 8V/5V
RDS(ON)	26 mOhm @1.8V
LOADING	100? mA (EDP)

5V SUS FET

MOSFET	SiA427
CHANNEL	P-TYPE 8V/5V
RDS(ON)	16 mOhm @4.5V
LOADING	100? mA (EDP)

5.0V S0 FET

MOSFET	TPCP8102
CHANNEL	P-TYPE
RDS(ON)	18 MOHM @4.5V
LOADING	1.678 A (EDP)

1.5V S3/S0 FET

MOSFET	SI7108DN
CHANNEL	N-TYPE
RDS(ON)	6 mOhm @4.5V
LOADING	5 A (EDP)


SYNC MASTER=JACK K90I SYNC DATE=10/22/2010


Power FETs

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

DRAWING NUMBER	72
REVISION	
BRANCH	
PAGE	78 OF 109
SHEET	72 OF 86

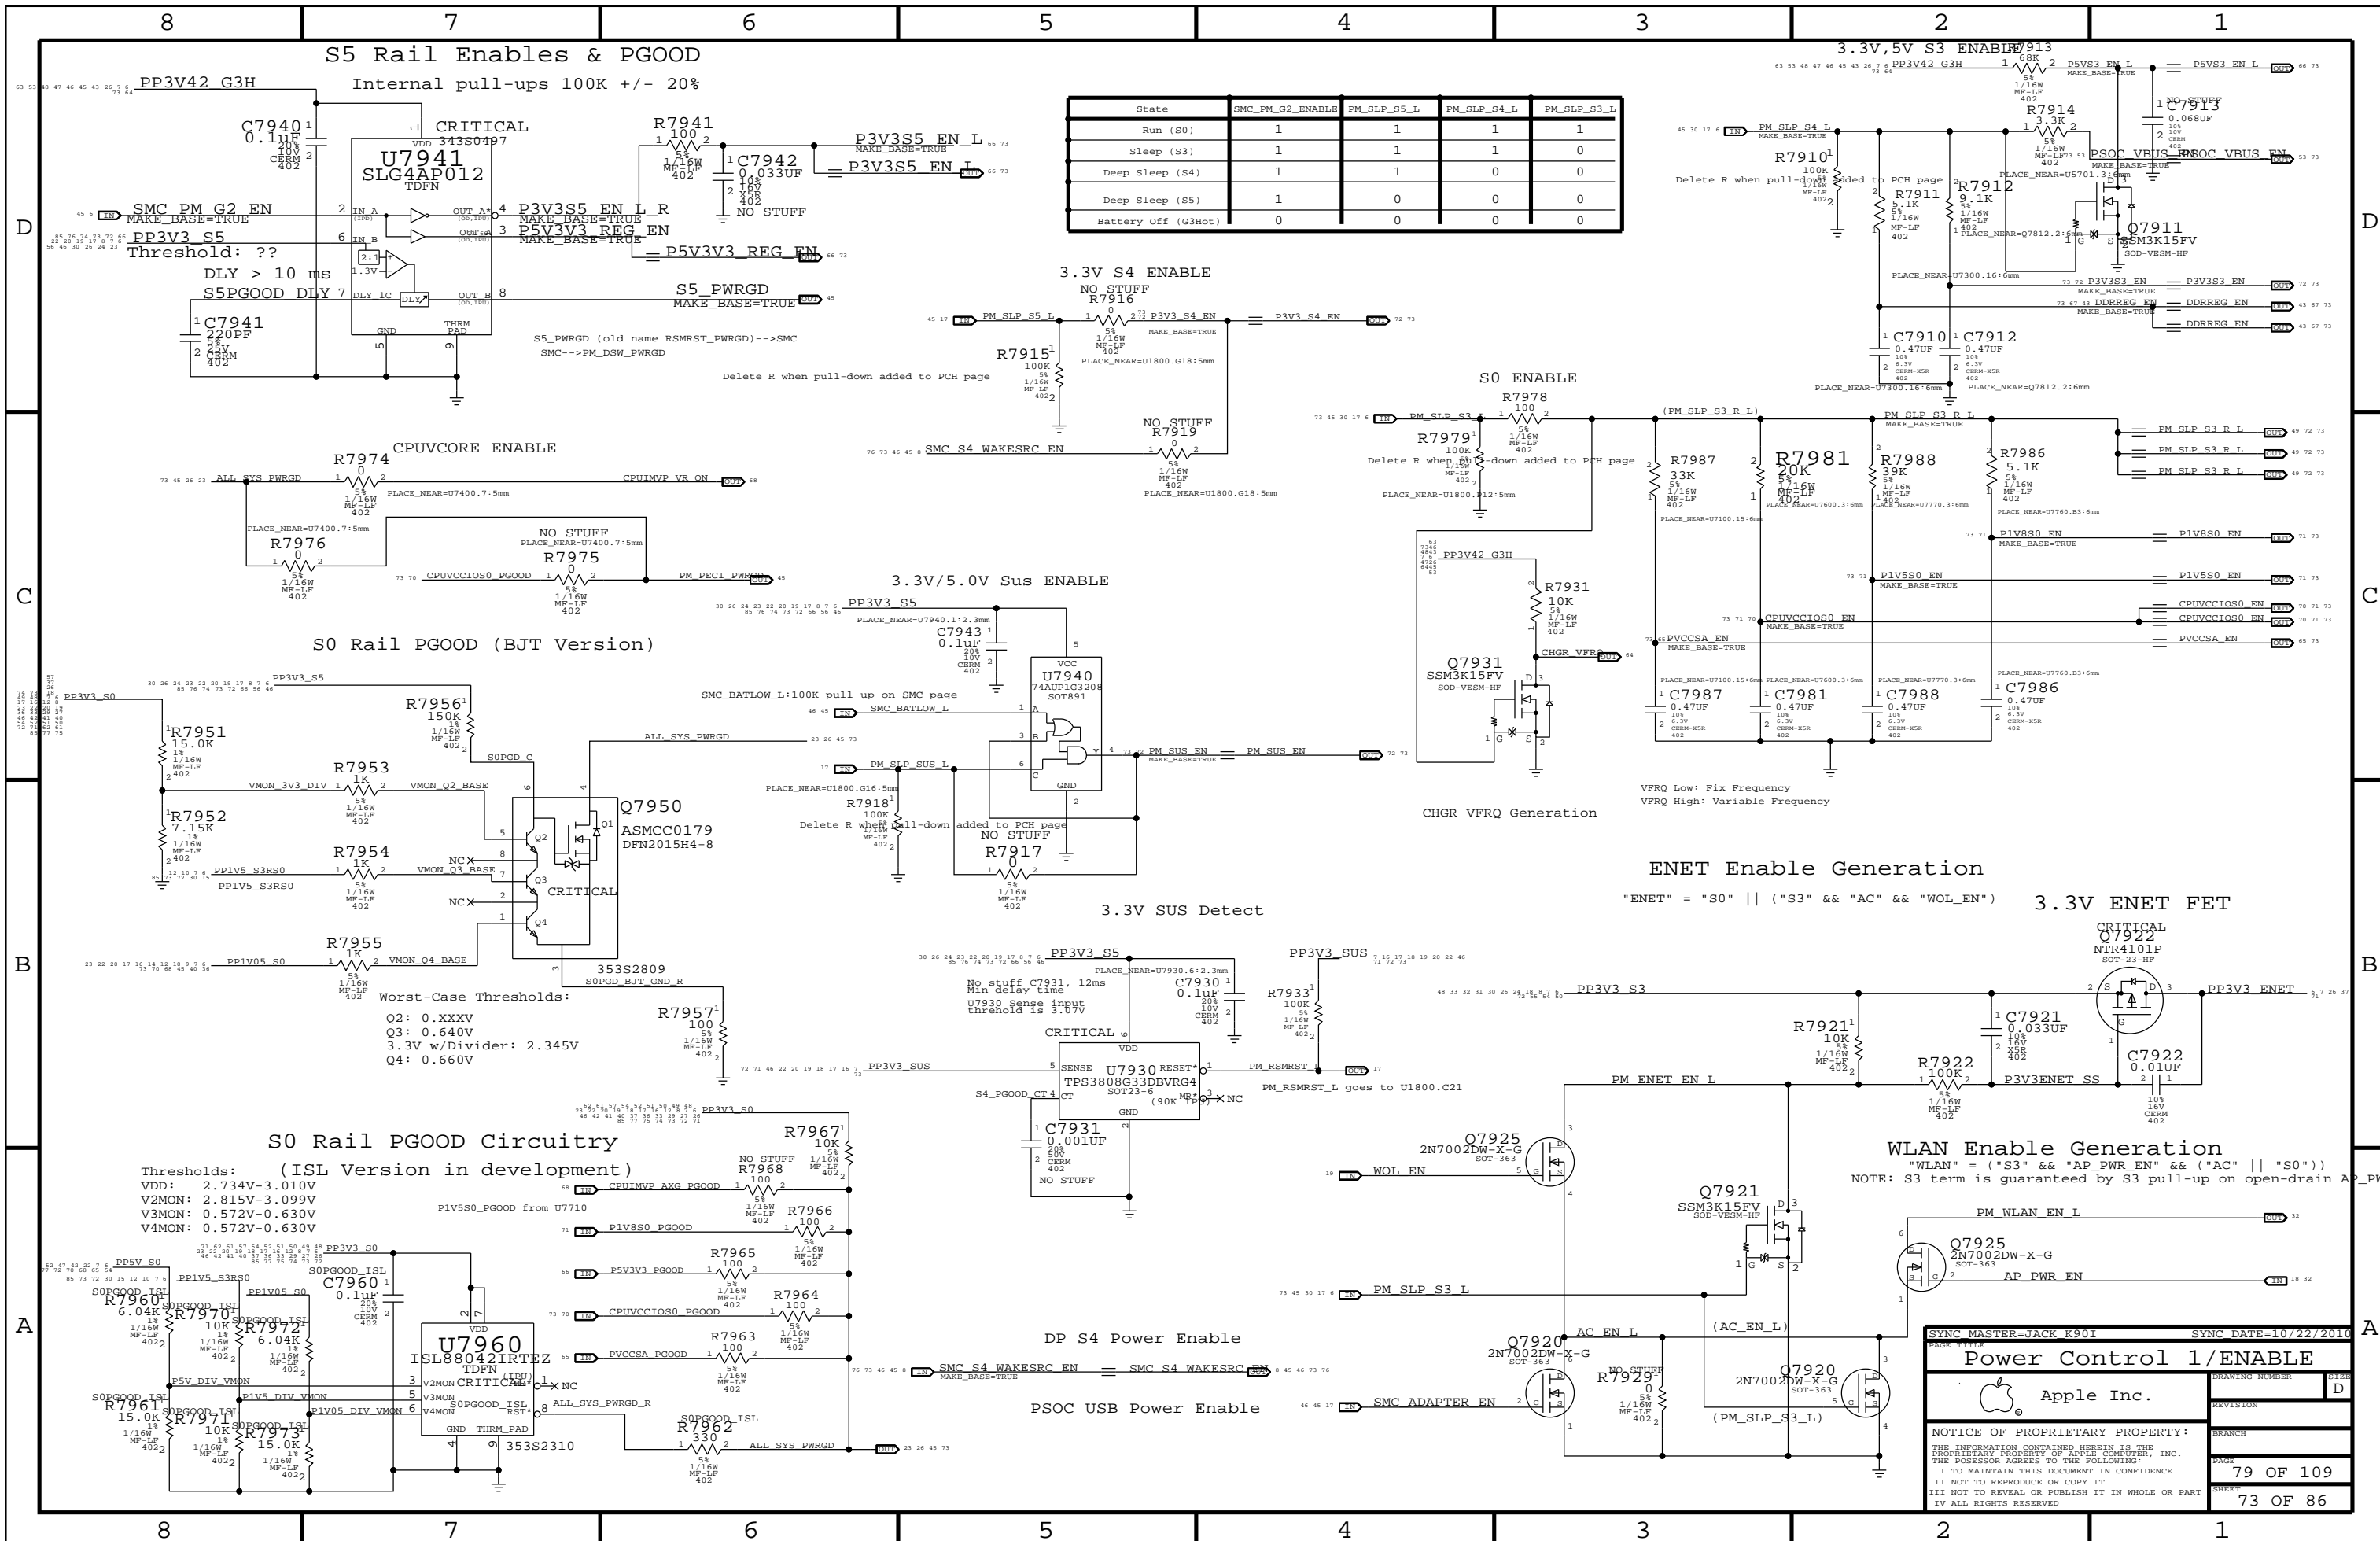

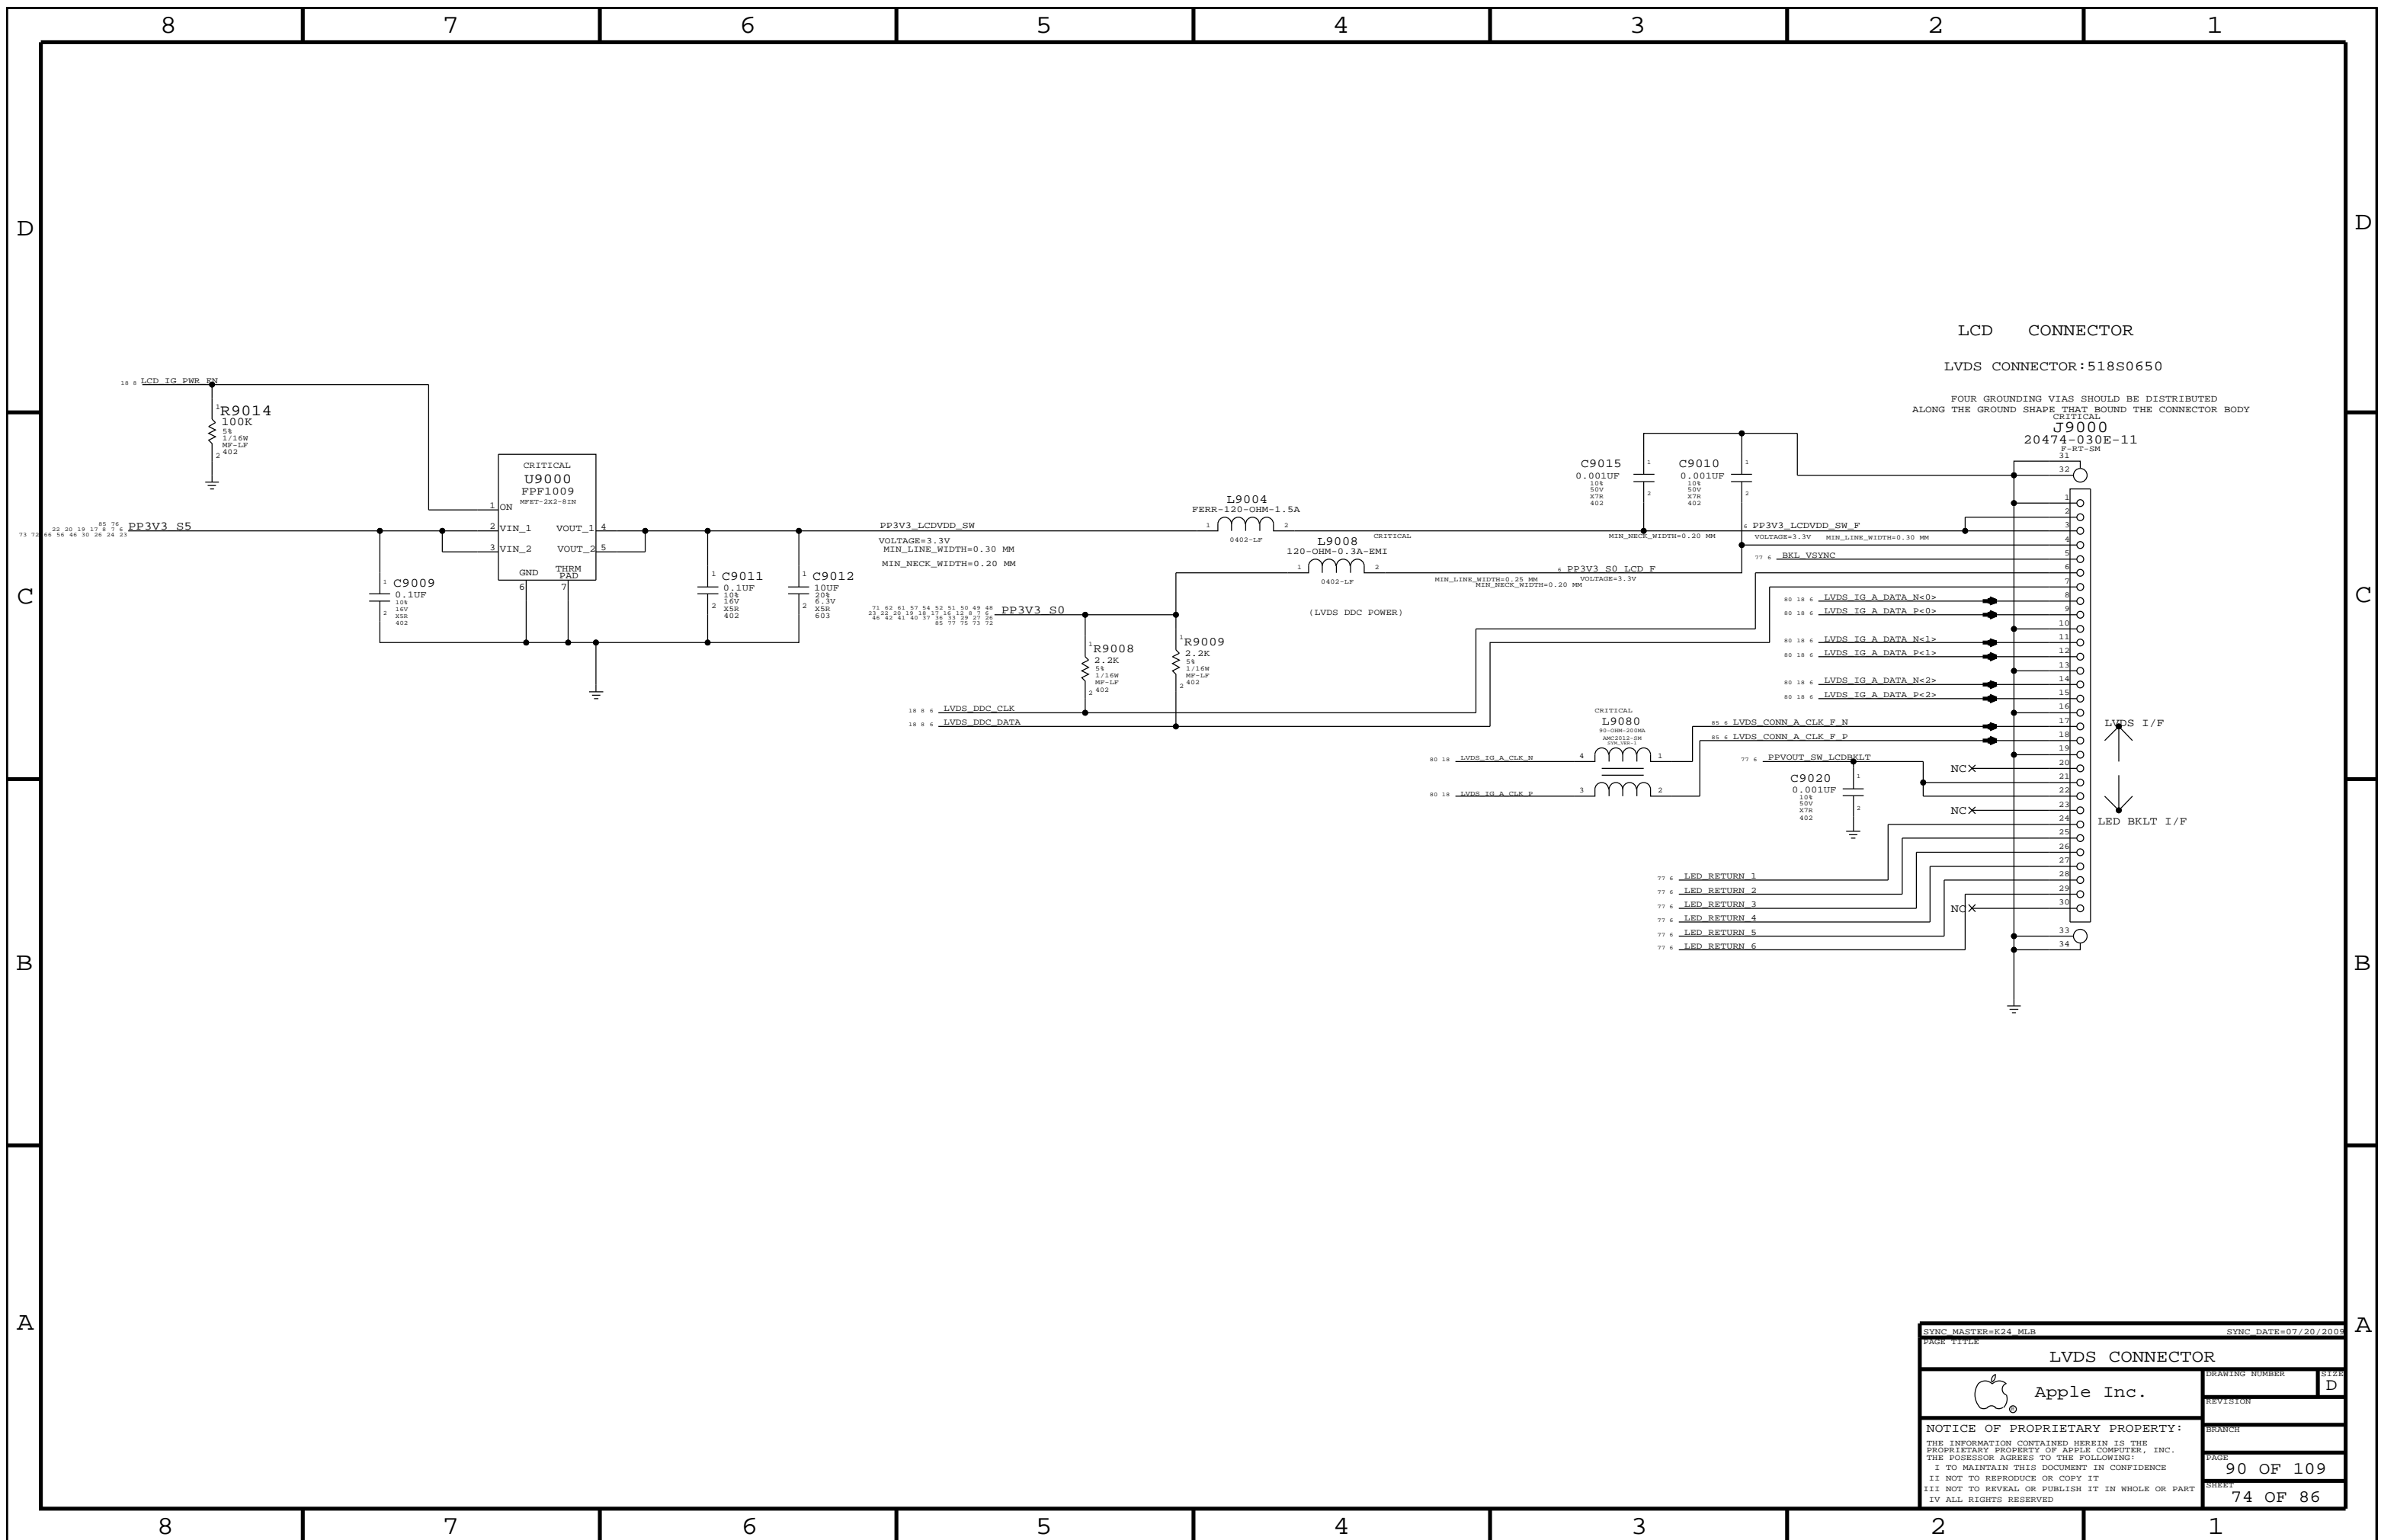


LCD CONNECTOR
LVDS CONNECTOR: 518S0650

FOUR GROUNDING VIAS SHOULD BE DISTRIBUTED ALONG THE GROUND SHAPE THAT BOUND THE CONNECTOR BODY

CRITICAL
J9000
20474-030E-11
P-RT-SM

LVDS I/F
LED BKLT I/F

SYNC MASTER=K24 MLB		SYNC DATE=07/20/2005	
PAGE TITLE			
LVDS CONNECTOR		DRAWING NUMBER	SIZE
Apple Inc.		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE	90 OF 109
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET	74 OF 86
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

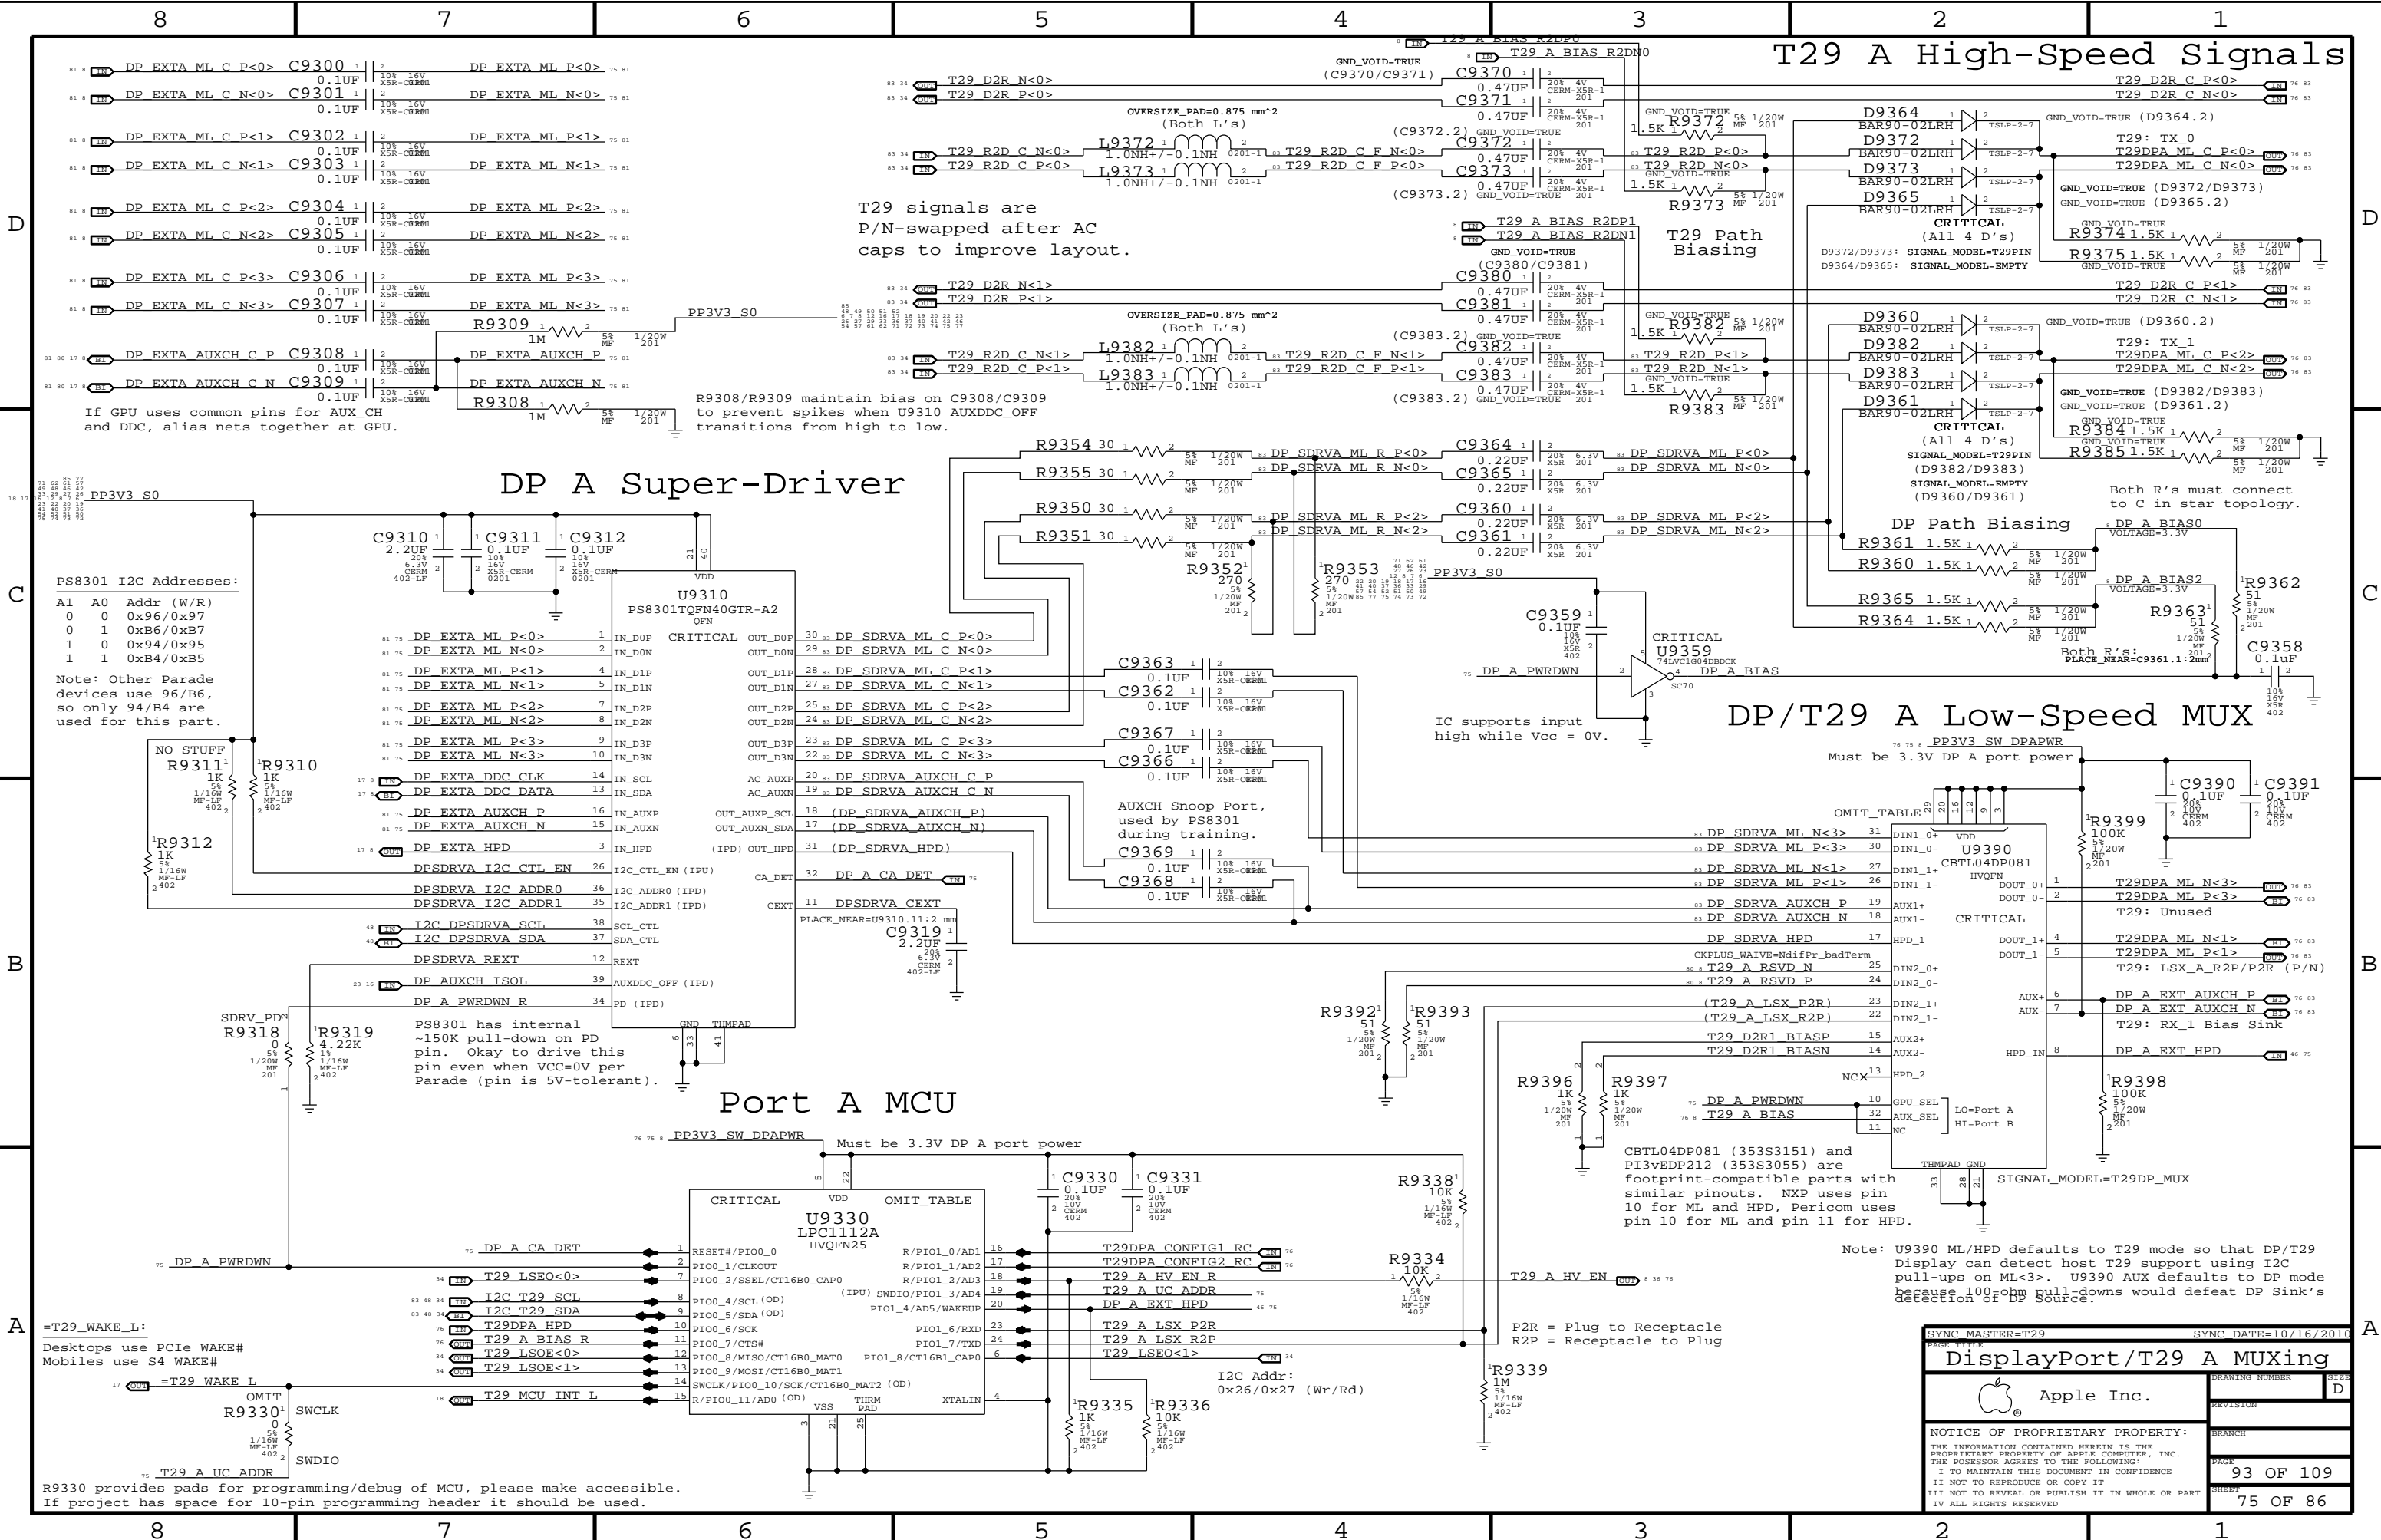

T29 signals are P/N-swapped after AC caps to improve layout.

R9308/R9309 maintain bias on C9308/C9309 to prevent spikes when U9310 AUXDDC_OFF transitions from high to low.

If GPU uses common pins for AUX_CH and DDC, alias nets together at GPU.

PS8301 I2C Addresses:
 A1 A0 Addr (W/R)
 0 0 0x96/0x97
 0 1 0xB6/0xB7
 1 0 0x94/0x95
 1 1 0xB4/0xB5
 Note: Other Parade devices use 96/B6, so only 94/B4 are used for this part.

PS8301 has internal ~150K pull-down on PD pin. Okay to drive this pin even when VCC=0V per Parade (pin is 5V-tolerant).

=T29_WAKE_L:
 Desktops use PCIe WAKE#
 Mobiles use S4 WAKE#

R9330 provides pads for programming/debug of MCU, please make accessible. If project has space for 10-pin programming header it should be used.

T29 A High-Speed Signals

DP A Super-Driver

DP/T29 A Low-Speed MUX

Port A MCU

CBTL04DP081 (353S3151) and PI3VEDP212 (353S3055) are footprint-compatible parts with similar pinouts. NXP uses pin 10 for ML and HPD, Pericom uses pin 10 for ML and pin 11 for HPD.


Note: U9390 ML/HPD defaults to T29 mode so that DP/T29 Display can detect host T29 support using I2C pull-ups on ML<3>. U9390 AUX defaults to DP mode because 100-ohm pull-downs would defeat DP Sink's detection of DP Source.

SYNC MASTER=T29		SYNC DATE=10/16/2010	
DisplayPort/T29 A MUXing			
Apple Inc.		DRAWING NUMBER	SIZE
NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		REVISION	BRANCH
		PAGE	SHEET
		93 OF 109	75 OF 86


Port A HV Power Switch

3.3V/HV Power MUX

Port A 3.3V Power Switch

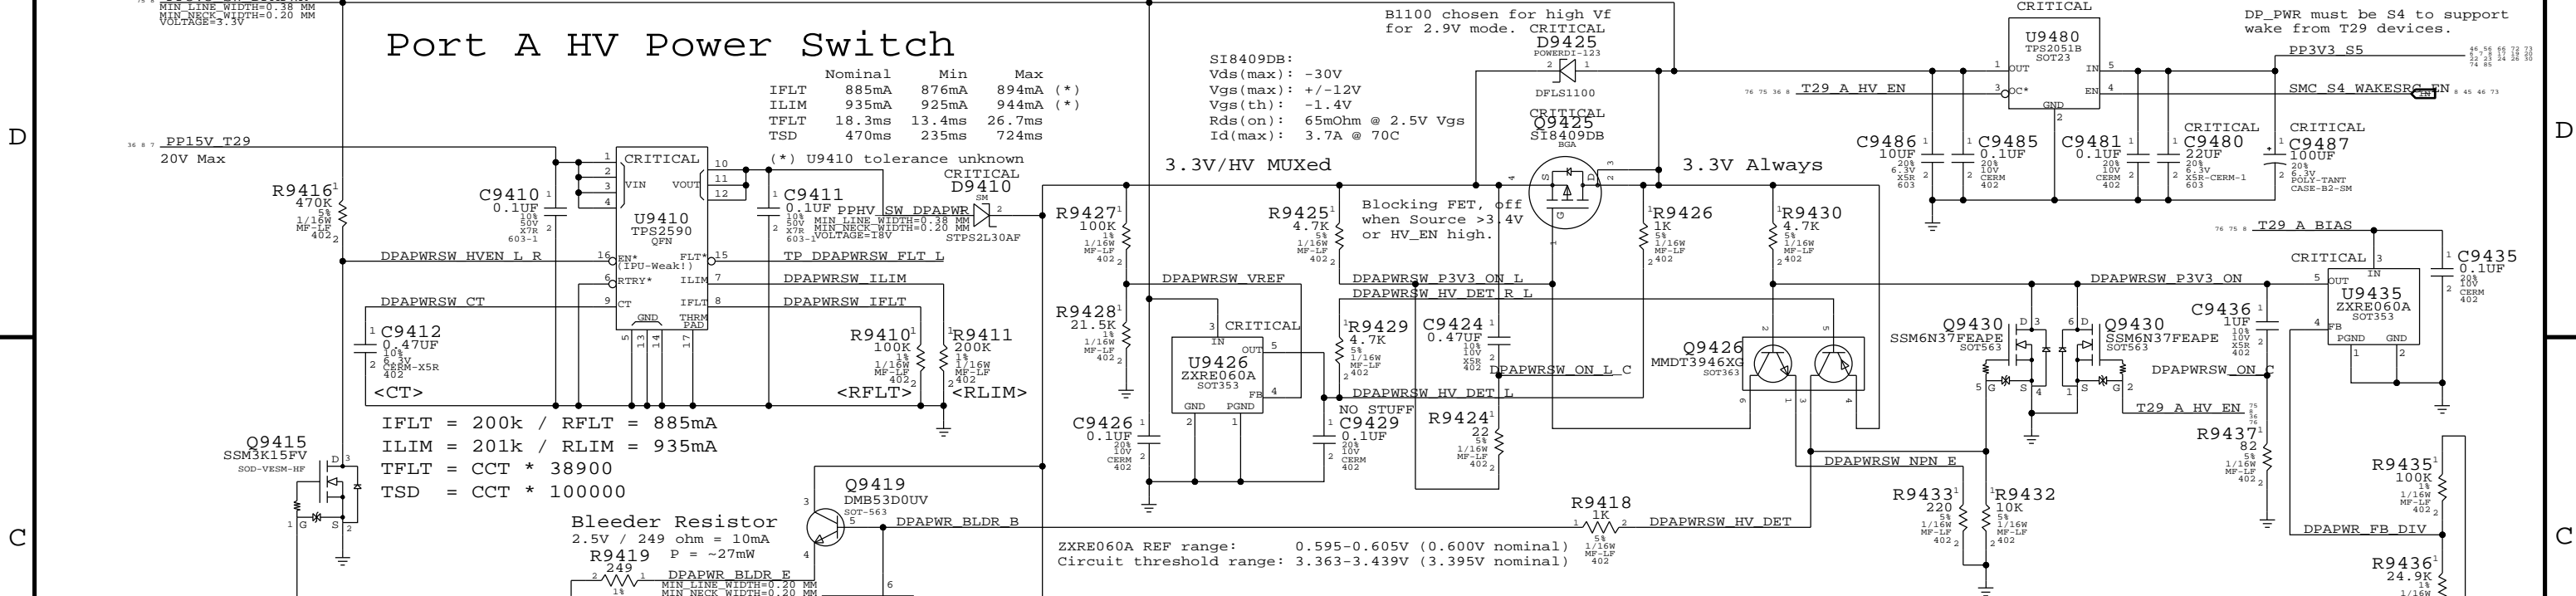

DisplayPort/T29 A Connector

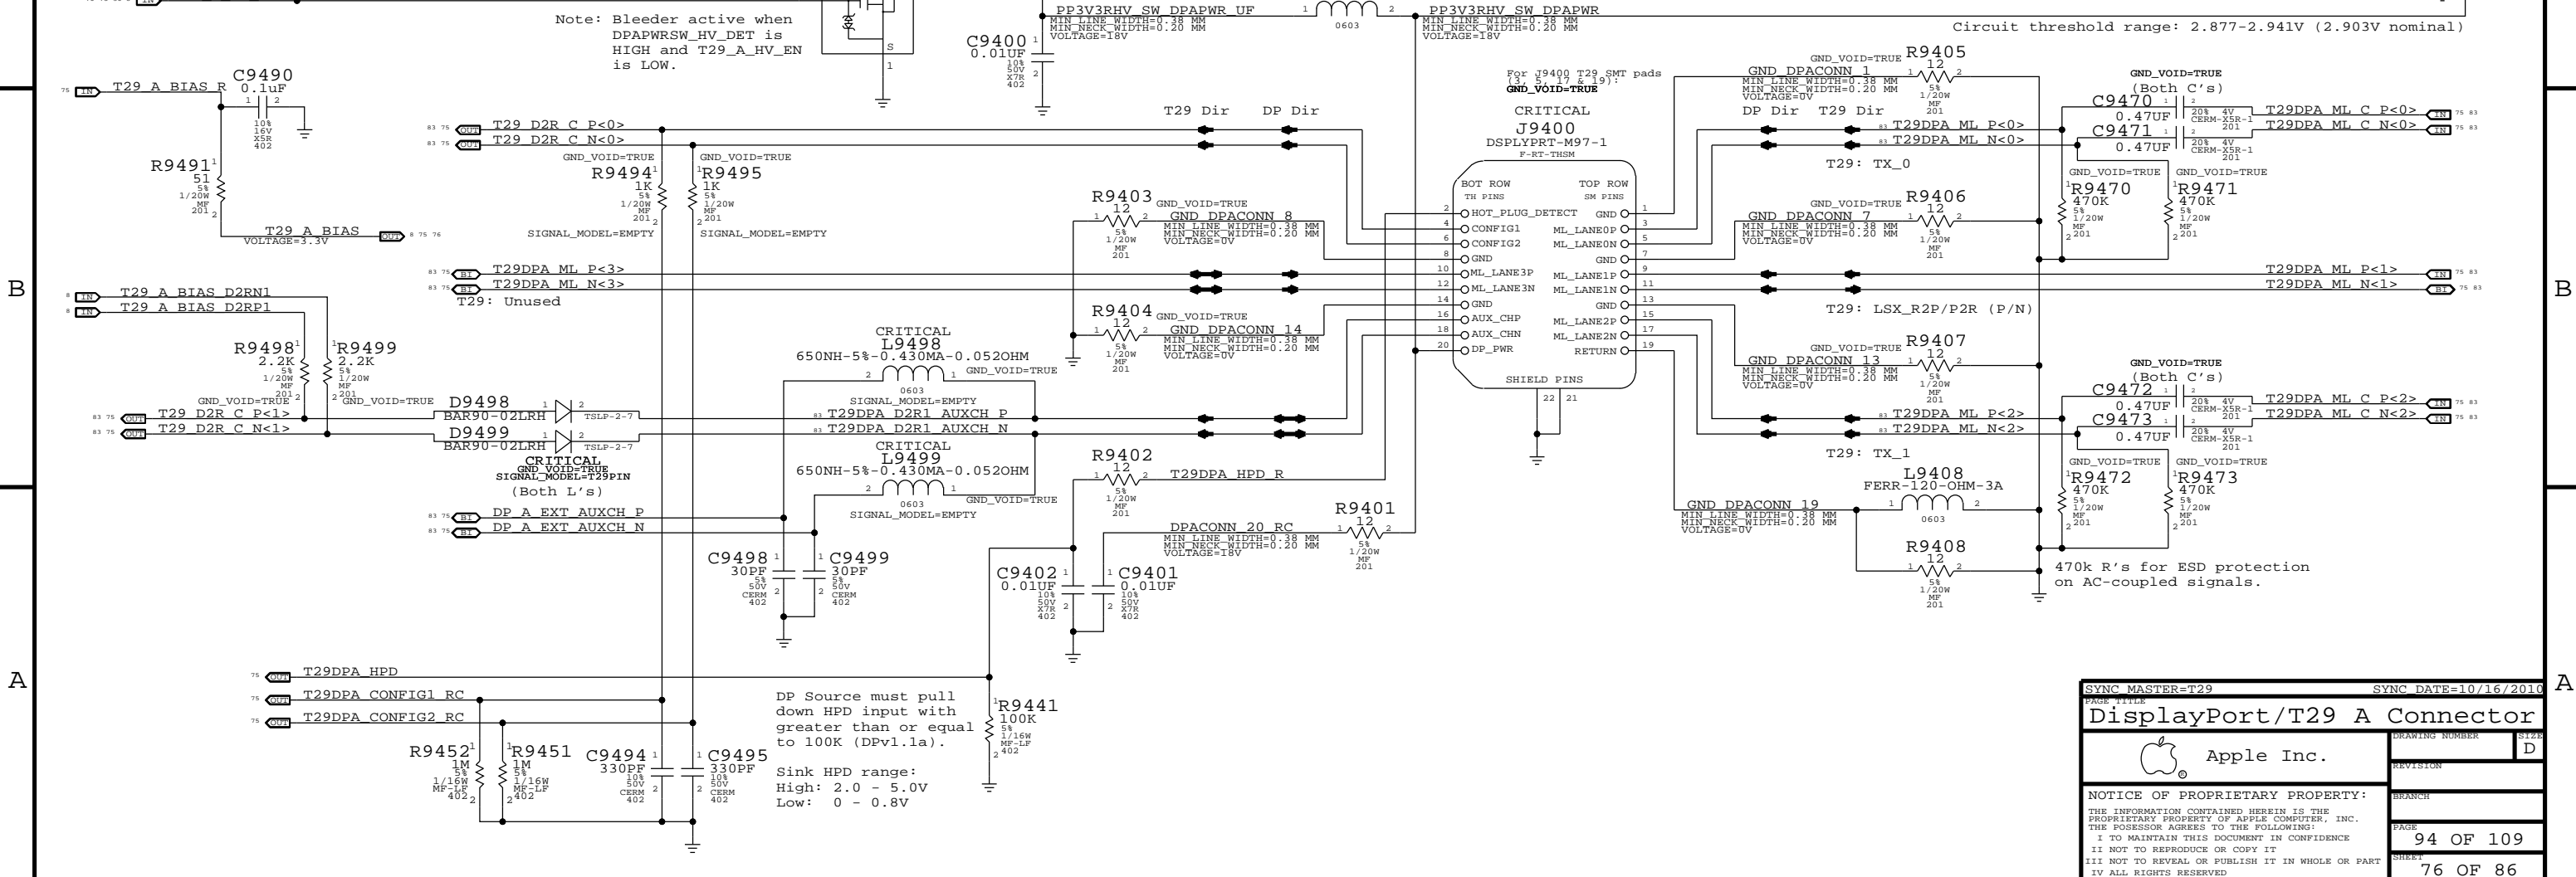


SYNC MASTER=T29		SYNC DATE=10/16/2010	
DisplayPort/T29 A Connector			
Apple Inc.		DRAWING NUMBER	SIZE
		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:			
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE			
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			
		PAGE	94 OF 109
		SHEET	76 OF 86

PPBUS S0 LCDBKLT FET	
MOSFET	FDC638APZ
CHANNEL	P-TYPE
RDS(ON)	43 mOhm @4.5V
LOADING	0.65 A (EDP)

THERE IS A SENSE RESISTOR BETWEEN PPBUS_SW_LCDBKLT_PWR AND PPBUS_SW_BKL ON THE SENSOR PAGE

*C9797 AND C9799 SHOULD BE PLACED IN T-BONE FOR ACOUSTICS
 *PPBUS_SW_LCDBKLT_PWR_SW SHOULD BE KEPT AS SHORT AS POSSIBLE.
 *LCD_BKLT_PWM SHOULD BE AWAY FROM BOOST CIRCUIT

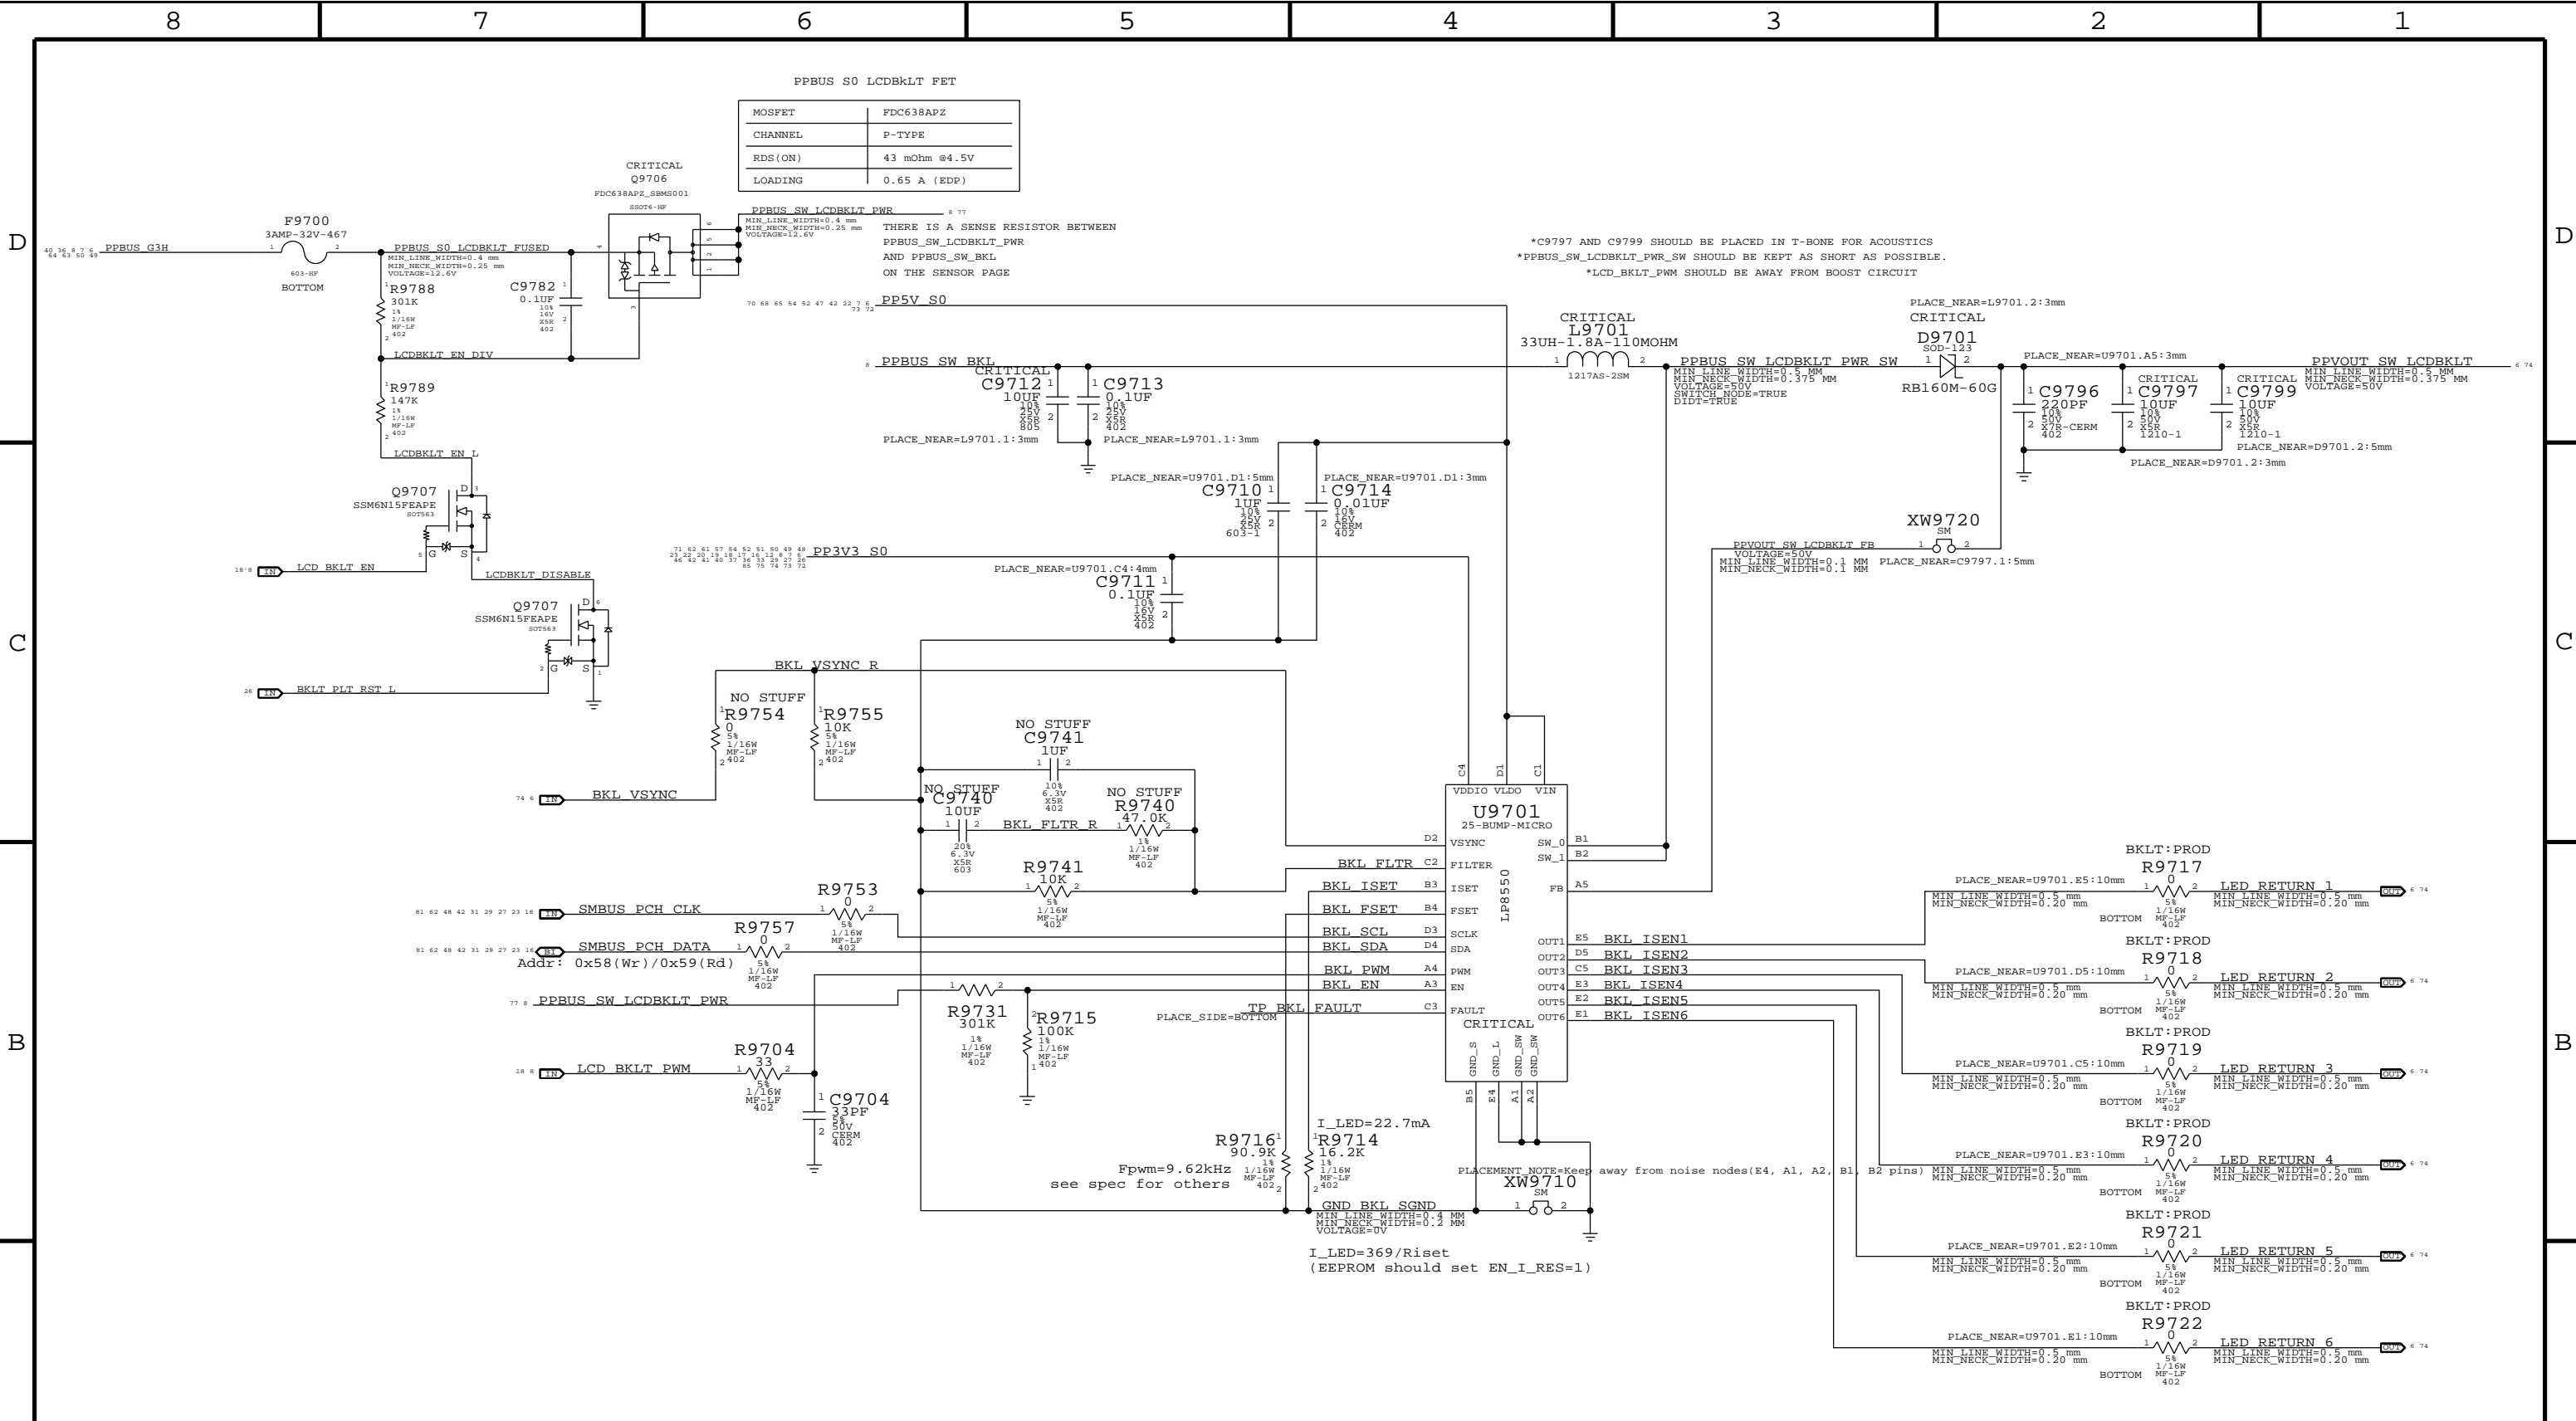

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
103S0198	3	RES,THIN FLIM,1/16W,10.2 OHM,0.1,0402,SM	R9717,R9718,R9719		BKLT:ENG
103S0198	3	RES,THIN FLIM,1/16W,10.2 OHM,0.1,0402,SM	R9720,R9721,R9722		BKLT:ENG

10.2 ohm resistors for current measurement on LED strings.

PAGE TITLE		SYNC MASTER=VEMURI K901		SYNC DATE=06/25/2010	
LCD Backlight Driver				DRAWING NUMBER	D
Apple Inc.				REVISION	
NOTICE OF PROPRIETARY PROPERTY:					
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:					
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE					
II NOT TO REPRODUCE OR COPY IT					
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART					
IV ALL RIGHTS RESERVED					
				PAGE	97 OF 109
				SHEET	77 OF 86

CPU Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CPU_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD
CPU_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD
CPU_27P4S	*	=27P4_OHM_SE	=27P4_OHM_SE	=27P4_OHM_SE	=27P4_OHM_SE	7 MIL	7 MIL

NOTE: 7 mil gap is for VCCSense pair, which Intel says to route with 7 mil spacing without specifying a target impedance.

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CPU_AGTL	*	=STANDARD	?	CPU_AGTL	TOP,BOTTOM	=2X_DIELECTRIC	?
CPU_8MIL	*	8 MIL	?				
CPU_COMP	*	20 MIL	?				
CPU_ITP	*	=2:1_SPACING	?				
CPU_VCCSENSE	*	25 MIL	?				

Most CPU signals with impedance requirements are 50-ohm single-ended. Some signals require 27.4-ohm single-ended impedance.

SOURCE: Huron River SFF DG (DG-438297_v1.0), Section 4.18 and Huron River Platform Power Delivery DG v1.0 Section 2.7

PCI-Express

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
PCIE_85D	*	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF
CLK_PCIE_90D	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
PCIE	*	=3X_DIELECTRIC	?	PCIE	TOP,BOTTOM	=4X_DIELECTRIC	?
CLK_PCIE	*	20 MIL	?				

SOURCE: Huron River SFF DG (DG-438297_v1.0), Section 4.18 and Huron River Platform Power Delivery DG v1.0 Section 2.7

CPU Net Properties

ELECTRICAL_CONSTRAINT_SET	PHYSICAL	NET_TYPE	SPACING	
DMI_S2N	PCIE_85D	PCIE		DMI_S2N P<3:0> 9 17
DMI_S2N	PCIE_85D	PCIE		DMI_S2N N<3:0> 9 17
DMI_N2S	PCIE_85D	PCIE		DMI_N2S P<3:0> 9 17
DMI_N2S	PCIE_85D	PCIE		DMI_N2S N<3:0> 9 17
FDI_DATA	PCIE_85D	PCIE		FDI_DATA P<7:0> 9 17
FDI_DATA	PCIE_85D	PCIE		FDI_DATA N<7:0> 9 17
	CPU_50S	CPU_AGTL		FDI_FSYNC<1..0> 9 17
	CPU_50S	CPU_AGTL		FDI_LSYNC<1..0> 9 17
	CPU_50S	CPU_AGTL		FDI_INT 9 17
	CPU_50S	PCIE		CPU_PRCI 10 19 45
	CPU_50S	CPU_AGTL		PM_SYNC 10 17
	CPU_50S	CPU_AGTL		PM_MEM_PWRGD 10 17 30
	CPU_50S	CPU_ITP		XDP_DBRESET_L 10 23 26
	CPU_50S	CPU_ITP		XDP_CPU_PRDY_L 10 23
	CPU_50S	CPU_ITP		XDP_CPU_PREQ_L 10 23
	CPU_50S	CPU_AGTL		PM_EXT_TS_L<0> 10
	CPU_50S	CPU_AGTL		PM_EXT_TS_L<1> 10
	CPU_SM_RCOMP	CPU_COMP		CPU_SM_RCOMP<0> 10
	CPU_SM_RCOMP	CPU_COMP		CPU_SM_RCOMP<1> 10
	CPU_SM_RCOMP	CPU_COMP		CPU_SM_RCOMP<2> 10
	CPU_50S	CPU_ITP		CPU_CFG<11..0> 9 23
	CPU_50S	CPU_AGTL		CPU_CATERR_L 10
	CPU_50S	CPU_AGTL		CPU_VCCIO_SEE_L 12
	CPU_50S	CPU_AGTL		CPU_PROCHOT_L 10 46 68
	CPU_50S	CPU_AGTL		CPU_PWRGD 10 19 23
	CPU_50S	CPU_8MIL		PM_THERMTRIP_L 10 19
	CLK_PCIE_90D	CLK_PCIE		DMI_CLK100M_CPU_P 10 16
	CLK_PCIE_90D	CLK_PCIE		DMI_CLK100M_CPU_N 10 16
	ITPCPU_CLK100M	CLK_PCIE		ITPCPU_CLK100M_P 10 16
	ITPCPU_CLK100M	CLK_PCIE		ITPCPU_CLK100M_N 10 16
	ITPXPDP_CLK100M	CLK_PCIE		ITPXPDP_CLK100M_P 16 23
	ITPXPDP_CLK100M	CLK_PCIE		ITPXPDP_CLK100M_N 16 23
	XDP_CPU_CLK100M	CLK_PCIE		XDP_CPU_CLK100M_P 23
	XDP_CPU_CLK100M	CLK_PCIE		XDP_CPU_CLK100M_N 23
	CPU_27P4S	CPU_COMP		EDP_COMP 9
	CPU_27P4S	CPU_COMP		CPU_PEG_COMP 9
	XDP_TDI	CPU_50S	CPU_ITP	XDP_CPU_TDI 10 23
	XDP_TDO	CPU_50S	CPU_ITP	XDP_CPU_TDO 10 23
	XDP_TMS	CPU_50S	CPU_ITP	XDP_CPU_TMS 10 23
	XDP_TCK	CPU_50S	CPU_ITP	XDP_CPU_TCK 10 23
	XDP_TRST_L	CPU_50S	CPU_ITP	XDP_CPU_TRST_L 10 23
	XDP_BM_L	CPU_50S	CPU_ITP	XDP_BM_L<3..0> 10 23
	XDP_BM_S_L	CPU_50S	CPU_ITP	CPU_CFG<15..12> 9 23
	(FSB_CPUURST_L)	CPU_50S	CPU_ITP	XDP_CPUURST_L 23
	CPU_VCCIO_SENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VCCSENSE_P 12 68
	CPU_VCCIO_SENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VCCSENSE_N 12 68
	CPU_VCCIO_SENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VCCIOSENSE_P 12 70
	CPU_VCCIO_SENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VCCIOSENSE_N 12 70
	CPU_VCCIO_SENSE	CPU_27P4S	CPU_VCCSENSE	CPU_AXG_SENSE_P 12 68
	CPU_VCCIO_SENSE	CPU_27P4S	CPU_VCCSENSE	CPU_AXG_SENSE_N 12 68
	CPU_VALSENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VDDO_SENSE_P 12
	CPU_VALSENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VDDO_SENSE_N 12
	CPU_VALSENSE	CPU_27P4S	CPU_VCCSENSE	CPU_AXG_VALSENSE_P 9
	CPU_VALSENSE	CPU_27P4S	CPU_VCCSENSE	CPU_AXG_VALSENSE_N 9
	CPU_VALSENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VCC_VALSENSE_P 9
	CPU_VALSENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VCC_VALSENSE_N 9
	CPU_VIDALERT_L	CPU_50S	CPU_COMP	CPU_VIDALERT_L 12 68
	CPU_VIDSCCLK	CPU_50S	CPU_COMP	CPU_VIDSCCLK 12 68
	CPU_VIDSOUT	CPU_50S	CPU_COMP	CPU_VIDSOUT 12 68
	PEG_E2D	PCIE_85D	PCIE	PEG_E2D P<15..0> 8
	PEG_E2D	PCIE_85D	PCIE	PEG_E2D N<15..0> 8
	PEG_D2R	PCIE_85D	PCIE	PEG_D2R C P<15..0> 8
	PEG_D2R	PCIE_85D	PCIE	PEG_D2R C N<15..0> 8
	PEG_D2R	PCIE_85D	PCIE	PEG_D2R P<15..0> 8
	PEG_D2R	PCIE_85D	PCIE	PEG_D2R N<15..0> 8
	PEG_D2R	PCIE_85D	PCIE	PEG_D2R C P<15..0> 8
	PEG_D2R	PCIE_85D	PCIE	PEG_D2R C N<15..0> 8

CPU_VCCSA_VID<0>
CPU_VCCSA_VID<1>

SYNC MASTER=ANNE K901 SYNC DATE=06/08/2011

CPU Constraints

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
IV ALL RIGHTS RESERVED

DRAWING NUMBER: CPU Constraints
REVISION: D
PAGE: 100 OF 109
SHEET: 78 OF 86

Memory Bus Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MEM_37S	*	=37_OHM_SE	=37_OHM_SE	=37_OHM_SE	=37_OHM_SE	=STANDARD	=STANDARD
MEM_40S	*	=40_OHM_SE	=40_OHM_SE	=40_OHM_SE	=40_OHM_SE	=STANDARD	=STANDARD
MEM_72D	*	=72_OHM_DIFF	=72_OHM_DIFF	=72_OHM_DIFF	=72_OHM_DIFF	=72_OHM_DIFF	=72_OHM_DIFF
MEM_50S	TOP,BOTTOM	Y	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD
MEM_85D	TOP,BOTTOM	Y	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF
MEM_50S	ISL10	N	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD
MEM_85D	ISL10	N	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF
MEM_50S	ISL3,ISL4,ISL9	Y	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD
MEM_85D	ISL3,ISL4,ISL9	Y	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MEM_CLK2MEM	*	=4:1_SPACING	?
MEM_CTRL2CTRL	*	=3:1_SPACING	?
MEM_CTRL2MEM	*	=2.5:1_SPACING	?
MEM_CMD2CMD	*	=1.5:1_SPACING	?
MEM_CMD2MEM	*	=3:1_SPACING	?
MEM_DATA2DATA	*	=1.5:1_SPACING	?
MEM_DATA2MEM	*	=3:1_SPACING	?
MEM_DQS2MEM	*	=3:1_SPACING	?
MEM_20OTHER	*	25 MILS	?

Memory Bus Spacing Group Assignments

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CLK	MEM_CLK	*	MEM_CLK2MEM
MEM_CLK	MEM_CTRL	*	MEM_CLK2MEM
MEM_CLK	MEM_CMD	*	MEM_CLK2MEM
MEM_CLK	MEM_DATA	*	MEM_CLK2MEM
MEM_CLK	MEM_DQS	*	MEM_CLK2MEM
MEM_CTRL	MEM_CTRL	*	MEM_CTRL2CTRL
MEM_CTRL	MEM_CLK	*	MEM_CTRL2MEM
MEM_CTRL	MEM_CMD	*	MEM_CTRL2MEM
MEM_CTRL	MEM_DATA	*	MEM_CTRL2MEM
MEM_CTRL	MEM_DQS	*	MEM_CTRL2MEM
MEM_CMD	MEM_CMD	*	MEM_CMD2CMD
MEM_CMD	MEM_CLK	*	MEM_CMD2MEM
MEM_CMD	MEM_CTRL	*	MEM_CMD2MEM
MEM_CMD	MEM_DATA	*	MEM_CMD2MEM
MEM_CMD	MEM_DQS	*	MEM_CMD2MEM
MEM_DATA	MEM_DATA	*	MEM_DATA2DATA
MEM_DATA	MEM_CLK	*	MEM_DATA2MEM
MEM_DATA	MEM_CTRL	*	MEM_DATA2MEM
MEM_DATA	MEM_CMD	*	MEM_DATA2MEM
MEM_DATA	MEM_DATA	*	MEM_DATA2DATA
MEM_DATA	MEM_DQS	*	MEM_DATA2MEM
MEM_DQS	MEM_DQS	*	MEM_DQS2MEM
MEM_DQS	MEM_CLK	*	MEM_DQS2MEM
MEM_DQS	MEM_CTRL	*	MEM_DQS2MEM
MEM_DQS	MEM_CMD	*	MEM_DQS2MEM
MEM_DQS	MEM_DATA	*	MEM_DQS2MEM
MEM_DQS	MEM_DQS	*	MEM_DQS2MEM

Need to support MEM*-style wildcards!

DDR3: Sandybridge SFF 2C when routed on Type-3 (Through hole) should follow rPGA guidelines per Huron River SFF DG rev1.0 (#438297).
 DQS intra-pair matching should be within 0.127mm, no inter-pair matching requirement.
 DQ to DQS matching per byte lane should be within 0.127mm.
 DQS to clock matching should be within [CLK-63.5mm] and [CLK+38.1mm].
 CLK intra-pair matching should be within 0.127mm, inter-pair matching should be within 0.0508mm.
 CONTROL signals should be matched within [CLK-2.54mm] to [CLK+0.0mm] of CLK pairs.
 A/BA/CMD signals should be matched within [CLK-12.7mm] to [CLK+12.7mm] of CLK pairs A/BA/CMD signals to each other should match within 5.08mm.
 DQ/DQS/A/BA/cmd signal spacing is 4x dielectric, CLK is 5x dielectric.
 Maximum length of any signal from die pad to SODIMM pad is 119.83mm, from processor ball to SODIMM pad is 88.9mm.
 SOURCE: Huron River Platform DG, Rev 1.01 (#436735), Section 2.5

Memory Net Properties

ELECTRICAL_CONSTRAINT_SET	PHYSICAL	NET_TYPE	SPACING
MEM_A_CLK	MEM_37D	MEM_CLK	MEM_A_CLK P<5..0>
MEM_A_CLK	MEM_72D	MEM_CLK	MEM_A_CLK N<5..0>
MEM_A_CTRL	MEM_37S	MEM_CTRL	MEM_A_CKE<3..0>
MEM_A_CTRL	MEM_37S	MEM_CTRL	MEM_A_CS L<3..0>
MEM_A_CTRL	MEM_37S	MEM_CTRL	MEM_A_ODT<3..0>
MEM_A_CMD	MEM_40S	MEM_CMD	MEM_A_A<15..0>
MEM_A_CMD	MEM_40S	MEM_CMD	MEM_A_BA<2..0>
MEM_A_CMD	MEM_40S	MEM_CMD	MEM_A_BAS L
MEM_A_CMD	MEM_40S	MEM_CMD	MEM_A_CAS L
MEM_A_CMD	MEM_40S	MEM_CMD	MEM_A_WE L
MEM_A_DQ_BYTE0	MEM_50S	MEM_DATA	MEM_A_DQ<7..0>
MEM_A_DQ_BYTE1	MEM_50S	MEM_DATA	MEM_A_DQ<15..8>
MEM_A_DQ_BYTE2	MEM_50S	MEM_DATA	MEM_A_DQ<23..16>
MEM_A_DQ_BYTE3	MEM_50S	MEM_DATA	MEM_A_DQ<31..24>
MEM_A_DQ_BYTE4	MEM_50S	MEM_DATA	MEM_A_DQ<39..32>
MEM_A_DQ_BYTE5	MEM_50S	MEM_DATA	MEM_A_DQ<47..40>
MEM_A_DQ_BYTE6	MEM_50S	MEM_DATA	MEM_A_DQ<55..48>
MEM_A_DQ_BYTE7	MEM_50S	MEM_DATA	MEM_A_DQ<63..56>
MEM_B_CLK	MEM_37D	MEM_CLK	MEM_B_CLK P<5..0>
MEM_B_CLK	MEM_72D	MEM_CLK	MEM_B_CLK N<5..0>
MEM_B_CTRL	MEM_37S	MEM_CTRL	MEM_B_CKE<3..0>
MEM_B_CTRL	MEM_37S	MEM_CTRL	MEM_B_CS L<3..0>
MEM_B_CTRL	MEM_37S	MEM_CTRL	MEM_B_ODT<3..0>
MEM_B_CMD	MEM_40S	MEM_CMD	MEM_B_A<15..0>
MEM_B_CMD	MEM_40S	MEM_CMD	MEM_B_BA<2..0>
MEM_B_CMD	MEM_40S	MEM_CMD	MEM_B_BAS L
MEM_B_CMD	MEM_40S	MEM_CMD	MEM_B_CAS L
MEM_B_CMD	MEM_40S	MEM_CMD	MEM_B_WE L
MEM_B_DQ_BYTE0	MEM_50S	MEM_DATA	MEM_B_DQ<7..0>
MEM_B_DQ_BYTE1	MEM_50S	MEM_DATA	MEM_B_DQ<15..8>
MEM_B_DQ_BYTE2	MEM_50S	MEM_DATA	MEM_B_DQ<23..16>
MEM_B_DQ_BYTE3	MEM_50S	MEM_DATA	MEM_B_DQ<31..24>
MEM_B_DQ_BYTE4	MEM_50S	MEM_DATA	MEM_B_DQ<39..32>
MEM_B_DQ_BYTE5	MEM_50S	MEM_DATA	MEM_B_DQ<47..40>
MEM_B_DQ_BYTE6	MEM_50S	MEM_DATA	MEM_B_DQ<55..48>
MEM_B_DQ_BYTE7	MEM_50S	MEM_DATA	MEM_B_DQ<63..56>
MEM_B_DQS0	MEM_85D	MEM_DQS	MEM_B_DQS P<0>
MEM_B_DQS0	MEM_85D	MEM_DQS	MEM_B_DQS N<0>
MEM_B_DQS1	MEM_85D	MEM_DQS	MEM_B_DQS P<1>
MEM_B_DQS1	MEM_85D	MEM_DQS	MEM_B_DQS N<1>
MEM_B_DQS2	MEM_85D	MEM_DQS	MEM_B_DQS P<2>
MEM_B_DQS2	MEM_85D	MEM_DQS	MEM_B_DQS N<2>
MEM_B_DQS3	MEM_85D	MEM_DQS	MEM_B_DQS P<3>
MEM_B_DQS3	MEM_85D	MEM_DQS	MEM_B_DQS N<3>
MEM_B_DQS4	MEM_85D	MEM_DQS	MEM_B_DQS P<4>
MEM_B_DQS4	MEM_85D	MEM_DQS	MEM_B_DQS N<4>
MEM_B_DQS5	MEM_85D	MEM_DQS	MEM_B_DQS P<5>
MEM_B_DQS5	MEM_85D	MEM_DQS	MEM_B_DQS N<5>
MEM_B_DQS6	MEM_85D	MEM_DQS	MEM_B_DQS P<6>
MEM_B_DQS6	MEM_85D	MEM_DQS	MEM_B_DQS N<6>
MEM_B_DQS7	MEM_85D	MEM_DQS	MEM_B_DQS P<7>
MEM_B_DQS7	MEM_85D	MEM_DQS	MEM_B_DQS N<7>

SYNC MASTER=ANNE K901 SYNC DATE=05/28/2011

Apple Inc.

Memory Constraints

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

DRAWING NUMBER: 101 OF 109
 REVISION: 79 OF 86

Digital Video Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
DP_85D	*	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF
LVDS_90D	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
DISPLAYPORT	*	=3x_DIELECTRIC	?	DISPLAYPORT	TOP,BOTTOM	=4x_DIELECTRIC	?
LVDS	*	=3x_DIELECTRIC	?	LVDS	TOP,BOTTOM	=4x_DIELECTRIC	?

LVDS intra-pair matching should be 5 mils. Pairs should be within 100 mils of clock length.
 DisplayPort/TMDS intra-pair matching should be 5 ps. Inter-pair matching should be within 150 ps.
 DisplayPort AUX CH intra-pair matching should be 5 ps. No relationship to other signals.
 Max length of LVDS/DisplayPort/TMDS traces: 12 inches.
 SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Sections 2.5.3 & 2.5.4.

SATA Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SATA_90D	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SATA	*	=4x_DIELECTRIC	?	SATA	TOP,BOTTOM	=3x_DIELECTRIC	?
SATA_IOMP	*	8 MIL	?				

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.7.1.

USB 2.0 Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
PCH_USB_BIAS	*	=STANDARD	8 MIL	8 MIL	=STANDARD	=STANDARD	=STANDARD
USB_85D	*	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF	=85_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
USB	*	=2x_DIELECTRIC	?	USB	TOP,BOTTOM	=4x_DIELECTRIC	?

SOURCE: Calpella Platform Design Guide for Ixex Peak M (DG-398905-398905_v1.5), Section 3.8

PCH Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
DP_ML	DP_85D	DISPLAYPORT	DP IG ML P<3..0>	8
DP_ML	DP_85D	DISPLAYPORT	DP IG ML N<3..0>	8
DP_EXTA_AUXCH	DP_85D	DISPLAYPORT	DP EXTA AUXCH C P	8 17 75 81
DP_EXTA_AUXCH	DP_85D	DISPLAYPORT	DP EXTA AUXCH C N	8 17 75 81
LVDS_IG_A_CLK	LVDS_90D	LVDS	LVDS IG A CLK P	18 74
LVDS_IG_A_CLK	LVDS_90D	LVDS	LVDS IG A CLK N	18 74
LVDS_IG_A_DATA	LVDS_90D	LVDS	LVDS IG A DATA P<2..0>	6 18 74
LVDS_IG_A_DATA	LVDS_90D	LVDS	LVDS IG A DATA N<2..0>	6 18 74
	LVDS_90D	LVDS	NC LVDS IG A DATAP<3>	8 18
	LVDS_90D	LVDS	NC LVDS IG A DATAN<3>	8 18
	LVDS_90D	LVDS	LVDS IG B DATA P<3..0>	8
	LVDS_90D	LVDS	LVDS IG B DATA N<3..0>	8
	LVDS_90D	LVDS	TP LVDS IG B CLKP	6 8 18
	LVDS_90D	LVDS	TP LVDS IG B CLKN	6 8 18
SATA_HDD_R2D	SATA_90D	SATA	SATA HDD R2D C P	16 42
SATA_HDD_R2D	SATA_90D	SATA	SATA HDD R2D C N	16 42
SATA_HDD_R2D_CONN	SATA_90D	SATA	SATA HDD R2D P	6 42
SATA_HDD_R2D_CONN	SATA_90D	SATA	SATA HDD R2D N	6 42
SATA_HDD_D2R	SATA_90D	SATA	SATA HDD D2R P	16 42
SATA_HDD_D2R	SATA_90D	SATA	SATA HDD D2R N	16 42
SATA_HDD_D2R_CONN	SATA_90D	SATA	SATA HDD D2R C P	6 42
SATA_HDD_D2R_CONN	SATA_90D	SATA	SATA HDD D2R C N	6 42
SATA_ODD_R2D	SATA_90D	SATA	SATA ODD R2D C P	16 42
SATA_ODD_R2D	SATA_90D	SATA	SATA ODD R2D C N	16 42
SATA_ODD_R2D	SATA_90D	SATA	SATA ODD R2D P	6 42
SATA_ODD_R2D	SATA_90D	SATA	SATA ODD R2D N	6 42
SATA_ODD_D2R	SATA_90D	SATA	SATA ODD D2R P	16 42
SATA_ODD_D2R	SATA_90D	SATA	SATA ODD D2R N	16 42
SATA_HDD_R2D_CONN	SATA_90D	SATA	SATA HDD R2D RC P	42
SATA_HDD_R2D_CONN	SATA_90D	SATA	SATA HDD R2D RC N	42
SATA_HDD_D2R_CONN	SATA_90D	SATA	SATA HDD D2R RC P	42
SATA_HDD_D2R_CONN	SATA_90D	SATA	SATA HDD D2R RC N	42
PCH_SATA_IOMP	SATA_IOMP	SATA_IOMP	PCH SATAIOMP	16
USB_HUB1_UP	USB_85D	USB	USB_HUB1_UP_P	18 24
USB_HUB1_UP	USB_85D	USB	USB_HUB1_UP_N	18 24
USB_HUB2_UP	USB_85D	USB	USB_HUB2_UP_P	18 24
USB_HUB2_UP	USB_85D	USB	USB_HUB2_UP_N	18 24
USB_EXTA	USB_85D	USB	USB_EXTA_P	24 43
USB_EXTA	USB_85D	USB	USB_EXTA_N	24 43
USB_EXTB	USB_85D	USB	USB_EXTB_P	24 43
USB_EXTB	USB_85D	USB	USB_EXTB_N	24 43
USB_EXTC	USB_85D	USB	USB_EXTC_P	8 24
USB_EXTC	USB_85D	USB	USB_EXTC_N	8 24
USB_EXTD	USB_85D	USB	USB_T29A_P	8 24
USB_EXTD	USB_85D	USB	USB_T29A_N	8 24
	USB_85D	USB	T29_A_ESVD_P	8 75
	USB_85D	USB	T29_A_ESVD_N	8 75
USB_CAMERA	USB_85D	USB	USB_CAMERA_P	18 32
USB_CAMERA	USB_85D	USB	USB_CAMERA_N	18 32
USB_CAMERA	USB_85D	USB	USB_CAMERA_CONN_P	6 32
USB_CAMERA	USB_85D	USB	USB_CAMERA_CONN_N	6 32
USB_BT	USB_85D	USB	USB_BT_P	6 24 32
USB_BT	USB_85D	USB	USB_BT_N	6 24 32
USB_TPAD	USB_85D	USB	USB_TPAD_P	24 53
USB_TPAD	USB_85D	USB	USB_TPAD_N	24 53
USB_IR	USB_85D	USB	USB_IR_P	24 44
USB_IR	USB_85D	USB	USB_IR_N	24 44
USB_SDCARD	USB_85D	USB	USB_SDCARD_P	
USB_SDCARD	USB_85D	USB	USB_SDCARD_N	
USB_BRCRYPT	USB_85D	USB	USB_BRCRYPT_P	
USB_BRCRYPT	USB_85D	USB	USB_BRCRYPT_N	
PCH_USB_BIAS	PCH_USB_BIAS	PCH_USB_BIAS	PCH USB_BIAS	18
PCH_PCIE_CLK_UNUSED	CLK_PCIE_90D	CLK_PCIE	PCIE_CLK100M_PCH_P	16 25
PCH_PCIE_CLK_UNUSED	CLK_PCIE_90D	CLK_PCIE	PCIE_CLK100M_PCH_N	16 25
	CLK_PCIE_90D	CLK_PCIE	NC_FSB_CLK133M_PCH_P	8
	CLK_PCIE_90D	CLK_PCIE	NC_FSB_CLK133M_PCH_N	8
PCH_PCIE_CLK_UNUSED	CLK_PCIE_90D	CLK_PCIE	PCH_CLK96M_DOT_P	16 25
PCH_PCIE_CLK_UNUSED	CLK_PCIE_90D	CLK_PCIE	PCH_CLK96M_DOT_N	16 25
PCH_PCIE_CLK_UNUSED	CLK_PCIE_90D	CLK_PCIE	PCH_CLK100M_SATA_P	16 25
PCH_PCIE_CLK_UNUSED	CLK_PCIE_90D	CLK_PCIE	PCH_CLK100M_SATA_N	16 25
	CLK_PCIE_90D	CLK_PCIE	PCH_CLK14P3M_REFCLK	16 25
	CLK_PCIE_90D	CLK_PCIE	PCH_CLK33M_PCIEIN	16 26
GFX_CLK_DP1LSS	CLK_PCIE_90D	CLK_PCIE	GFX_CLK120M_DP1LSS_P	
GFX_CLK_DP1LSS	CLK_PCIE_90D	CLK_PCIE	GFX_CLK120M_DP1LSS_N	

SYNC MASTER=K91_MLB		SYNC DATE=05/15/2011	
PAGE TITLE			
PCH Constraints 1			
Apple Inc.		DRAWING NUMBER	SIZE
		REVISION	D
NOTICE OF PROPRIETARY PROPERTY:		BRANCH	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:			
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		PAGE	102 OF 109
II NOT TO REPRODUCE OR COPY IT		SHEET	80 OF 86
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

LPC Bus Constraints

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP. Includes rows for LPC_50S and CLK_LPC_50S.

SOURCE: Calpella Platform Design Guide for Ibox Peak M (DG-398905-398905_v1.5), Section 3.15

SMBus Interface Constraints

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP. Includes rows for SMB_50S and SMB.

HD Audio Interface Constraints

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP. Includes rows for HDA_50S and HDA.

SOURCE: Calpella Platform Design Guide for Ibox Peak M (DG-398905-398905_v1.5), Section 3.15

SIO Signal Constraints

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP. Includes rows for CLK_SLOW_55S and CLK_SLOW.

SPI Interface Constraints

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP. Includes rows for SPI_55S and SPI.

DisplayPort Signal Constraints

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP. Includes rows for DP_85D and DISPLAYPORT.

PCI-Express Signal Constraints

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP. Includes rows for PCIE_85D, CLK_PCIE_90D, and PCIE.

System Clock Signal Constraints

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP. Includes rows for CLK_SLOW_55S, CLK_25M_55S, and CLK_25M.

NOTE: 25MHz system clocks very sensitive to noise.

PCH Net Properties

Table with 3 columns: ELECTRICAL_CONSTRAINT_SET, PHYSICAL, SPACING. Lists various net types like LPC_AD<3..0>, LPC_FRAME_L, LPCPLUS RESET_L, etc.

Chipset Net Properties

Table with 3 columns: ELECTRICAL_CONSTRAINT_SET, PHYSICAL, SPACING. Lists various net types like DP_EXT_A ML C P<3..0>, DP_EXT_A ML C N<3..0>, etc.

Clock Net Properties

Table with 3 columns: ELECTRICAL_CONSTRAINT_SET, PHYSICAL, SPACING. Lists various net types like SYSCLK_CLK32K_RTC, SYSCLK_CLK25M_SB, etc.

D

C

B

A

D

C

B

A

Metadata block containing Apple logo, Apple Inc., drawing title 'PCH Constraints 2', drawing number, revision, and page information '103 OF 109' and '81 OF 86'.

CAESAR IV (Ethernet) Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
ENET_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
ENET_3X	*	=3:1_SPACING	?

SOURCE: Broadcom 5764-DS04-RDS Page 38

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
ENET_CR_DATA	*	5MIL	?

CAESAR IV (Ethernet PHY) Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
ENET_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
ENET_MDI	*	0.6 MM	?

SOURCE: Broadcom 5764-DS04-RDS Page 38

FireWire Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
FW_110D	*	=110_OHM_DIFF	=110_OHM_DIFF	=110_OHM_DIFF	=110_OHM_DIFF	=110_OHM_DIFF	=110_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
FW_TP	*	=3:1_SPACING	?

Ethernet Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
ENET_50S	ENET_3X	ENET_3X	BCM5764_CLK25M_XTALI	
ENET_50S	ENET_3X	ENET_3X	BCM5764_CLK25M_XTALO	
ENET_50S	ENET_3X	ENET_3X	ENET_RESET_L	33 37
ENET_MDI	ENET_100D	ENET_MDI	ENET_MDI_P<3..0>	37 38
ENET_MDI	ENET_100D	ENET_MDI	ENET_MDI_N<3..0>	37 38
ENET_CR_DATA	ENET_50S	ENET_CR_DATA	ENET_CR_DATA<7..0>	33 37
ENET_CR_DATA	ENET_50S	ENET_CR_DATA	ENET_CR_CMD	33 37
ENET_CR_CLK	ENET_50S	ENET_CR_DATA	ENET_CR_CLK	33 37
ENET_CR_DATA	ENET_50S	ENET_CR_DATA	SDCONN_DATA<7..0>	33
ENET_CR_DATA	ENET_50S	ENET_CR_DATA	SDCONN_CMD	33
ENET_CR_CLK	ENET_50S	ENET_CR_DATA	SDCONN_CLK	33
ENET_CR_CLK	ENET_50S	ENET_CR_DATA	SDCONN_CLK_L	33

FireWire Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE			
	PHYSICAL	SPACING		
FW_D0_TPA	FW_110D	FW_TP	NC_FW0_TPAP	6 39 41
FW_D0_TPA	FW_110D	FW_TP	NC_FW0_TPAN	39 41
FW_D0_TPB	FW_110D	FW_TP	NC_FW0_TBPB	6 39 41
FW_D0_TPB	FW_110D	FW_TP	NC_FW0_TBPN	6 39 41
FW_D1_TPA	FW_110D	FW_TP	FW_PORT1_TPA_P	39 41
FW_D1_TPA	FW_110D	FW_TP	FW_PORT1_TPA_N	39 41
FW_D1_TPB	FW_110D	FW_TP	FW_PORT1_TPB_P	39 41
FW_D1_TPB	FW_110D	FW_TP	FW_PORT1_TPB_N	39 41
Port 2 Not Used				

SYNC MASTER=K91_MLB SYNC DATE=05/15/2011

Ethernet/FW Constraints

Apple Inc.

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:
 I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 II NOT TO REPRODUCE OR COPY IT
 III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 IV ALL RIGHTS RESERVED

DRAWING NUMBER: D
 REVISION:
 BRANCH:
 PAGE: 104 OF 109
 SHEET: 82 OF 86

DisplayPort Signal Constraints

NOTE: DisplayPort Physical/Spacing Constraints provided by Chipset or GPU page.

T29 I2C Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
T29_I2C_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
T29_I2C	*	=2x_DIELECTRIC	?

T29 SPI Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
T29_SPI_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
T29_SPI	*	=2x_DIELECTRIC	?

T29/DP Connector Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
T29DP_80D	*	=80_OHM_DIFF	=80_OHM_DIFF	=80_OHM_DIFF	=80_OHM_DIFF	=80_OHM_DIFF	=80_OHM_DIFF
T29DP_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT	SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
T29DP	*	=5x_DIELECTRIC	?	T29DP	TOP,BOTTOM	=7x_DIELECTRIC	?

SOURCE: Bill Cornelius's T29 Routing Notes

T29/DP Net Properties

ELECTRICAL_CONSTRAINT_SET	NET TYPE		
	PHYSICAL	SPACING	
T29_R2D0	T29DP_80D	T29DP	T29 R2D P<0>
T29_R2D0	T29DP_80D	T29DP	T29 R2D N<0>
T29_R2D1	T29DP_80D	T29DP	T29 R2D P<1>
T29_R2D1	T29DP_80D	T29DP	T29 R2D N<1>
T29DP_80D	T29DP_80D	T29DP	T29 R2D C F P<1..0>
T29DP_80D	T29DP_80D	T29DP	T29 R2D C F N<1..0>
T29_D2R0	T29DP_100D	T29DP	T29 D2R C P<0>
T29_D2R0	T29DP_100D	T29DP	T29 D2R C N<0>
T29_D2R1	T29DP_100D	T29DP	T29 D2R C P<1>
T29_D2R1	T29DP_100D	T29DP	T29 D2R C N<1>
T29DP_100D	T29DP_100D	T29DP	T29DPA D2R1 AUXCH P
T29DP_100D	T29DP_100D	T29DP	T29DPA D2R1 AUXCH N
T29DP_80D	T29DP_80D	T29DP	DP SDRVA ML C P<3..0>
T29DP_80D	T29DP_80D	T29DP	DP SDRVA ML C N<3..0>
T29DP_80D	T29DP_80D	T29DP	DP SDRVA ML R P<3..0>
T29DP_80D	T29DP_80D	T29DP	DP SDRVA ML R N<3..0>
DP_SDRVA_ML_EVEN	T29DP_80D	T29DP	DP SDRVA ML P<2..0:2>
DP_SDRVA_ML_EVEN	T29DP_80D	T29DP	DP SDRVA ML N<2..0:2>
DP_SDRVA_ML_ODD	T29DP_80D	T29DP	DP SDRVA ML P<3..1:2>
DP_SDRVA_ML_ODD	T29DP_80D	T29DP	DP SDRVA ML N<3..1:2>
DP_SDRVA_AUXCH	T29DP_80D	T29DP	DP SDRVA AUXCH P
DP_SDRVA_AUXCH	T29DP_80D	T29DP	DP SDRVA AUXCH N
DP_SDRVA_AUXCH	T29DP_80D	T29DP	DP SDRVA AUXCH C P
DP_SDRVA_AUXCH	T29DP_80D	T29DP	DP SDRVA AUXCH C N
T29DP_80D	T29DP_80D	T29DP	T29DPA ML P<3..0>
T29DP_80D	T29DP_80D	T29DP	T29DPA ML N<3..0>
T29DP_80D	T29DP_80D	T29DP	T29DPA ML C P<3..0>
T29DP_80D	T29DP_80D	T29DP	T29DPA ML C N<3..0>
T29DP_80D	T29DP_80D	T29DP	DP A EXT AUXCH P
T29DP_80D	T29DP_80D	T29DP	DP A EXT AUXCH N
T29_R2D2	T29DP_80D	T29DP	T29 R2D P<2>
T29_R2D2	T29DP_80D	T29DP	T29 R2D N<2>
T29_R2D3	T29DP_80D	T29DP	T29 R2D P<3>
T29_R2D3	T29DP_80D	T29DP	T29 R2D N<3>
T29DP_80D	T29DP_80D	T29DP	T29 R2D C F P<3..2>
T29DP_80D	T29DP_80D	T29DP	T29 R2D C F N<3..2>
T29_D2R2	T29DP_100D	T29DP	T29 D2R C P<2>
T29_D2R2	T29DP_100D	T29DP	T29 D2R C N<2>
T29_D2R3	T29DP_100D	T29DP	T29 D2R C P<3>
T29_D2R3	T29DP_100D	T29DP	T29 D2R C N<3>
T29DP_100D	T29DP_100D	T29DP	T29DPB D2R3 AUXCH P
T29DP_100D	T29DP_100D	T29DP	T29DPB D2R3 AUXCH N
T29DP_80D	T29DP_80D	T29DP	DP SDRVB ML C P<3..0>
T29DP_80D	T29DP_80D	T29DP	DP SDRVB ML C N<3..0>
T29DP_80D	T29DP_80D	T29DP	DP SDRVB ML R P<3..0>
T29DP_80D	T29DP_80D	T29DP	DP SDRVB ML R N<3..0>
DP_SDRVB_ML_EVEN	T29DP_80D	T29DP	DP SDRVB ML P<2..0:2>
DP_SDRVB_ML_EVEN	T29DP_80D	T29DP	DP SDRVB ML N<2..0:2>
DP_SDRVB_ML_ODD	T29DP_80D	T29DP	DP SDRVB ML P<3..1:2>
DP_SDRVB_ML_ODD	T29DP_80D	T29DP	DP SDRVB ML N<3..1:2>
DP_SDRVB_AUXCH	T29DP_80D	T29DP	DP SDRVB AUXCH P
DP_SDRVB_AUXCH	T29DP_80D	T29DP	DP SDRVB AUXCH N
DP_SDRVB_AUXCH	T29DP_80D	T29DP	DP SDRVB AUXCH C P
DP_SDRVB_AUXCH	T29DP_80D	T29DP	DP SDRVB AUXCH C N
T29DP_80D	T29DP_80D	T29DP	T29DPB ML P<3..0>
T29DP_80D	T29DP_80D	T29DP	T29DPB ML N<3..0>
T29DP_80D	T29DP_80D	T29DP	T29DPB ML C P<3..0>
T29DP_80D	T29DP_80D	T29DP	T29DPB ML C N<3..0>
T29DP_80D	T29DP_80D	T29DP	DP B EXT AUXCH P
T29DP_80D	T29DP_80D	T29DP	DP B EXT AUXCH N

Only used on dual-port hosts.

T29 IC Net Properties

ELECTRICAL_CONSTRAINT_SET	NET TYPE		
	PHYSICAL	SPACING	
DP_T29SNK0_ML	DP_85D	DISPLAYPORT	DP T29SNK0 ML C P<3..0>
DP_T29SNK0_ML	DP_85D	DISPLAYPORT	DP T29SNK0 ML C N<3..0>
DP_T29SNK0_ML	DP_85D	DISPLAYPORT	DP T29SNK0 ML P<3..0>
DP_T29SNK0_ML	DP_85D	DISPLAYPORT	DP T29SNK0 ML N<3..0>
DP_T29SNK0_AUXCH	DP_85D	DISPLAYPORT	DP T29SNK0 AUXCH C P
DP_T29SNK0_AUXCH	DP_85D	DISPLAYPORT	DP T29SNK0 AUXCH C N
DP_T29SNK0_AUXCH	DP_85D	DISPLAYPORT	DP T29SNK0 AUXCH P
DP_T29SNK0_AUXCH	DP_85D	DISPLAYPORT	DP T29SNK0 AUXCH N
DP_T29SNK1_ML	DP_85D	DISPLAYPORT	DP T29SNK1 ML C P<3..0>
DP_T29SNK1_ML	DP_85D	DISPLAYPORT	DP T29SNK1 ML C N<3..0>
DP_T29SNK1_ML	DP_85D	DISPLAYPORT	DP T29SNK1 ML P<3..0>
DP_T29SNK1_ML	DP_85D	DISPLAYPORT	DP T29SNK1 ML N<3..0>
DP_T29SNK1_AUXCH	DP_85D	DISPLAYPORT	DP T29SNK1 AUXCH C P
DP_T29SNK1_AUXCH	DP_85D	DISPLAYPORT	DP T29SNK1 AUXCH C N
DP_T29SNK1_AUXCH	DP_85D	DISPLAYPORT	DP T29SNK1 AUXCH P
DP_T29SNK1_AUXCH	DP_85D	DISPLAYPORT	DP T29SNK1 AUXCH N
DP_T29SRC_ML	DP_85D	DISPLAYPORT	DP T29SRC ML C P<3..0>
DP_T29SRC_ML	DP_85D	DISPLAYPORT	DP T29SRC ML C N<3..0>
DP_T29SRC_AUXCH	DP_85D	DISPLAYPORT	DP T29SRC AUXCH C P
DP_T29SRC_AUXCH	DP_85D	DISPLAYPORT	DP T29SRC AUXCH C N
T29_I2C_55S	T29_I2C	I2C	I2C T29_SCL
T29_I2C_55S	T29_I2C	I2C	I2C T29_SDA
T29_SPI_CLK	T29_SPI_55S	T29_SPI	T29 SPI_CLK
T29_SPI_MOSI	T29_SPI_55S	T29_SPI	T29 SPI_MOSI
T29_SPI_MISO	T29_SPI_55S	T29_SPI	T29 SPI_MISO
T29_SPI_CS_L	T29_SPI_55S	T29_SPI	T29 SPI_CS_L
T29DP_80D	T29DP	T29DP	T29 R2D C P<3..0>
T29DP_80D	T29DP	T29DP	T29 R2D C N<3..0>
T29DP_100D	T29DP	T29DP	T29 D2R P<3..0>
T29DP_100D	T29DP	T29DP	T29 D2R N<3..0>

Only used on hosts supporting T29 video-in

SYNC MASTER=Master		SYNC DATE=06/21/2011	
PAGE TITLE			
T29 Constraints		DRAWING NUMBER	SIZE
		Apple Inc.	D
NOTICE OF PROPRIETARY PROPERTY:		REVISION	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART IV ALL RIGHTS RESERVED		BRANCH	
		PAGE	105 OF 109
		SHEET	83 OF 86

8

7

6

5

4

3

2

1

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
1TO1_DIFFPAIR	*	=STANDARD	=STANDARD	=STANDARD	=STANDARD	0.1 MM	0.1 MM

SMC SMBus Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE		NET_NAME	SIZE
	PHYSICAL	SPACING		
SMBUS_SMC_A_S3_SCL	SMB_50S	250S	SMBUS_SMC_A_S3_SCL	6 32 45 48 54 55
SMBUS_SMC_A_S3_SDA	SMB_50S	250S	SMBUS_SMC_A_S3_SDA	6 32 45 48 54 55
SMBUS_SMC_B_S0_SCL	SMB_50S	250S	SMBUS_SMC_B_S0_SCL	45 48 51
SMBUS_SMC_B_S0_SDA	SMB_50S	250S	SMBUS_SMC_B_S0_SDA	45 48 51
SMBUS_SMC_O_S0_SCL	SMB_50S	250S	SMBUS_SMC_O_S0_SCL	6 32 45 48 51
SMBUS_SMC_O_S0_SDA	SMB_50S	250S	SMBUS_SMC_O_S0_SDA	6 32 45 48 51
SMBUS_SMC_BSA_SCL	SMB_50S	250S	SMBUS_SMC_BSA_SCL	6 45 48 53 64
SMBUS_SMC_BSA_SDA	SMB_50S	250S	SMBUS_SMC_BSA_SDA	6 45 48 53 64
SMBUS_SMC_MGMT_SCL	SMB_50S	250S	SMBUS_SMC_MGMT_SCL	45 48
SMBUS_SMC_MGMT_SDA	SMB_50S	250S	SMBUS_SMC_MGMT_SDA	45 48

SMBus Charger Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE		NET_NAME	SIZE
	PHYSICAL	SPACING		
CHGR_CSI	1TO1_DIFFPAIR		CHGR_CSI_P	64
	1TO1_DIFFPAIR		CHGR_CSI_N	64
CHGR_CSO	1TO1_DIFFPAIR		CHGR_CSO_P	64
	1TO1_DIFFPAIR		CHGR_CSO_N	64

D

D

C

C

B

B

A

A

SYNC MASTER=K91_MLB		SYNC DATE=05/15/2010	
PAGE TITLE: SMC Constraints			
DRAWING NUMBER: D		SIZE: D	
Apple Inc.		REVISION:	
NOTICE OF PROPRIETARY PROPERTY:		BRANCH:	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING:		PAGE: 106 OF 109	
I TO MAINTAIN THIS DOCUMENT IN CONFIDENCE		SHEET: 84 OF 86	
II NOT TO REPRODUCE OR COPY IT			
III NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART			
IV ALL RIGHTS RESERVED			

8

7

6

5

4

3

2

1

K90i Board-Specific Spacing & Physical Constraints

Summary table with columns: BOARD LAYERS, BOARD AREAS, BOARD UNITS (MILS OR MM), ALLEGRO VERSION

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

NOTE: These are Intel recommended impedances for PEG, unused on K90i.

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 4 columns: SPACING_RULE_SET, LAYER, LINE-TO-LINE SPACING, WEIGHT

Table with 4 columns: NET_SPACING_TYPE1, NET_SPACING_TYPE2, AREA_TYPE, SPACING_RULE_SET

Table with 4 columns: SPACING_RULE_SET, LAYER, LINE-TO-LINE SPACING, WEIGHT

Table with 4 columns: SPACING_RULE_SET, LAYER, LINE-TO-LINE SPACING, WEIGHT

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

NOTE: 85_DIFF_BGA is 85-ohms differential impedance on outer layers and 80-ohms on inner layers.

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

NOTE: 90_DIFF_BGA is 90-ohms differential impedance on outer layers and 85-ohms on inner layers.

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

NOTE: 100_DIFF_BGA is 100-ohms differential impedance on outer layers and 95-ohms on inner layers.

Table with 8 columns: PHYSICAL_RULE_SET, LAYER, ALLOW ROUTE ON LAYER?, MINIMUM LINE WIDTH, MINIMUM NECK WIDTH, MAXIMUM NECK LENGTH, DIFFPAIR PRIMARY GAP, DIFFPAIR NECK GAP

NOTE: 110_DIFF is 110-ohms differential impedance on outer layers and 105-ohms on inner layers.

SYNC MASTER=ANNE K90I SYNC DATE=06/08/2011

PCB Rule Definitions header with Apple logo, drawing number, revision, and a notice of proprietary property.