



Repairing IBM ThinkPad 560z Screen

Tools used in this guide

- [#00 Phillips Screwdriver](#)
- [Thumb Tack](#)



Step 1 - installation Battery

- Slide the button to the right and hold.



Step 2

- Slide the battery out.



Step 3 - Screen

- Use a push pin to remove the plastic screw covers.



Step 4

- Use the screwdriver to remove the Phillips screws.
- Be careful when removing the screws, as they can become stripped easily.



Step 5

- Insert the iPod opening tool between the screen cover and back cover to pry open.




Step 6

- Remove the cover by pulling down on the sides.



Step 7

- Use the screwdriver to remove the 4 Phillips screws.

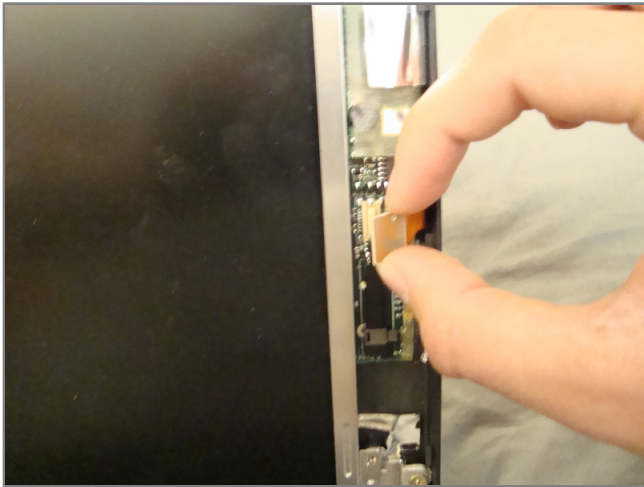



Step 8

- Using your hands, detach the connector on the right side of the screen.



Step 9

- The screen has a similar connector on the back which can be damaged if not careful.
- Slowly pull back the screen from the top.

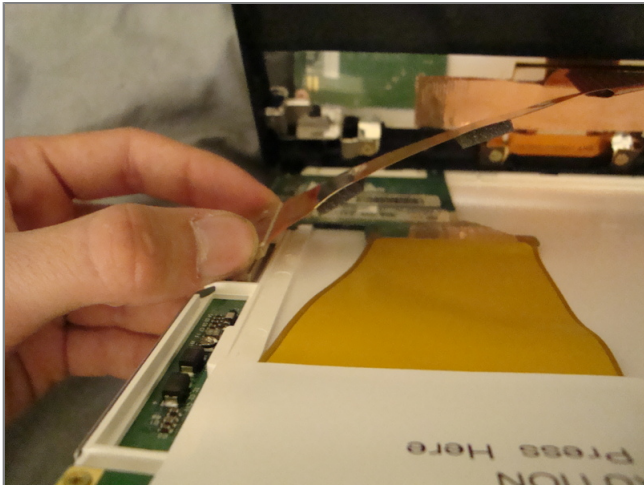

Step 10

- Use your fingers to detach the connector and free the screen.