



Installing Zune Flash 2nd Generation Back Cover



Tools used in this guide

- [Plastic Opening Tools](#)
- [Tri-wing Screwdriver](#)




Step 1 - Back Cover

- Prior to disassembly, verify the hold switch is engaged to ensure the device will not turn on during the procedure.
- If the device turns on while it is being disassembled it could cause irreversible damage to the device.
- PICS MAKE NO SENSE.

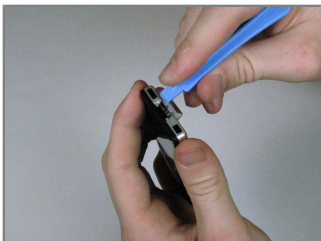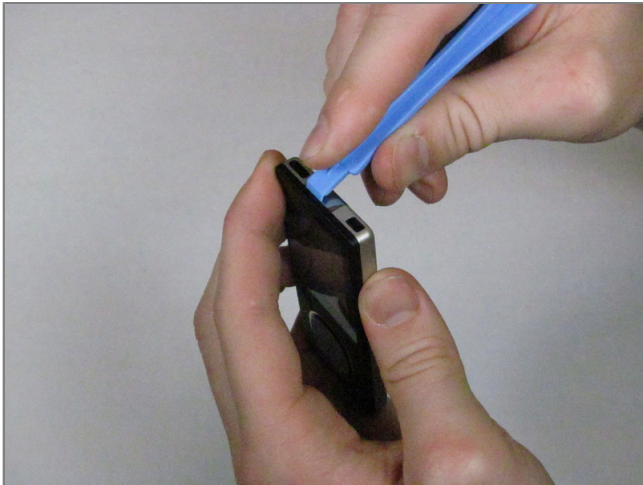


Step 2

- Remove the top metal clip by inserting an iPod opening tool in between the faceplate and back cover and pulling gently back as shown in the images.
- You should hear a 'click' as the clip detaches from the device.

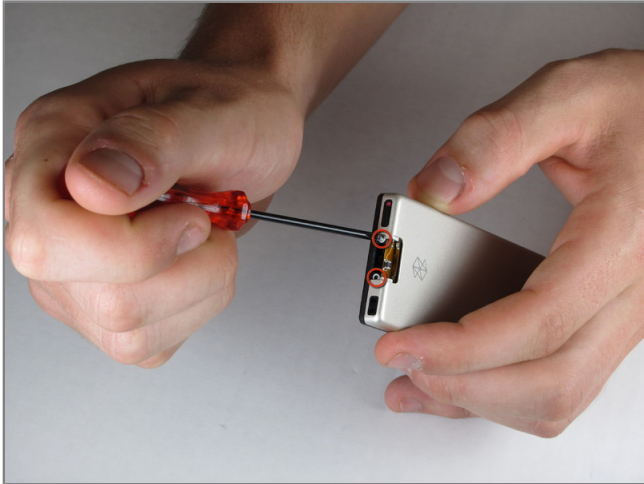


Step 3


- Remove the two screws shown using a small Tri-Wing screwdriver.
- You will need to use a very small Tri-Wing screwdriver to ensure that you do not strip the screws.

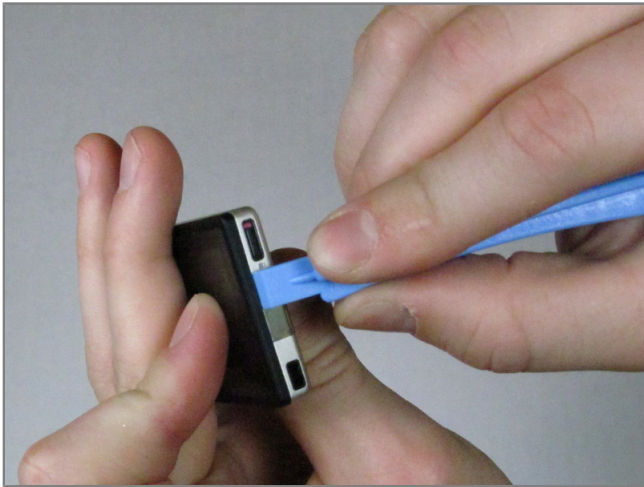

Step 4

- Insert the iPod opening tool between the faceplate and the back cover, starting from the top and slowly work your way around the device.

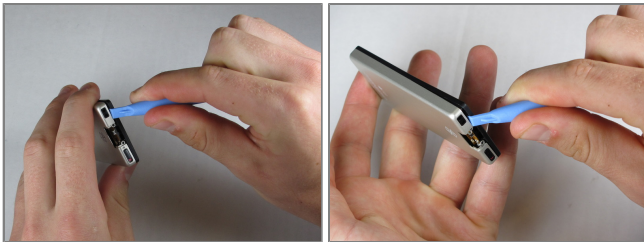

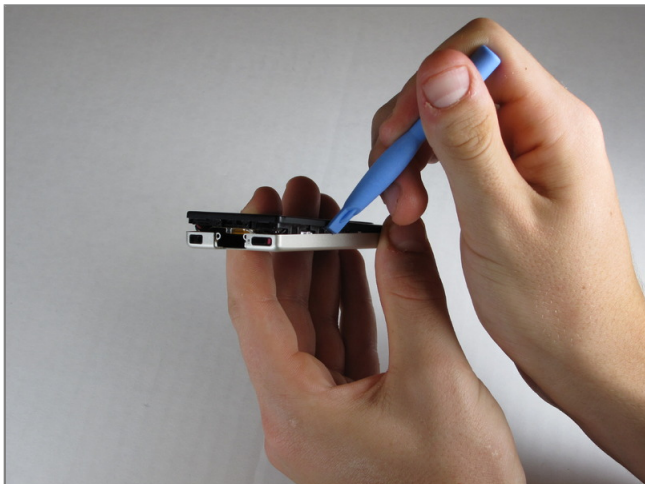

Step 5

- Work your way around the Zune until the back cover comes free. Remove the back plate and set it aside.

