

3 Schematic Diagrams and PCB Silkscreen

3-1 Main Board

3-1-1 Schematic Diagrams

[CONTENTS]	Cover & Contents
Sheet 1.	BLOCK / POWER / CLK / PLATFORM INFO / RESET
Sheet 2-6.	Clock Generator
Sheet 7.	CPU (Pentium-IV)
Sheet 8-9.	Thermal Sensor
Sheet 10.	845G
Sheet 11-13.	845G GLUE LOGIC
Sheet 14.	CH7017
Sheet 15.	LCD / CRT
Sheet 16.	SDR MEMORY
Sheet 17.	ICH4
Sheet 18-20.	FWH
Sheet 21.	MICOM
Sheet 22.	MICOM GLUE LOGIC
Sheet 23.	POWER LED / KBD / PS2 / TOUCHPAD
Sheet 24.	AC97 CODEC
Sheet 25.	AMP / SPK / MIC / SPDIF
Sheet 26.	HDD / CD
Sheet 27.	CARDBUS CONTROLLER
Sheet 28.	CARDBUS SOCKET
Sheet 29.	1394 Controller & PHY
Sheet 30.	SUPER I/O
Sheet 31.	PIO & USB
Sheet 32.	Kinnereth & MDC
Sheet 33.	MINIPCI
Sheet 34.	LED / SWITCH
Sheet 35.	DC Jack & B/D to B/D & bypass
Sheet 36.	CHARGING CIRCUIT
Sheet 37.	CPU DC/DC
Sheet 38.	

DRACO


CPU : Pentium-IV
Chip Set : Brookdale-GL / ICH4

Model Name	: DRACO
PBA Name	: MAIN BOARD
PCB Code	:
Dev. Step	: MP
Revision	: 1.0
T.R. Date	: Aug, 15, 2002

DRAW	CHECK	APPROVAL
W.S. Jung	H.J. KIM	Kevin, Lee


☐ Owner : Signature : X

3-1-1(a) Main Board Schematic Sheet 2 of 39(CLOCK GENERATOR)

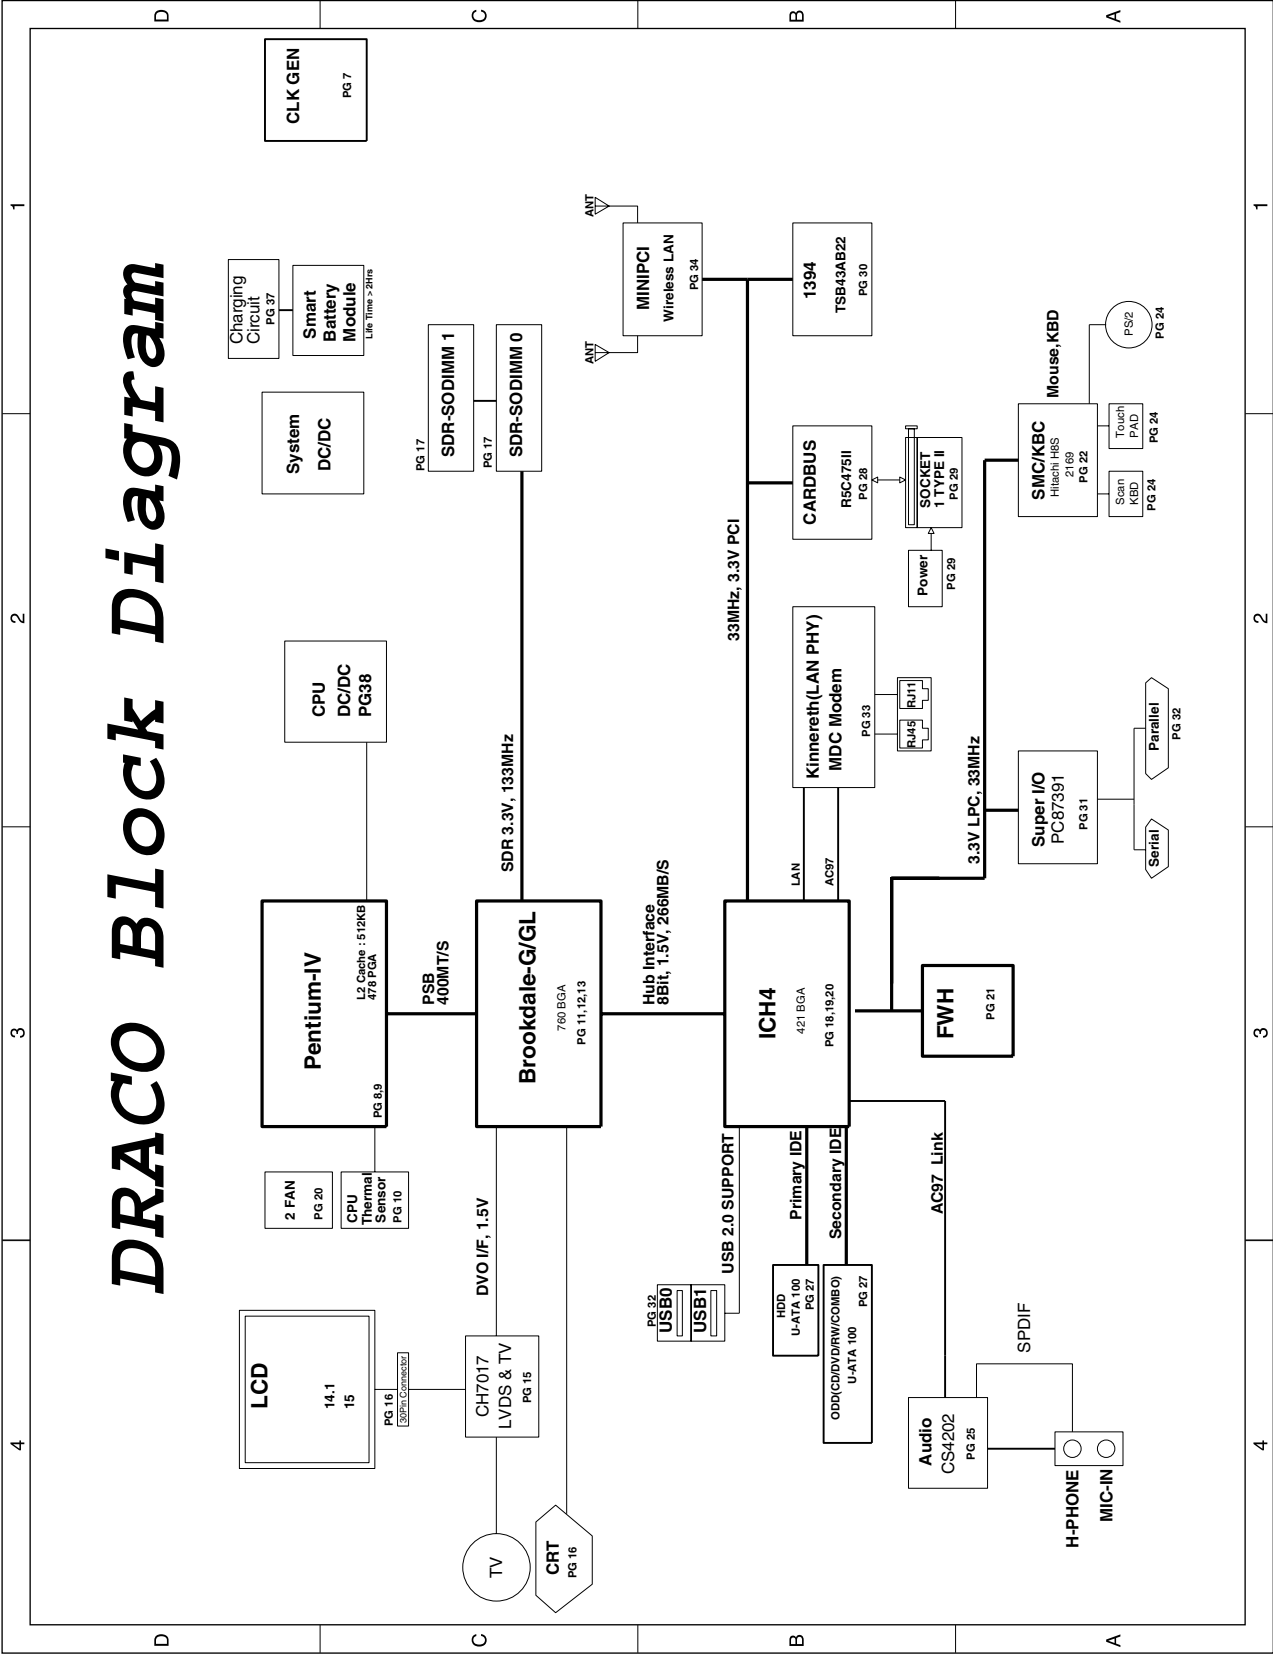



3-1-1(c) Main Board Schematic Sheet 4 of 39(CLK DIARAM)

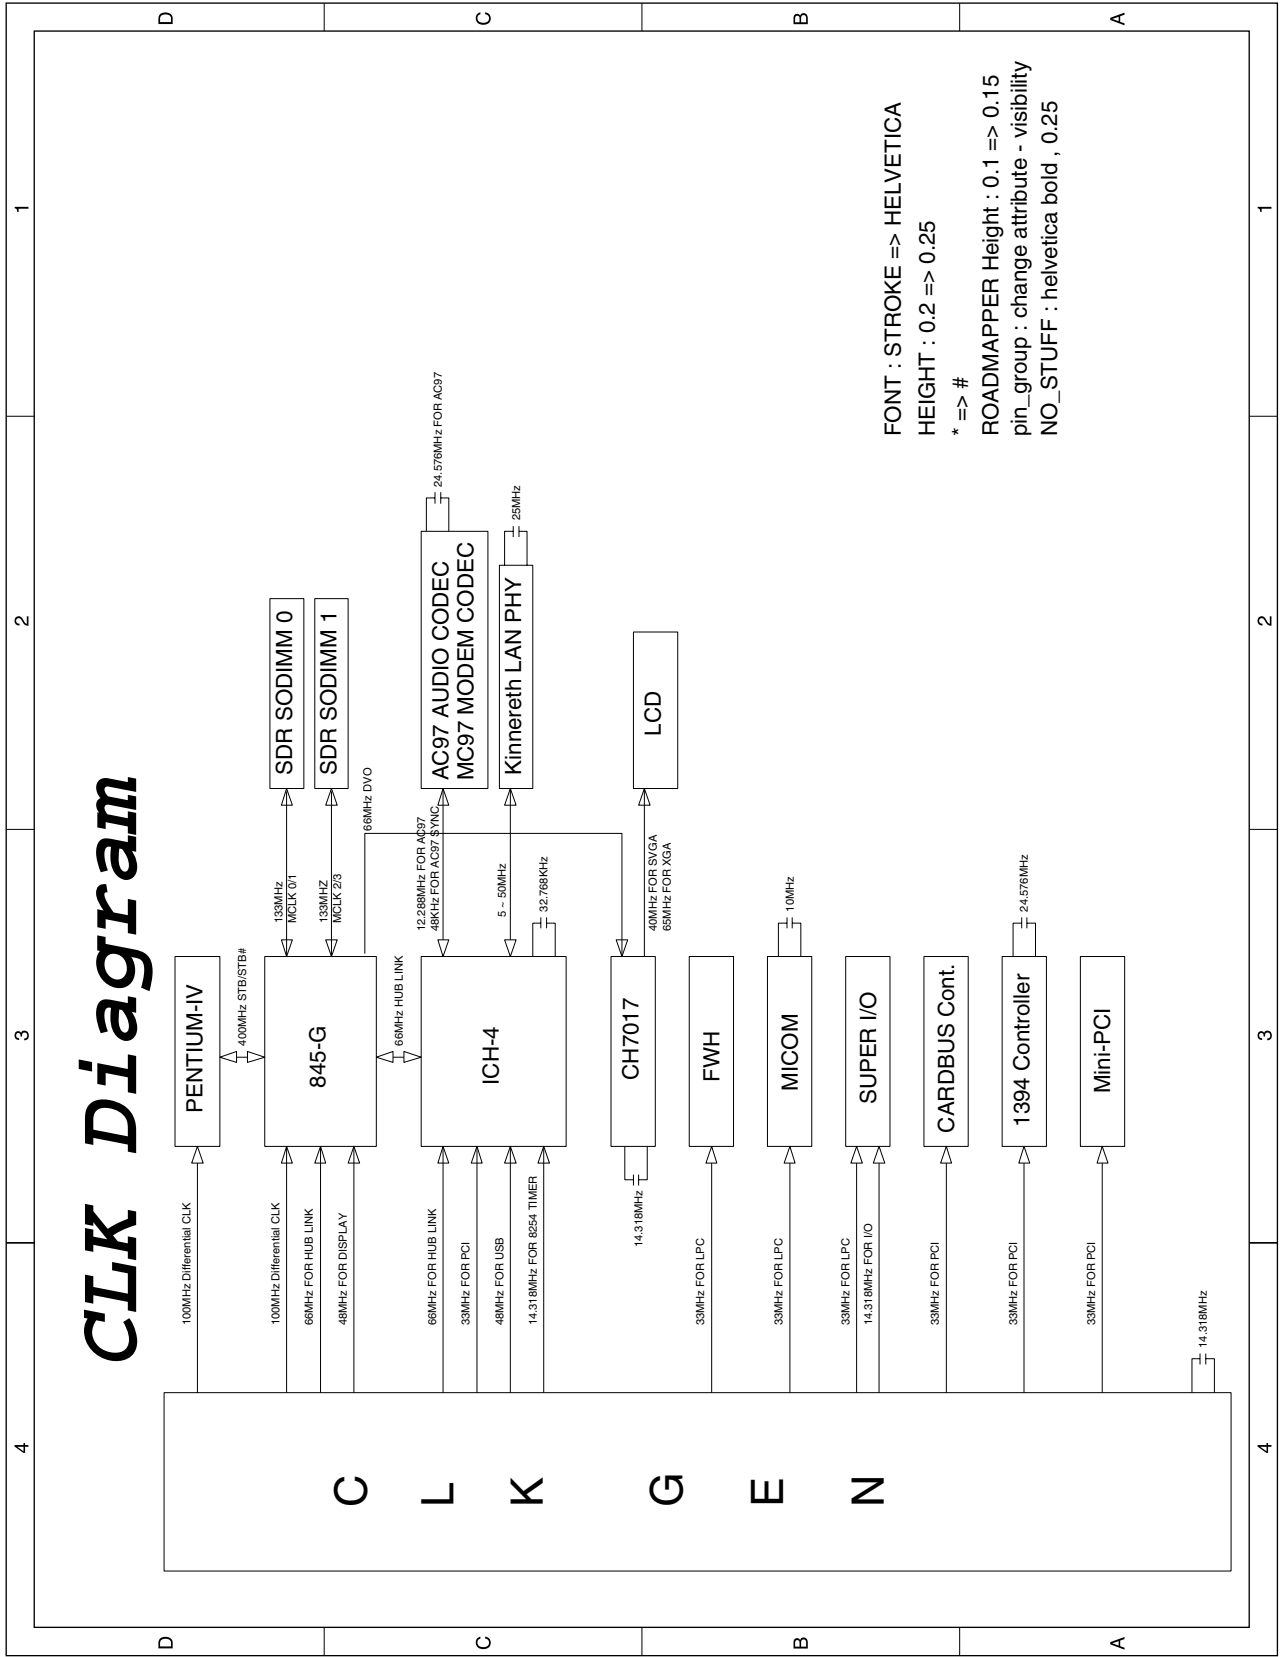

3-1-1(d) Main Board Schematic Sheet 5 of 39(PLATFORM INFORMATION)

DRACO REFERENCE PLATFORM

SCHEMATIC ANNOTATIONS AND BOARD INFORMATION

PCI Devices

Devices	IDSEL#	REG/INT#	Interrupts
Cardbus	AD19	0	A,B
AGP	AD17(internal)	0	A,B
PCI	AD16	2	A,B
Knimeth	AD24(internal)	0	USB2.0 #0 : A
USB	AD25(internal)	0	USB2.0 #1 : D

Make to PCI

AD30(internal)

:

B

AD31(internal)

:

I²C / SMB Address

Devices	Address	Hex	Bus
ICH4	Master	-	SMBUS Master
ADM1032 (CPU Thermal Sensor)	0100 110x	4Ch	Thermal Sensor
ADM1021 (CPU Thermal Sensor)	0100 110x	4Ch	Thermal Sensor
SDRAM	1010 000x	A2h	SDRAM
SDRAM	1101 000x	D2h	SDRAM
CK-Titan (Clock Generator)	1110 101x	EAh	SDR SDRAM1
LVDS & TV Encoder(CH7017)	1110 101x	EAh	Clock Unused Clock Output Disable
			I2C BUS

CPU Core Voltage Table

VID4	VID3	VID2	VID1	VID0	Voltage
0	1	1	0	0	1.550 V
0	1	1	0	1	1.525 V
0	1	1	1	0	1.500 V
0	1	1	1	1	1.475 V
1	0	0	0	0	1.450 V
1	0	0	0	1	1.425 V
1	0	0	1	0	1.400 V
1	0	0	1	1	1.375 V
1	0	1	0	0	1.350 V
1	0	1	0	1	1.325 V


USB PORT Assign

PORT NUMBER	ASSIGNED TO
0	SYSTEM A
2	SYSTEM B
1, 3-5	(RESERVED)


REVISION HISTORY

See rev notes in the changes file for more information.


3-1-1(e) Main Board Schematic Sheet 6 of 39(CLK GEN)

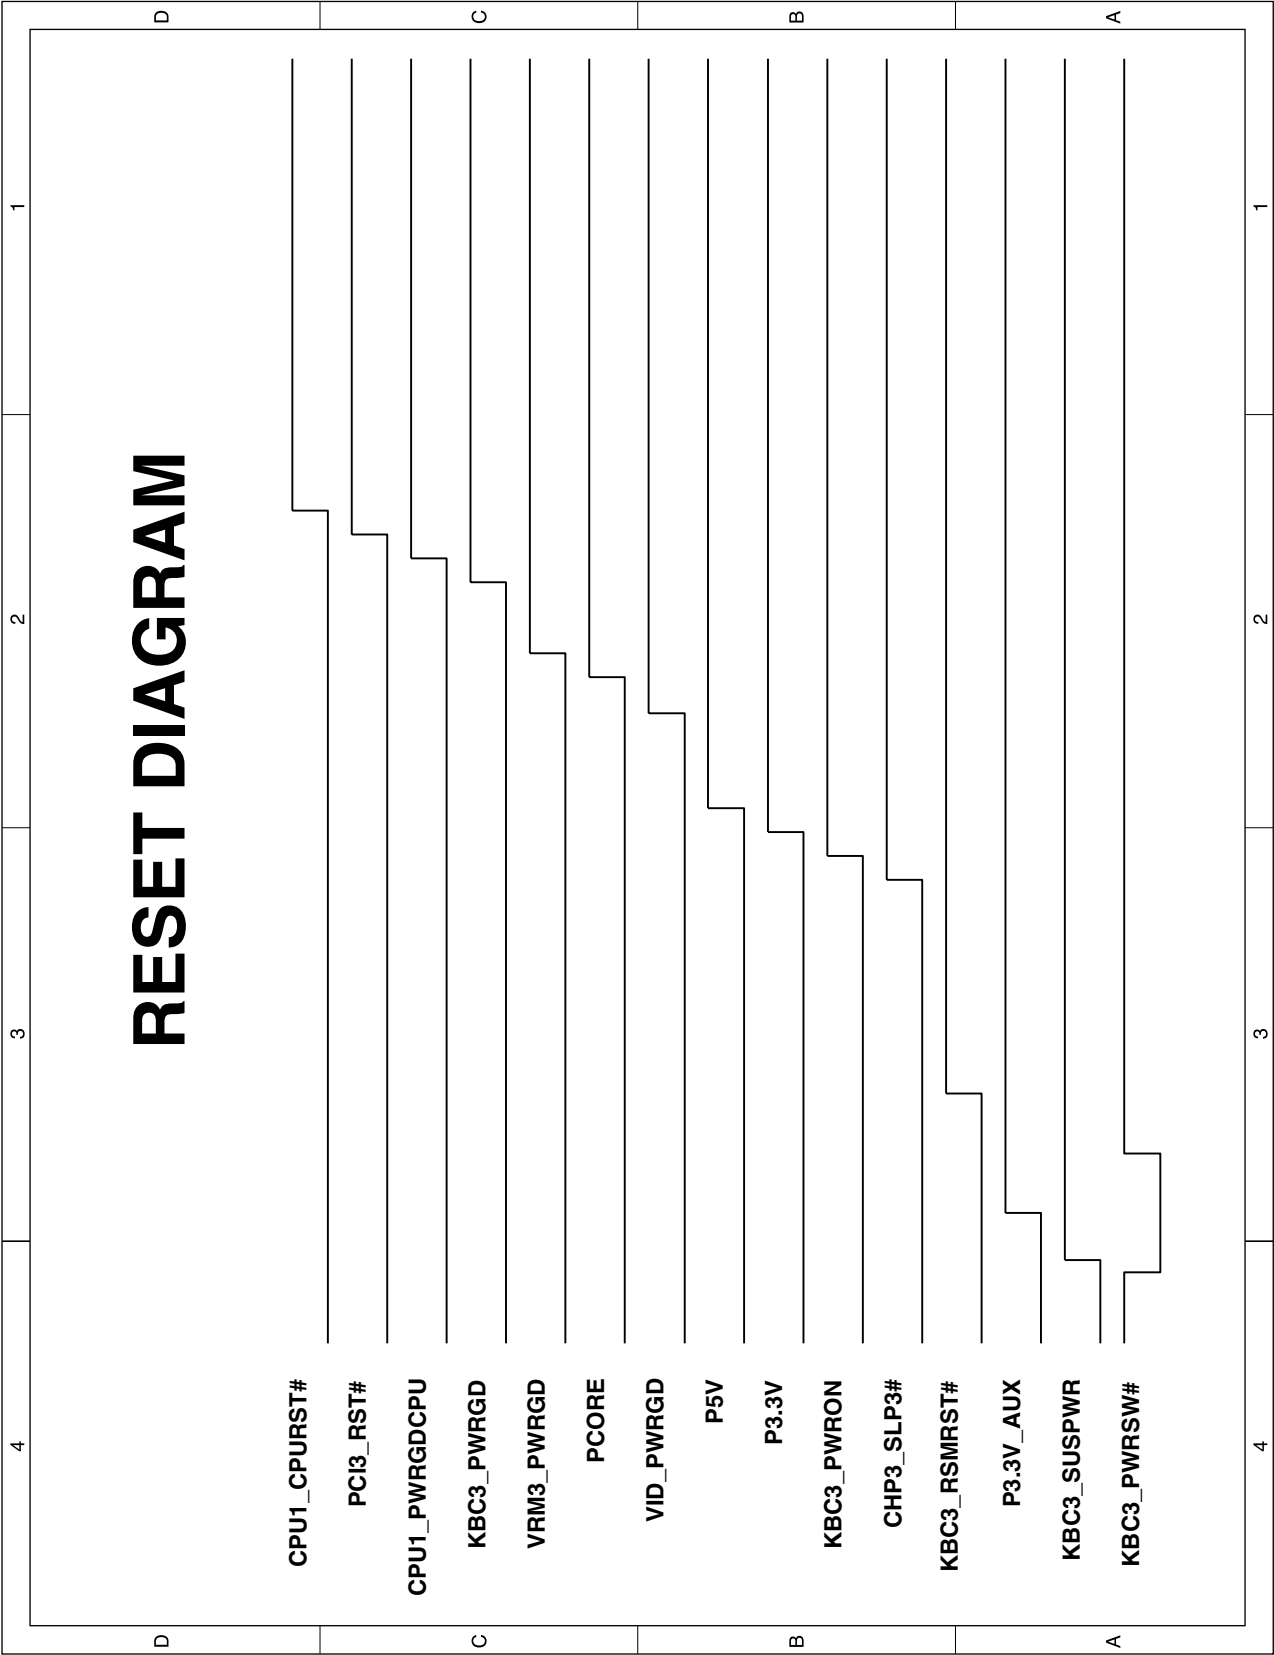


3-1-1(f) Main Board Schematic Sheet 7 of 39(CLK GEN)

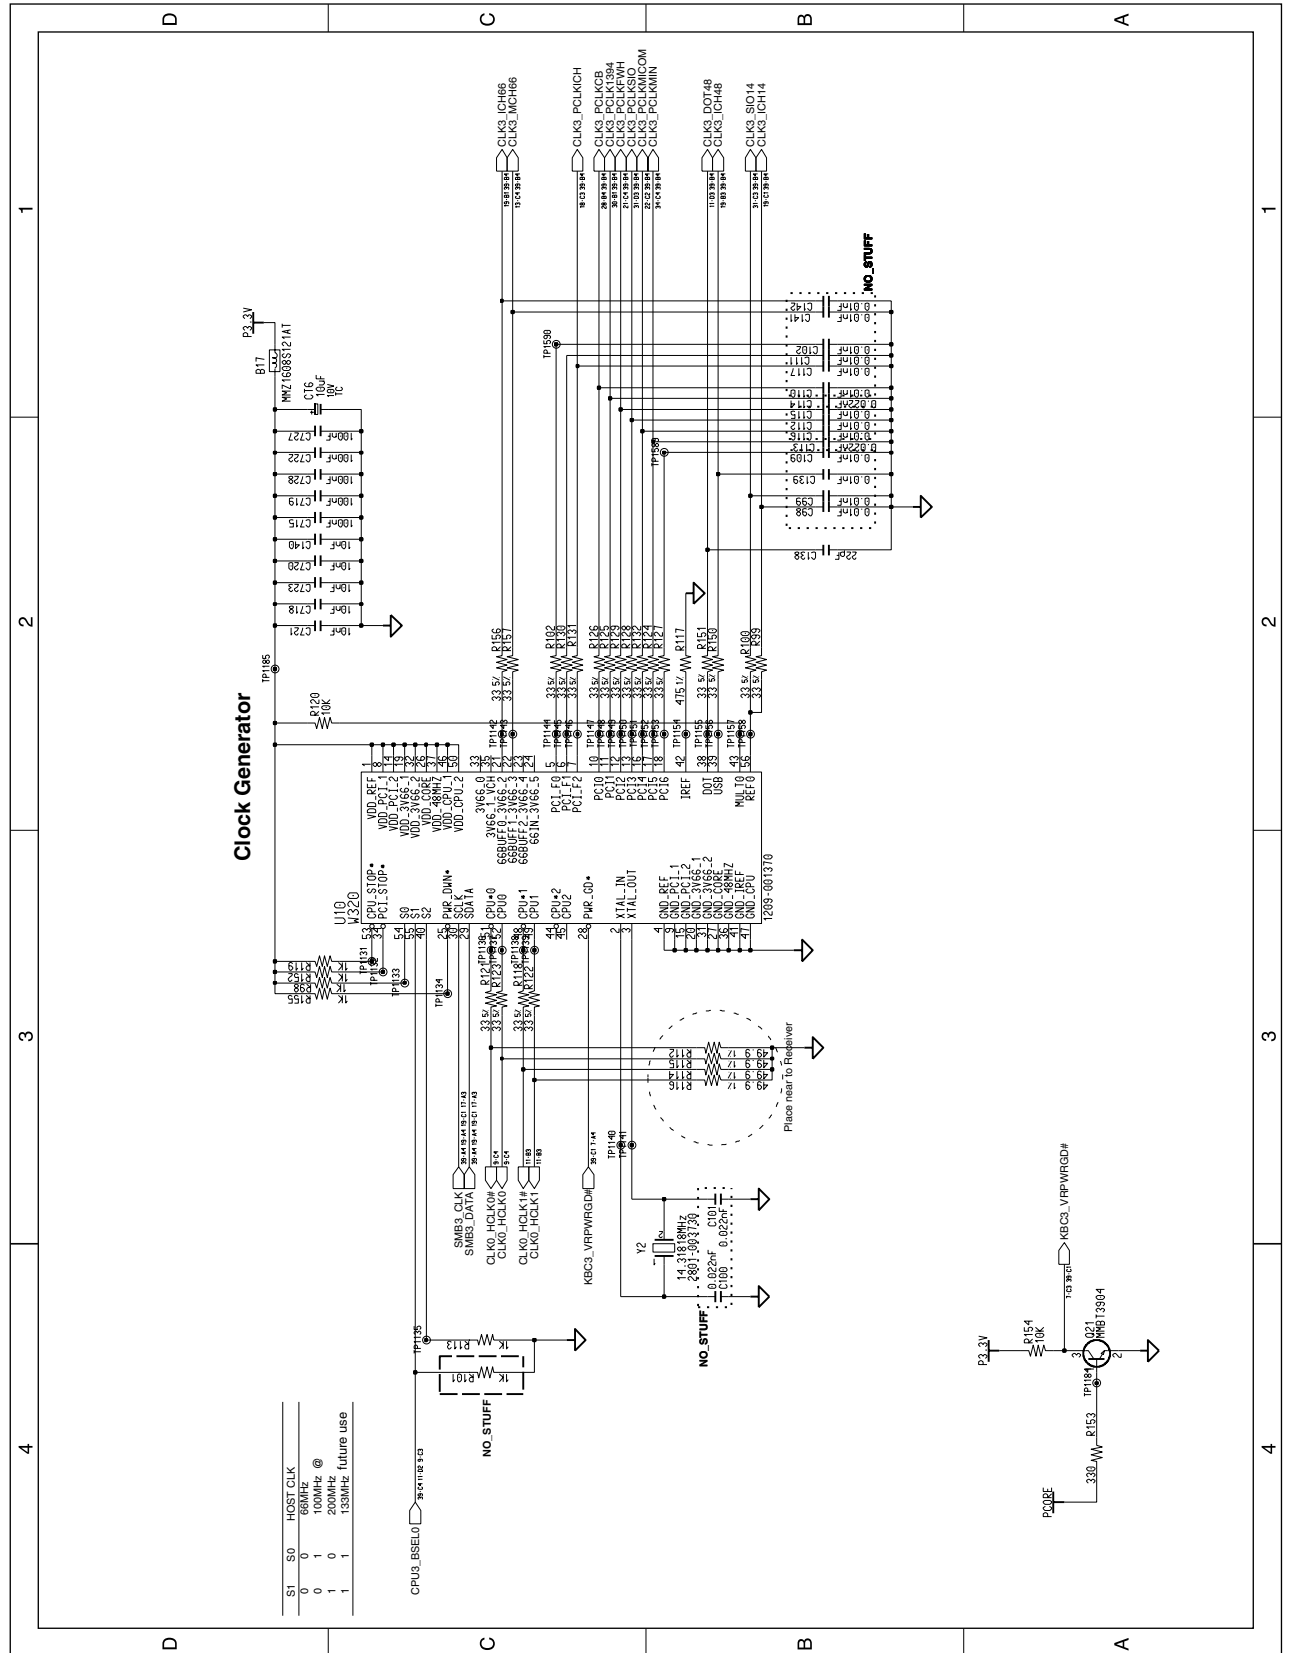


3-1-1(g) Main Board Schematic Sheet 8 of 39(Pentium-IV [1/2])

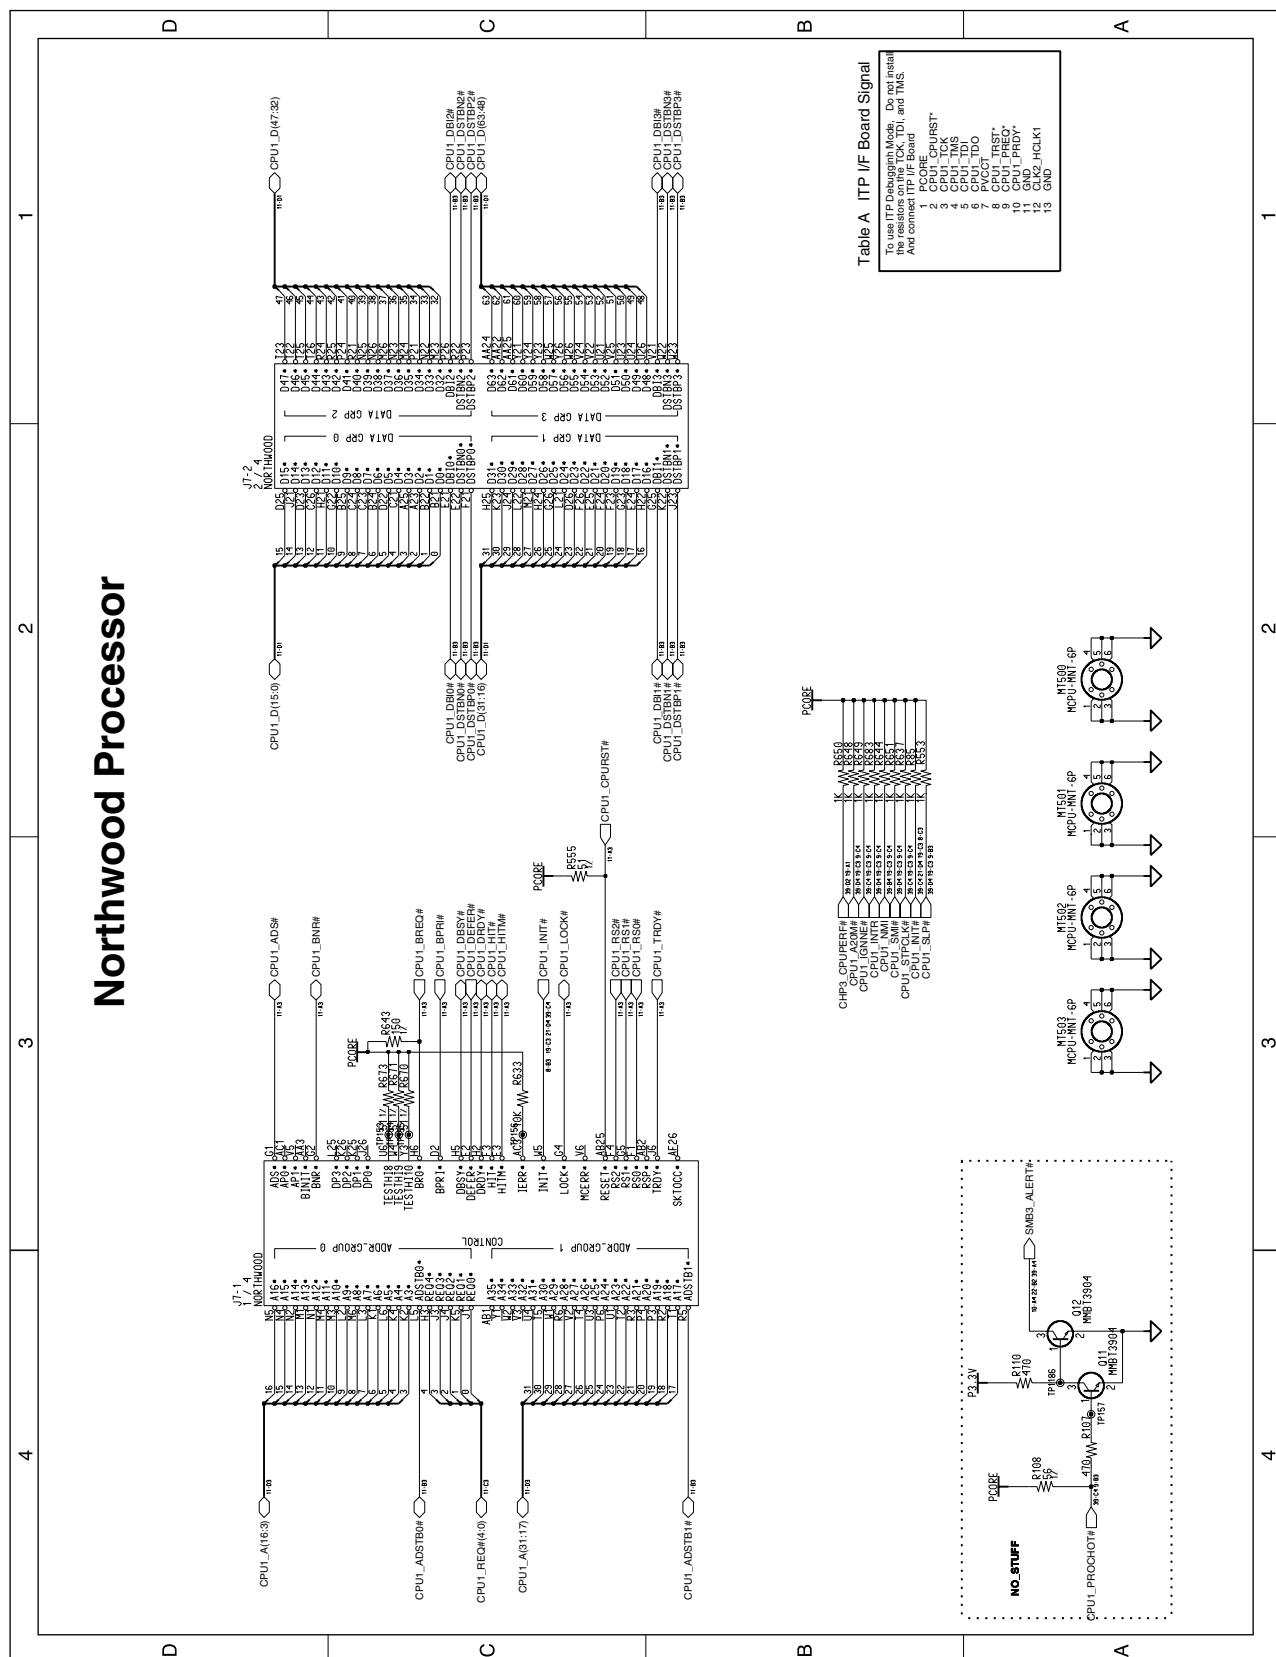

3-1-1(h) Main Board Schematic Sheet 9 of 39(Pentium-IV [2/2])

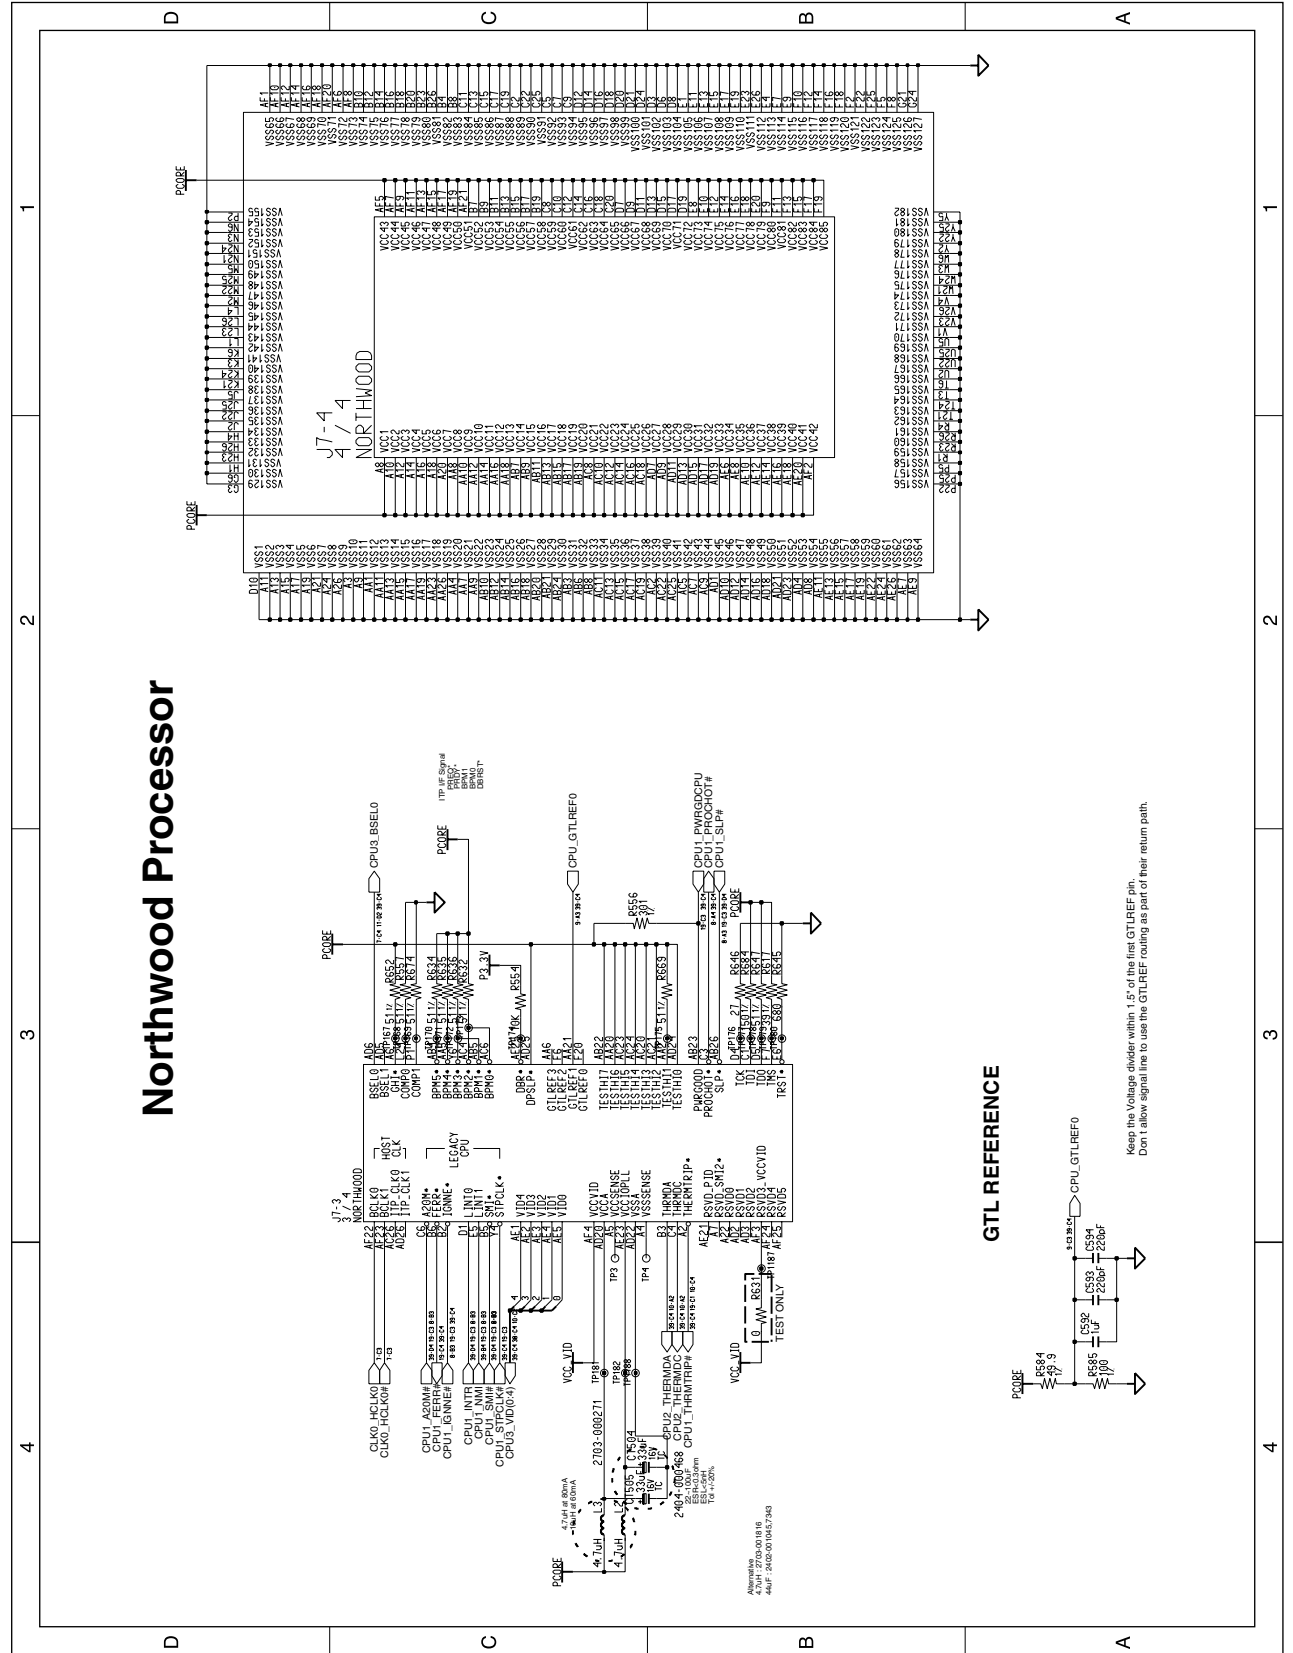


3-1-1(j) Main Board Schematic Sheet 11 of 39(845GL [1/3])

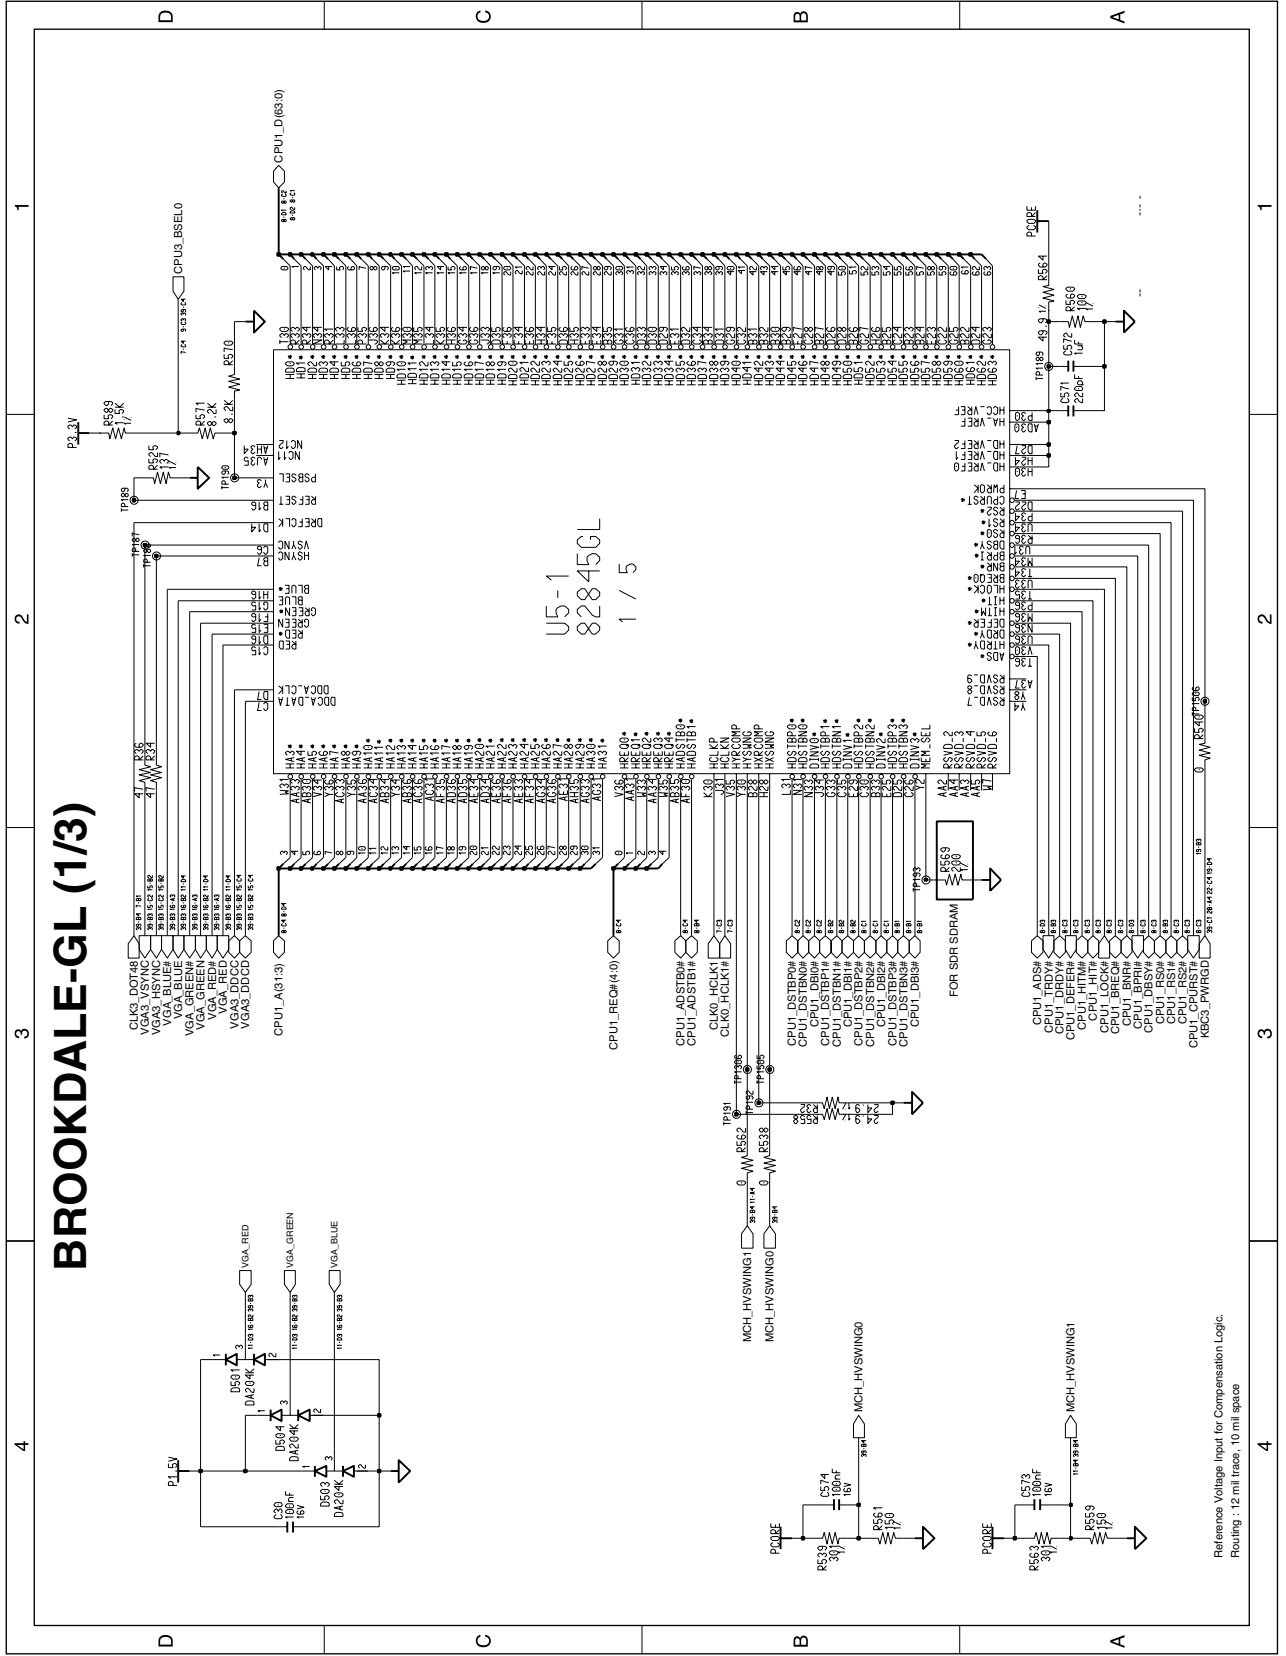





3-1-1(m) Main Board Schematic Sheet 14 of 39(845GL Bypass)

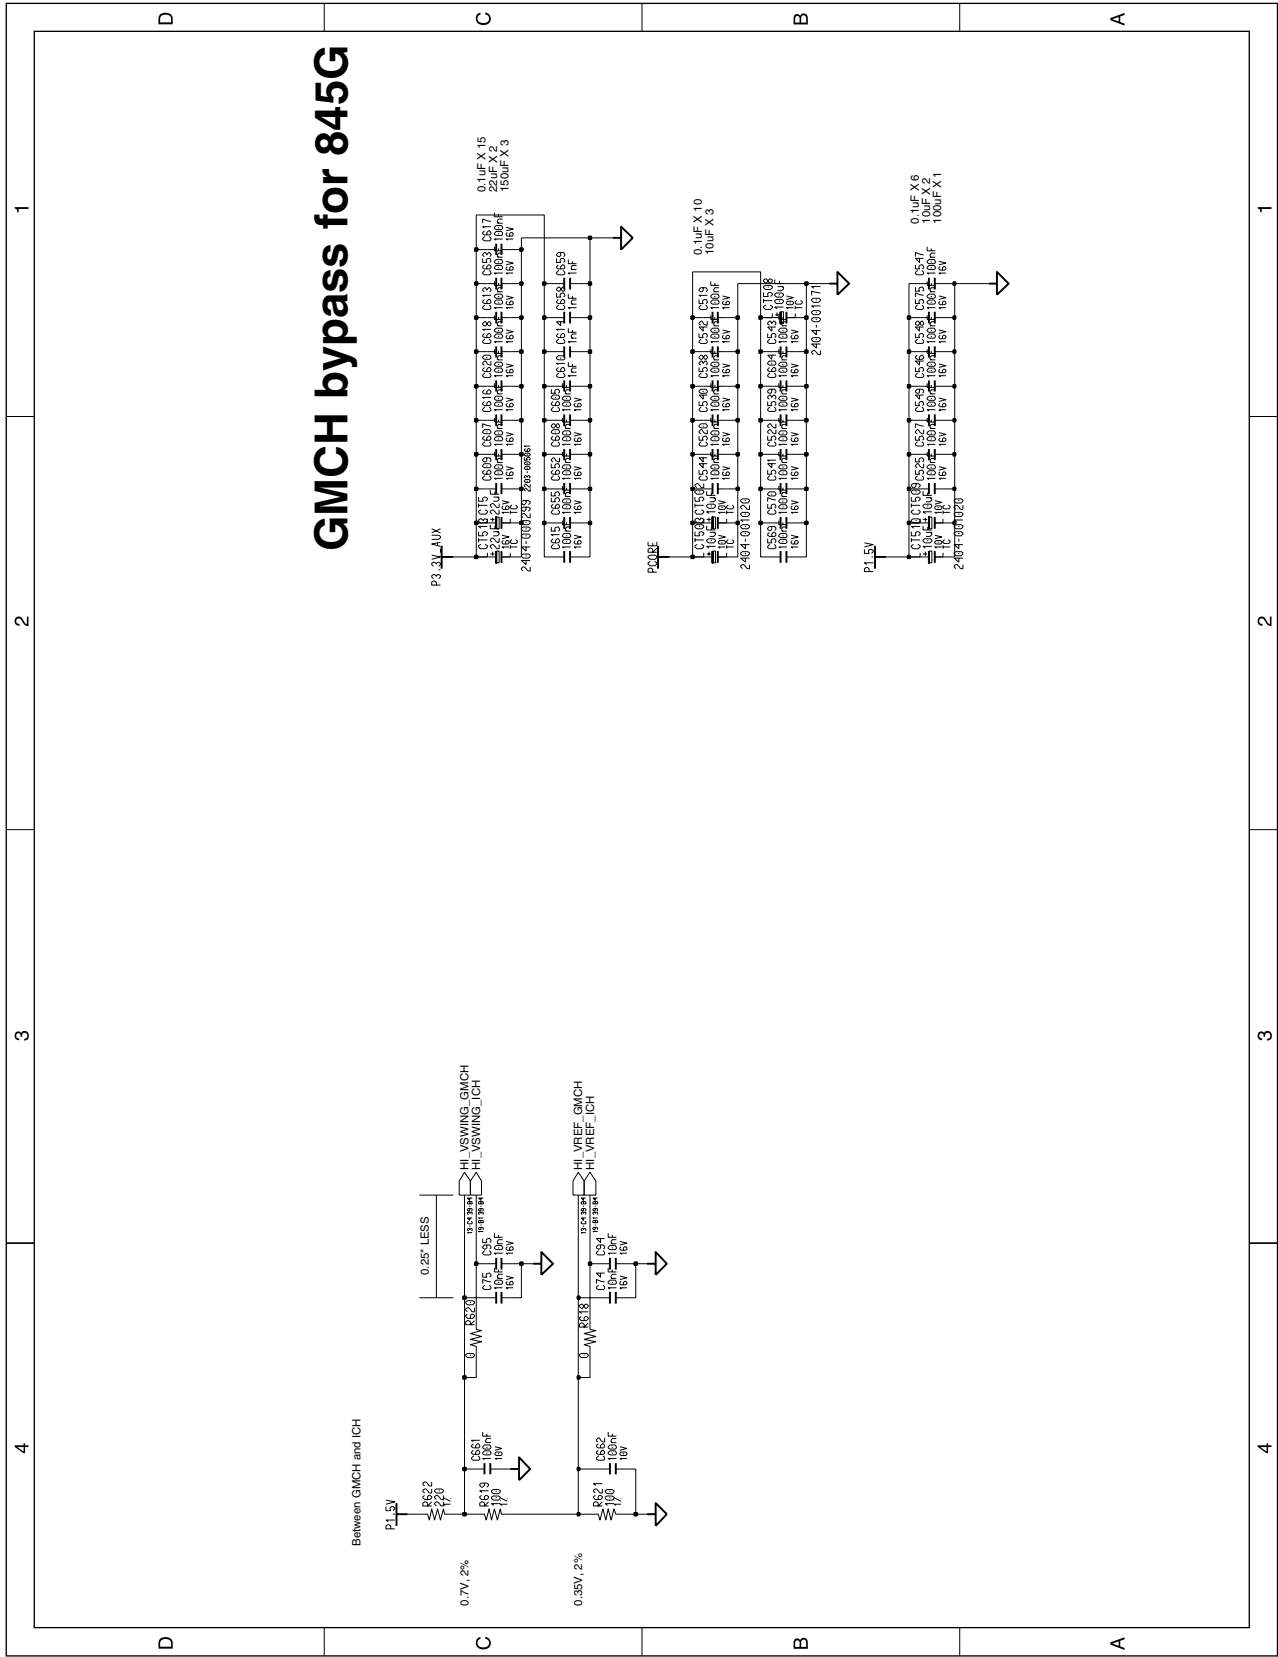


3-1-1(n) Main Board Schematic Sheet 15 of 39(VCH)

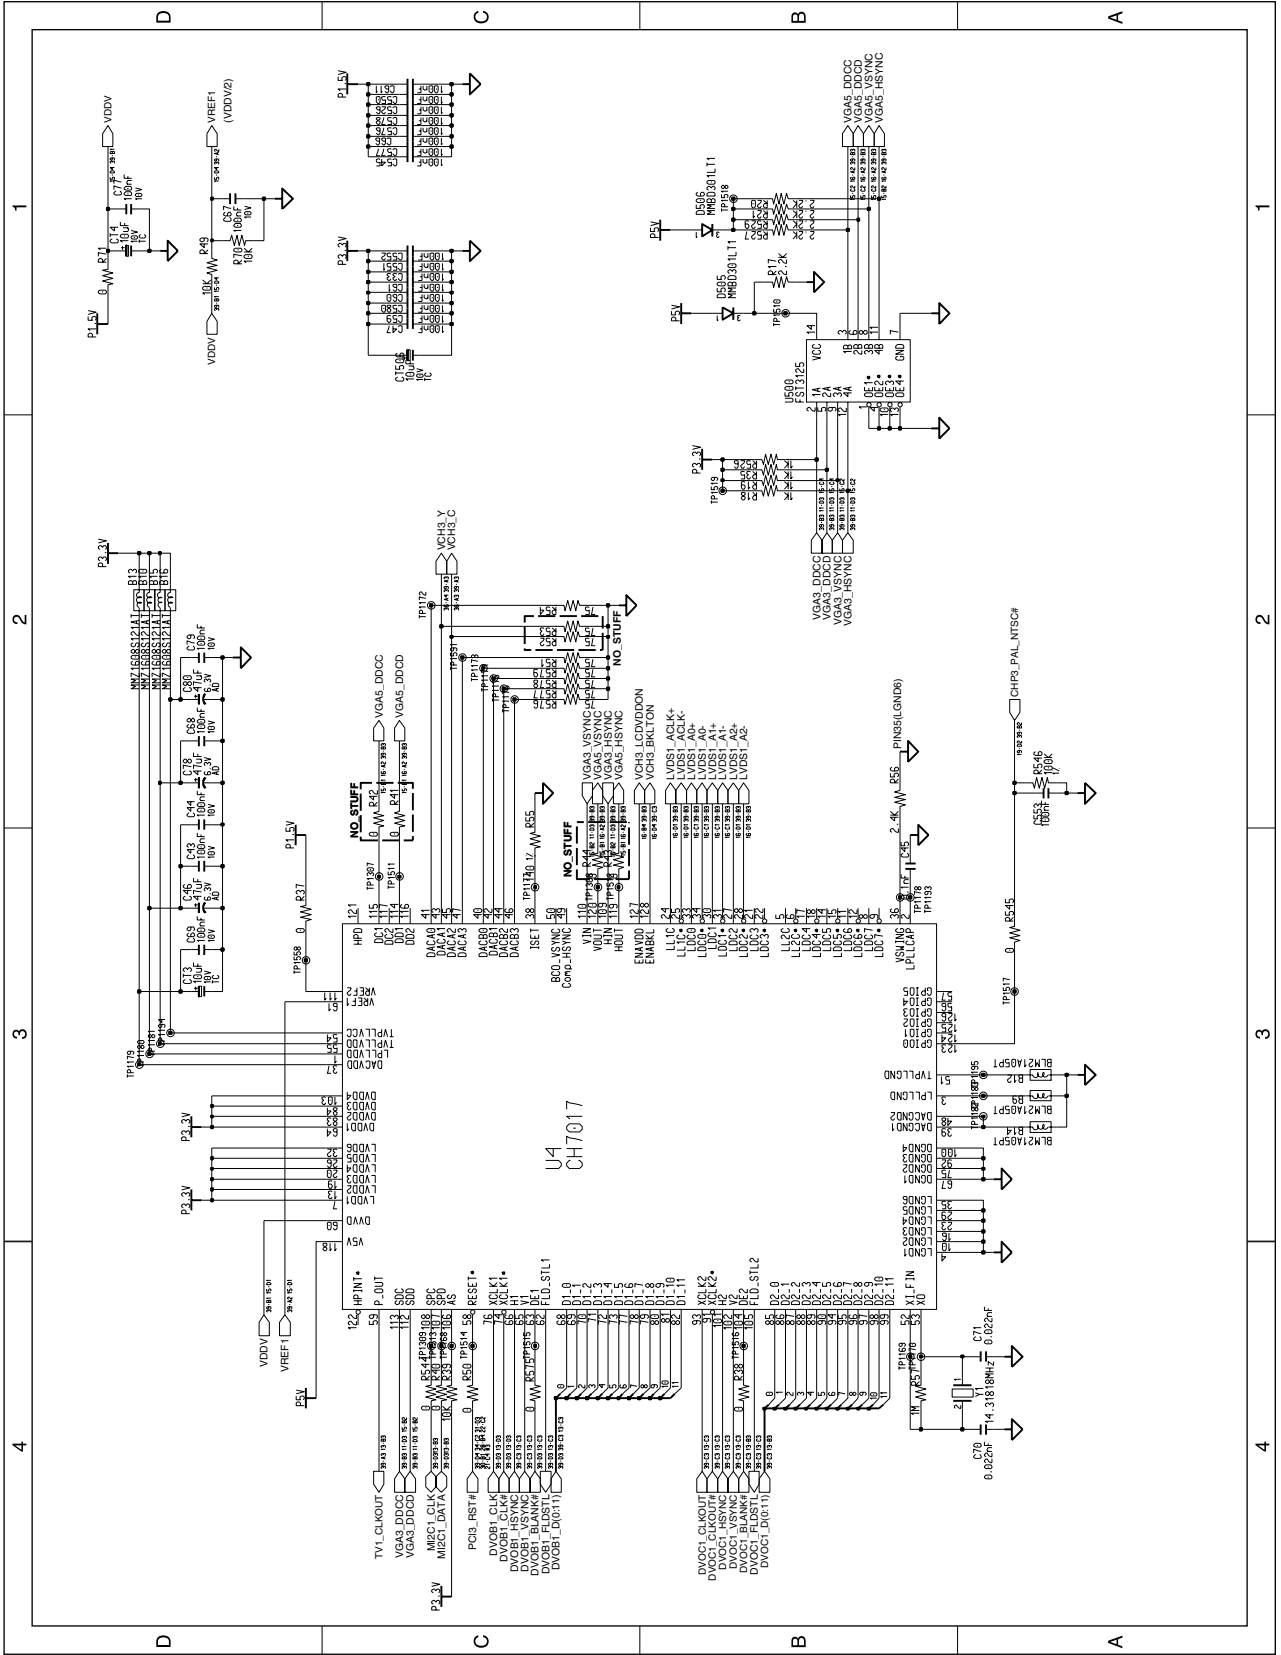


3-1-1(o) Main Board Schematic Sheet 16 of 39(LCD & CRT)

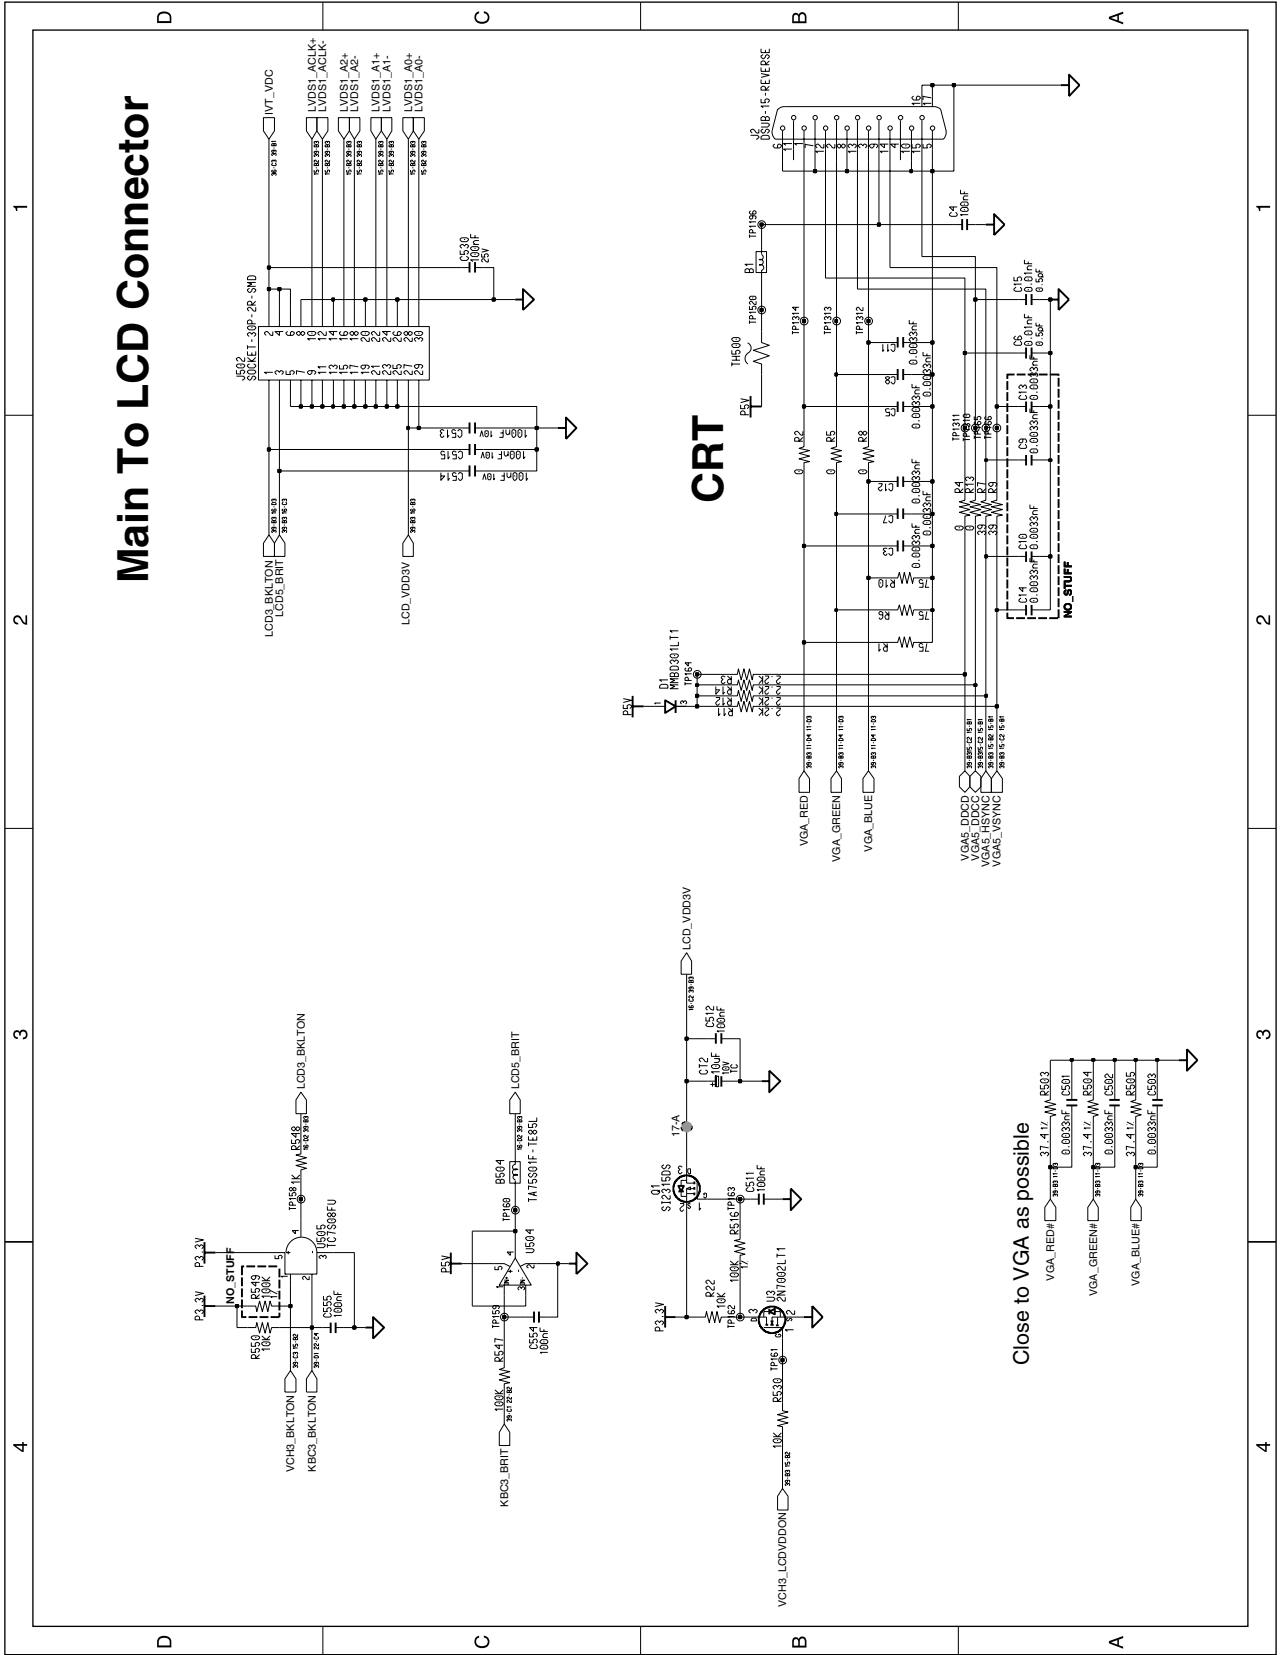


3-1-1(s) Main Board Schematic Sheet 20 of 39(ICH4 [3/3])

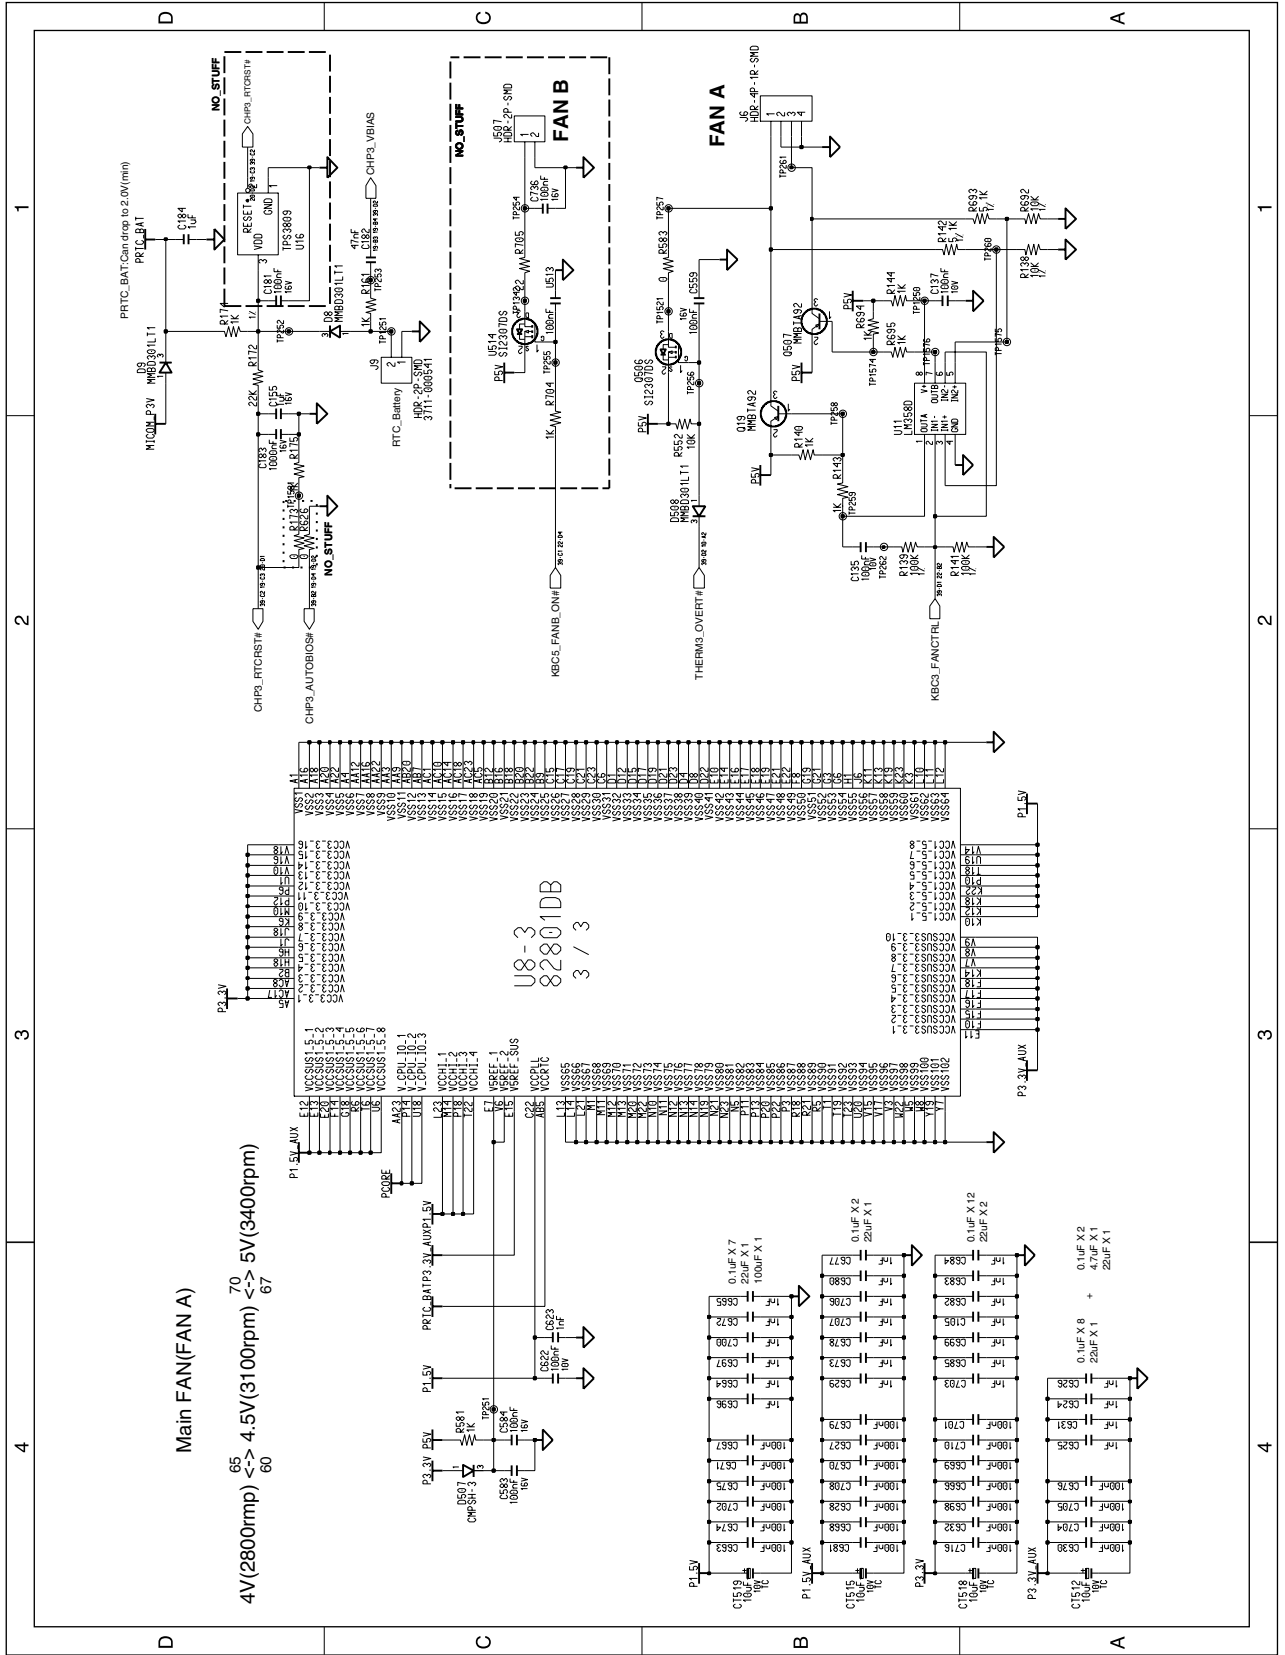

3-1-1(t) Main Board Schematic Sheet 21 of 39(FWH)

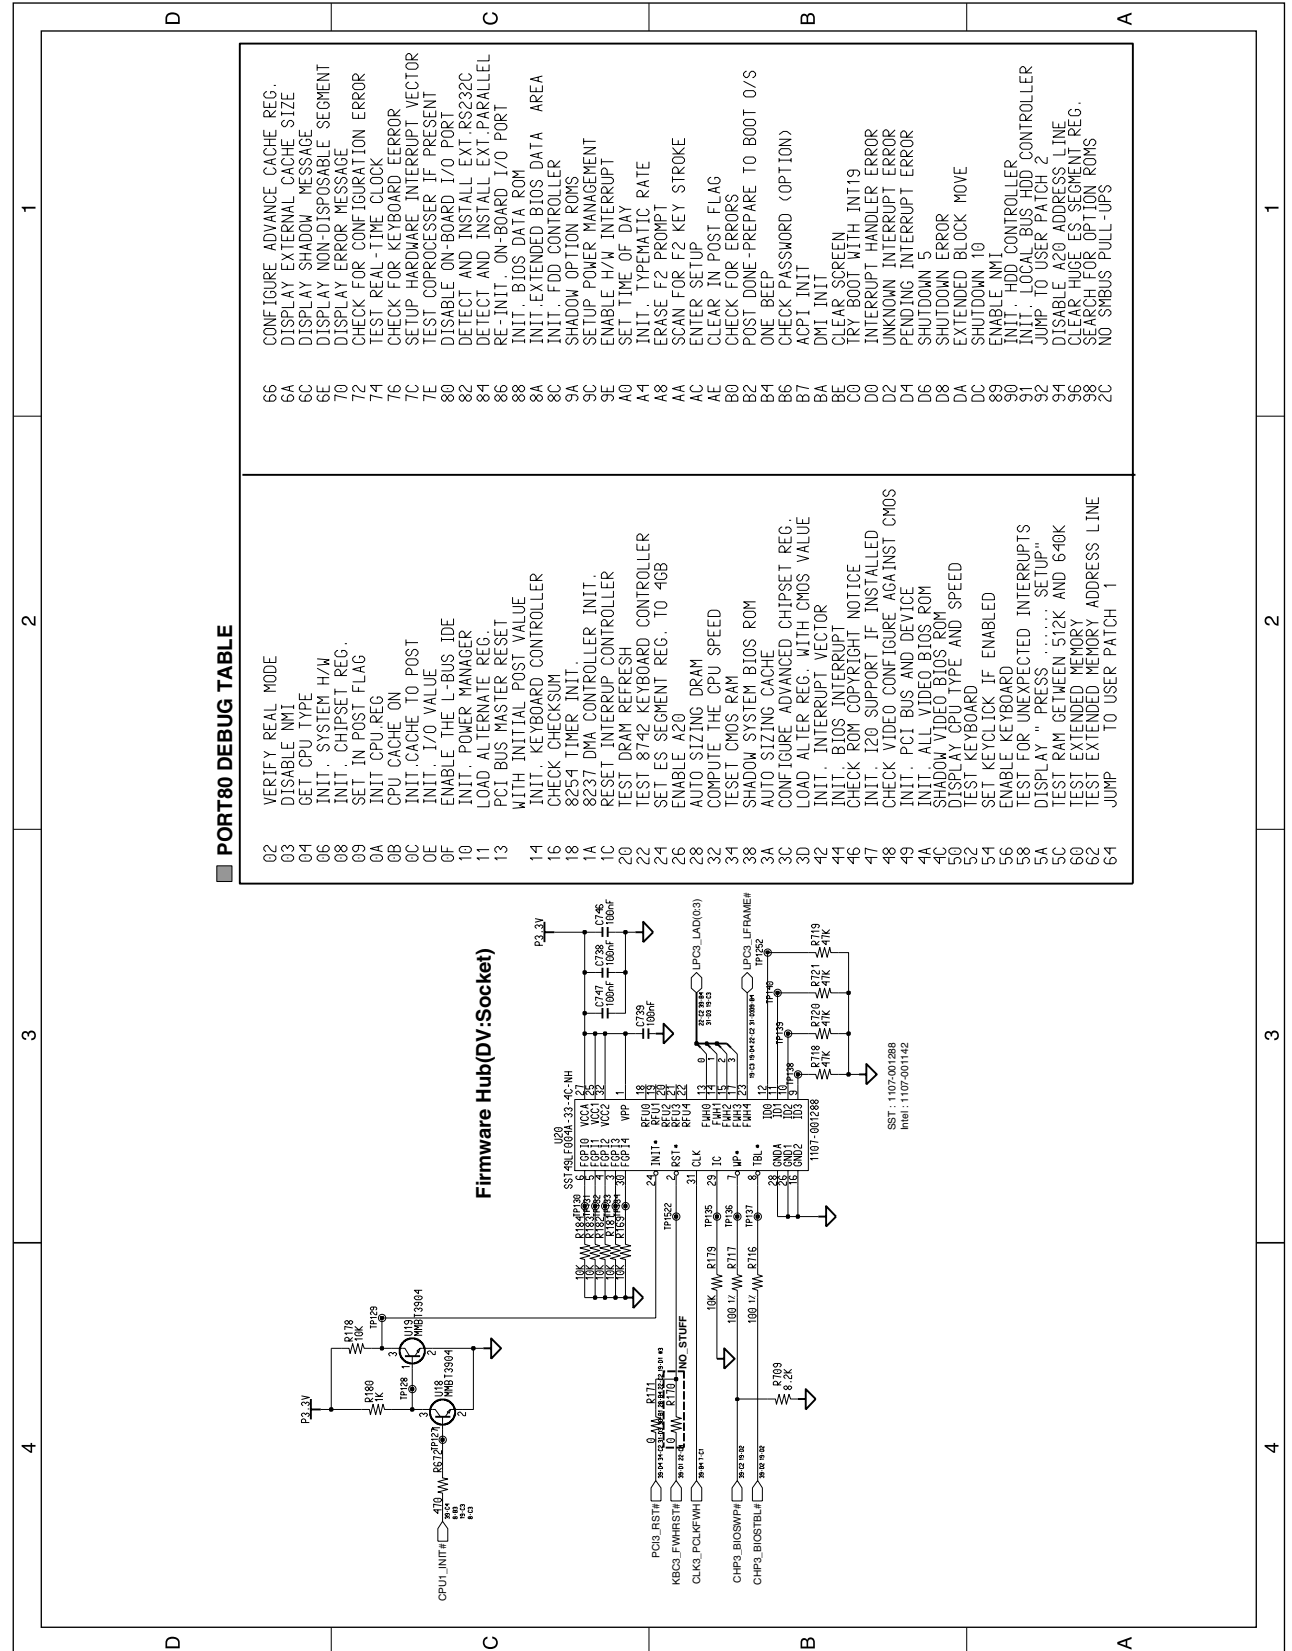


3-1-1(u) Main Board Schematic Sheet 22 of 39(MICOM)

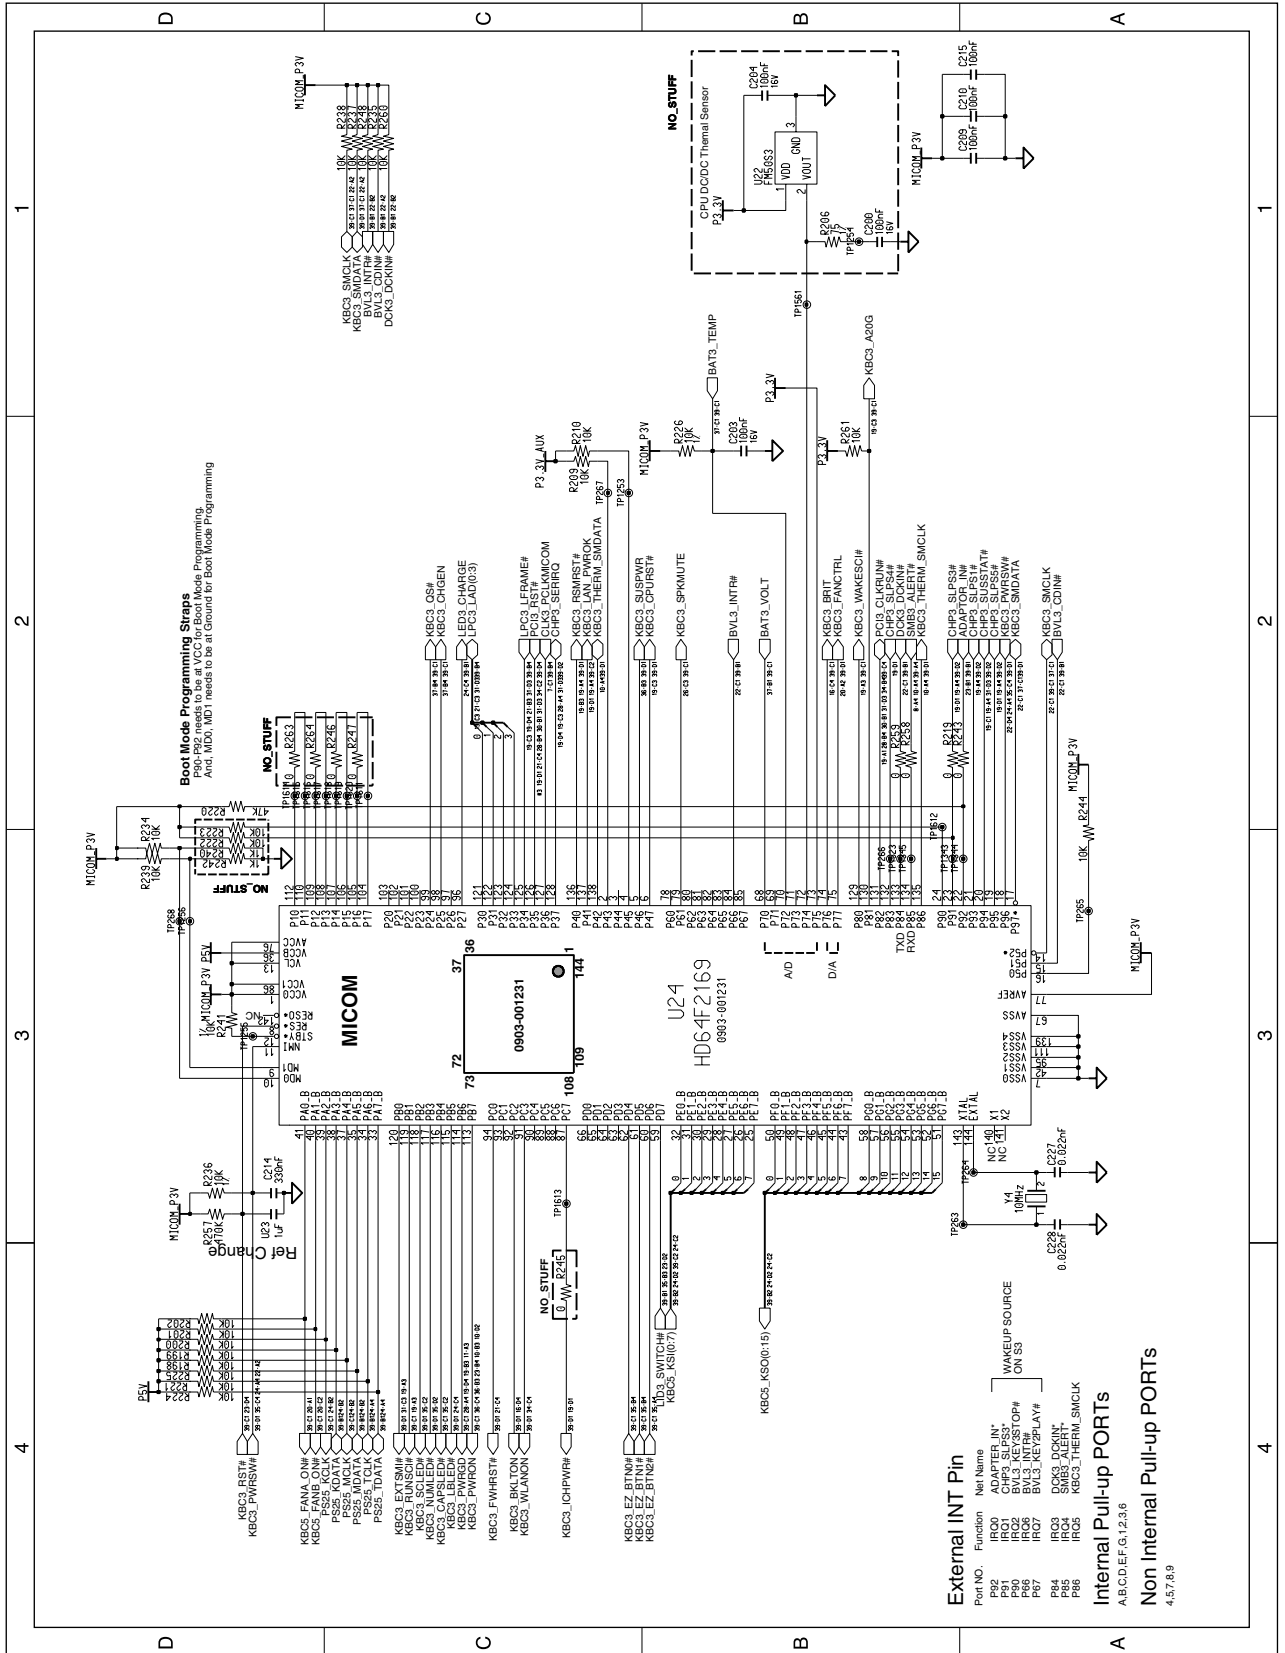





3-1-1(w) Main Board Schematic Sheet 24 of 39(POWER LED & KBD & PS2)

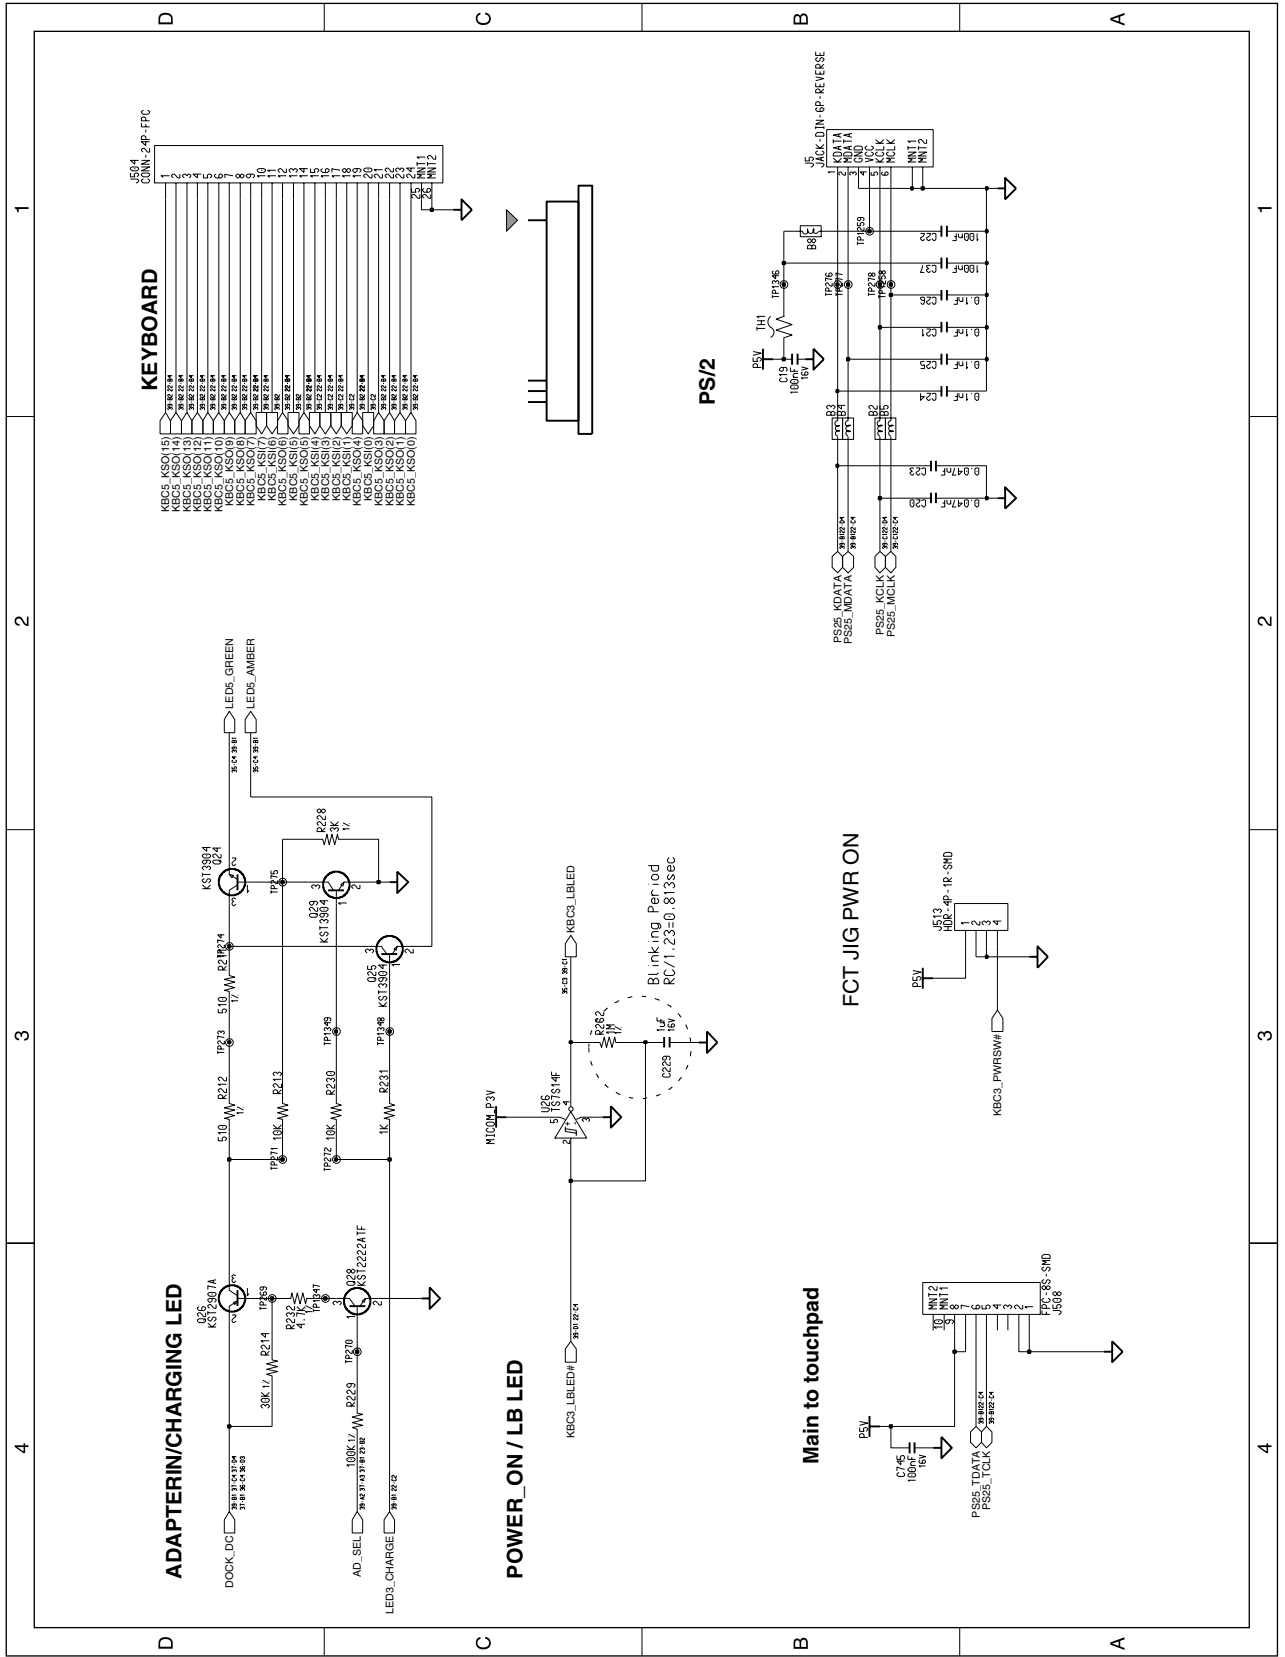


3-1-1(z) Main Board Schematic Sheet 27 of 39(HDD & CD)

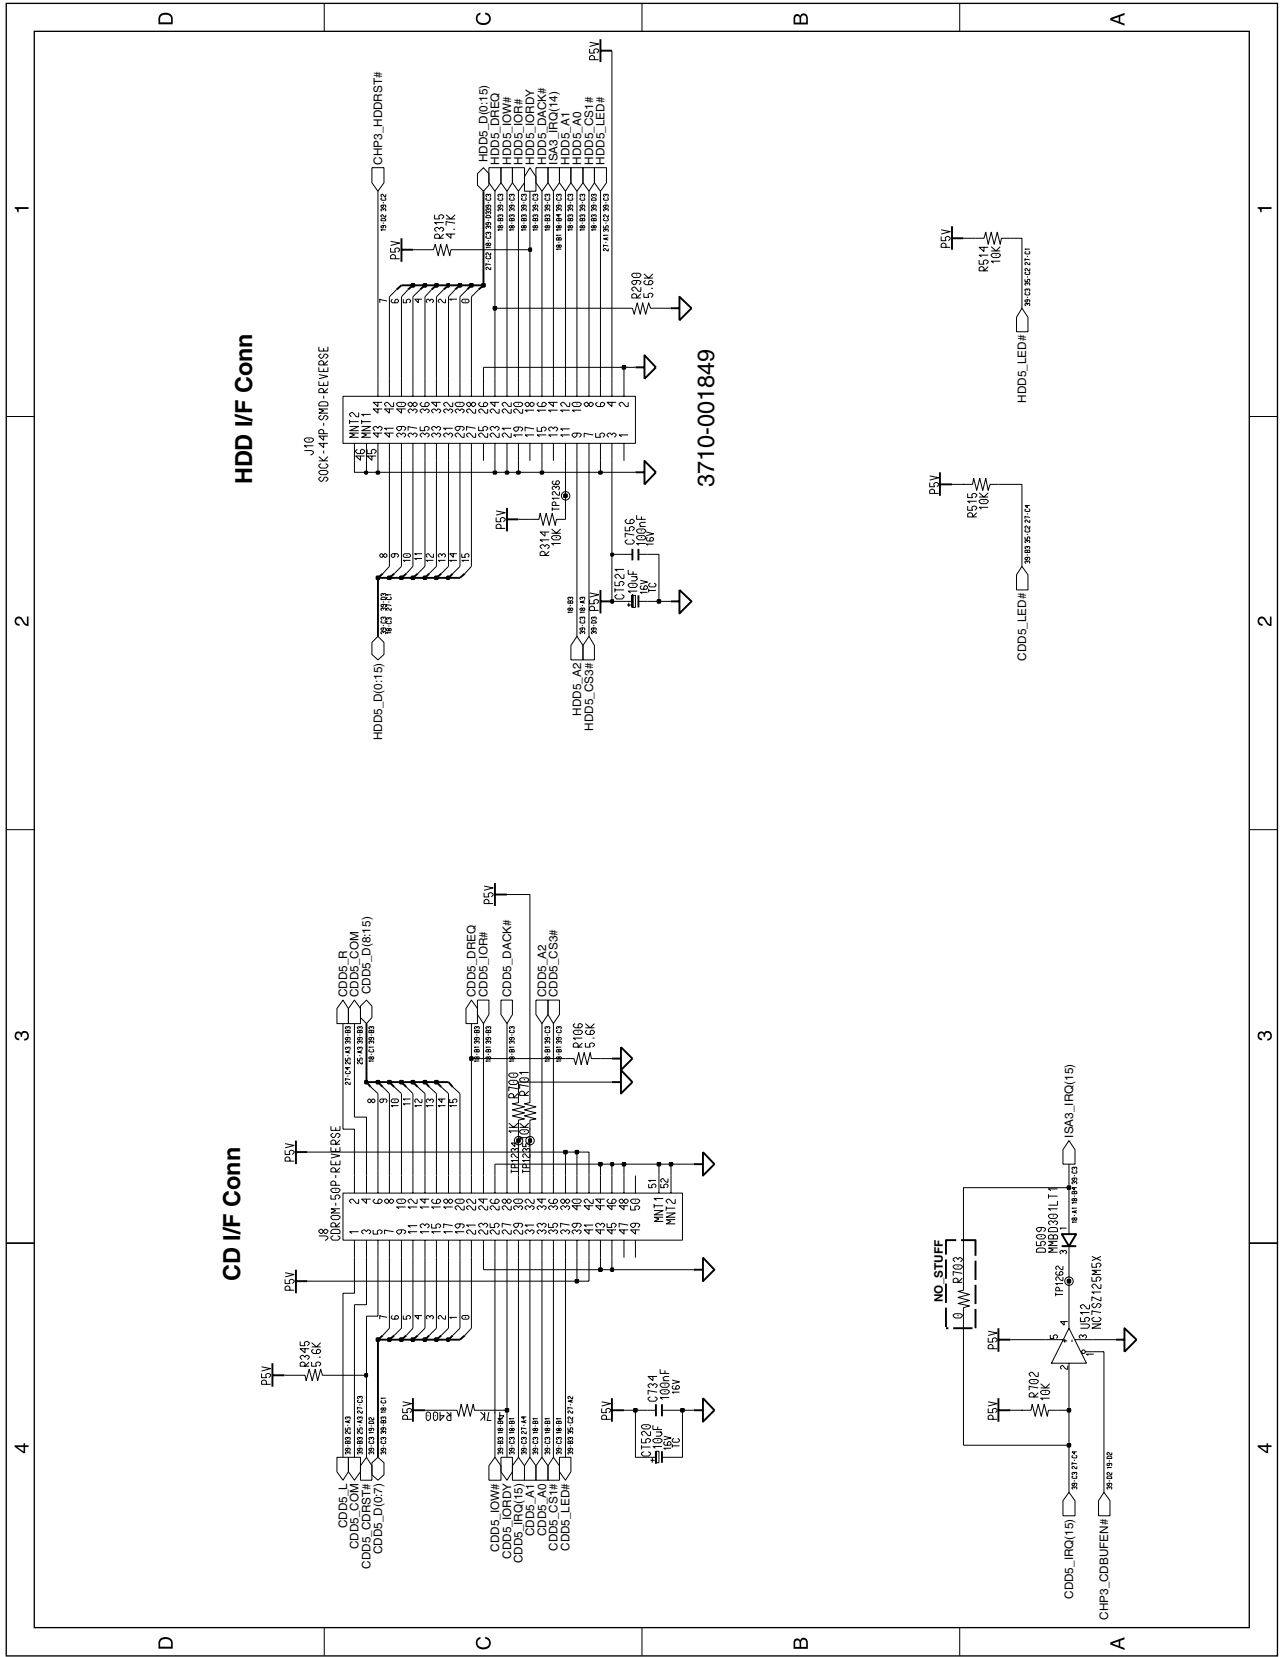


3-1-1(bb) Main Board Schematic Sheet 29 of 39(CARDBUS SOCKET)

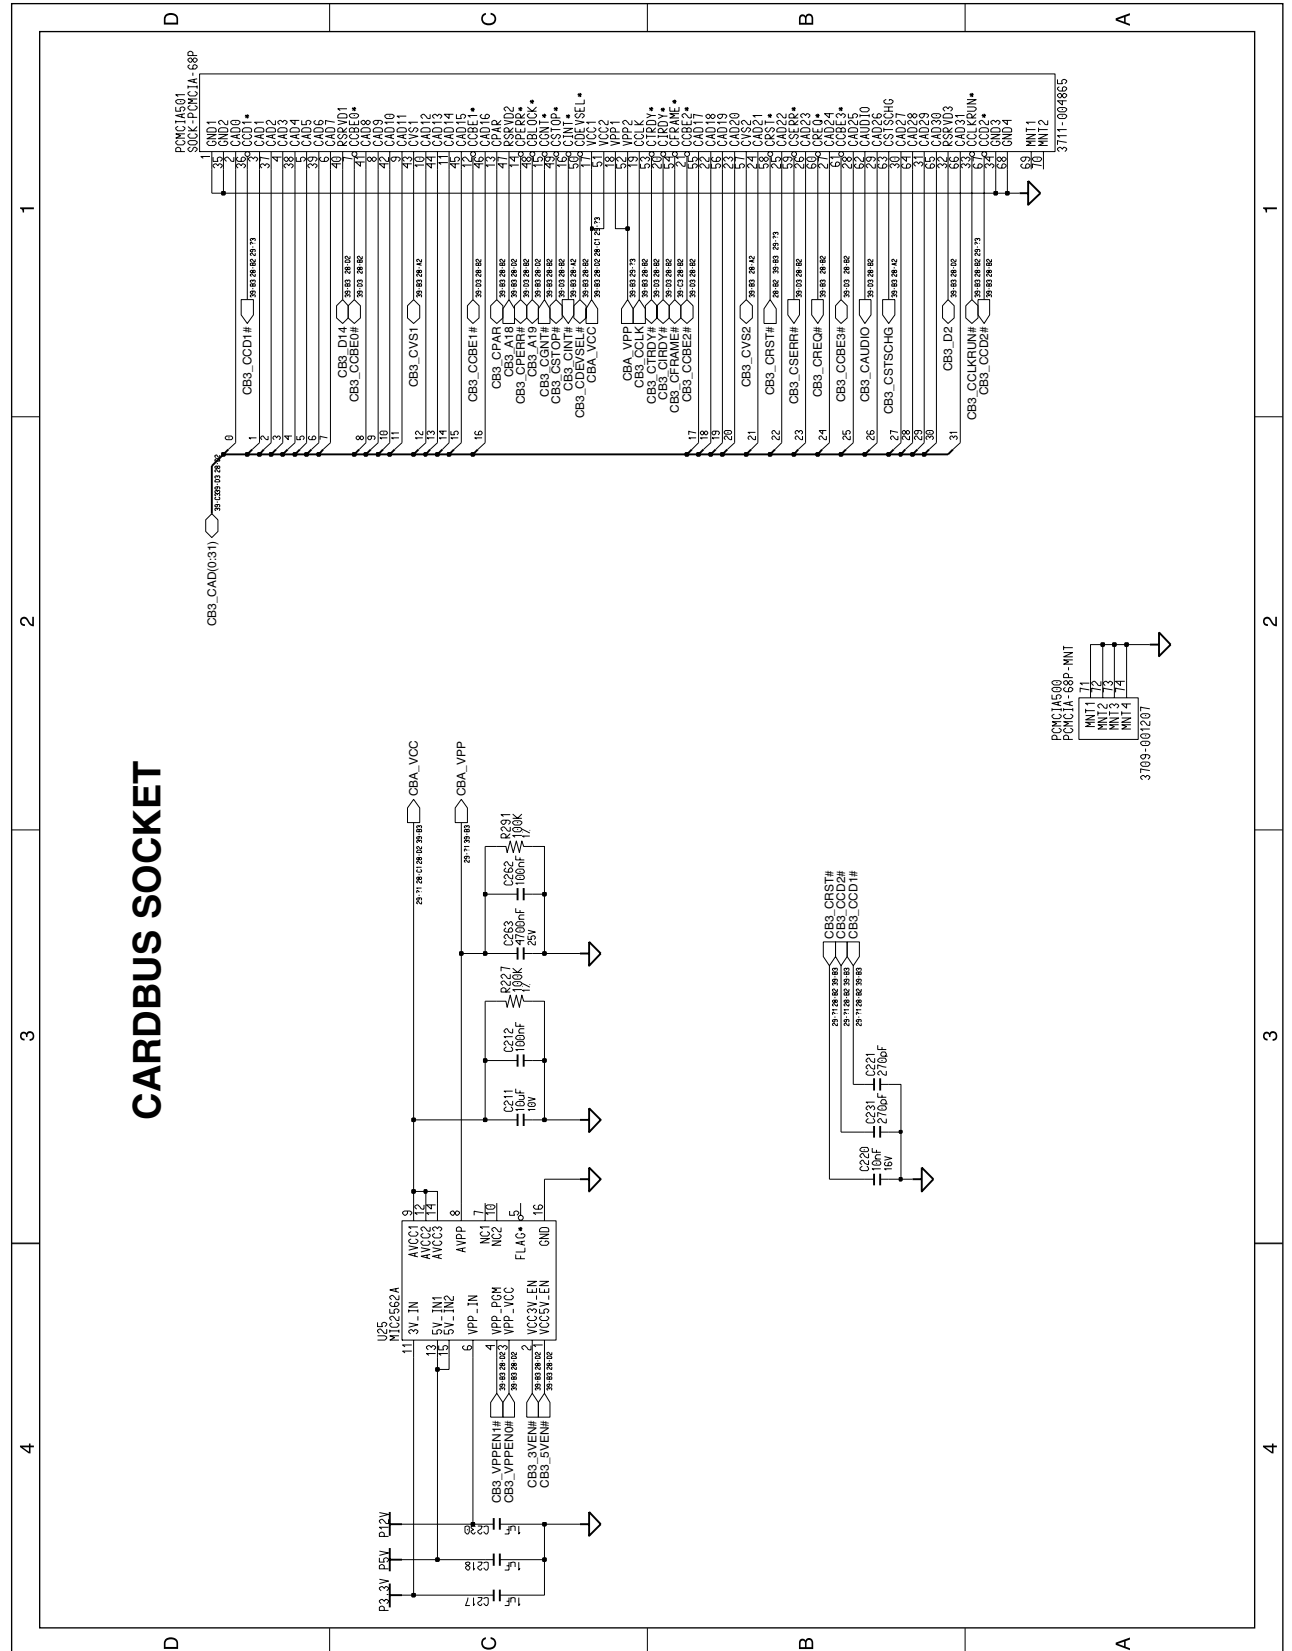


3-1-1(cc) Main Board Schematic Sheet 30 of 39(1394 CONTROLLER)

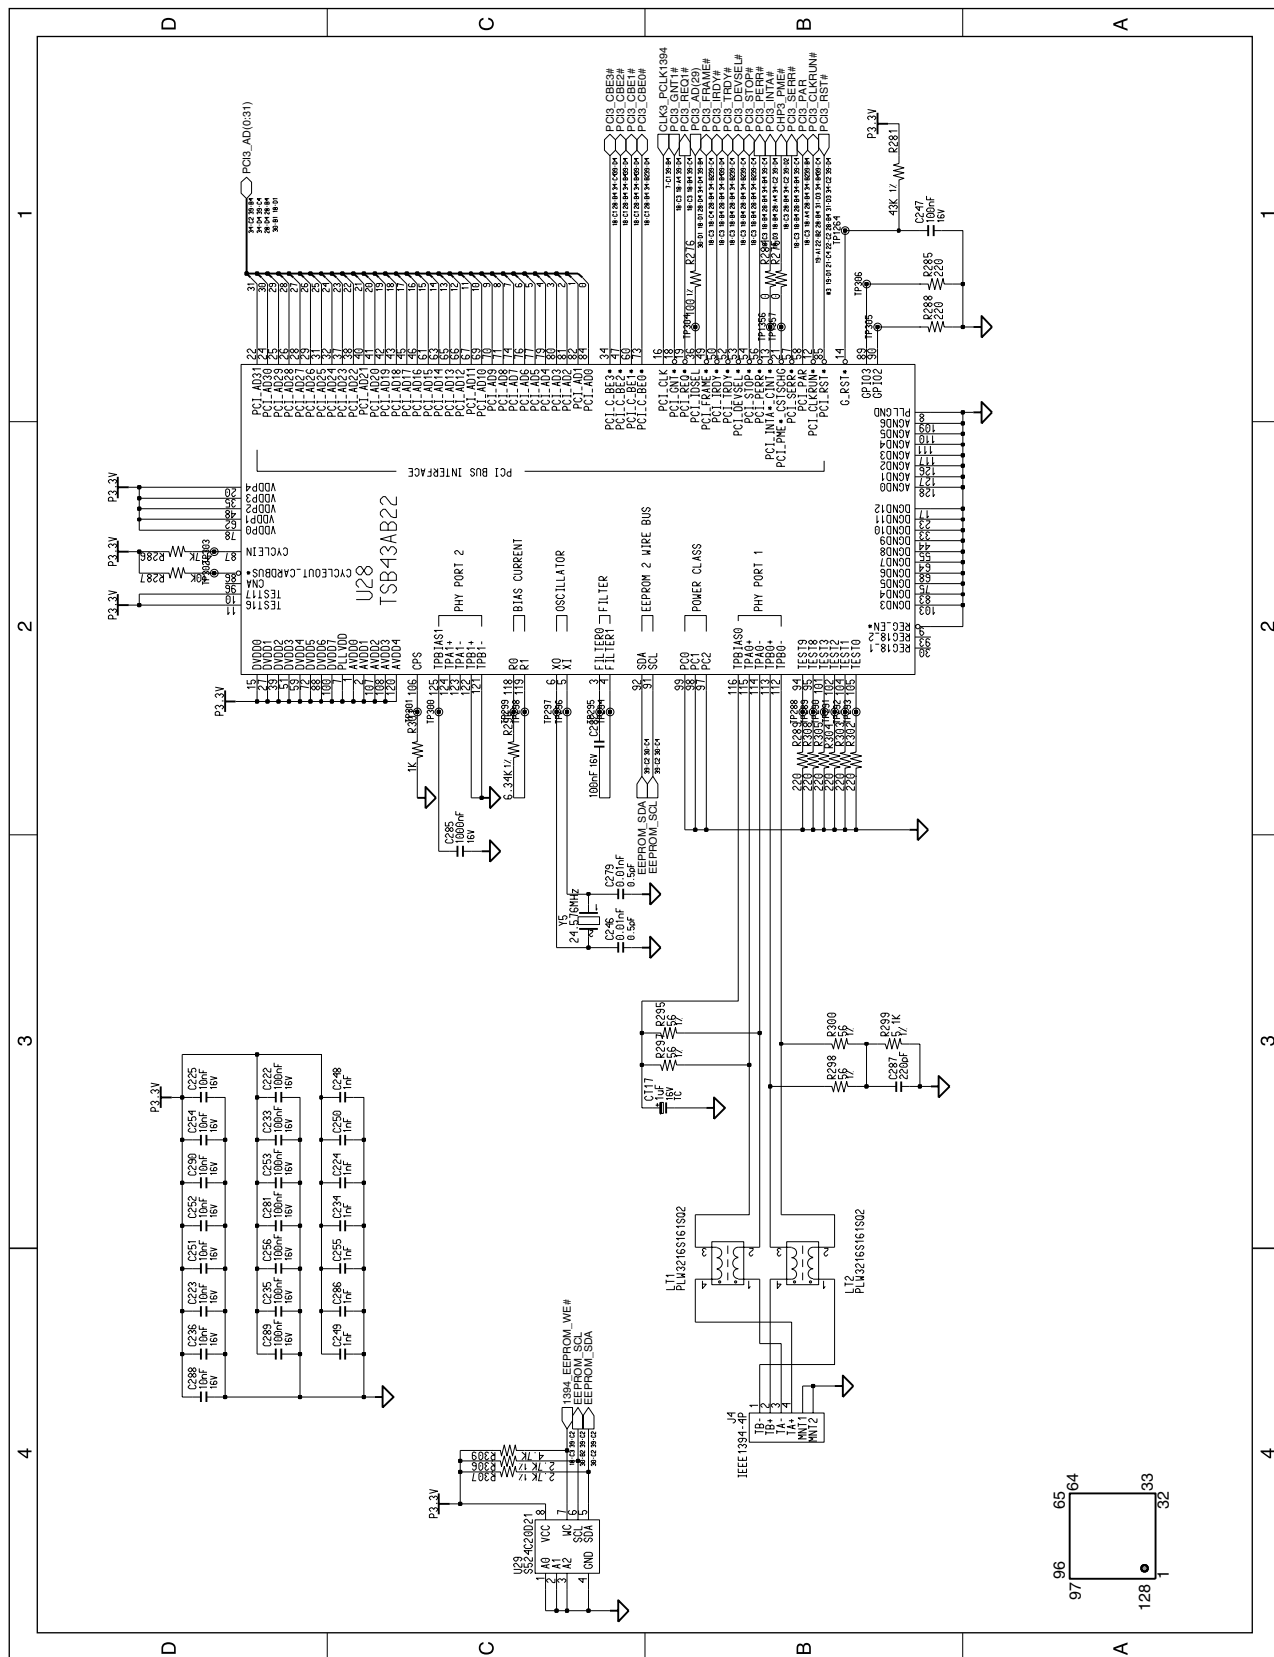


3-1-1(dd) Main Board Schematic Sheet 31 of 39(SUPER IO)

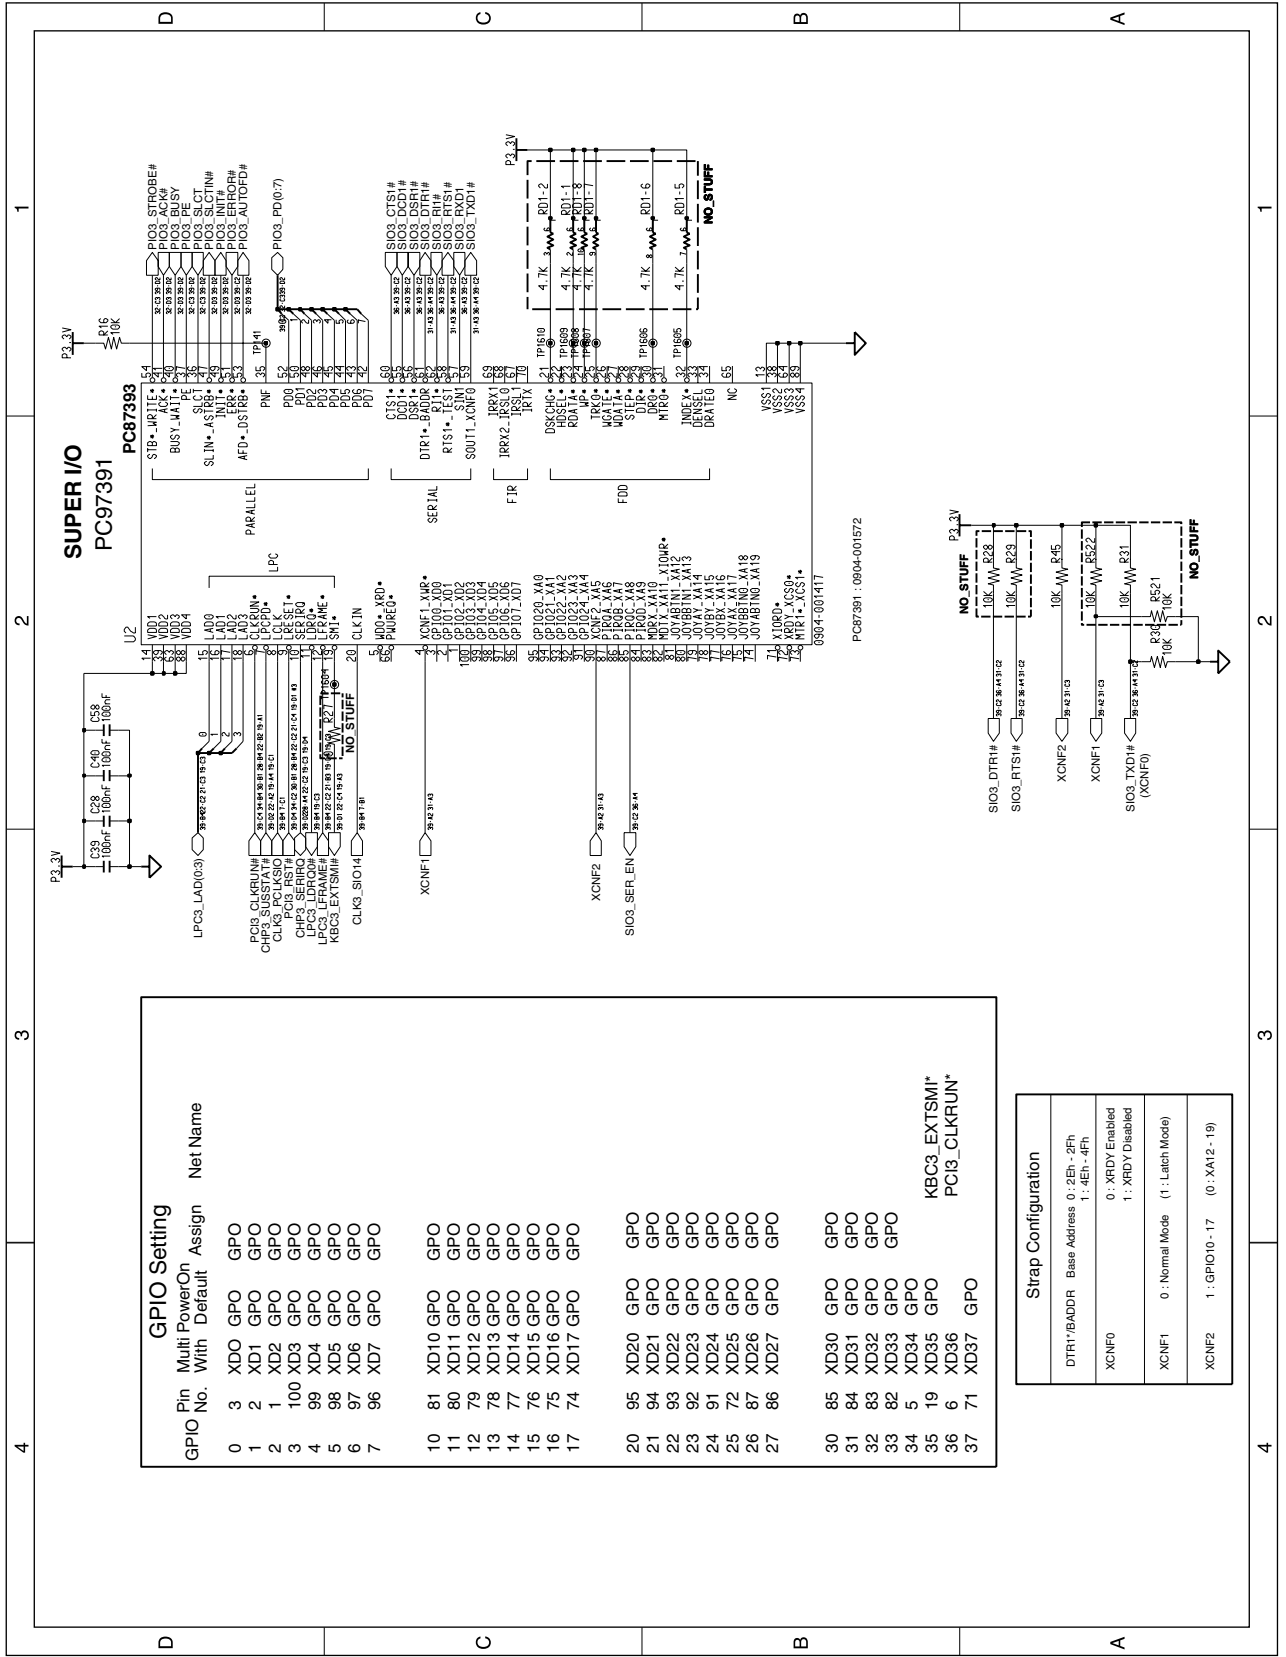


3-1-1(ee) Main Board Schematic Sheet 32 of 39(PIO & USB)

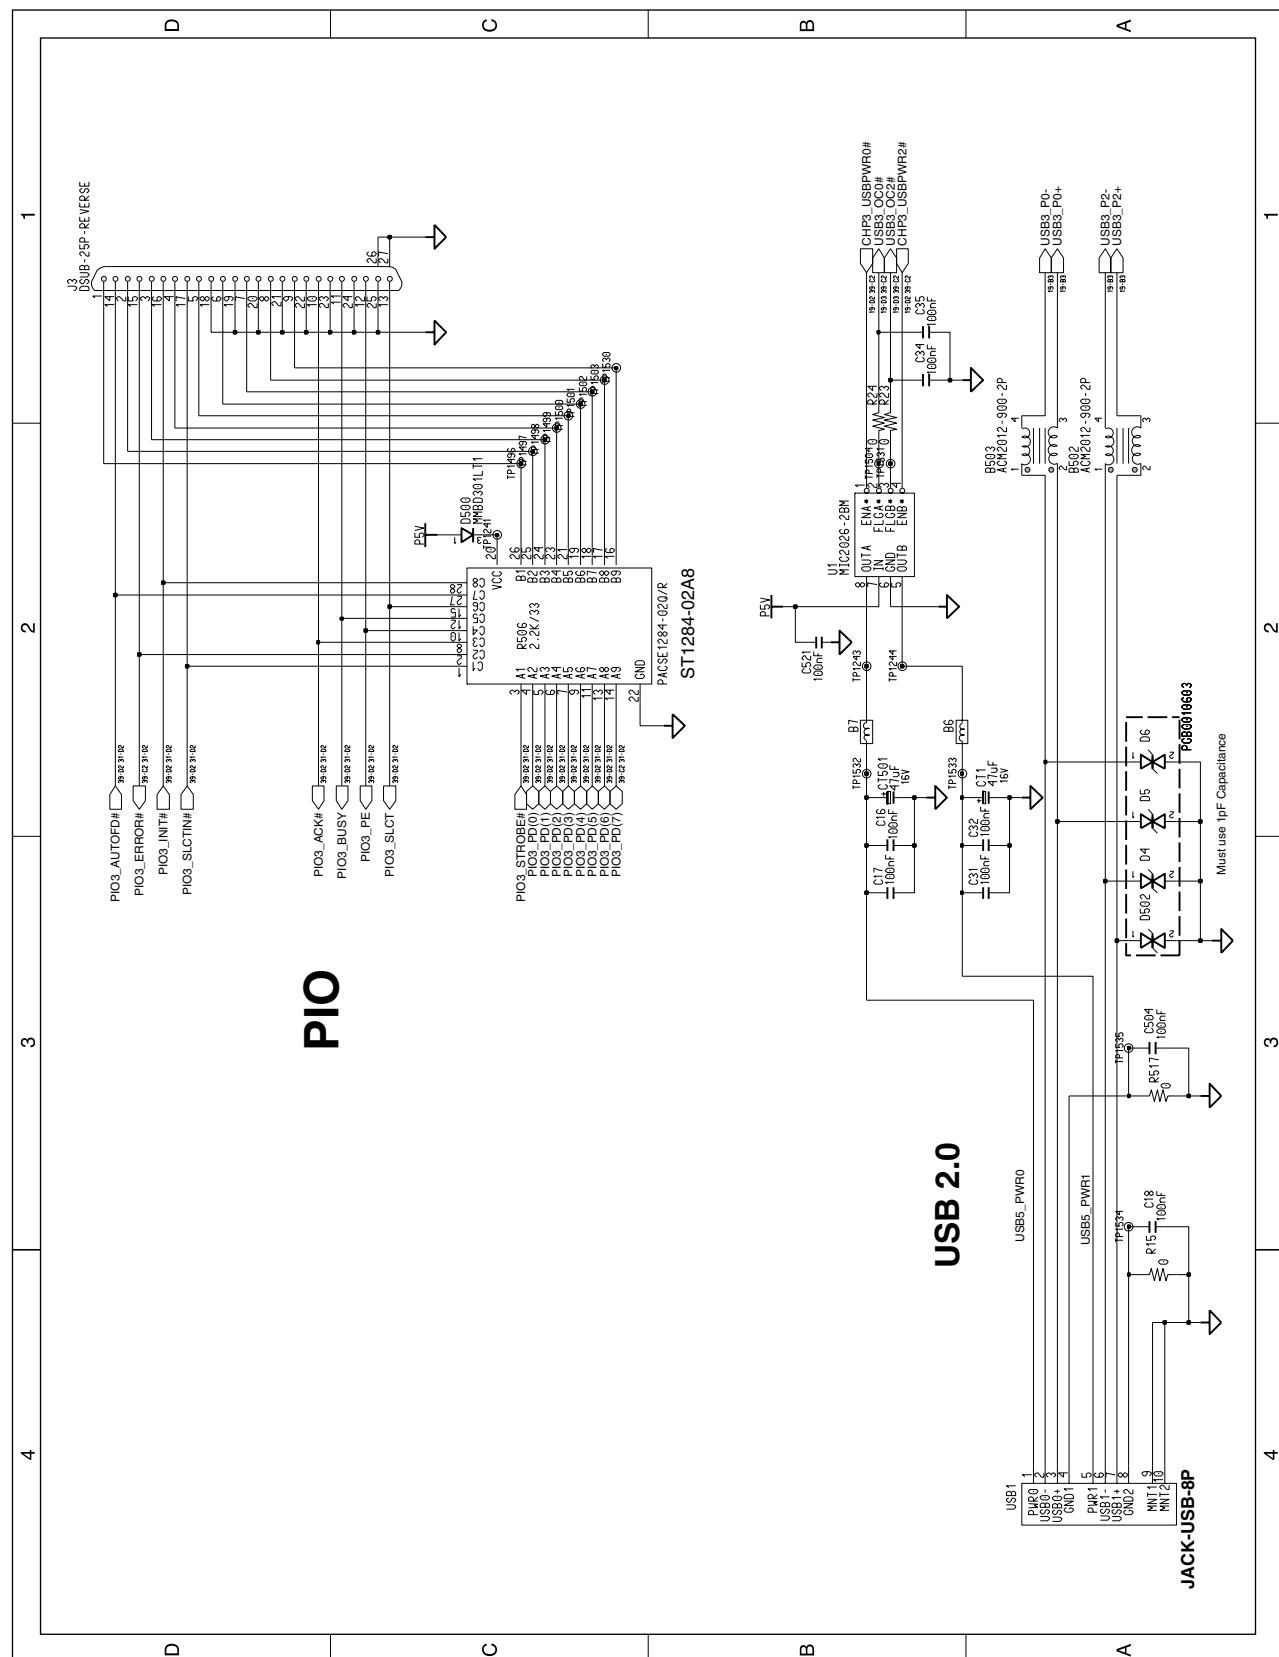


3-1-1(ff) Main Board Schematic Sheet 33 of 39(KINNERETH & MDC MODEM)

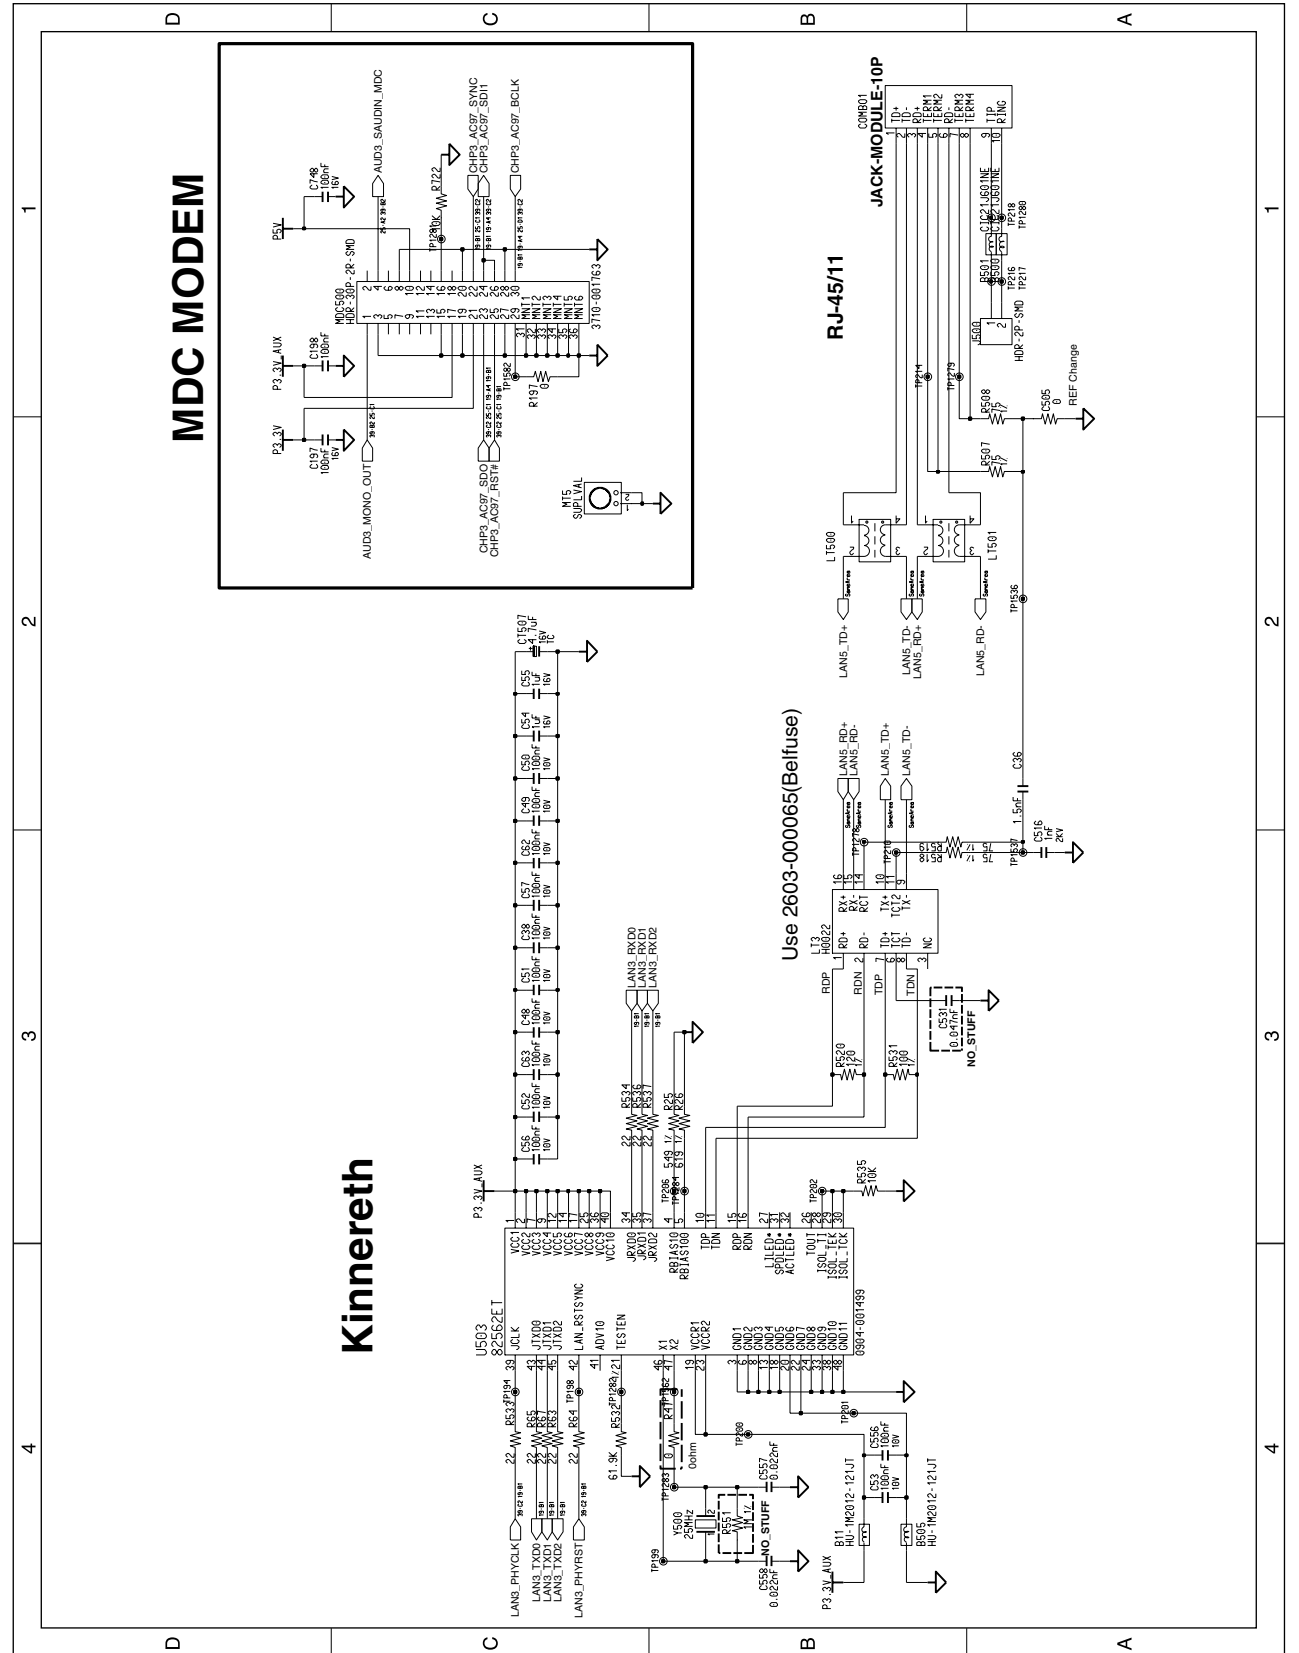


3-1-1(gg) Main Board Schematic Sheet 34 of 39(MINIPCI)

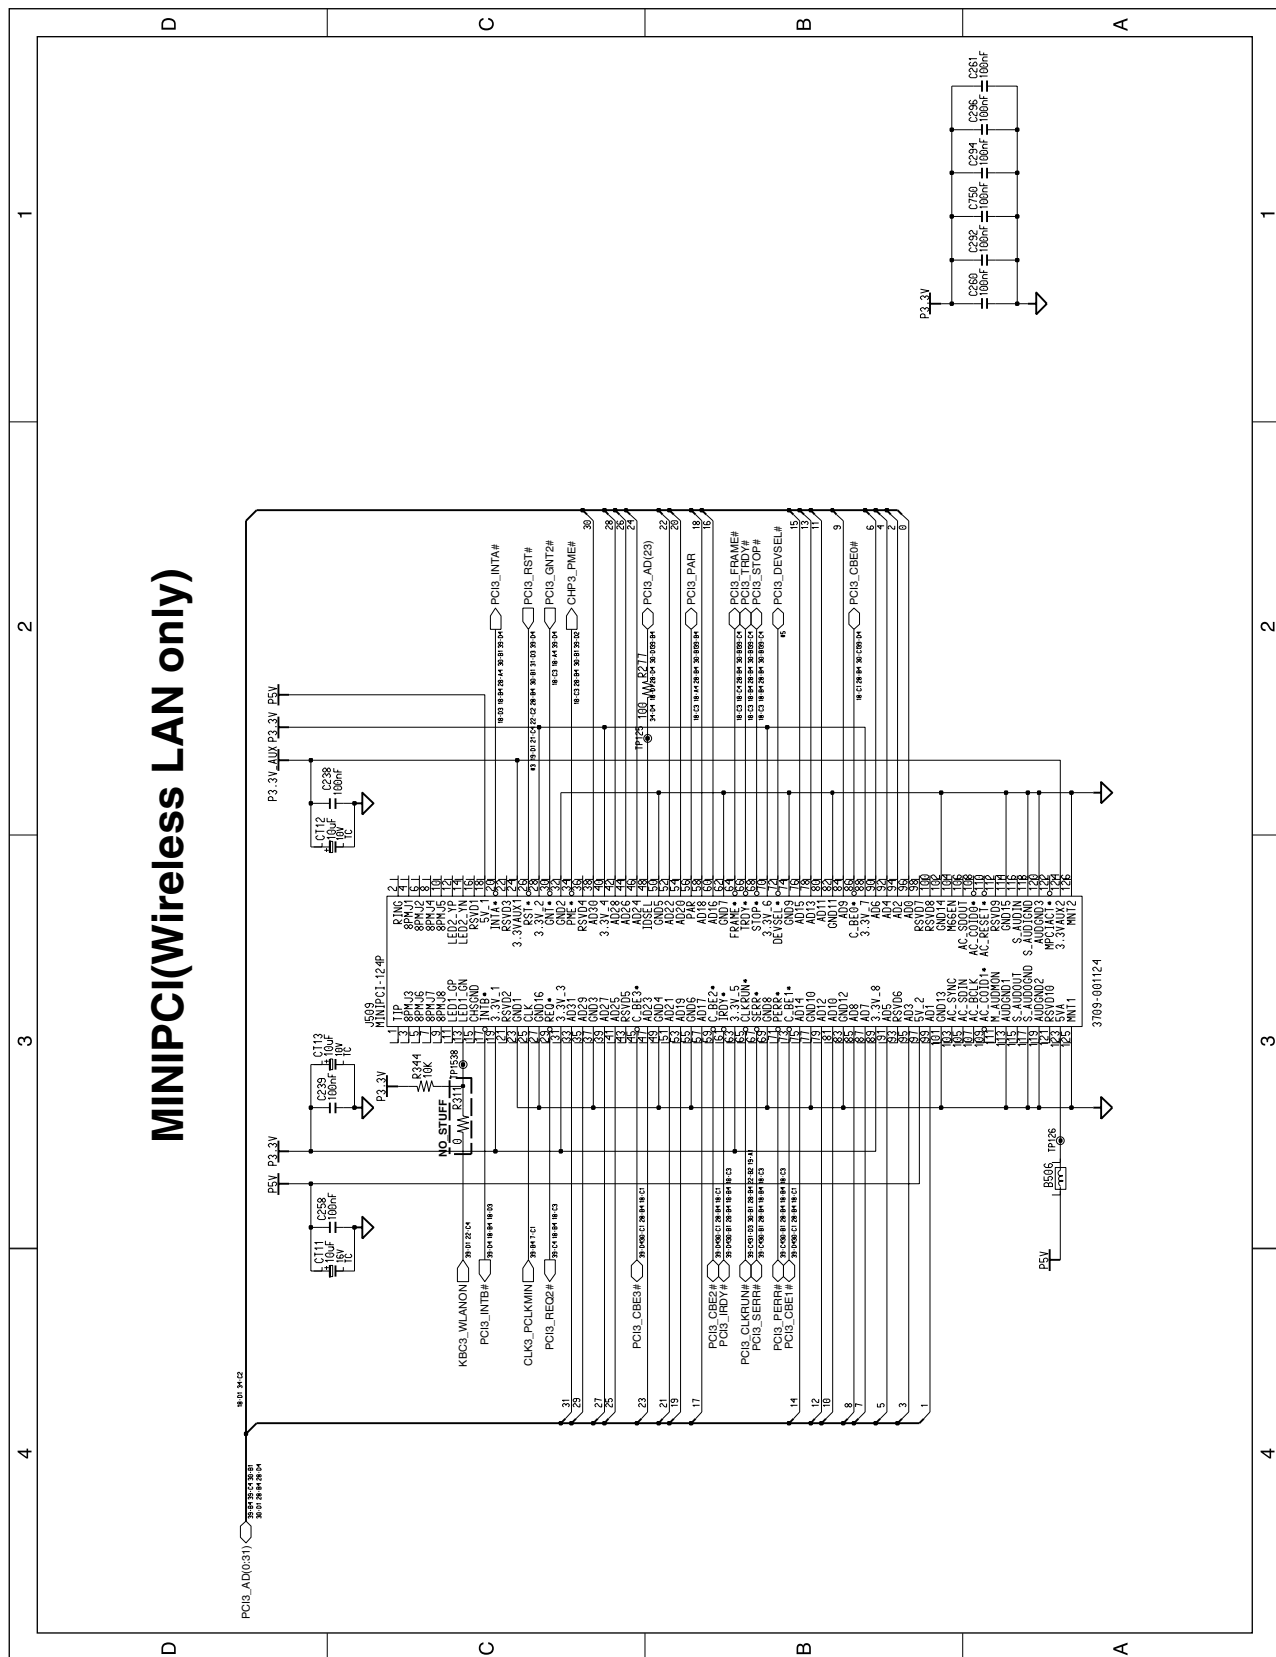

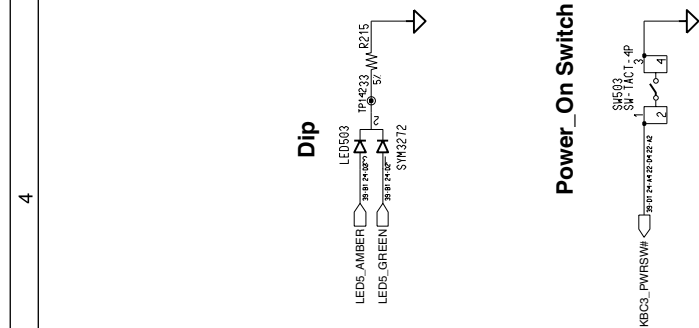

3-1-1(kk) Main Board Schematic Sheet 38 of 39(CPU VRM)

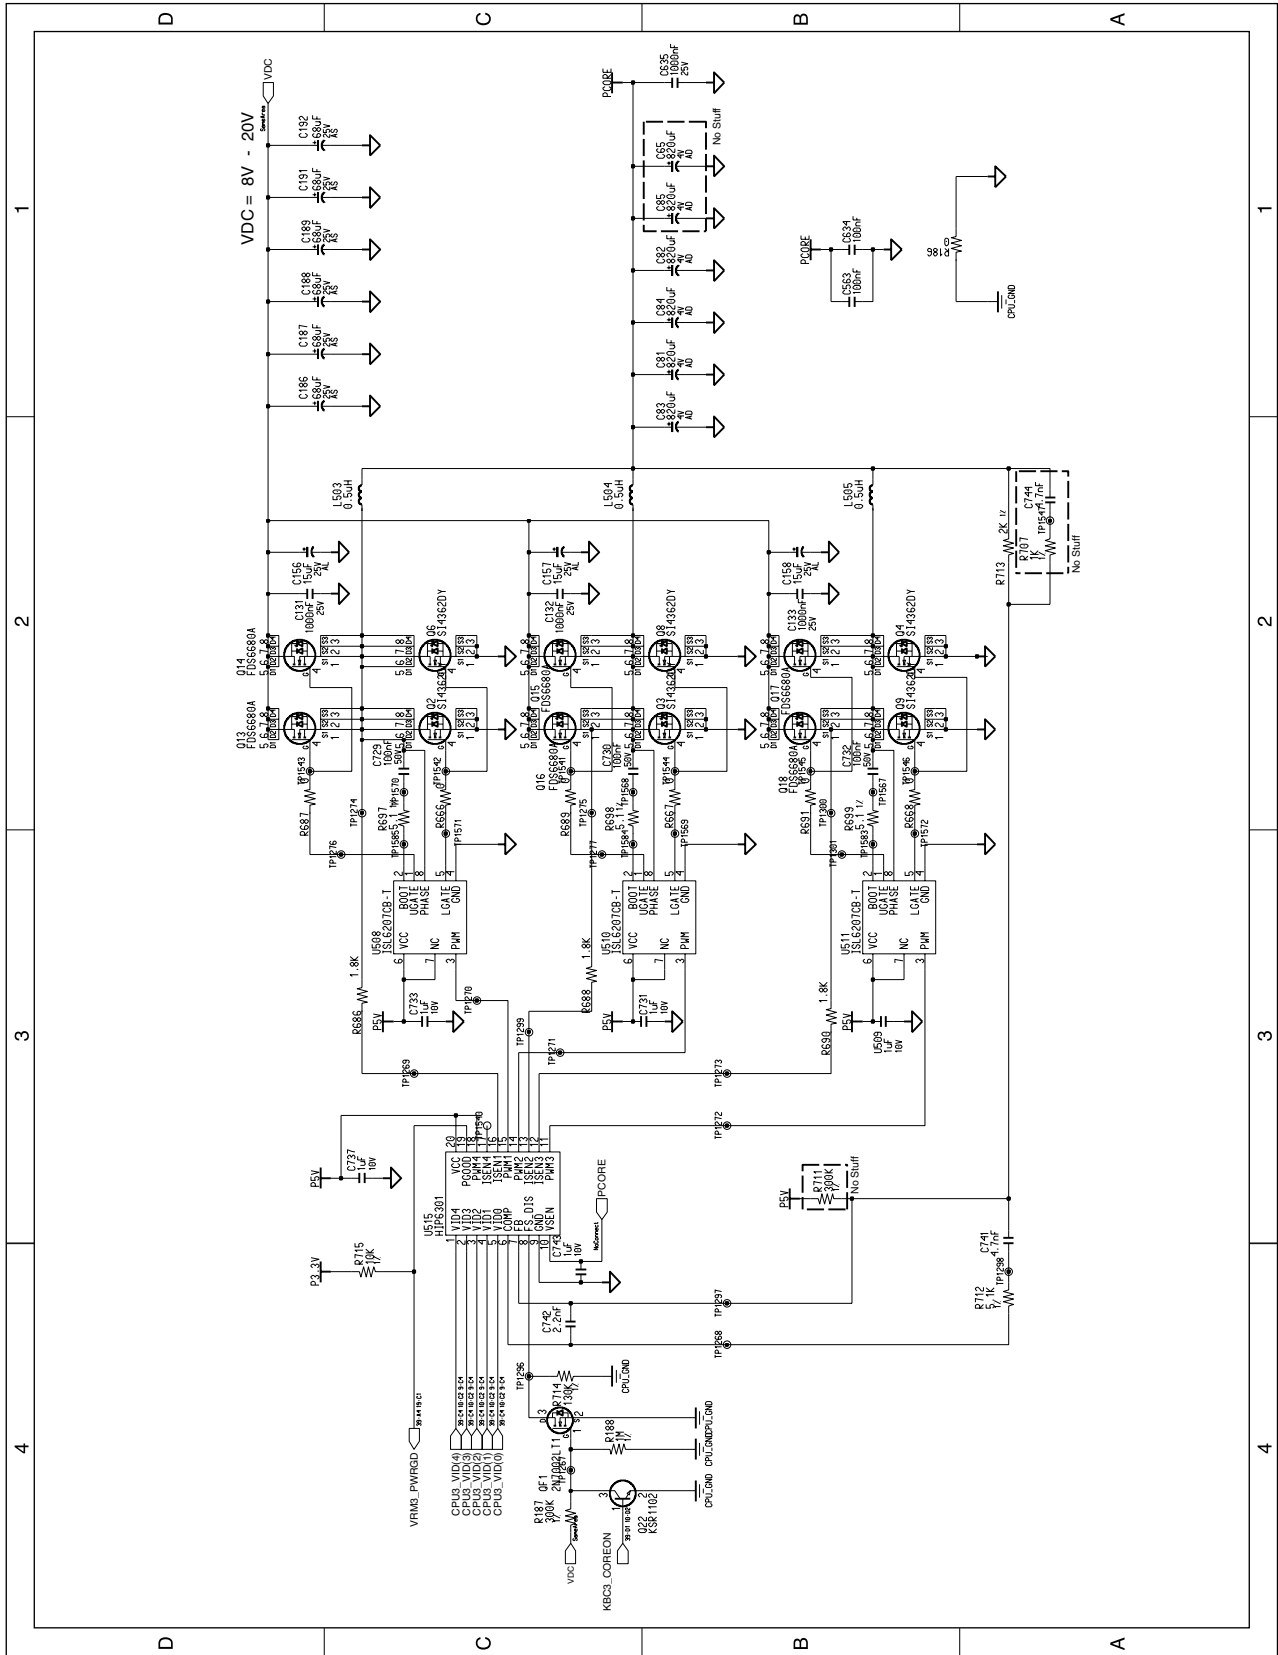

3-1-1(II) Main Board Schematic Sheet 39 of 39(TEST POINT)

[illegible]

3-1-2 Signal Location

Net Name	Sheet Number - Location	Net Name	Sheet Number - Location
1394_EEPROM_WE#	18-C3, 30-C4, 39-C2]	CB3_CAD(14)	28-D2, 29-X2, 39-C3
ADAPTOR_IN#	22-A2, 23-B1, 39-B1	CB3_CAD(4)	28-D2, 29-X2, 39-D3
AD_SEL	23-B2, 24-D4, 37-B1, 37-A3, 39-A2	CB3_CAD(6)	28-D2, 29-X2, 39-C3
AGPBUSY#	19-A3, 19-D4, 39-A4	CB3_CAD(18)	28-D2, 29-X2, 39-C3
AUD3_MONO_OUT	25-C1, 33-D2, 39-B2	CB3_CAD(25)	28-D2, 29-X2, 39-C3
AUD3_SAUDIN_MDC	25-A2, 33-D1, 39-B2	CB3_CAD(27)	28-D2, 29-X2, 39-C3
AUD5_CDCOM	25-A4, 25-C3, 39-B2	CB3_CAD(16)	28-D2, 29-X2, 39-C3
AUD5_CDL	25-A4, 25-C3, 39-B2	CB3_CAD(3)	28-D2, 29-X2, 39-D3
AUD5_CDR	25-A4, 25-C3, 39-B2	CB3_CAD(22)	28-D2, 29-X2, 39-C3
AUD5_HP_L	26-C4, 36-B4, 39-B2	CB3_CAD(31)	28-D2, 29-X2, 39-C3
AUD5_HP_R	26-D4, 36-B4, 39-B2	CB3_CAD(9)	28-D2, 29-X2, 39-C3
AUD5_LINE_OUT_L	25-C1, 26-C1, 39-B2	CB3_CAD(0)	28-D2, 29-X2, 39-D3
AUD5_LINE_OUT_R	25-C1, 26-C1, 39-B2	CB3_CAD(15)	28-D2, 29-X2, 39-C3
AUD5_MIC	25-C4, 36-B4, 39-B2	CB3_CAD(2)	28-D2, 29-X2, 39-D3
AUD5_SAUDIN	25-C3, 25-A3, 39-C2	CB3_CAD(23)	28-D2, 29-X2, 39-C3
AUD5_SPKR	25-A3, 25-D4, 39-B2	CB3_CAD(12)	28-D2, 29-X2, 39-C3
AUD5_SPK_L+	26-B4, 26-C3, 39-C2	CB3_CAD(5)	28-D2, 29-X2, 39-C3
AUD5_SPK_L-	26-B4, 26-C3, 39-C2	CB3_CAD(1)	28-D2, 29-X2, 39-D3
AUD5_SPK_R+	26-C4, 26-C3, 39-C2	CB3_CAD(28)	28-D2, 29-X2, 39-C3
AUD5_SPK_R-	26-C4, 26-C3, 39-B2	CB3_CAD(8)	28-D2, 29-X2, 39-C3
BAT3_TEMP	22-B2, 37-C1, 39-C1	CB3_CAD(30)	28-D2, 29-X2, 39-C3
BAT3_VOLT	22-B2, 37-B1, 39-C1	CB3_CAD(10)	28-D2, 29-X2, 39-C3
BATLOW#	19-D1, 19-B4, 39-C1	CB3_CAD(11)	28-D2, 29-X2, 39-C3
BVL3_CDIN#	22-A2, 22-C1, 39-B1	CB3_CAD(0:31)	28-D2, 29-X2
BVL3_INTR#	22-B2, 22-C1, 39-B1	CB3_CAUDIO	28-B2, 29-X1, 39-D3
CB3_3VEN#	28-D2, 29-X4, 39-B3	CB3_CCBE0#	28-B2, 29-X1, 39-D3
CB3_5VEN#	28-D2, 29-X4, 39-B3	CB3_CCBE1#	28-B2, 29-X1, 39-D3
CB3_A18	28-D2, 29-X1, 39-B3	CB3_CCBE2#	28-B2, 29-X1, 39-D3
CB3_A19	28-D2, 29-X1, 39-B3	CB3_CCBE3#	28-B2, 29-X1, 39-D3
CB3_CAD(26)	28-D2, 29-X2, 39-C3	CB3_CCD1#	28-B2, 29-X3, 29-X1, 39-B3
CB3_CAD(20)	28-D2, 29-X2, 39-C3	CB3_CCD2#	28-B2, 29-X3, 29-X1, 39-B3
CB3_CAD(13)	28-D2, 29-X2, 39-C3	CB3_CCLK	28-B2, 29-X1, 39-B3
CB3_CAD(24)	28-D2, 29-X2, 39-C3	CB3_CCLKRUN#	28-B2, 29-X1, 39-B3
CB3_CAD(29)	28-D2, 29-X2, 39-C3	CB3_CDEVSEL#	28-B2, 29-X1, 39-B3
CB3_CAD(21)	28-D2, 29-X2, 39-C3	CB3_CFRAME#	28-B2, 29-X1, 39-C3
CB3_CAD(19)	28-D2, 29-X2, 39-C3	CB3_CGNT#	28-B2, 29-X1, 39-B3
CB3_CAD(7)	28-D2, 29-X2, 39-C3	CB3_CINT#	28-A2, 29-X1, 39-B3
CB3_CAD(17)	28-D2, 29-X2, 39-C3	CB3_CIRDY#	28-B2, 29-X1, 39-D3

Net Name	Sheet Number - Location	Net Name	Sheet Number - Location
CB3_CPAR	28-B2, 29-X1, 39-B3	CDD5_D(0)	18-C1, 27-C4, 39-C3
CB3_CPERR#	28-B2, 29-X1, 39-D3	CDD5_D(11)	18-C1, 27-C3, 39-B3
CB3_CREQ#	28-B2, 29-X1, 39-B3	CDD5_D(0:7)	27-C4
CB3_CRST#	28-B2, 29-X3, 29-X1, 39-B3	CDD5_D(8:15)	27-C3
CB3_CSERR#	28-B2, 29-X1, 39-D3	CDD5_D(0:15)	18-C1
CB3_CSTOP#	28-B2, 29-X1, 39-D3	CDD5_DACK	18-B1, 27-C3, 39-C3
CB3_CSTSCHG	28-A2, 29-X1, 39-B3	CDD5_DREQ	18-B1, 27-C3, 39-B3
CB3_CTRDY#	28-B2, 29-X1, 39-D3	CDD5_IOR#	18-B1, 27-C3, 39-B3
CB3_CVS1	28-A2, 29-X1, 39-B3	CDD5_IORDY	18-B1, 27-C4, 39-C3
CB3_CVS2	28-A2, 29-X1, 39-B3	CDD5_IOW#	18-B1, 27-C4, 39-B3
CB3_D14	28-D2, 29-X1, 39-B3	CDD5_IRQ(15)	27-A4, 27-C4, 39-C3
CB3_D2	28-D2, 29-X1, 39-B3	CDD5_L	25-A3, 27-C4, 39-B3
CB3_VPPEN0#	28-D2, 29-X4, 39-B3	CDD5_LED#	27-A2, 27-C4, 35-C2, 39-B3
CB3_VPPEN1#	28-D2, 29-X4, 39-B3	CDD5_R	25-A3, 27-C3, 39-B3
CBA_VCC	28-C1, 28-D2, 29-X3, 29-X1, 39-B3	CHARGER_VDC	37-D1, 37-B4, 39-B1
CBA_VPP	29-X3, 29-X1, 39-B3	CHP3_AC97_BCLK	19-B1, 19-A4, 25-D1, 33-C1, 39-C2
CBS3_SPKR	25-A2, 28-A3, 39-B3	CHP3_AC97_RST#	19-B1, 25-C1, 33-C2, 39-C2
CDD5_A0	18-B1, 27-C4, 39-C3	CHP3_AC97_SDIO	19-B1, 19-A4, 25-C1, 39-C2
CDD5_A1	18-B1, 27-C4, 39-C3	CHP3_AC97_SDI1	19-B1, 19-A4, 33-C1, 39-C2
CDD5_A2	18-B1, 27-C3, 39-C3	CHP3_AC97_SDI2	19-B1, 19-A4, 39-C2
CDD5_CDRST#	19-D2, 27-C4, 39-C3	CHP3_AC97_SDO	19-B1, 19-A4, 25-C1, 33-C2, 39-C2
CDD5_COM	25-A3, 27-C4, 27-C3, 39-B3	CHP3_AC97_SYNC	19-B1, 25-C1, 33-C1, 39-C2
CDD5_CS1#	18-B1, 27-C4, 39-C3	CHP3_AUTOBIOIS#	19-D2, 19-D4, 20-D2, 39-B2
CDD5_CS3#	18-B1, 27-C3, 39-C3	CHP3_BIOSTBL#	19-D2, 21-B4, 39-D2
CDD5_D(5)	18-C1, 27-C4, 39-B3	CHP3_BIOSWP#	19-D2, 21-B4, 39-C2
CDD5_D(13)	18-C1, 27-C3, 39-B3	CHP3_CDBUFEN#	19-D2, 27-A4, 39-D2
CDD5_D(7)	18-C1, 27-C4, 39-B3	CHP3_CPUPERF#	8-B3, 19-A1, 39-D2
CDD5_D(9)	18-C1, 27-C3, 39-B3	CHP3_HDDRST#	19-D2, 27-C1, 39-C2
CDD5_D(4)	18-C1, 27-C4, 39-B3	CHP3_PAL_NTSC#	15-A2, 19-D2, 39-B2
CDD5_D(14)	18-C1, 27-C3, 39-B3	CHP3_PCREQA#	18-C3, 18-B4, 39-C2
CDD5_D(2)	18-C1, 27-C4, 39-C3	CHP3_PCREQB#	18-C3, 18-B4, 39-C2
CDD5_D(6)	18-C1, 27-C4, 39-B3	CHP3_PME#	18-C3, 28-B4, 30-B1, 34-C2, 39-D2
CDD5_D(12)	18-C1, 27-C3, 39-B3	CHP3_RTCRST#	19-C3, 20-D2, 20-D1, 39-C2
CDD5_D(10)	18-C1, 27-C3, 39-B3	CHP3_SERIRQ	19-D4, 19-C3, 22-C2, 28-A4, 31-D3, 39-D2
CDD5_D(3)	18-C1, 27-C4, 39-B3		
CDD5_D(8)	18-C1, 27-C3, 39-B3	CHP3_SLPS1#	19-A4, 22-A2, 39-D2
CDD5_D(1)	18-C1, 27-C4, 39-C3	CHP3_SLPS3#	19-D1, 19-A4, 22-A2, 39-D2
CDD5_D(15)	18-C1, 27-C3, 39-B3	CHP3_SLPS4#	19-D1, 22-B2

Net Name	Sheet Number - Location	Net Name	Sheet Number - Location
CHP3_SLPS5#	19-D1, 19-A4, 22-A2, 39-D2	CPU1_A(15)	8-D4, 11-D3
CHP3_SPDSELA#	17-A2, 19-D2, 39-D2	CPU1_A(11)	8-D4, 11-D3
CHP3_SPDSELB#	17-A3, 19-D2, 39-D2	CPU1_A(31)	8-C4, 11-D3
CHP3_SPKR	19-C1, 25-A2, 39-D2	CPU1_A(30)	8-C4, 11-D3
CHP3_SUSSTAT#	19-C1, 19-A4, 22-A2, 31-D3, 39-D2	CPU1_A(29)	8-C4, 11-D3
CHP3_USBPWR0#	19-D2, 32-B1, 39-C2	CPU1_A(28)	8-C4, 11-D3
CHP3_USBPWR2#	19-D2, 32-B1, 39-C2	CPU1_A(27)	8-C4, 11-D3
CHP3_VBIAS	19-B3, 19-B4, 20-C1, 39-D2	CPU1_A(26)	8-C4, 11-D3
CLK0_HCLK0	7-C3, 9-C4	CPU1_A(25)	8-C4, 11-D3
CLK0_HCLK0#	7-C3, 9-C4	CPU1_A(3)	8-D4, 11-D3
CLK0_HCLK1	7-C3, 11-B3	CPU1_A(23)	8-C4, 11-D3
CLK0_HCLK1#	7-C3, 11-B3	CPU1_A(13)	8-D4, 11-D3
CLK3_DOT48	7-B1, 11-D3, 39-B4	CPU1_A(9)	8-D4, 11-D3
CLK3_ICH14	7-B1, 19-C1, 39-B4	CPU1_A(8)	8-D4, 11-D3
CLK3_ICH48	7-B1, 19-B3, 39-B4	CPU1_A(7)	8-D4, 11-D3
CLK3_ICH66	7-C1, 19-B1, 39-B4	CPU1_A(6)	8-D4, 11-D3
CLK3_MCH66	7-C1, 13-C4, 39-B4	CPU1_A(5)	8-D4, 11-D3
CLK3_MCLK0	12-C4, 12-A4, 17-A4, 17-C3	CPU1_A(4)	8-D4, 11-D3
CLK3_MCLK1	12-C4, 12-A4, 17-A4, 17-C2	CPU1_A(21)	8-C4, 11-D3
CLK3_MCLK2	12-C4, 17-C2, 17-A4	CPU1_A(20)	8-C4, 11-D3
CLK3_MCLK3	12-C4, 17-C1, 17-A4	CPU1_A(31:3)	11-D3
CLK3_PCLK1394	7-C1, 30-B1, 39-B4	CPU1_A(16:3)	8-D4
CLK3_PCLKCB	7-C1, 28-B4, 39-B4	CPU1_A(31:17)	8-C4
CLK3_PCLKFWH	7-C1, 21-C4, 39-B4	CPU1_A20M#	8-B3, 9-C4, 19-C3, 39-D4
CLK3_PCLKICH	7-C1, 18-C3, 39-B4	CPU1_ADS#	8-D3, 11-A3
CLK3_PCLKMICOM	7-C1, 22-C2, 39-B4	CPU1_ADSTB0#	8-C4, 11-B3
CLK3_PCLKMIN	7-C1, 34-C4, 39-B4	CPU1_ADSTB1#	8-B4, 11-B3
CLK3_PCLKSIO	7-C1, 31-D3, 39-B4	CPU1_BNR#	8-D3, 11-A3
CLK3_SIO14	7-B1, 31-C3, 39-B4	CPU1_BPRI#	8-C3, 11-A3
CPU1_A(14)	8-D4, 11-D3	CPU1_BREQ#	8-C3, 11-A3
CPU1_A(12)	8-D4, 11-D3	CPU1_CPURST#	8-C3, 11-A3
CPU1_A(10)	8-D4, 11-D3	CPU1_D(42)	8-D1, 11-D1
CPU1_A(22)	8-C4, 11-D3	CPU1_D(41)	8-D1, 11-D1
CPU1_A(24)	8-C4, 11-D3	CPU1_D(39)	8-D1, 11-D1
CPU1_A(19)	8-C4, 11-D3	CPU1_D(37)	8-D1, 11-D1
CPU1_A(18)	8-C4, 11-D3	CPU1_D(35)	8-D1, 11-D1
CPU1_A(17)	8-C4, 11-D3	CPU1_D(34)	8-D1, 11-D1
CPU1_A(16)	8-D4, 11-D3	CPU1_D(33)	8-D1, 11-D1

Net Name	Sheet Number - Location
CPU1_D(32)	8-D1, 11-D1
CPU1_D(31)	8-C2, 11-D1
CPU1_D(30)	8-C2, 11-D1
CPU1_D(28)	8-C2, 11-D1
CPU1_D(26)	8-C2, 11-D1
CPU1_D(18)	8-C2, 11-D1
CPU1_D(8)	8-D2, 11-D1
CPU1_D(6)	8-D2, 11-D1
CPU1_D(4)	8-D2, 11-D1
CPU1_D(63)	8-C1, 11-D1
CPU1_D(62)	8-C1, 11-D1
CPU1_D(60)	8-C1, 11-D1
CPU1_D(58)	8-C1, 11-D1
CPU1_D(50)	8-C1, 11-D1
CPU1_D(40)	8-D1, 11-D1
CPU1_D(38)	8-D1, 11-D1
CPU1_D(36)	8-D1, 11-D1
CPU1_D(19)	8-C2, 11-D1
CPU1_D(17)	8-C2, 11-D1
CPU1_D(16)	8-C2, 11-D1
CPU1_D(14)	8-D2, 11-D1
CPU1_D(13)	8-D2, 11-D1
CPU1_D(12)	8-D2, 11-D1
CPU1_D(11)	8-D2, 11-D1
CPU1_D(10)	8-D2, 11-D1
CPU1_D(9)	8-D2, 11-D1
CPU1_D(7)	8-D2, 11-D1
CPU1_D(5)	8-D2, 11-D1
CPU1_D(3)	8-D2, 11-D1
CPU1_D(2)	8-D2, 11-D1
CPU1_D(1)	8-D2, 11-D1
CPU1_D(0)	8-D2, 11-D1
CPU1_D(61)	8-C1, 11-D1
CPU1_D(59)	8-C1, 11-D1
CPU1_D(57)	8-C1, 11-D1
CPU1_D(56)	8-C1, 11-D1
CPU1_D(55)	8-C1, 11-D1
CPU1_D(54)	8-C1, 11-D1

Net Name	Sheet Number - Location
CPU1_D(53)	8-C1, 11-D1
CPU1_D(52)	8-C1, 11-D1
CPU1_D(51)	8-C1, 11-D1
CPU1_D(49)	8-C1, 11-D1
CPU1_D(48)	8-C1, 11-D1
CPU1_D(46)	8-D1, 11-D1
CPU1_D(45)	8-D1, 11-D1
CPU1_D(44)	8-D1, 11-D1
CPU1_D(43)	8-D1, 11-D1
CPU1_D(47)	8-D1, 11-D1
CPU1_D(15)	8-D2, 11-D1
CPU1_D(29)	8-C2, 11-D1
CPU1_D(27)	8-C2, 11-D1
CPU1_D(25)	8-C2, 11-D1
CPU1_D(24)	8-C2, 11-D1
CPU1_D(23)	8-C2, 11-D1
CPU1_D(22)	8-C2, 11-D1
CPU1_D(21)	8-C2, 11-D1
CPU1_D(20)	8-C2, 11-D1
CPU1_D(63:0)	11-D1
CPU1_D(63:48)	8-C1
CPU1_D(15:0)	8-D2
CPU1_D(31:16)	8-C2
CPU1_D(47:32)	8-D1
CPU1_DBI0#	8-C2, 11-B3
CPU1_DBI1#	8-B2, 11-B3
CPU1_DBI2#	8-C1, 11-B3
CPU1_DBI3#	8-B1, 11-B3
CPU1_DBSY#	8-C3, 11-A3
CPU1_DEFER#	8-C3, 11-A3
CPU1_DRDY#	8-C3, 11-A3
CPU1_DSTBN0#	8-C2, 11-B3
CPU1_DSTBN1#	8-B2, 11-B3
CPU1_DSTBN2#	8-C1, 11-B3
CPU1_DSTBN3#	8-B1, 11-B3
CPU1_DSTBP0#	8-C2, 11-B3
CPU1_DSTBP1#	8-B2, 11-B3
CPU1_DSTBP2#	8-C1, 11-B3

Net Name	Sheet Number - Location	et Name	Sheet Number - Location
CPU1_DSTBP3#	8-B1, 11-B3		37-D4, 37-C4, 39-B1
CPU1_FERR#	9-C4, 19-C4, 39-C4	DVOB1_BLANK#	13-C3, 15-C4, 39-D3
CPU1_HIT#	8-C3, 11-A3	DVOB1_CLK	13-D3, 15-C4, 39-D3
CPU1_HITM#	8-C3, 11-A3	DVOB1_CLK#	13-D3, 15-C4, 39-D3
CPU1_IGNNE#	8-B3, 9-C4, 19-C3, 39-C4	DVOB1_D(0)	13-C3, 15-C4, 39-D3
CPU1_INIT#	8-C3, 8-B3, 19-C3, 21-D4, 39-C4	DVOB1_D(5)	13-C3, 15-C4, 39-D3
CPU1_INTR	8-B3, 9-C4, 19-C3, 39-D4	DVOB1_D(4)	13-C3, 15-C4, 39-D3
CPU1_LOCK#	8-C3, 11-A3	DVOB1_D(3)	13-C3, 15-C4, 39-D3
CPU1_NMI	8-B3, 9-C4, 19-C3, 39-B4	DVOB1_D(10)	13-C3, 15-C4, 39-C3
CPU1_PROCHOT#	8-A4, 9-B3, 39-C4	DVOB1_D(2)	13-C3, 15-C4, 39-D3
CPU1_PWRGDCPU	9-B3, 19-C3, 39-C4	DVOB1_D(1)	13-C3, 15-C4, 39-D3
CPU1_REQ#(4)	8-C4, 11-C3	DVOB1_D(6)	13-C3, 15-C4, 39-D3
CPU1_REQ#(3)	8-C4, 11-C3	DVOB1_D(11)	13-C3, 15-C4, 39-C3
CPU1_REQ#(2)	8-C4, 11-C3	DVOB1_D(9)	13-C3, 15-C4, 39-C3
CPU1_REQ#(1)	8-C4, 11-C3	DVOB1_D(8)	13-C3, 15-C4, 39-D3
CPU1_REQ#(0)	8-C4, 11-C3	DVOB1_D(7)	13-C3, 15-C4, 39-D3
CPU1_REQ#(4:0)	8-C4, 11-C3	DVOB1_D(0:11)	13-C3, 15-C4
CPU1_RS0#	8-B3, 11-A3	DVOB1_FLDSTL	13-C3, 15-C4, 39-D3
CPU1_RS1#	8-C3, 11-A3	DVOB1_HSYNC	13-C3, 15-C4, 39-C3
CPU1_RS2#	8-C3, 11-A3	DVOB1_VSYNC	13-C3, 15-C4, 39-C3
CPU1_SLP#	8-A3, 9-B3, 19-C3, 39-D4	DVOC1_BLANK#	13-B3, 15-B4, 39-C3
CPU1_SMI#	8-B3, 9-C4, 19-C3, 39-D4	DVOC1_CLKOUT	13-C3, 15-B4, 39-C3
CPU1_STPCLK#	8-B3, 9-C4, 19-C3, 39-C4	DVOC1_CLKOUT#	13-C3, 15-B4, 39-C3
CPU1_THRMTRIP#	9-B4, 10-C4, 19-C1, 39-C4	DVOC1_D(7)	13-B3, 15-B4, 39-C3
CPU1_TRDY#	8-B3, 11-A3	DVOC1_D(1)	13-B3, 15-B4, 39-C3
CPU2_THERMDA	9-B4, 10-A2, 39-C4	DVOC1_D(3)	13-B3, 15-B4, 39-C3
CPU2_THERMDC	9-B4, 10-A2, 39-C4	DVOC1_D(5)	13-B3, 15-B4, 39-C3
CPU3_BSEL0	7-C4, 9-C3, 11-D2, 39-C4	DVOC1_D(6)	13-B3, 15-B4, 39-C3
CPU3_THRMTRIP#	10-D2, 10-D3, 39-C4	DVOC1_D(8)	13-B3, 15-B4, 39-C3
CPU3_VID(2)	9-C4, 10-C2, 38-C4, 39-C4	DVOC1_D(9)	13-B3, 15-B4, 39-C3
CPU3_VID(1)	9-C4, 10-C2, 38-C4, 39-C4	DVOC1_D(2)	13-B3, 15-B4, 39-C3
CPU3_VID(0)	9-C4, 10-C2, 38-C4, 39-C4	DVOC1_D(0)	13-B3, 15-B4, 39-C3
CPU3_VID(4)	9-C4, 10-C2, 38-C4, 39-C4	DVOC1_D(10)	13-B3, 15-B4, 39-C3
CPU3_VID(3)	9-C4, 10-C2, 38-C4, 39-C4	DVOC1_D(11)	13-B3, 15-B4, 39-C3
CPU3_VID(0:4)	9-C4, 10-C2	DVOC1_D(4)	13-B3, 15-B4, 39-C3
CPU_GTLREFO	9-C3, 9-A3, 39-C4	DVOC1_D(0:11)	13-B3, 15-B4
DCK3_DCKIN#	22-B2, 22-C1, 39-B1	DVOC1_FLDSTL	13-C3, 15-B4, 39-C3
DOCK_DC	24-D4, 36-D3, 36-C4, 37-B1, 37-B1,	DVOC1_HSYNC	13-C3, 15-B4, 39-C3

Net Name	Sheet Number - Location	Net Name	Sheet Number - Location
DVOC1_VSYNC	13-C3, 15-B4, 39-C3	HI_VREF_GMCH	13-C4, 14-C3, 39-B4
EEPROM_SCL	30-B2, 30-C4, 39-C2	HI_VREF_ICH	14-C3, 19-B1, 39-B4
EEPROM_SDA	30-C2, 30-C4, 39-C2	HI_VSWING_GMCH	13-C4, 14-C3, 39-B4
GPIO17	18-C3, 18-B4, 39-A2	HI_VSWING_ICH	14-C3, 19-B1, 39-B4
GPIO2	18-A4, 18-D3, 39-B2	HP5_IN	26-C3, 36-B3, 39-B2
GPIO3	18-D3, 18-A4, 39-B2	HP_L_TEST	26-C4, 26-B4, 39-B2
GPIO4	18-D3, 18-A4, 39-B2	HP_R_TEST	26-C4, 26-B4, 39-B2
GPIO5	18-D3, 18-A4, 39-B2	HUB1_HL(8)	13-C4, 19-C1
HDD5_A0	18-B3, 27-C1, 39-C3	HUB1_HL(7)	13-C4, 19-C1
HDD5_A1	18-B3, 27-C1, 39-C3	HUB1_HL(4)	13-C4, 19-C1
HDD5_A2	18-B3, 27-C2, 39-C3	HUB1_HL(3)	13-C4, 19-C1
HDD5_CS1#	18-B3, 27-C1, 39-D3	HUB1_HL(0)	13-C4, 19-C1
HDD5_CS3#	18-A3, 27-C2, 39-D3	HUB1_HL(2)	13-C4, 19-C1
HDD5_D(3)	18-C3, 27-C1, 27-C2, 39-D3	HUB1_HL(1)	13-C4, 19-C1
HDD5_D(5)	18-C3, 27-C1, 27-C2, 39-D3	HUB1_HL(10)	13-C4, 19-C1
HDD5_D(1)	18-C3, 27-C1, 27-C2, 39-D3	HUB1_HL(9)	13-C4, 19-C1
HDD5_D(4)	18-C3, 27-C1, 27-C2, 39-D3	HUB1_HL(6)	13-C4, 19-C1
HDD5_D(12)	18-C3, 27-C1, 27-C2, 39-D3	HUB1_HL(5)	13-C4, 19-C1
HDD5_D(10)	18-C3, 27-C1, 27-C2, 39-D3	HUB1_HL(0:10)	13-C4, 19-C1
HDD5_D(9)	18-C3, 27-C1, 27-C2, 39-D3	HUB1_STBF	13-D4, 19-C1
HDD5_D(2)	18-C3, 27-C1, 27-C2, 39-D3	HUB1_STBS	13-D4, 19-C1
HDD5_D(6)	18-C3, 27-C1, 27-C2, 39-D3	ISA3_IRQ(15)	18-A1, 18-B4, 27-A3, 39-C3
HDD5_D(0)	18-C3, 27-C1, 27-C2, 39-D3	ISA3_IRQ(14)	18-B1, 18-B4, 27-C1, 39-C3
HDD5_D(14)	18-C3, 27-C1, 27-C2, 39-C3	IVT_VDC	16-D1, 36-C3, 39-B1
HDD5_D(13)	18-C3, 27-C1, 27-C2, 39-C3	KBC3_A20G	19-C3, 22-B2, 39-C1
HDD5_D(8)	18-C3, 27-C1, 27-C2, 39-D3	KBC3_BKLTON	16-D4, 22-C4, 39-D1
HDD5_D(7)	18-C3, 27-C1, 27-C2, 39-D3	KBC3_BRIT	16-C4, 22-B2, 39-C1
HDD5_D(11)	18-C3, 27-C1, 27-C2, 39-D3	KBC3_CAPSLED#	22-C4, 35-C2, 39-C1
HDD5_D(15)	18-C3, 27-C1, 27-C2, 39-C3	KBC3_CHGEN	22-C2, 37-B4, 39-C1
HDD5_D(0:15)	18-C3, 27-C1, 27-C2	KBC3_COREON	10-D2, 38-C4, 39-D1
HDD5_DACK#	18-B3, 27-C1, 39-C3	KBC3_CPURST#	19-C3, 22-B2, 39-D1
HDD5_DREQ	18-B3, 27-C1, 39-C3	KBC3_EXTSMI#	19-A3, 22-C4, 31-C3, 39-D1
HDD5_IOR#	18-B3, 27-C1, 39-C3	KBC3_EZ_BTN0#	22-C4, 35-B4, 39-C1
HDD5_IORDY	18-B3, 27-C1, 39-C3	KBC3_EZ_BTN1#	22-B4, 35-B4, 39-C1
HDD5_IOW#	18-B3, 27-C1, 39-C3	KBC3_EZ_BTN2#	22-B4, 35-A4, 39-C1
HDD5_LED#	27-A1, 27-C1, 35-C2, 39-C3	KBC3_FANCTRL	20-A2, 22-B2, 39-D1
HI11	19-C1, 19-C1	KBC3_FWHRST#	21-C4, 22-C4, 39-D1
HI_RCOMP	19-B1, 19-C1	KBC3_ICHPWR#	19-D1, 22-C4, 39-D1

Net Name	Sheet Number - Location	Net Name	Sheet Number - Location
KBC3_LAN_PWROK	19-D1, 19-A4, 22-C2, 39-C2	KBC5_KSO(14)	22-B4, 24-D2, 39-B2
KBC3_LBLED	24-C3, 35-C3, 39-C1	KBC5_KSO(7)	22-B4, 24-D2, 39-B2
KBC3_LBLED#	22-C4, 24-C4, 39-D1	KBC5_KSO(2)	22-B4, 24-C2, 39-B2
KBC3_NUMLED#	22-C4, 35-D2, 39-D1	KBC5_KSO(3)	22-B4, 24-C2, 39-B2
KBC3_PWRGD	11-A3, 19-B3, 19-D4, 22-C4, 28-A4, 39-C1	KBC5_KSO(5)	22-B4, 24-D2, 39-B2
KBC3_PWRON	10-D2, 10-B3, 22-C4, 23-B4, 36-B3, 36-C4, 39-C1	KBC5_KSO(12)	22-B4, 24-D2, 39-B2
KBC3_PWRSW#	22-A2, 22-D4, 24-A4, 35-C4, 39-D1	KBC5_KSO(4)	22-B4, 24-D2, 39-B2
KBC3_QS#	22-C2, 37-B4, 39-C1	KBC5_KSO(0)	22-B4, 24-C2, 39-B2
KBC3_RSMRST#	19-B3, 19-A4, 22-C2, 39-D1	KBC5_KSO(6)	22-B4, 24-D2, 39-B2
KBC3_RST#	22-D4, 23-D4, 39-C1	KBC5_KSO(9)	22-B4, 24-D2, 39-B2
KBC3_RUNSCI#	19-A3, 22-C4, 39-C1	KBC5_KSO(1)	22-B4, 24-C2, 39-B2
KBC3_SCLED#	22-C4, 35-C2, 39-D1	KBC5_KSO(10)	22-B4, 24-D2, 39-B2
KBC3_SMCLK	22-A2, 22-C1, 37-C1, 39-C1	KBC5_KSO(0:15)	22-B4
KBC3_SMDATA	22-A2, 22-C1, 37-C1, 39-D1	LAN3_PHYCLK	19-B1, 33-C4, 39-C2
KBC3_SPKMUTE	22-B2, 26-C3, 39-C1	LAN3_PHYRST	19-B1, 33-C4, 39-C2
KBC3_SUSPWR	22-B2, 36-B3, 39-D1	LAN3_RXD0	19-B1, 33-C3
KBC3_THERM_SMCLK	10-A4, 22-B2, 39-D1	LAN3_RXD1	19-B1, 33-C3
KBC3_THERM_SMDATA	10-A4, 22-C2, 39-D1	LAN3_RXD2	19-B1, 33-C3
KBC3_VRPWRGD#	7-C3, 7-A4, 39-C1	LAN3_TXD0	19-B1, 33-C4
KBC3_WAKESCI#	19-A3, 22-B2, 39-C1	LAN3_TXD1	19-B1, 33-C4
KBC3_WLANON	22-C4, 34-C4, 39-D1	LAN3_TXD2	19-B1, 33-C4
KBC5_FANA_ON#	20-A1, 22-D4, 39-C1	LAN5_RD+	33-B2, 33-B2
KBC5_FANB_ON#	20-C2, 22-D4, 39-C1	LAN5_RD-	33-B2, 33-B2
KBC5_KSI(2)	22-B4, 24-D2, 39-C2	LAN5_TD+	33-B2, 33-B2
KBC5_KSI(0)	22-B4, 24-C2, 39-C2	LAN5_TD-	33-B2, 33-B2
KBC5_KSI(7)	22-B4, 24-D2, 39-B2	LCD5_BKLTON	16-D3, 16-D2, 39-B3
KBC5_KSI(3)	22-B4, 24-D2, 39-C2	LCD5_BRIT	16-C3, 16-D2, 39-B3
KBC5_KSI(1)	22-B4, 24-D2, 39-C2	LCD_VDD3V	16-B3, 16-C2, 39-B3
KBC5_KSI(4)	22-B4, 24-D2, 39-C2	LED3_CHARGE	22-C2, 24-C4, 39-B1
KBC5_KSI(5)	22-B4, 24-D2, 39-B2	LED5_AMBER	24-D2, 35-C4, 39-B1
KBC5_KSI(6)	22-B4, 24-D2, 39-B2	LED5_GREEN	24-D2, 35-C4, 39-B1
KBC5_KSI(0:7)	22-B4	LID3_SWITCH#	22-B4, 23-D2, 35-B3, 39-B1
KBC5_KSO(11)	22-B4, 24-D2, 39-B2	LPC3_LAD(0)	19-C3, 21-C3, 22-C2, 31-D3, 39-B4
KBC5_KSO(13)	22-B4, 24-D2, 39-B2	LPC3_LAD(1)	19-C3, 21-C3, 22-C2, 31-D3, 39-B4
KBC5_KSO(15)	22-B4, 24-D2, 39-B2	LPC3_LAD(3)	19-C3, 21-C3, 22-C2, 31-D3, 39-B4
KBC5_KSO(8)	22-B4, 24-D2, 39-B2	LPC3_LAD(2)	19-C3, 21-C3, 22-C2, 31-D3, 39-B4
		LPC3_LAD(0:3)	19-C3, 21-C3, 22-C2, 31-D3
		LPC3_LDRQ0#	19-C3, 31-D3, 39-B4

Net Name	Sheet Number - Location	Net Name	Sheet Number - Location
LPC3_LDRQ1#	19-C3, 19-D4, 39-B4	MEM3_MAA(12)	12-D4, 17-C1, 17-C2
LPC3_LFRAME#	19-C3, 19-D4, 21-B3, 22-C2, 31-D3, 39-B4	MEM3_MAA(8)	12-D4, 17-B2, 17-B3
LVDS1_A0+	15-B2, 16-C1, 39-B3	MEM3_MAA(7)	12-D4, 17-B1, 17-B2
LVDS1_A0-	15-B2, 16-C1, 39-B3	MEM3_MAA(6)	12-D4, 17-B2, 17-B3
LVDS1_A1+	15-B2, 16-C1, 39-B3	MEM3_MAA(5)	12-D4, 17-C1, 17-C2
LVDS1_A1-	15-B2, 16-C1, 39-B3	MEM3_MAA(3)	12-D4, 17-C1, 17-C2
LVDS1_A2+	15-B2, 16-D1, 39-B3	MEM3_MAA(4)	12-D4, 17-C1, 17-C2
LVDS1_A2-	15-B2, 16-D1, 39-B3	MEM3_MAA(0:12)	12-D4
LVDS1_ACLK+	15-B2, 16-D1, 39-B3	MEM3_MD(49)	12-D3, 17-D2, 17-D3
LVDS1_ACLK-	15-B2, 16-D1, 39-B3	MEM3_MD(15)	12-D3, 17-D2, 17-D3
MCH_HVSWING0	11-B4, 11-B4, 39-B4	MEM3_MD(31)	12-D3, 17-D2, 17-D3
MCH_HVSWING1	11-B4, 11-A4, 39-B4	MEM3_MD(16)	12-D3, 17-D2, 17-D3
MEM3_BS0	12-B4, 17-B1, 17-B2	MEM3_MD(18)	12-D3, 17-D2, 17-D3
MEM3_BS1	12-B4, 17-B1, 17-B2	MEM3_MD(22)	12-D3, 17-D2, 17-D3
MEM3_CKE0	12-C4, 17-C2	MEM3_MD(32)	12-D3, 17-D2, 17-D3
MEM3_CKE1	12-C4, 17-C2	MEM3_MD(34)	12-D3, 17-D2, 17-D3
MEM3_CKE2	12-C4, 17-C1	MEM3_MD(50)	12-D3, 17-D2, 17-D3
MEM3_CKE3	12-C4, 17-C1	MEM3_MD(36)	12-D3, 17-D2, 17-D3
MEM3_CSA0#	12-C4, 17-C3	MEM3_MD(46)	12-D3, 17-D2, 17-D3
MEM3_CSA1#	12-C4, 17-C3	MEM3_MD(47)	12-D3, 17-D2, 17-D3
MEM3_CSA2#	12-C4, 17-C2	MEM3_MD(51)	12-D3, 17-D2, 17-D3
MEM3_CSA3#	12-C4, 17-C2	MEM3_MD(27)	12-D3, 17-D2, 17-D3
MEM3_DQMA(6)	12-C4, 17-C2, 17-C3	MEM3_MD(28)	12-D3, 17-D2, 17-D3
MEM3_DQMA(1)	12-C4, 17-B1, 17-B2	MEM3_MD(29)	12-D3, 17-D2, 17-D3
MEM3_DQMA(0)	12-C4, 17-B1, 17-B2	MEM3_MD(33)	12-D3, 17-D2, 17-D3
MEM3_DQMA(2)	12-C4, 17-C1, 17-C2	MEM3_MD(35)	12-D3, 17-D2, 17-D3
MEM3_DQMA(7)	12-C4, 17-D2, 17-D3	MEM3_MD(37)	12-D3, 17-D2, 17-D3
MEM3_DQMA(5)	12-C4, 17-B2, 17-B3	MEM3_MD(39)	12-D3, 17-D2, 17-D3
MEM3_DQMA(4)	12-C4, 17-B2, 17-B3	MEM3_MD(57)	12-D3, 17-D2, 17-D3
MEM3_DQMA(3)	12-C4, 17-D1, 17-D2	MEM3_MD(26)	12-D3, 17-D2, 17-D3
MEM3_DQMA(0:7)	12-C4	MEM3_MD(30)	12-D3, 17-D2, 17-D3
MEM3_MAA(11)	12-D4, 17-B1, 17-B2	MEM3_MD(52)	12-D3, 17-D2, 17-D3
MEM3_MAA(2)	12-D4, 17-C2, 17-C3	MEM3_MD(38)	12-D3, 17-D2, 17-D3
MEM3_MAA(1)	12-D4, 17-C2, 17-C3	MEM3_MD(54)	12-D3, 17-D2, 17-D3
MEM3_MAA(0)	12-D4, 17-C2, 17-C3	MEM3_MD(3)	12-D3, 17-D2, 17-D3
MEM3_MAA(10)	12-D4, 17-B2, 17-B3	MEM3_MD(17)	12-D3, 17-D2, 17-D3
MEM3_MAA(9)	12-D4, 17-B2, 17-B3	MEM3_MD(19)	12-D3, 17-D2, 17-D3
		MEM3_MD(20)	12-D3, 17-D2, 17-D3

Net Name	Sheet Number - Location	Net Name	Sheet Number - Location
MEM3_MD(21)	12-D3, 17-D2, 17-D3	MEM3_SRASA#	12-B4, 17-C2, 17-C3
MEM3_MD(48)	12-D3, 17-D2, 17-D3	MI2C1_CLK	13-B3, 15-C4, 39-D3
MEM3_MD(55)	12-D3, 17-D2, 17-D3	MI2C1_DATA	13-B3, 15-C4, 39-D3
MEM3_MD(41)	12-D3, 17-D2, 17-D3	MIC_TEST	25-C4, 26-B4, 39-B2
MEM3_MD(43)	12-D3, 17-D2, 17-D3	PCI3_AD(19)	18-D1, 28-D4, 28-B4, 30-D1, 34-D4, 39-B4
MEM3_MD(44)	12-D3, 17-D2, 17-D3	PCI3_AD(4)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(45)	12-D3, 17-D2, 17-D3	PCI3_AD(5)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(9)	12-D3, 17-D2, 17-D3	PCI3_AD(10)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(13)	12-D3, 17-D2, 17-D3	PCI3_AD(20)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(14)	12-D3, 17-D2, 17-D3	PCI3_AD(3)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(25)	12-D3, 17-D2, 17-D3	PCI3_AD(21)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(63)	12-D3, 17-D2, 17-D3	PCI3_AD(17)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(40)	12-D3, 17-D2, 17-D3	PCI3_AD(26)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(56)	12-D3, 17-D2, 17-D3	PCI3_AD(27)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(53)	12-D3, 17-D2, 17-D3	PCI3_AD(24)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(23)	12-D3, 17-D2, 17-D3	PCI3_AD(22)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(1)	12-D3, 17-D2, 17-D3	PCI3_AD(29)	18-D1, 28-D4, 30-D1, 30-B1, 34-D4, 39-B4
MEM3_MD(42)	12-D3, 17-D2, 17-D3	PCI3_AD(0)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(4)	12-D3, 17-D2, 17-D3	PCI3_AD(12)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(5)	12-D3, 17-D2, 17-D3	PCI3_AD(14)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(6)	12-D3, 17-D2, 17-D3	PCI3_AD(18)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(7)	12-D3, 17-D2, 17-D3	PCI3_AD(8)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(8)	12-D3, 17-D2, 17-D3	PCI3_AD(28)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(10)	12-D3, 17-D2, 17-D3	PCI3_AD(1)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(0)	12-D3, 17-D2, 17-D3	PCI3_AD(2)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(58)	12-D3, 17-D2, 17-D3	PCI3_AD(7)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(59)	12-D3, 17-D2, 17-D3	PCI3_AD(11)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(60)	12-D3, 17-D2, 17-D3	PCI3_AD(6)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(61)	12-D3, 17-D2, 17-D3	PCI3_AD(16)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(62)	12-D3, 17-D2, 17-D3	PCI3_AD(30)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(24)	12-D3, 17-D2, 17-D3	PCI3_AD(31)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(2)	12-D3, 17-D2, 17-D3	PCI3_AD(25)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(11)	12-D3, 17-D2, 17-D3	PCI3_AD(9)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(12)	12-D3, 17-D2, 17-D3	PCI3_AD(13)	18-D1, 28-D4, 30-D1, 34-D4, 39-C4
MEM3_MD(0:63)	17-D2, 17-D3	PCI3_AD(15)	18-D1, 28-D4, 30-D1, 34-D4, 39-B4
MEM3_MD(63:0)	12-D3	PCI3_AD(23)	18-D1, 28-D4, 30-D1, 34-D4,
MEM3_MWEA#	12-B4, 17-C2, 17-C3		
MEM3_SCASA#	12-B4, 17-C1, 17-C2		

Net Name	Sheet Number - Location
	34-C2, 39-B4
PCI3_AD(0:31)	18-D1, 28-D4, 30-D1, 34-D4
PCI3_CBE0#	18-C1, 28-B4, 30-C1, 34-B2, 39-D4
PCI3_CBE1#	18-C1, 28-B4, 30-C1, 34-B4, 39-D4
PCI3_CBE2#	18-C1, 28-B4, 30-C1, 34-B4, 39-D4
PCI3_CBE3#	18-C1, 28-B4, 30-C1, 34-C4, 39-D4
PCI3_CLKRUN#	19-A1, 22-B2, 28-B4, 30-B1, 31-D3, 34-B4, 39-C4
PCI3_DEVSEL#	18-C3, 18-B4, 28-B4, 30-B1, 34-B2, 39-C4
PCI3_FRAME#	18-C3, 18-C4, 28-B4, 30-B1, 34-B2, 39-C4
PCI3_GNT0#	18-C3, 28-B4, 39-D4
PCI3_GNT1#	18-C3, 18-A4, 30-B1, 39-D4
PCI3_GNT2#	18-C3, 18-A4, 34-C2, 39-D4
PCI3_GNT3#	18-C3, 18-A4, 39-D4
PCI3_GNT4#	18-C3, 18-A4, 39-D4
PCI3_INTA#	18-D3, 18-B4, 28-A4, 30-B1, 34-C2, 39-D4
PCI3_INTB#	18-D3, 18-B4, 34-C4, 39-D4
PCI3_INTC#	18-D3, 18-B4, 39-D4
PCI3_INTD#	18-D3, 18-B4, 39-D4
PCI3_IRDY#	18-C3, 18-B4, 28-B4, 30-B1, 34-B4, 39-D4
PCI3_PAR	18-C3, 18-A4, 28-B4, 30-B1, 34-B2, 39-B4
PCI3_PERR#	18-C3, 18-B4, 28-B4, 30-B1, 34-B4, 39-C4
PCI3_PLOCK#	18-C3, 18-B4, 39-C4
PCI3_REQ0#	18-C3, 18-B4, 28-B4, 39-C4
PCI3_REQ1#	18-C3, 18-B4, 30-B1, 39-C4
PCI3_REQ2#	18-C3, 18-B4, 34-C4, 39-C4
PCI3_REQ3#	18-C3, 18-B4, 39-C4
PCI3_REQ4#	18-D3, 18-B4, 39-C4
PCI3_RST#	13-C4, 15-C4, 18-C4, 19-D1, 21-C4, 22-C2, 28-B4, 30-B1, 31-D3, 34-C2, 39-D4
PCI3_RSTF#	18-C4, 18-C3, 39-C4

Net Name	Sheet Number - Location
PCI3_SERR#	18-C3, 18-B4, 28-B4, 30-B1, 34-B4, 39-C4
PCI3_STOP#	18-C3, 18-B4, 28-B4, 30-B1, 34-B2, 39-C4
PCI3_TRDY#	18-C3, 18-B4, 28-B4, 30-B1, 34-B2, 39-C4
PIO3_ACK#	31-D2, 32-D3, 39-D2
PIO3_AUTOFD#	31-D2, 32-D3, 39-D2
PIO3_BUSY	31-D2, 32-D3, 39-D2
PIO3_ERROR#	31-D2, 32-D3, 39-C2
PIO3_INIT#	31-D2, 32-D3, 39-D2
PIO3_PD(1)	31-D2, 32-C3, 39-D2
PIO3_PD(4)	31-D2, 32-C3, 39-D2
PIO3_PD(5)	31-D2, 32-C3, 39-D2
PIO3_PD(6)	31-D2, 32-C3, 39-D2
PIO3_PD(7)	31-D2, 32-C3, 39-C2
PIO3_PD(0)	31-D2, 32-C3, 39-D2
PIO3_PD(2)	31-D2, 32-C3, 39-D2
PIO3_PD(3)	31-D2, 32-C3, 39-D2
PIO3_PD(0:7)	31-D2
PIO3_PE	31-D2, 32-C3, 39-D2
PIO3_SLCT	31-D2, 32-C3, 39-D2
PIO3_SLCTIN#	31-D2, 32-D3, 39-D2
PIO3_STROBE#	31-D2, 32-C3, 39-D2
PS25_KCLK	22-D4, 24-B2, 39-C1
PS25_KDATA	22-D4, 24-B2, 39-B1
PS25_MCLK	22-C4, 24-B2, 39-C1
PS25_MDATA	22-C4, 24-B2, 39-B1
PS25_TCLK	22-C4, 24-A4, 39-B1
PS25_TDATA	22-C4, 24-A4, 39-B1
RI#	19-D1, 19-B4, 39-C2
SIO3_CTS1#	31-C2, 36-A3, 39-C2
SIO3_DCD1#	31-C2, 36-A3, 39-C2
SIO3_DS1#	31-C2, 36-A3, 39-C2
SIO3_DTR1#	31-C2, 31-A3, 36-A4, 39-C2
SIO3_RI1#	31-C2, 36-A3, 39-C2
SIO3_RTS1#	31-C2, 31-A3, 36-A4, 39-C2
SIO3_RXD1	31-C2, 36-A3, 39-C2

Net Name	Sheet Number - Location	Net Name	Sheet Number - Location
SIO3_SER_EN	31-C3, 36-A4, 39-C2	VCH3_LCDVDDON	15-B2, 16-B4, 39-B3
SIO3_TXD1#	31-C2, 31-A3, 36-A4, 39-C2	VCH3_Y	15-C2, 36-A4, 39-A3
SMB3_ALERT#	8-A4, 10-A4, 22-B2, 39-A4	VDDV	15-D4, 15-D1, 15-D1, 39-B1
SMB3_CLK	7-C3, 17-A3, 19-C1, 19-A4, 39-A4	VGA3_DDCC	11-D3, 15-B2, 15-C4, 39-B3
SMB3_DATA	7-C3, 17-A3, 19-C1, 19-A4, 39-A4	VGA3_DDCCD	11-D3, 15-C4, 15-B2, 39-B3
SMB3_SCA	17-A2, 17-A2, 39-A4	VGA3_HSYNC	11-D3, 15-C2, 15-B2, 39-B3
SMB3_SCB	17-A3, 17-A1, 39-A4	VGA3_VSYNC	11-D3, 15-C2, 15-B2, 39-B3
SMB3_SDA	17-A2, 17-A3, 39-A4	VGA5_DDCC	15-B1, 15-C2, 16-A2, 39-B3
SMB3_SDB	17-A3, 17-A2, 39-A4	VGA5_DDCCD	15-B1, 15-C2, 16-A2, 39-B3
SMBALERT#	19-C1, 19-A4, 39-A4	VGA5_HSYNC	15-B1, 15-B2, 16-A2, 39-B3
SPDIF	25-C1, 36-B3, 39-B2	VGA5_VSYNC	15-B1, 15-C2, 16-A2, 39-B3
THERM3_OVERT#	10-A2, 20-B2, 39-D2	VGA_BLUE	11-D3, 11-D4, 16-B2, 39-B3
THRM#	19-C1, 19-D4, 39-A2	VGA_BLUE#	11-D3, 16-A3, 39-B3
TV1_CLKOUT	13-B3, 15-C4, 39-A3	VGA_GREEN	11-D3, 11-D4, 16-B2, 39-B3
USB3_OC0#	19-D3, 32-B1, 39-C2	VGA_GREEN#	11-D3, 16-A3, 39-B3
USB3_OC2#	19-D3, 32-B1, 39-C2	VGA_RED	11-D3, 11-D4, 16-B2, 39-B3
USB3_P0+	19-B3, 32-A1	VGA_RED#	11-D3, 16-A3, 39-B3
USB3_P0-	19-B3, 32-A1	VID_PWRGD	10-B3, 10-D4, 39-C4
USB3_P2+	19-B3, 32-A1	VREF1	15-D4, 15-D1, 39-A2
USB3_P2-	19-B3, 32-A1	VRM3_PWRGD	19-C1, 38-C4, 39-A4
VCH3_BKLTON	15-B2, 16-D4, 39-C3	XCNF1	31-C3, 31-A3, 39-A2
VCH3_C	15-C2, 36-A3, 39-A3	XCNF2	31-C3, 31-A3, 39-A2

3-1-3 Symbol Location & Parts List(Schematic)

Ref	Value/Supplier	Code	Page	Loc
B1	EFCB322513TS	3301-000326	draco-16	1-B
B10	MMZ1608S121AT	3301-000314	draco-15	2-D
B11	HU-1M2012-121JT	3301-001272	draco-33	4-B
B12	BLM21A05PT	3301-000317	draco-15	3-A
B13	MMZ1608S121AT	3301-000314	draco-15	2-D
B14	BLM21A05PT	3301-000317	draco-15	3-A
B15	MMZ1608S121AT	3301-000314	draco-15	2-D
B16	MMZ1608S121AT	3301-000314	draco-15	2-D
B17	MMZ1608S121AT	3301-000314	draco-7	1-D
B18	EFCB322513TS	3301-000326	draco-25	1-A
B2	MMZ1608S121AT	3301-000314	draco-24	2-B
B3	MMZ1608S121AT	3301-000314	draco-24	2-B
B4	MMZ1608S121AT	3301-000314	draco-24	2-B
B5	MMZ1608S121AT	3301-000314	draco-24	2-B
B500	CIC21J601NE	3301-001569	draco-33	1-B
B501	CIC21J601NE	3301-001569	draco-33	1-B
B502	ACM2012-900-2P	3301-001594	draco-32	2-A
B503	ACM2012-900-2P	3301-001594	draco-32	2-A
B504	MMZ1608S121AT	3301-000314	draco-16	3-C
B505	HU-1M2012-121JT	3301-001272	draco-33	4-B
B506	EFCB322513TS	3301-000326	draco-34	3-A
B6	EFCB322513TS	3301-000326	draco-32	2-B
B7	EFCB322513TS	3301-000326	draco-32	2-B
B8	HF70ACB-321611-T	3301-000322	draco-24	1-B
B9	BLM21A05PT	3301-000317	draco-15	3-A
C1	4700nF	2203-005368	draco-36	4-C
C10	0.0033nF	2203-005052	draco-16	2-A
C100	0.022nF	2203-000628	draco-7	4-B
C101	0.022nF	2203-000628	draco-7	3-B
C102	0.01nF	2203-000278	draco-7	1-B
C103	270pF	2203-001408	draco-17	4-A
C104	1nF	2203-000440	draco-23	4-A
C105	1nF	2203-000438	draco-20	4-A
C106	4700nF	2203-005368	draco-10	3-B
C107	1nF	2203-000438	draco-10	4-B
C108	100nF	2203-005148	draco-10	4-B
C109	0.01nF	2203-000278	draco-7	2-B
C11	0.0033nF	2203-005052	draco-16	1-B
C110	0.01nF	2203-000278	draco-7	1-B

Ref	Value/Supplier	Code	Page	Loc
C111	0.01nF	2203-000278	draco-7	1-B
C112	0.01nF	2203-000278	draco-7	2-B
C113	0.022nF	2203-000628	draco-7	2-B
C114	0.022nF	2203-000628	draco-7	1-B
C115	0.01nF	2203-000278	draco-7	2-B
C116	0.01nF	2203-000278	draco-7	2-B
C117	0.01nF	2203-000278	draco-7	1-B
C118	100nF	2203-005482	draco-17	4-B
C119	10nF	2203-000254	draco-17	4-C
C12	0.0033nF	2203-005052	draco-16	2-B
C120	10nF	2203-000254	draco-17	4-C
C121	10nF	2203-000254	draco-17	4-C
C122	100nF	2203-005482	draco-17	4-B
C123	10nF	2203-000254	draco-17	4-C
C124	10nF	2203-000254	draco-17	4-C
C125	10nF	2203-000254	draco-17	4-D
C126	100nF	2203-005482	draco-17	4-B
C127	10nF	2203-000254	draco-17	4-C
C128	0.006nF	2203-001178	draco-19	4-B
C129	0.006nF	2203-001178	draco-19	4-B
C13	0.0033nF	2203-005052	draco-16	1-A
C130	100nF	2203-000189	draco-36	2-C
C131	1000nF	2203-005261	draco-38	2-D
C132	1000nF	2203-005261	draco-38	2-C
C133	1000nF	2203-005261	draco-38	2-B
C134	100nF	2203-005061	draco-36	2-D
C135	100nF	2203-005482	draco-20	2-B
C136	4700nF	2203-005368	draco-10	4-B
C137	100nF	2203-005482	draco-20	1-A
C138	22pF	2203-000626	draco-7	2-B
C139	0.01nF	2203-000278	draco-7	2-B
C14	0.0033nF	2203-005052	draco-16	2-A
C140	10nF	2203-000254	draco-7	2-D
C141	0.01nF	2203-000278	draco-7	1-B
C142	0.01nF	2203-000278	draco-7	1-B
C143	100nF	2203-005482	draco-17	4-B
C144	10nF	2203-000254	draco-17	4-D
C145	10nF	2203-000254	draco-17	4-D
C146	270pF	2203-001408	draco-17	4-A

Ref	Value/Supplier	Code	Page	Loc
C147	10nF	2203-000254	draco-17	4-D
C148	270pF	2203-001408	draco-17	4-A
C149	10nF	2203-000254	draco-17	4-D
C15	0.01nF	2203-000278	draco-16	1-A
C150	10nF	2203-000254	draco-17	4-D
C151	10nF	2203-000254	draco-17	4-C
C152	10nF	2203-000254	draco-17	4-D
C153	10nF	2203-000254	draco-17	4-D
C154	10nF	2203-000254	draco-17	4-C
C155	1uF	2203-000476	draco-20	1-D
C156	15uF	2402-001125	draco-38	2-D
C157	15uF	2402-001125	draco-38	2-C
C158	15uF	2402-001125	draco-38	2-B
C159	10nF	2203-000254	draco-17	4-C
C16	100nF	2203-005061	draco-32	3-B
C160	10nF	2203-000254	draco-17	4-D
C161	100nF	2203-005482	draco-17	4-B
C162	100nF	2203-005482	draco-17	4-B
C163	10nF	2203-000254	draco-17	4-C
C164	10nF	2203-000254	draco-17	4-D
C165	10nF	2203-000254	draco-17	4-D
C166	10nF	2203-000254	draco-17	4-D
C167	10nF	2203-000254	draco-17	4-C
C168	10nF	2203-000254	draco-17	4-D
C169	10nF	2203-000254	draco-17	4-C
C17	100nF	2203-005061	draco-32	3-B
C170	10nF	2203-000254	draco-17	4-D
C171	10nF	2203-000254	draco-17	4-D
C172	10nF	2203-000254	draco-17	4-C
C173	10nF	2203-000254	draco-17	4-D
C174	10nF	2203-000254	draco-17	4-C
C175	10nF	2203-000254	draco-17	4-C
C176	10nF	2203-000254	draco-17	4-C
C177	100nF	2203-005482	draco-17	4-B
C178	100nF	2203-005482	draco-17	4-B
C179	10nF	2203-000254	draco-17	4-C
C18	100nF	2203-005061	draco-32	3-A
C180	10nF	2203-000254	draco-17	4-D
C181	100nF	2203-005061	draco-20	1-D

Ref	Value/Supplier	Code	Page	Loc
C182	47nF	2203-000062	draco-20	1-C
C183	1000nF	2203-000476	draco-20	2-D
C184	1uF	2203-000476	draco-20	1-D
C185	100nF	2203-000189	draco-36	2-C
C186	68uF	2402-001046	draco-38	2-D
C187	68uF	2402-001046	draco-38	1-D
C188	68uF	2402-001046	draco-38	1-D
C189	68uF	2402-001046	draco-38	1-D
C19	100nF	2203-005148	draco-24	1-B
C190	100nF	2203-000189	draco-36	1-C
C191	68uF	2402-001046	draco-38	1-D
C192	68uF	2402-001046	draco-38	1-D
C193	100nF	2203-000206	draco-23	4-C
C194	270pF	2203-001408	draco-17	4-A
C195	100nF	2203-005061	draco-23	3-B
C196	1000nF	2203-000476	draco-23	4-B
C197	100nF	2203-005061	draco-33	2-D
C198	100nF	2203-005061	draco-33	1-D
C199	0.047nF	2203-000995	draco-25	3-A
C2	100nF	2203-005061	draco-36	1-D
C20	0.047nF	2203-000995	draco-24	2-B
C200	100nF	2203-005061	draco-22	1-B
C201	100nF	2203-005061	draco-23	1-D
C202	0.047nF	2203-000995	draco-25	3-A
C203	100nF	2203-005061	draco-22	2-B
C204	100nF	2203-005061	draco-22	1-B
C205	1nF	2203-000440	draco-23	4-A
C206	100nF	2203-005061	draco-23	3-B
C207	68uF	2402-001046	draco-37	4-D
C208	100nF	2203-005061	draco-36	1-D
C209	100nF	2203-005061	draco-22	1-A
C21	0.1nF	2203-000233	draco-24	1-B
C210	100nF	2203-005061	draco-22	1-A
C211	10uF	2203-005437	draco-29	3-C
C212	100nF	2203-005061	draco-29	3-C
C213	68uF	2402-001046	draco-37	4-D
C214	330nF	2203-001630	draco-22	3-D
C215	100nF	2203-005061	draco-22	1-A
C216	100nF	2203-005061	draco-36	1-D

Ref	Value/Supplier	Code	Page	Loc
C217	1uF	2203-000476	draco-29	4-C
C218	1uF	2203-000476	draco-29	4-C
C219	100nF	2203-005061	draco-28	1-C
C22	100nF	2203-005482	draco-24	1-B
C220	10nF	2203-000254	draco-29	3-B
C221	270pF	2203-001408	draco-29	3-B
C222	100nF	2203-005061	draco-30	3-D
C223	10nF	2203-000254	draco-30	4-D
C224	1nF	2203-000438	draco-30	3-D
C225	10nF	2203-000254	draco-30	3-D
C226	68uF	2402-001046	draco-37	2-D
C227	0.022nF	2203-000628	draco-22	3-A
C228	0.022nF	2203-000628	draco-22	4-A
C229	1uF	2203-000476	draco-24	3-C
C23	0.047nF	2203-000995	draco-24	2-B
C230	1uF	2203-000476	draco-29	4-C
C231	270pF	2203-001408	draco-29	3-B
C232	330nF	2203-001630	draco-25	2-A
C233	100nF	2203-005061	draco-30	3-D
C234	1nF	2203-000438	draco-30	3-D
C235	100nF	2203-005061	draco-30	4-D
C236	10nF	2203-000254	draco-30	4-D
C237	68uF	2402-001046	draco-37	2-D
C238	100nF	2203-005061	draco-34	3-D
C239	100nF	2203-005061	draco-34	3-D
C24	0.1nF	2203-000233	draco-24	1-B
C240	100nF	2203-005061	draco-28	1-B
C241	10uF	2203-005437	draco-28	1-B
C242	1nF	2203-000438	draco-28	1-B
C243	100nF	2203-005061	draco-28	1-B
C244	1nF	2203-000438	draco-28	1-B
C245	100nF	2203-005061	draco-28	1-B
C246	0.01nF	2203-000278	draco-30	3-C
C247	100nF	2203-005061	draco-30	1-B
C248	1nF	2203-000438	draco-30	3-D
C249	1nF	2203-000438	draco-30	4-D
C25	0.1nF	2203-000233	draco-24	1-B
C250	1nF	2203-000438	draco-30	3-D
C251	10nF	2203-000254	draco-30	4-D

Ref	Value/Supplier	Code	Page	Loc
C252	10nF	2203-000254	draco-30	3-D
C253	100nF	2203-005061	draco-30	3-D
C254	10nF	2203-000254	draco-30	3-D
C255	1nF	2203-000438	draco-30	4-D
C256	100nF	2203-005061	draco-30	4-D
C257	68uF	2402-001046	draco-37	2-D
C258	100nF	2203-005061	draco-34	4-D
C259	100nF	2203-005061	draco-36	2-D
C26	0.1nF	2203-000233	draco-24	1-B
C260	100nF	2203-005061	draco-34	1-A
C261	100nF	2203-005061	draco-34	1-A
C262	100nF	2203-005061	draco-29	3-C
C263	4700nF	2203-005368	draco-29	3-C
C264	1nF	2203-000438	draco-28	1-B
C265	0.047nF	2203-000995	draco-26	2-C
C266	1uF	2203-000476	draco-26	1-C
C267	100nF	2203-005061	draco-26	2-C
C268	1nF	2203-000438	draco-26	1-C
C269	1uF	2203-000476	draco-25	3-C
C27	100nF	2203-005061	draco-36	2-D
C270	220nF	2203-005493	draco-25	3-C
C271	220nF	2203-005493	draco-25	3-C
C272	1uF	2203-000476	draco-25	3-C
C273	100nF	2203-005061	draco-26	2-C
C274	100nF	2203-005061	draco-25	3-C
C275	100nF	2203-005061	draco-25	3-C
C276	1nF	2203-000438	draco-25	3-C
C277	1nF	2203-000438	draco-25	3-C
C278	10K	2007-000148	draco-25	3-C
C279	0.01nF	2203-000278	draco-30	3-C
C28	100nF	2203-005061	draco-31	3-D
C281	100nF	2203-005061	draco-30	3-D
C282	100nF	2203-005061	draco-30	2-C
C283	10nF	2203-000260	draco-25	1-B
C284	1uF	2203-000476	draco-25	2-C
C285	1000nF	2203-000476	draco-30	3-C
C286	1nF	2203-000438	draco-30	4-D
C287	220pF	2203-000585	draco-30	3-B
C288	10nF	2203-000254	draco-30	4-D

Ref	Value/Supplier	Code	Page	Loc
C289	100nF	2203-005061	draco-30	4-D
C29	820uF	2409-001033	draco-12	2-C
C290	10nF	2203-000254	draco-30	3-D
C291	100nF	2203-005061	draco-36	1-D
C292	100nF	2203-005061	draco-34	1-A
C293	0.15nF	2203-000357	draco-37	2-C
C294	100nF	2203-005061	draco-34	1-A
C295	5.6nF	2203-001662	draco-37	3-C
C296	100nF	2203-005061	draco-34	1-A
C297	330nF	2203-001630	draco-26	2-C
C298	0.047nF	2203-000995	draco-26	2-D
C299	1uF	2203-000476	draco-26	1-C
C3	0.0033nF	2203-005052	draco-16	2-B
C30	100nF	2203-005061	draco-11	4-D
C300	220nF	2203-005493	draco-25	3-C
C301	1uF	2203-000476	draco-25	4-A
C302	1uF	2203-000476	draco-25	4-A
C303	1uF	2203-000476	draco-25	4-A
C304	220nF	2203-005493	draco-25	3-D
C305	220nF	2203-005493	draco-25	3-C
C306	100nF	2203-005061	draco-25	2-D
C307	10nF	2203-000260	draco-25	1-B
C308	33pF	2203-000815	draco-37	1-C
C309	33pF	2203-000815	draco-37	1-C
C31	100nF	2203-005061	draco-32	3-B
C310	10nF	2203-000257	draco-37	1-B
C311	100nF	2203-000206	draco-37	2-C
C312	1.5nF	2203-000140	draco-37	2-C
C313	10nF	2203-000257	draco-37	3-C
C314	100nF	2203-005148	draco-37	3-C
C315	100nF	2203-005061	draco-36	2-D
C316	100nF	2203-005061	draco-36	1-D
C317	100nF	2203-005061	draco-36	2-D
C318	330nF	2203-001630	draco-25	2-A
C319	10nF	2203-000260	draco-25	1-B
C32	100nF	2203-005061	draco-32	3-B
C320	1nF	2203-000438	draco-26	1-C
C321	220nF	2203-005493	draco-25	3-C
C322	330nF	2203-001630	draco-25	3-C

Ref	Value/Supplier	Code	Page	Loc
C323	220nF	2203-005493	draco-25	3-C
C324	1uF	2203-005198	draco-25	3-C
C325	100nF	2203-005061	draco-25	3-D
C326	4.7nF	2203-000888	draco-25	3-D
C327	100nF	2203-005061	draco-25	2-D
C328	0.022nF	2203-000628	draco-25	3-B
C329	330nF	2203-001630	draco-25	2-A
C33	100nF	2203-005482	draco-15	1-C
C330	0.022nF	2203-000628	draco-25	3-B
C331	100nF	2203-005061	draco-25	2-D
C332	33pF	2203-000815	draco-37	1-C
C333	10nF	2203-000260	draco-25	1-B
C334	10nF	2203-000260	draco-25	1-B
C34	100nF	2203-005061	draco-32	2-B
C35	100nF	2203-005061	draco-32	2-B
C36	1.5nF	2203-000142	draco-33	2-B
C37	100nF	2203-005482	draco-24	1-B
C38	100nF	2203-005482	draco-33	3-C
C39	100nF	2203-005061	draco-31	3-D
C4	100nF	2203-005061	draco-16	1-B
C40	100nF	2203-005061	draco-31	3-D
C41	100nF	2203-005148	draco-12	1-D
C42	100nF	2203-005482	draco-12	2-B
C43	100nF	2203-005482	draco-15	3-D
C44	100nF	2203-005482	draco-15	2-D
C45	0.1nF	2203-000233	draco-15	3-A
C46	47uF	2402-001151	draco-15	3-D
C47	100nF	2203-005482	draco-15	1-C
C48	100nF	2203-005482	draco-33	3-C
C49	100nF	2203-005482	draco-33	2-C
C5	0.0033nF	2203-005052	draco-16	1-B
C50	100nF	2203-005482	draco-33	2-C
C500	100nF	2203-000206	draco-36	3-D
C501	0.0033nF	2203-005052	draco-16	3-A
C502	0.0033nF	2203-005052	draco-16	3-A
C503	0.0033nF	2203-005052	draco-16	3-A
C504	100nF	2203-005061	draco-32	3-A
C505	0	2007-000033	draco-33	1-B
C506	100nF	2203-005148	draco-36	3-C

Ref	Value/Supplier	Code	Page	Loc
C507	100nF	2203-005148	draco-23	3-A
C508	100nF	2203-005148	draco-23	3-A
C509	100nF	2203-005148	draco-23	2-A
C51	100nF	2203-005482	draco-33	3-C
C510	100nF	2203-005148	draco-23	3-A
C511	100nF	2203-005061	draco-16	3-B
C512	100nF	2203-005061	draco-16	3-B
C513	100nF	2203-005482	draco-16	2-C
C514	100nF	2203-005482	draco-16	2-C
C515	100nF	2203-005482	draco-16	2-C
C516	1nF	2203-006039	draco-33	3-B
C517	100nF	2203-005148	draco-23	3-A
C518	100nF	2203-000189	draco-36	2-C
C519	100nF	2203-005061	draco-14	1-B
C52	100nF	2203-005482	draco-33	3-C
C520	100nF	2203-005061	draco-14	2-B
C521	100nF	2203-005061	draco-32	2-B
C522	100nF	2203-005061	draco-14	2-B
C523	100nF	2203-005482	draco-12	2-C
C524	10nF	2203-000254	draco-12	2-C
C525	100nF	2203-005061	draco-14	2-B
C526	100nF	2203-005482	draco-15	1-C
C527	100nF	2203-005061	draco-14	2-B
C528	100nF	2203-005482	draco-12	2-A
C529	100nF	2203-005061	draco-36	1-D
C53	100nF	2203-005482	draco-33	4-B
C530	100nF	2203-000189	draco-16	1-C
C531	0.047nF	2203-000995	draco-33	3-B
C532	100nF	2203-000189	draco-36	2-C
C533	330uF	2402-001168	draco-10	2-D
C534	330uF	2402-001168	draco-10	2-D
C535	330uF	2402-001168	draco-10	1-D
C536	100nF	2203-005148	draco-12	1-D
C537	100nF	2203-005148	draco-12	1-D
C538	100nF	2203-005061	draco-14	2-B
C539	100nF	2203-005061	draco-14	2-B
C54	1uF	2203-000476	draco-33	2-C
C540	100nF	2203-005061	draco-14	2-B
C541	100nF	2203-005061	draco-14	2-B

Ref	Value/Supplier	Code	Page	Loc
C542	100nF	2203-005061	draco-14	1-B
C543	100nF	2203-005061	draco-14	1-B
C544	100nF	2203-005061	draco-14	2-B
C545	100nF	2203-005482	draco-15	1-C
C546	100nF	2203-005061	draco-14	2-B
C547	100nF	2203-005061	draco-14	1-B
C548	100nF	2203-005061	draco-14	1-B
C549	100nF	2203-005061	draco-14	2-B
C55	1uF	2203-000476	draco-33	2-C
C550	100nF	2203-005482	draco-15	1-C
C551	100nF	2203-005482	draco-15	1-C
C552	100nF	2203-005482	draco-15	1-C
C553	100nF	2203-005482	draco-15	2-A
C554	100nF	2203-005061	draco-16	4-C
C555	100nF	2203-005061	draco-16	4-D
C556	100nF	2203-005482	draco-33	4-B
C557	0.022nF	2203-000628	draco-33	4-B
C558	0.022nF	2203-000628	draco-33	4-B
C559	100nF	2203-005061	draco-20	1-B
C56	100nF	2203-005482	draco-33	3-C
C560	100nF	2203-005148	draco-23	2-A
C561	10uF	2203-005437	draco-10	1-C
C562	100nF	2203-005148	draco-10	1-B
C563	100nF	2203-000208	draco-38	1-B
C564	100nF	2203-000208	draco-10	1-D
C565	100nF	2203-005148	draco-10	1-B
C566	100nF	2203-005148	draco-10	1-B
C567	10uF	2203-005437	draco-10	2-C
C568	100nF	2203-005148	draco-12	1-D
C569	100nF	2203-005061	draco-14	2-B
C57	100nF	2203-005482	draco-33	3-C
C570	100nF	2203-005061	draco-14	2-B
C571	220pF	2203-000585	draco-11	2-A
C572	1uF	2203-000476	draco-11	2-A
C573	100nF	2203-005061	draco-11	4-A
C574	100nF	2203-005061	draco-11	4-B
C575	100nF	2203-005061	draco-14	1-B
C576	100nF	2203-005482	draco-15	1-C
C577	100nF	2203-005482	draco-15	1-C

Ref	Value/Supplier	Code	Page	Loc
C578	100nF	2203-005482	draco-15	1-C
C579	100nF	2203-005482	draco-13	4-A
C58	100nF	2203-005061	draco-31	3-D
C580	100nF	2203-005482	draco-15	1-C
C581	100nF	2203-005061	draco-23	2-B
C582	100nF	2203-005148	draco-23	3-A
C583	100nF	2203-005061	draco-20	4-C
C584	100nF	2203-005061	draco-20	4-C
C585	10uF	2203-005437	draco-10	2-C
C586	10uF	2203-005437	draco-10	1-C
C587	10uF	2203-005437	draco-10	1-C
C588	10uF	2203-005437	draco-10	2-C
C589	10uF	2203-005437	draco-10	2-C
C59	100nF	2203-005482	draco-15	1-C
C590	470nF	2203-002494	draco-10	1-C
C591	470nF	2203-002494	draco-10	2-C
C592	1uF	2203-000476	draco-9	4-A
C593	220pF	2203-000585	draco-9	4-A
C594	220pF	2203-000585	draco-9	4-A
C595	470nF	2203-002494	draco-10	1-C
C596	470nF	2203-002494	draco-10	1-C
C597	10uF	2203-005437	draco-10	1-C
C598	10uF	2203-005437	draco-10	1-C
C599	10uF	2203-005437	draco-10	2-C
C6	0.01nF	2203-000278	draco-16	1-A
C60	100nF	2203-005482	draco-15	1-C
C600	10uF	2203-005437	draco-10	1-C
C601	10uF	2203-005437	draco-10	1-C
C602	10uF	2203-005437	draco-10	1-C
C603	100nF	2203-005148	draco-12	1-D
C604	100nF	2203-005061	draco-14	2-B
C605	100nF	2203-005061	draco-14	2-C
C606	0.047nF	2203-000995	draco-12	4-B
C607	100nF	2203-005061	draco-14	2-C
C608	100nF	2203-005061	draco-14	2-C
C609	100nF	2203-005061	draco-14	2-C
C61	100nF	2203-005482	draco-15	1-C
C610	1nF	2203-000438	draco-14	2-C
C611	100nF	2203-005482	draco-15	1-C

Ref	Value/Supplier	Code	Page	Loc
C612	0.022nF	2203-000628	draco-12	4-A
C613	100nF	2203-005061	draco-14	1-C
C614	1nF	2203-000438	draco-14	1-C
C615	100nF	2203-005061	draco-14	2-C
C616	100nF	2203-005061	draco-14	2-C
C617	100nF	2203-005061	draco-14	1-C
C618	100nF	2203-005061	draco-14	1-C
C619	100nF	2203-005482	draco-12	2-B
C62	100nF	2203-005482	draco-33	3-C
C620	100nF	2203-005061	draco-14	2-C
C621	100nF	2203-005061	draco-23	3-B
C622	100nF	2203-005482	draco-20	4-C
C623	1nF	2203-000438	draco-20	4-C
C624	1nF	2203-000438	draco-20	4-A
C625	1nF	2203-000438	draco-20	4-A
C626	1nF	2203-000438	draco-20	4-A
C627	100nF	2203-005061	draco-20	4-B
C628	100nF	2203-005061	draco-20	4-B
C629	1nF	2203-000438	draco-20	4-B
C63	100nF	2203-005482	draco-33	3-C
C630	100nF	2203-005061	draco-20	4-A
C631	1nF	2203-000438	draco-20	4-A
C632	100nF	2203-005061	draco-20	4-A
C633	100nF	2203-000208	draco-10	1-D
C634	100nF	2203-000208	draco-38	1-B
C635	1000nF	2203-005261	draco-38	1-B
C636	10uF	2203-005437	draco-10	2-C
C637	10uF	2203-005437	draco-10	1-C
C638	10uF	2203-005437	draco-10	1-C
C639	10uF	2203-005437	draco-10	2-C
C64	100nF	2203-000189	draco-36	2-C
C640	10000nF	2203-005437	draco-10	1-D
C641	10uF	2203-005437	draco-10	1-C
C642	10uF	2203-005437	draco-10	1-C
C643	10uF	2203-005437	draco-10	1-C
C644	470nF	2203-002494	draco-10	2-C
C645	470nF	2203-002494	draco-10	1-C
C646	10uF	2203-005437	draco-10	1-C
C647	10uF	2203-005437	draco-10	1-C

Ref	Value/Supplier	Code	Page	Loc
C648	10uF	2203-005437	draco-10	1-C
C649	10uF	2203-005437	draco-10	2-C
C65	820uF	2409-001069	draco-38	1-B
C650	10uF	2203-005437	draco-10	2-C
C651	10uF	2203-005437	draco-10	1-C
C652	100nF	2203-005061	draco-14	2-C
C653	100nF	2203-005061	draco-14	1-C
C654	0.022nF	2203-000628	draco-12	4-C
C655	100nF	2203-005061	draco-14	2-C
C656	0.022nF	2203-000628	draco-12	4-C
C657	0.022nF	2203-000628	draco-12	4-A
C658	1nF	2203-000438	draco-14	1-C
C659	1nF	2203-000438	draco-14	1-C
C66	100nF	2203-005482	draco-15	1-C
C660	1nF	2203-000440	draco-23	4-A
C661	100nF	2203-005482	draco-14	4-C
C662	100nF	2203-005482	draco-14	4-C
C663	100nF	2203-005061	draco-20	4-B
C664	1nF	2203-000438	draco-20	4-B
C665	1nF	2203-000438	draco-20	4-B
C666	100nF	2203-005061	draco-20	4-A
C667	100nF	2203-005061	draco-20	4-B
C668	100nF	2203-005061	draco-20	4-B
C669	100nF	2203-005061	draco-20	4-A
C67	100nF	2203-005482	draco-15	1-D
C670	100nF	2203-005061	draco-20	4-B
C671	100nF	2203-005061	draco-20	4-B
C672	1nF	2203-000438	draco-20	4-B
C673	1nF	2203-000438	draco-20	4-B
C674	100nF	2203-005061	draco-20	4-B
C675	100nF	2203-005061	draco-20	4-B
C676	100nF	2203-005061	draco-20	4-A
C677	1nF	2203-000438	draco-20	4-B
C678	1nF	2203-000438	draco-20	4-B
C679	100nF	2203-005061	draco-20	4-B
C68	100nF	2203-005482	draco-15	2-D
C680	1nF	2203-000438	draco-20	4-B
C681	100nF	2203-005061	draco-20	4-B
C682	1nF	2203-000438	draco-20	4-A

Ref	Value/Supplier	Code	Page	Loc
C683	1nF	2203-000438	draco-20	4-A
C684	1nF	2203-000438	draco-20	4-A
C685	1nF	2203-000438	draco-20	4-A
C686	10uF	2203-005437	draco-10	1-C
C687	10uF	2203-005437	draco-10	1-C
C688	10uF	2203-005437	draco-10	1-C
C689	10uF	2203-005437	draco-10	2-C
C69	100nF	2203-005482	draco-15	3-D
C690	10000nF	2203-005437	draco-10	1-D
C691	470nF	2203-002494	draco-10	1-C
C692	100nF	2203-005148	draco-10	2-B
C693	470nF	2203-002494	draco-10	1-C
C694	10uF	2203-005437	draco-10	1-C
C695	10uF	2203-005437	draco-10	1-C
C696	1nF	2203-000438	draco-20	4-B
C697	1nF	2203-000438	draco-20	4-B
C698	100nF	2203-005061	draco-20	4-A
C699	1nF	2203-000438	draco-20	4-A
C7	0.0033nF	2203-005052	draco-16	2-B
C70	0.022nF	2203-000628	draco-15	4-A
C700	1nF	2203-000438	draco-20	4-B
C701	100nF	2203-005061	draco-20	4-A
C702	100nF	2203-005061	draco-20	4-B
C703	1nF	2203-000438	draco-20	4-A
C704	100nF	2203-005061	draco-20	4-A
C705	100nF	2203-005061	draco-20	4-A
C706	1nF	2203-000438	draco-20	4-B
C707	1nF	2203-000438	draco-20	4-B
C708	100nF	2203-005061	draco-20	4-B
C709	0.01nF	2203-000278	draco-19	3-C
C71	0.022nF	2203-000628	draco-15	4-A
C710	100nF	2203-005061	draco-20	4-A
C711	100nF	2203-000208	draco-10	1-D
C712	330uF	2402-001168	draco-10	1-D
C713	330uF	2402-001168	draco-10	2-D
C714	100nF	2203-005148	draco-10	1-B
C715	100nF	2203-005061	draco-7	2-D
C716	100nF	2203-005061	draco-20	4-A
C717	100nF	2203-005148	draco-10	2-B

Ref	Value/Supplier	Code	Page	Loc
C718	10nF	2203-000254	draco-7	2-D
C719	100nF	2203-005061	draco-7	2-D
C72	10uF	2203-005437	draco-10	1-C
C720	10nF	2203-000254	draco-7	2-D
C721	10nF	2203-000254	draco-7	2-D
C722	100nF	2203-005061	draco-7	2-D
C723	10nF	2203-000254	draco-7	2-D
C724	100nF	2203-005061	draco-36	2-D
C725	100nF	2203-005061	draco-36	2-D
C726	100nF	2203-005148	draco-10	1-B
C727	100nF	2203-005061	draco-7	2-D
C728	100nF	2203-005061	draco-7	2-D
C729	100nF	2203-005254	draco-38	2-C
C73	10uF	2203-005437	draco-10	2-C
C730	100nF	2203-005254	draco-38	2-C
C731	1uF	2203-005198	draco-38	3-C
C732	100nF	2203-005254	draco-38	2-B
C733	1uF	2203-005198	draco-38	3-C
C734	100nF	2203-005061	draco-27	4-B
C735	100nF	2203-005061	draco-36	1-D
C736	100nF	2203-005061	draco-20	1-C
C737	1uF	2203-005198	draco-38	3-C
C738	100nF	2203-005061	draco-21	3-C
C739	100nF	2203-005061	draco-21	3-C
C74	10nF	2203-000254	draco-14	4-C
C740	100nF	2203-005061	draco-36	1-D
C741	4.7nF	2203-000888	draco-38	4-A
C742	2.2nF	2203-001397	draco-38	4-C
C743	1uF	2203-005198	draco-38	4-C
C744	4.7nF	2203-000888	draco-38	2-A
C745	100nF	2203-005061	draco-24	4-B
C746	100nF	2203-005061	draco-21	3-C
C747	100nF	2203-005061	draco-21	3-C
C748	100nF	2203-005061	draco-33	1-D
C749	1000nF	2203-005261	draco-37	3-D
C75	10nF	2203-000254	draco-14	4-C
C750	100nF	2203-005061	draco-34	1-A
C751	100nF	2203-005061	draco-36	2-D
C752	100nF	2203-000206	draco-37	3-B

Ref	Value/Supplier	Code	Page	Loc
C753	100nF	2203-000206	draco-37	2-C
C754	100nF	2203-005148	draco-37	4-C
C755	1000nF	2203-005261	draco-37	1-A
C756	100nF	2203-005061	draco-27	2-C
C757	100nF	2203-005061	draco-36	2-D
C758	100nF	2203-000206	draco-37	3-B
C759	330uF	2402-001168	draco-10	1-D
C76	100nF	2203-005482	draco-12	3-A
C77	100nF	2203-005482	draco-15	1-D
C78	47uF	2402-001151	draco-15	2-D
C79	100nF	2203-005482	draco-15	2-D
C8	0.0033nF	2203-005052	draco-16	1-B
C80	47uF	2402-001151	draco-15	2-D
C81	820uF	2409-001069	draco-38	1-B
C82	820uF	2409-001069	draco-38	1-B
C83	820uF	2409-001069	draco-38	2-B
C84	820uF	2409-001069	draco-38	1-B
C85	820uF	2409-001069	draco-38	1-B
C86	10uF	2203-005437	draco-10	2-C
C87	10uF	2203-005437	draco-10	1-C
C88	100nF	2203-005061	draco-10	3-A
C89	470nF	2203-002494	draco-10	2-C
C9	0.0033nF	2203-005052	draco-16	2-A
C90	2.2nF	2203-000489	draco-10	3-A
C91	10uF	2203-005437	draco-10	1-C
C92	470nF	2203-002494	draco-10	1-C
C93	1uF	2203-000476	draco-12	2-B
C94	10nF	2203-000254	draco-14	3-C
C95	10nF	2203-000254	draco-14	3-C
C96	100nF	2203-000189	draco-36	2-C
C97	1nF	2203-000440	draco-23	4-A
C98	0.01nF	2203-000278	draco-7	2-B
C99	0.01nF	2203-000278	draco-7	2-B
COMBO1	JACK-MODULE-10P	3722-001692	draco-33	1-B
CT1	47uF	2404-000256	draco-32	3-B
CT10	10uF	2404-001020	draco-23	3-B
CT11	10uF	2404-000284	draco-34	4-D
CT12	10uF	2404-001020	draco-34	3-D
CT13	10uF	2404-001020	draco-34	3-D

Ref	Value/Supplier	Code	Page	Loc
CT14	100uF	2404-001075	draco-26	3-C
CT15	10uF	2404-000284	draco-26	2-C
CT16	10uF	2404-000284	draco-25	3-C
CT17	1uF	2404-000151	draco-30	3-B
CT18	100uF	2404-001075	draco-26	3-D
CT19	1uF	2404-000151	draco-26	2-C
CT2	10uF	2404-001020	draco-16	3-B
CT20	10uF	2404-000284	draco-26	2-C
CT21	10uF	2404-000284	draco-25	2-D
CT22	10uF	2404-000284	draco-25	2-D
CT3	10uF	2404-001020	draco-15	3-D
CT4	10uF	2404-001020	draco-15	1-D
CT5	22uF	2404-000299	draco-14	2-C
CT500	22uF	2404-000299	draco-12	2-B
CT501	47uF	2404-000256	draco-32	3-B
CT502	10uF	2404-001020	draco-14	2-B
CT503	10uF	2404-001020	draco-14	2-B
CT504	33uF	2404-000468	draco-9	4-C
CT505	33uF	2404-000468	draco-9	4-C
CT506	10uF	2404-001020	draco-15	1-C
CT507	4.7uF	2404-000229	draco-33	2-C
CT508	100uF	2404-001071	draco-14	1-B
CT509	10uF	2404-001020	draco-14	2-B
CT510	10uF	2404-001020	draco-14	2-B
CT511	10uF	2404-001020	draco-23	2-B
CT512	10uF	2404-001020	draco-20	4-A
CT513	22uF	2404-000299	draco-14	2-C
CT514	220uF	2404-001025	draco-12	2-B
CT515	10uF	2404-001020	draco-20	4-B
CT516	100uF	2404-001071	draco-10	1-C
CT517	100uF	2404-001071	draco-10	1-C
CT518	10uF	2404-001020	draco-20	4-A
CT519	10uF	2404-001020	draco-20	4-B
CT520	10uF	2404-000284	draco-27	4-B
CT521	10uF	2404-000284	draco-27	2-C
CT6	10uF	2404-001020	draco-7	2-D
CT7	10uF	2404-001020	draco-17	4-B
CT8	10uF	2404-001020	draco-17	4-B
CT9	10uF	2404-001020	draco-23	3-D

Ref	Value/Supplier	Code	Page	Loc
D1	MMBD301LT1	0404-000114	draco-16	2-B
D10	B340A	0402-001405	draco-37	2-D
D11	B340A	0402-001405	draco-37	2-D
D12	B340A	0402-001405	draco-37	2-D
D13	MBRD835L	0402-001173	draco-37	3-B
D2	N	0402-001405	draco-36	4-C
D3	N	0402-001405	draco-36	4-C
D4	N	0406-001141	draco-32	3-A
D5	N	0406-001141	draco-32	3-A
D500	MMBD301LT1	0404-000114	draco-32	2-C
D501	N	0407-001008	draco-11	4-D
D502	N	0406-001141	draco-32	3-A
D503	N	0407-001008	draco-11	4-C
D504	N	0407-001008	draco-11	4-D
D505	MMBD301LT1	0404-000114	draco-15	1-B
D506	MMBD301LT1	0404-000114	draco-15	1-B
D507	CMPSH-3	0404-000002	draco-20	4-C
D508	MMBD301LT1	0404-000114	draco-20	2-B
D509	MMBD301LT1	0404-000114	draco-27	3-A
D6	N	0406-001141	draco-32	2-A
D7	MMBD301LT1	0404-000114	draco-19	3-A
D8	MMBD301LT1	0404-000114	draco-20	1-D
D9	MMBD301LT1	0404-000114	draco-20	1-D
EMI500	CONTACT-PLATE-EMI	BA70-00564A	draco-17	4-B
EMI501	CONTACT-PLATE-EMI	BA70-00564A	draco-17	4-A
EMI502	CONTACT-PLATE-EMI	BA70-00564A	draco-17	4-B
EMI503	CONTACT-PLATE-EMI	BA70-00564A	draco-17	4-B
EMI504	CONTACT-PLATE-EMI	BA70-00564A	draco-17	4-A
EMI505	CONTACT-PLATE-EMI	BA70-00564A	draco-17	4-A
J1	JACK-DC-POWER-3P	3722-001175	draco-36	3-D
J10	SOCK-44P-SMD-REVERS	3710-001849	draco-27	2-C
J11	BATT-CONTACT-10P	3711-005226	draco-37	1-D
J2	DSUB-15-REVERSE	3701-001275	draco-16	1-B
J3	DSUB-25P-REVERSE	3701-001274	draco-32	1-C
J4	IEEE1394-4P	3722-001732	draco-30	4-B
J5	JACK-DIN-6P-REVERSE	3722-001829	draco-24	1-B
J500	HDR-2P-SMD	3711-000541	draco-33	1-B
J501	HDR-2P-1R	3711-002162	draco-35	3-B
J502	SOCKET-30P-2R-SMD	3711-004905	draco-16	1-C

Ref	Value/Supplier	Code	Page	Loc
J503	SOCKET-60P-2R	3710-001847	draco-36	4-A
J504	CONN-24P-FPC	3708-001532	draco-24	1-C
J505	SODIMM-144P-SMD	3709-001014	draco-17	1-A
J506	SODIMM-144P-SMD	3709-001186	draco-17	3-A
J507	HDR-2P-SMD	3711-000541	draco-20	1-C
J508	FPC-8S-SMD	3708-001733	draco-24	4-B
J509	MINIPCI-124P	3709-001124	draco-34	3-A
J510	HDR-2P-SMD	3711-000541	draco-26	4-B
J511	HDR-2P-SMD	3711-000541	draco-26	4-B
J512	HDR-2P-SMD	3711-000541	draco-26	4-C
J513	HDR-4P-1R-SMD	3711-000456	draco-24	3-A
J6	HDR-4P-1R-SMD	3711-000456	draco-20	1-B
J7-1	NORTHWOOD	3704-001153	draco-8	4-B
J7-2	NORTHWOOD	3704-001153	draco-8	2-B
J7-3	NORTHWOOD	3704-001153	draco-9	4-B
J7-4	NORTHWOOD	3704-001153	draco-9	2-B
J8	CDROM-50P-REVERSE	3710-001838	draco-27	3-C
J8000	HDR-2P-SMD	3711-000541	draco-35	3-B
J9	HDR-2P-SMD	3711-000541	draco-20	1-C
L1	4.7uH	2703-000271	draco-12	3-B
L2	4.7uH	2703-000271	draco-9	4-C
L3	4.7uH	2703-000271	draco-9	4-C
L4	4.7uH	2703-000271	draco-12	3-A
L5	4.7uH	2703-000271	draco-12	3-B
L500	4.7uH	2703-000271	draco-12	3-C
L501	4.7uH	2703-000271	draco-12	2-C
L502	4.7uH	2703-000271	draco-12	3-B
L503	0.5uH	2703-002249	draco-38	2-C
L504	0.5uH	2703-002249	draco-38	2-C
L505	0.5uH	2703-002249	draco-38	2-B
L6	22uH	2703-002335	draco-37	2-D
LED500	CL-150PG-CD-T	0601-000189	draco-35	1-D
LED501	CL-150PG-CD-T	0601-000189	draco-35	1-C
LED502	CL-150PG-CD-T	0601-000189	draco-35	1-C
LED503	N	0601-001666	draco-35	4-C
LED504	N	0601-001667	draco-35	3-C
LT1	160ohm-100MHz	BA27-00018A	draco-30	4-B
LT2	160ohm-100MHz	BA27-00018A	draco-30	4-B
LT3	H0022	2603-000048	draco-33	3-B

Ref	Value/Supplier	Code	Page	Loc
LT500	160ohm-100MHz	BA27-00018A	draco-33	2-B
LT501	160ohm-100MHz	BA27-00018A	draco-33	2-B
MDC500	HDR-30P-2R-SMD	3710-001763	draco-33	1-C
PCMCIA500	PCMCIA-68P-MNT	3709-001207	draco-29	2-A
PCMCIA501	SOCK-PCMCIA-68P	3711-004865	draco-29	1-A
Q1	SI2315DS	0505-001516	draco-16	3-B
Q11	MMBT3904	0501-000465	draco-8	4-A
Q12	MMBT3904	0501-000465	draco-8	4-A
Q13	FDS6680A	0505-001386	draco-38	2-D
Q14	N	0505-001386	draco-38	2-D
Q15	N	0505-001386	draco-38	2-C
Q16	FDS6680A	0505-001386	draco-38	2-C
Q17	N	0505-001386	draco-38	2-B
Q18	FDS6680A	0505-001386	draco-38	2-B
Q19	N	0501-000481	draco-20	1-B
Q2	SI4362DY	0505-001708	draco-38	2-C
Q21	MMBT3904	0501-000465	draco-7	4-A
Q22	KSR1102	0504-000127	draco-38	4-C
Q23	2N7002LT1	0505-000110	draco-23	4-B
Q24	KST3904	0501-000466	draco-24	3-D
Q25	KST3904	0501-000466	draco-24	3-C
Q26	KST2907A	0501-000463	draco-24	4-D
Q27	2N7002LT1	0505-000110	draco-23	1-B
Q28	KST2222ATF	0501-000458	draco-24	4-D
Q29	KST3904	0501-000466	draco-24	3-D
Q3	SI4362DY	0505-001708	draco-38	2-B
Q30	2N7002LT1	0505-000110	draco-37	4-B
Q4	SI4362DY	0505-001708	draco-38	2-B
Q500	KSR1102	0504-000127	draco-36	3-C
Q501	SI2307DS	0505-001341	draco-36	3-C
Q502	N	0505-001049	draco-35	1-D
Q503	N	0505-001049	draco-35	1-C
Q504	N	0505-001049	draco-35	1-C
Q506	SI2307DS	0505-001341	draco-20	1-B
Q507	MMBTA92	0501-000481	draco-20	1-B
Q508	KST2222ATF	0501-000458	draco-37	3-A
Q6	SI4362DY	0505-001708	draco-38	2-C
Q8	SI4362DY	0505-001708	draco-38	2-B
Q9	SI4362DY	0505-001708	draco-38	2-B

Ref	Value/Supplier	Code	Page	Loc
QF1	2N7002LT1	0505-000110	draco-38	4-C
QF2	2N7002LT1	0505-000110	draco-37	3-A
QF500	SI4435DY	0505-000275	draco-37	3-D
QF501	2N7002LT1	0505-000110	draco-37	4-C
QF502	SI4435DY	0505-000275	draco-37	3-B
R1	75	2007-007009	draco-16	2-B
R10	75	2007-007009	draco-16	2-B
R100	33	2007-001292	draco-7	2-B
R101	1K	2007-000140	draco-7	4-C
R102	33	2007-001292	draco-7	2-C
R103	0	2007-000171	draco-19	3-C
R104	0	2007-000171	draco-19	3-C
R105	8.2K	2007-000147	draco-18	4-B
R106	5.6K	2007-000982	draco-27	3-C
R107	470	2007-000077	draco-8	4-A
R108	56	2007-008026	draco-8	4-A
R11	2.2K	2007-000141	draco-16	2-B
R110	470	2007-000077	draco-8	4-A
R111	56	2007-008026	draco-10	4-D
R112	49.9	2007-008298	draco-7	3-B
R113	1K	2007-000140	draco-7	4-C
R114	49.9	2007-008298	draco-7	3-B
R115	49.9	2007-008298	draco-7	3-B
R116	49.9	2007-008298	draco-7	3-B
R117	475	2007-008293	draco-7	2-B
R118	33	2007-001292	draco-7	3-C
R119	1K	2007-000140	draco-7	3-D
R12	2.2K	2007-000141	draco-16	2-B
R120	10K	2007-000148	draco-7	2-D
R121	33	2007-001292	draco-7	3-C
R122	33	2007-001292	draco-7	3-C
R123	33	2007-001292	draco-7	3-C
R124	33	2007-001292	draco-7	2-C
R125	33	2007-001292	draco-7	2-C
R126	33	2007-001292	draco-7	2-C
R127	33	2007-001292	draco-7	2-C
R128	33	2007-001292	draco-7	2-C
R129	33	2007-001292	draco-7	2-C
R13	0	2007-000171	draco-16	2-A

Ref	Value/Supplier	Code	Page	Loc
R130	33	2007-001292	draco-7	2-C
R131	33	2007-001292	draco-7	2-C
R132	33	2007-001292	draco-7	2-C
R133	0	2007-000171	draco-17	1-C
R134	51	2007-007733	draco-17	4-A
R135	10M	2007-007100	draco-19	4-B
R136	10M	2007-007100	draco-19	4-B
R137	0	2007-000171	draco-10	3-B
R138	10K	2007-007142	draco-20	1-A
R139	100K	2007-007107	draco-20	2-B
R14	2.2K	2007-000141	draco-16	2-B
R140	1K	2007-000140	draco-20	2-B
R141	100K	2007-007107	draco-20	2-A
R142	5.1K	2007-000962	draco-20	1-A
R143	1K	2007-000140	draco-20	2-B
R144	1K	2007-000140	draco-20	1-B
R145	10K	2007-000148	draco-10	3-D
R146	0	2007-000171	draco-10	3-D
R147	10K	2007-000148	draco-10	4-D
R148	10K	2007-000148	draco-10	4-C
R149	10K	2007-000148	draco-10	3-C
R15	0	2007-000033	draco-32	4-A
R150	33	2007-001292	draco-7	2-B
R151	33	2007-001292	draco-7	2-B
R152	1K	2007-000140	draco-7	3-D
R153	330	2007-001313	draco-7	4-A
R154	10K	2007-000148	draco-7	4-A
R155	1K	2007-000140	draco-7	3-D
R156	33	2007-001292	draco-7	2-C
R157	33	2007-001292	draco-7	2-C
R158	51	2007-007733	draco-17	4-A
R159	0	2007-000171	draco-17	2-C
R16	10K	2007-000148	draco-31	2-D
R160	51	2007-007733	draco-17	4-A
R161	1K	2007-000140	draco-20	1-C
R162	10K	2007-000148	draco-19	3-A
R163	10K	2007-000148	draco-19	3-C
R164	1K	2007-000140	draco-10	2-C
R165	1K	2007-000140	draco-10	2-C

Ref	Value/Supplier	Code	Page	Loc
R166	1K	2007-000140	draco-10	2-C
R167	1K	2007-000140	draco-10	2-C
R168	1K	2007-000140	draco-10	2-C
R169	10K	2007-000148	draco-21	4-C
R17	2.2K	2007-000141	draco-15	1-B
R170	0	2007-000171	draco-21	4-C
R171	0	2007-000171	draco-21	4-C
R172	22K	2007-007311	draco-20	1-D
R173	0	2007-000171	draco-20	2-D
R174	1K	2007-000140	draco-20	1-D
R175	1K	2007-000140	draco-20	2-D
R176	150	2007-000403	draco-23	4-D
R177	150	2007-000403	draco-23	4-D
R178	10K	2007-000148	draco-21	4-D
R179	10K	2007-000148	draco-21	4-C
R18	1K	2007-000140	draco-15	2-B
R180	1K	2007-000140	draco-21	4-D
R181	10K	2007-000148	draco-21	4-C
R182	10K	2007-000148	draco-21	4-C
R183	10K	2007-000148	draco-21	4-C
R184	10K	2007-000148	draco-21	4-C
R185	51	2007-007733	draco-17	4-A
R186	0	2007-000070	draco-38	1-A
R187	300K	2007-007720	draco-38	4-C
R188	1M	2007-000475	draco-38	4-C
R189	150	2007-000403	draco-23	4-D
R19	1K	2007-000140	draco-15	2-B
R190	0	2007-000033	draco-23	3-D
R191	5.6K	2007-000982	draco-25	4-A
R192	0	2007-000171	draco-25	4-A
R193	10K	2007-000148	draco-19	4-A
R194	1K	2007-000140	draco-23	4-B
R195	10K	2007-000148	draco-23	4-B
R196	10K	2007-000148	draco-23	4-B
R197	0	2007-000171	draco-33	1-C
R198	10K	2007-000148	draco-22	4-D
R199	10K	2007-000148	draco-22	4-D
R2	0	2007-000171	draco-16	2-B
R20	2.2K	2007-000141	draco-15	1-B

Ref	Value/Supplier	Code	Page	Loc
R200	10K	2007-000148	draco-22	4-D
R201	10K	2007-000148	draco-22	4-D
R202	10K	2007-000148	draco-22	4-D
R203	0	2007-000171	draco-25	4-A
R204	5.6K	2007-000982	draco-25	4-A
R205	0	2007-000171	draco-25	4-A
R206	75	2007-008015	draco-22	1-B
R207	10K	2007-000148	draco-23	1-D
R208	5.6K	2007-000982	draco-25	4-A
R209	10K	2007-000148	draco-22	2-C
R21	2.2K	2007-000141	draco-15	1-B
R210	10K	2007-000148	draco-22	2-C
R211	510	2007-000998	draco-24	3-D
R212	510	2007-000998	draco-24	3-D
R213	10K	2007-000148	draco-24	3-D
R214	30K	2007-000735	draco-24	4-D
R215	33	2007-000113	draco-35	4-C
R216	100K	2007-007107	draco-23	2-B
R217	47K	2007-000157	draco-23	1-B
R218	10K	2007-000148	draco-23	1-B
R219	0	2007-000171	draco-22	2-A
R22	10K	2007-000148	draco-16	4-B
R220	47K	2007-000157	draco-22	2-D
R221	10K	2007-000148	draco-22	4-D
R222	10K	2007-000148	draco-22	3-D
R223	10K	2007-000148	draco-22	3-D
R224	10K	2007-000148	draco-22	4-D
R225	10K	2007-000148	draco-22	4-D
R226	10K	2007-007142	draco-22	2-B
R227	100K	2007-007107	draco-29	3-C
R228	3K	2007-000841	draco-24	3-D
R229	100K	2007-000277	draco-24	4-D
R23	0	2007-000171	draco-32	2-B
R230	10K	2007-000148	draco-24	3-D
R231	1K	2007-000140	draco-24	3-C
R232	4.7K	2007-000868	draco-24	4-D
R233	51	2007-007733	draco-35	3-C
R234	10K	2007-000148	draco-22	3-D
R235	10K	2007-000148	draco-22	1-C

Ref	Value/Supplier	Code	Page	Loc
R236	10K	2007-007142	draco-22	3-D
R237	10K	2007-000148	draco-22	1-C
R238	10K	2007-000148	draco-22	1-C
R239	10K	2007-000148	draco-22	3-D
R24	0	2007-000171	draco-32	2-B
R240	1K	2007-000140	draco-22	3-D
R241	10K	2007-007142	draco-22	3-D
R242	1K	2007-000140	draco-22	3-D
R243	0	2007-000171	draco-22	2-A
R244	10K	2007-000148	draco-22	3-A
R245	0	2007-000171	draco-22	4-C
R246	0	2007-000171	draco-22	2-D
R247	0	2007-000171	draco-22	2-C
R248	10K	2007-000148	draco-22	1-C
R249	33	2007-001292	draco-28	2-B
R25	549	2007-008306	draco-33	3-C
R250	10K	2007-000148	draco-28	4-A
R251	10K	2007-000148	draco-28	4-B
R252	0	2007-000171	draco-28	4-B
R253	8.2K	2007-000147	draco-18	4-B
R254	8.2K	2007-000147	draco-18	4-B
R255	8.2K	2007-000147	draco-18	4-B
R256	8.2K	2007-000147	draco-18	4-B
R257	470K	2007-007946	draco-22	3-D
R258	0	2007-000171	draco-22	2-B
R259	0	2007-000171	draco-22	2-B
R26	619	2007-008030	draco-33	3-C
R260	10K	2007-000148	draco-22	1-C
R261	10K	2007-000148	draco-22	2-B
R262	1M	2007-007942	draco-24	3-C
R263	0	2007-000171	draco-22	2-D
R264	0	2007-000171	draco-22	2-D
R265	0	2007-000171	draco-28	3-A
R266	0	2007-000171	draco-28	3-A
R267	0	2007-000171	draco-28	3-A
R268	0	2007-000171	draco-28	3-A
R269	0	2007-000171	draco-28	3-A
R27	0	2007-000171	draco-31	3-C
R270	10K	2007-000148	draco-19	4-D

Ref	Value/Supplier	Code	Page	Loc
R271	0	2007-000171	draco-28	4-B
R272	10K	2007-000148	draco-28	3-A
R273	10K	2007-000148	draco-28	4-A
R274	47K	2007-000157	draco-25	3-A
R275	0	2007-000171	draco-30	1-B
R276	100	2007-007306	draco-30	1-B
R277	100	2007-007306	draco-34	2-C
R278	100	2007-007306	draco-28	4-B
R279	8.2K	2007-000147	draco-18	4-B
R28	10K	2007-000148	draco-31	2-A
R280	8.2K	2007-000147	draco-18	4-B
R281	43K	2007-000910	draco-30	1-B
R282	8.2K	2007-000147	draco-18	4-A
R283	8.2K	2007-000147	draco-18	4-B
R284	0	2007-000171	draco-30	1-B
R285	220	2007-000139	draco-30	1-B
R286	4.7K	2007-000143	draco-30	2-D
R287	10K	2007-000148	draco-30	2-D
R288	220	2007-000139	draco-30	1-B
R289	220	2007-000139	draco-30	2-B
R29	10K	2007-000148	draco-31	2-A
R290	5.6K	2007-000982	draco-27	1-C
R291	100K	2007-007107	draco-29	3-C
R292	47K	2007-000939	draco-26	2-C
R293	30K	2007-000736	draco-26	2-C
R294	0	2007-000029	draco-25	1-B
R295	56	2007-008026	draco-30	3-B
R296	6.34K	2007-007552	draco-30	2-C
R297	56	2007-008026	draco-30	3-B
R298	56	2007-008026	draco-30	3-B
R299	5.1K	2007-000962	draco-30	3-B
R3	2.2K	2007-000141	draco-16	2-B
R30	10K	2007-000148	draco-31	3-A
R300	56	2007-008026	draco-30	3-B
R301	1K	2007-000140	draco-30	2-C
R302	220	2007-000139	draco-30	2-B
R303	220	2007-000139	draco-30	2-B
R304	220	2007-000139	draco-30	2-B
R305	220	2007-000139	draco-30	2-B

Ref	Value/Supplier	Code	Page	Loc
R306	2.7K	2007-000516	draco-30	4-C
R307	2.7K	2007-000516	draco-30	4-C
R308	220	2007-000139	draco-30	2-B
R309	4.7K	2007-000143	draco-30	4-C
R31	10K	2007-000148	draco-31	2-A
R310	0.033	2007-001280	draco-37	2-D
R311	0	2007-000171	draco-34	3-C
R312	10K	2007-000052	draco-37	3-C
R313	8.2K	2007-000147	draco-18	4-B
R314	10K	2007-000148	draco-27	2-C
R315	4.7K	2007-000143	draco-27	1-C
R316	0	2007-000070	draco-25	3-C
R317	0	2007-000070	draco-26	3-C
R318	22	2007-000071	draco-26	3-C
R319	22	2007-000071	draco-26	3-D
R32	24.9	2007-007302	draco-11	3-B
R320	47K	2007-000939	draco-26	2-D
R321	10K	2007-000148	draco-25	2-C
R322	10K	2007-000148	draco-25	2-C
R323	33	2007-000113	draco-37	1-C
R324	33	2007-000113	draco-37	1-C
R325	1M	2007-000475	draco-37	2-C
R326	1M	2007-000475	draco-37	1-C
R327	100K	2007-000060	draco-37	2-B
R328	43K	2007-000910	draco-37	2-C
R329	220K	2007-000106	draco-37	2-C
R33	1	2007-002425	draco-12	3-C
R330	100K	2007-000060	draco-37	3-C
R331	22K	2007-000583	draco-37	3-C
R332	30K	2007-000736	draco-37	3-C
R333	22K	2007-000583	draco-37	3-C
R334	0	2007-000070	draco-26	3-D
R335	30K	2007-000736	draco-26	2-C
R336	0	2007-000029	draco-25	1-B
R337	20K	2007-000152	draco-25	3-A
R338	0	2007-000171	draco-25	2-C
R339	4.7K	2007-000143	draco-25	3-D
R34	47	2007-000174	draco-11	3-D
R340	47K	2007-000157	draco-25	3-A

Ref	Value/Supplier	Code	Page	Loc
R341	1M	2007-007942	draco-25	3-B
R342	33	2007-000113	draco-37	1-C
R343	10K	2007-000148	draco-25	3-C
R344	10K	2007-000148	draco-34	3-C
R345	5.6K	2007-000982	draco-27	4-D
R346	10K	2007-000148	draco-25	3-A
R35	1K	2007-000140	draco-15	2-B
R36	47	2007-000174	draco-11	3-D
R37	0	2007-000070	draco-15	3-D
R38	0	2007-000171	draco-15	4-B
R39	10K	2007-000148	draco-15	4-C
R4	0	2007-000171	draco-16	2-A
R40	0	2007-000171	draco-15	4-C
R400	4.7K	2007-000143	draco-27	4-C
R41	0	2007-000171	draco-15	3-C
R42	0	2007-000171	draco-15	3-C
R43	0	2007-000171	draco-15	3-B
R44	0	2007-000171	draco-15	3-C
R45	10K	2007-000148	draco-31	2-A
R46	40.2	2007-007724	draco-13	4-B
R47	0	2007-000171	draco-33	4-C
R48	68	2007-001131	draco-13	4-C
R49	10K	2007-000148	draco-15	1-D
R5	0	2007-000171	draco-16	2-B
R50	0	2007-000171	draco-15	4-C
R500	0	2007-000033	draco-36	3-D
R501	0	2007-000033	draco-36	3-D
R502	10K	2007-000052	draco-36	3-D
R503	37.4	2007-008128	draco-16	3-A
R504	37.4	2007-008128	draco-16	3-A
R505	37.4	2007-008128	draco-16	3-A
R506	2.2K/33	2011-001295	draco-32	2-C
R507	75	2007-008015	draco-33	2-B
R508	75	2007-008015	draco-33	1-B
R509	300K	2007-007720	draco-36	3-C
R51	75	2007-007009	draco-15	2-C
R510	100K	2007-000060	draco-36	3-C
R511	33	2007-000113	draco-35	2-D
R512	33	2007-000113	draco-35	2-C

Ref	Value/Supplier	Code	Page	Loc
R513	33	2007-000113	draco-35	2-C
R514	10K	2007-000148	draco-27	1-A
R515	10K	2007-000148	draco-27	2-B
R516	100K	2007-007107	draco-16	4-B
R517	0	2007-000033	draco-32	3-A
R518	75	2007-008015	draco-33	3-B
R519	75	2007-008015	draco-33	2-B
R52	75	2007-007009	draco-15	2-C
R520	120	2007-000343	draco-33	3-B
R521	10K	2007-000148	draco-31	2-A
R522	10K	2007-000148	draco-31	2-A
R523	75	2007-001167	draco-35	1-C
R524	75	2007-001167	draco-35	1-C
R525	137	2007-008328	draco-11	2-D
R526	1K	2007-000140	draco-15	2-B
R527	2.2K	2007-000141	draco-15	1-B
R528	8.2K	2007-000147	draco-13	4-B
R529	2.2K	2007-000141	draco-15	1-B
R53	75	2007-007009	draco-15	2-C
R530	10K	2007-000148	draco-16	4-B
R531	100	2007-000287	draco-33	3-B
R532	61.9K	2007-002991	draco-33	4-C
R533	22	2007-000173	draco-33	4-C
R534	22	2007-000173	draco-33	3-C
R535	10K	2007-000148	draco-33	3-B
R536	22	2007-000173	draco-33	3-C
R537	22	2007-000173	draco-33	3-C
R538	0	2007-000171	draco-11	4-B
R539	301	2007-008313	draco-11	4-B
R54	75	2007-007009	draco-15	2-C
R540	0	2007-000171	draco-11	3-A
R541	4.7K	2007-000143	draco-13	3-B
R542	4.7K	2007-000143	draco-13	3-B
R543	330	2007-001313	draco-13	4-B
R544	0	2007-000171	draco-15	4-C
R545	0	2007-000171	draco-15	3-A
R546	100K	2007-007107	draco-15	2-A
R547	100K	2007-007107	draco-16	4-C
R548	1K	2007-000140	draco-16	3-D

Ref	Value/Supplier	Code	Page	Loc
R549	100K	2007-007107	draco-16	4-D
R55	140	2007-008439	draco-15	3-C
R550	10K	2007-000148	draco-16	4-D
R551	1M	2007-007942	draco-33	4-C
R552	10K	2007-000148	draco-20	1-B
R553	1K	2007-000140	draco-8	2-A
R554	10K	2007-000148	draco-9	3-C
R555	51	2007-007733	draco-8	3-C
R556	301	2007-008313	draco-9	3-C
R557	51	2007-007733	draco-9	3-C
R558	24.9	2007-007302	draco-11	3-B
R559	150	2007-007307	draco-11	4-A
R56	2.4K	2007-007697	draco-15	2-B
R560	100	2007-007306	draco-11	2-A
R561	150	2007-007307	draco-11	4-B
R562	0	2007-000171	draco-11	4-B
R563	301	2007-008313	draco-11	4-A
R564	49.9	2007-008298	draco-11	2-A
R565	4.7K	2007-000143	draco-13	3-A
R566	330	2007-001313	draco-13	4-C
R567	4.7K	2007-000143	draco-13	3-A
R568	4.7K	2007-000143	draco-13	3-B
R569	200	2007-000536	draco-11	3-B
R57	1M	2007-007942	draco-15	4-A
R570	8.2K	2007-000147	draco-11	2-D
R571	8.2K	2007-000147	draco-11	2-D
R572	4.7K	2007-000143	draco-13	3-B
R573	1K	2007-007318	draco-13	4-B
R574	1K	2007-007318	draco-13	4-A
R575	0	2007-000171	draco-15	4-C
R576	75	2007-007009	draco-15	2-C
R577	75	2007-007009	draco-15	2-C
R578	75	2007-007009	draco-15	2-C
R579	75	2007-007009	draco-15	2-C
R58	0	2007-000171	draco-19	3-B
R580	8.2K	2007-000147	draco-18	4-A
R581	1K	2007-000140	draco-20	4-C
R582	8.2K	2007-000147	draco-18	4-B
R583	0	2007-000033	draco-20	1-B

Ref	Value/Supplier	Code	Page	Loc
R584	49.9	2007-008298	draco-9	4-A
R585	100	2007-007306	draco-9	4-A
R586	20	2007-007520	draco-12	3-A
R587	0	2007-000171	draco-12	4-B
R588	20	2007-007520	draco-12	3-A
R589	1.5K	2007-007528	draco-11	2-D
R59	0	2007-000171	draco-19	3-B
R590	0	2007-000171	draco-19	3-B
R591	0	2007-000171	draco-19	2-D
R592	10K	2007-000148	draco-19	2-D
R593	10K	2007-000148	draco-19	2-D
R594	10K	2007-000148	draco-19	2-D
R595	8.2K	2007-000147	draco-19	4-A
R596	10K	2007-000148	draco-19	4-A
R597	10K	2007-000148	draco-19	4-A
R598	10K	2007-000148	draco-19	4-A
R599	33	2007-001292	draco-19	2-B
R6	75	2007-007009	draco-16	2-B
R60	10K	2007-000148	draco-19	2-D
R600	8.2K	2007-000147	draco-19	4-A
R601	33	2007-001292	draco-19	2-B
R602	10K	2007-000148	draco-19	1-B
R603	8.2K	2007-000147	draco-18	4-A
R604	8.2K	2007-000147	draco-18	4-A
R605	8.2K	2007-000147	draco-18	4-A
R606	8.2K	2007-000147	draco-18	4-B
R607	8.2K	2007-000147	draco-18	4-A
R608	8.2K	2007-000147	draco-18	4-B
R609	8.2K	2007-000147	draco-18	4-B
R61	10K	2007-000148	draco-19	2-D
R610	8.2K	2007-000147	draco-18	4-B
R611	8.2K	2007-000147	draco-18	4-B
R612	8.2K	2007-000147	draco-18	4-B
R613	8.2K	2007-000147	draco-18	4-A
R614	8.2K	2007-000147	draco-18	4-B
R615	8.2K	2007-000147	draco-18	4-A
R616	10K	2007-000148	draco-10	4-A
R617	39	2007-000835	draco-9	3-B
R618	0	2007-000171	draco-14	4-C

Ref	Value/Supplier	Code	Page	Loc
R619	100	2007-007306	draco-14	4-C
R62	10K	2007-000148	draco-19	2-D
R620	0	2007-000171	draco-14	4-C
R621	100	2007-007306	draco-14	4-C
R622	220	2007-000570	draco-14	4-C
R623	0	2007-000171	draco-19	2-D
R624	0	2007-000171	draco-19	2-A
R625	4.7K	2007-000143	draco-19	4-D
R626	0	2007-000171	draco-20	2-D
R627	0	2007-000171	draco-19	2-D
R628	10K	2007-000148	draco-19	3-C
R629	10K	2007-000148	draco-19	3-D
R63	22	2007-000173	draco-33	4-C
R630	8.2K	2007-000147	draco-18	4-B
R631	0	2007-000171	draco-9	4-B
R632	51	2007-007733	draco-9	3-C
R633	10K	2007-000148	draco-8	3-C
R634	51	2007-007733	draco-9	3-C
R635	51	2007-007733	draco-9	3-C
R636	51	2007-007733	draco-9	3-C
R637	1K	2007-000140	draco-8	2-B
R638	10K	2007-000148	draco-10	4-A
R639	0	2007-000171	draco-10	4-A
R64	22	2007-000173	draco-33	4-C
R640	0	2007-000171	draco-10	4-A
R641	10K	2007-000148	draco-10	4-A
R642	10K	2007-000148	draco-10	3-A
R643	150	2007-007307	draco-8	3-C
R644	1K	2007-000140	draco-8	2-B
R645	680	2007-001119	draco-9	3-B
R646	27	2007-003112	draco-9	3-B
R647	51	2007-007733	draco-9	3-B
R648	1K	2007-000140	draco-8	2-B
R649	1K	2007-000140	draco-8	2-B
R65	22	2007-000173	draco-33	4-C
R650	1K	2007-000140	draco-8	2-B
R651	1K	2007-000140	draco-8	2-B
R652	51	2007-007733	draco-9	3-C
R653	0	2007-000171	draco-19	2-A

Ref	Value/Supplier	Code	Page	Loc
R654	10K	2007-000148	draco-19	4-A
R655	4.7K	2007-000143	draco-19	4-D
R656	0	2007-000171	draco-19	3-A
R657	10K	2007-000148	draco-19	4-A
R658	0	2007-000171	draco-19	3-C
R659	0	2007-000171	draco-19	3-A
R66	10K	2007-000148	draco-19	1-B
R660	10K	2007-000148	draco-19	2-D
R661	0	2007-000171	draco-19	2-A
R662	4.7K	2007-000143	draco-19	4-D
R663	10K	2007-000148	draco-19	4-A
R664	8.2K	2007-000147	draco-19	4-B
R665	0	2007-000171	draco-19	2-A
R666	0	2007-000070	draco-38	2-C
R667	0	2007-000070	draco-38	2-B
R668	0	2007-000070	draco-38	2-B
R669	51	2007-007733	draco-9	3-B
R67	22	2007-000173	draco-33	4-C
R670	51	2007-007733	draco-8	3-C
R671	51	2007-007733	draco-8	3-C
R672	470	2007-000077	draco-21	4-D
R673	51	2007-007733	draco-8	3-C
R674	51	2007-007733	draco-9	3-C
R675	0	2007-000171	draco-19	1-D
R676	0	2007-000171	draco-19	1-D
R677	22K	2007-007311	draco-19	4-D
R678	10K	2007-000148	draco-19	4-A
R679	10K	2007-000148	draco-19	4-B
R68	100	2007-007306	draco-12	3-A
R680	0	2007-000171	draco-19	2-A
R681	2.7K	2007-000516	draco-19	4-A
R682	2.7K	2007-000516	draco-19	4-A
R683	1K	2007-000140	draco-8	2-B
R684	150	2007-007307	draco-9	3-B
R685	10K	2007-000148	draco-19	4-A
R686	1.8K	2007-000265	draco-38	3-C
R687	0	2007-000070	draco-38	2-D
R688	1.8K	2007-000265	draco-38	3-C
R689	0	2007-000070	draco-38	2-C

Ref	Value/Supplier	Code	Page	Loc
R69	100	2007-007306	draco-12	3-A
R690	1.8K	2007-000265	draco-38	3-B
R691	0	2007-000070	draco-38	2-B
R692	10K	2007-007142	draco-20	1-A
R693	5.1K	2007-000962	draco-20	1-A
R694	1K	2007-000140	draco-20	1-B
R695	1K	2007-000140	draco-20	1-B
R696	0	2007-000070	draco-36	4-B
R697	5.1	2007-000969	draco-38	3-C
R698	5.1	2007-000969	draco-38	3-C
R699	5.1	2007-000969	draco-38	3-B
R7	39	2007-000835	draco-16	2-A
R70	10K	2007-000148	draco-15	1-D
R700	1K	2007-000140	draco-27	3-C
R701	10K	2007-000148	draco-27	3-C
R702	10K	2007-000148	draco-27	4-A
R703	0	2007-000171	draco-27	3-B
R704	1K	2007-000140	draco-20	2-C
R705	22	2007-000598	draco-20	1-C
R707	1K	2007-000043	draco-38	2-A
R708	0	2007-000171	draco-19	2-D
R709	8.2K	2007-000147	draco-21	4-B
R71	0	2007-000033	draco-15	1-D
R711	300K	2007-007720	draco-38	3-B
R712	5.1K	2007-000962	draco-38	4-A
R713	2K	2007-000669	draco-38	2-A
R714	130K	2007-007352	draco-38	4-C
R715	10K	2007-000052	draco-38	4-C
R716	100	2007-007306	draco-21	4-B
R717	100	2007-007306	draco-21	4-B
R718	47K	2007-000157	draco-21	3-B
R719	47K	2007-000157	draco-21	3-B
R72	22.6	2007-008330	draco-19	3-B
R720	47K	2007-000157	draco-21	3-B
R721	47K	2007-000157	draco-21	3-B
R722	10K	2007-000148	draco-33	1-D
R723	22K	2007-000583	draco-37	4-C
R724	22K	2007-000583	draco-37	4-C
R725	1M	2007-000475	draco-37	4-C

Ref	Value/Supplier	Code	Page	Loc
R726	1M	2007-000475	draco-37	4-C
R727	7.15K	2007-000050	draco-37	4-C
R728	430K	2007-007416	draco-37	3-C
R729	80.6K	2007-007519	draco-37	3-C
R73	8.2K	2007-000147	draco-18	4-B
R730	200K	2007-002906	draco-37	2-A
R731	100K	2007-000060	draco-37	2-B
R732	0	2007-000070	draco-37	2-A
R733	10K	2007-000052	draco-37	2-B
R734	47K	2007-000939	draco-37	3-B
R735	300K	2007-007720	draco-37	3-B
R736	100K	2007-000060	draco-37	3-A
R74	8.2K	2007-000147	draco-18	4-C
R75	1	2007-002425	draco-12	2-A
R76	62	2007-001101	draco-19	1-C
R77	0	2007-000171	draco-19	2-D
R78	8.2K	2007-000147	draco-18	4-B
R79	8.2K	2007-000147	draco-18	4-B
R8	0	2007-000171	draco-16	2-B
R80	10K	2007-000148	draco-18	4-A
R81	62	2007-001101	draco-19	1-D
R82	0	2007-000171	draco-19	1-C
R83	62	2007-001101	draco-19	3-C
R84	0	2007-000171	draco-19	3-C
R85	1K	2007-000140	draco-8	2-B
R86	68	2007-001131	draco-19	1-C
R87	0	2007-000171	draco-19	3-C
R88	10K	2007-000148	draco-19	4-A
R89	0	2007-000171	draco-19	3-C
R9	39	2007-000835	draco-16	2-A
R90	0	2007-000171	draco-19	3-C
R91	0	2007-000171	draco-19	3-C
R92	0	2007-000171	draco-19	3-C
R93	0	2007-000171	draco-19	3-C
R94	10K	2007-000148	draco-19	4-D
R95	10K	2007-000148	draco-19	4-D
R96	0	2007-000171	draco-19	3-A
R97	0	2007-000171	draco-19	3-A
R98	1K	2007-000140	draco-7	3-D

Ref	Value/Supplier	Code	Page	Loc
R99	33	2007-001292	draco-7	2-B
RD1-1	4.7K	2011-001260	draco-31	2-C
RD1-2	4.7K	2011-001260	draco-31	2-C
RD1-5	4.7K	2011-001260	draco-31	2-B
RD1-6	4.7K	2011-001260	draco-31	2-B
RD1-7	4.7K	2011-001260	draco-31	2-C
RD1-8	4.7K	2011-001260	draco-31	2-C
SW500	JTP1138A	3404-001222	draco-35	4-B
SW501	JTP1138A	3404-001222	draco-35	4-A
SW502	JTP1138A	3404-001222	draco-35	4-A
SW503	JTP1138A	3404-001222	draco-35	4-C
SW8000	FR2024	3409-001095	draco-35	3-B
TH1	miniSMDC110-2	1404-001089	draco-24	1-B
TH500	miniSMDC110-2	1404-001089	draco-16	1-B
U1	MIC2026-2BM	1203-002197	draco-32	2-B
U10	W320	1209-001370	draco-7	3-B
U11	N	1201-000167	draco-20	2-A
U12-2	CD74HCT74M96	0801-000906	draco-10	4-C
U13	MMBT3904	0501-000465	draco-10	4-C
U14	TC7S08FU	0801-000794	draco-10	2-D
U15	QS3125Q	1001-001002	draco-17	3-A
U16	N	1203-002364	draco-20	1-D
U17	LP2951CM-3.3	1203-002203	draco-23	3-D
U18	MMBT3904	0501-000465	draco-21	4-D
U19	MMBT3904	0501-000465	draco-21	4-D
U2	PC87393	0904-001417	draco-31	3-B
U20	SST49LF004A-33-4C-N	1107-001288	draco-21	3-B
U21	SI4465DY	0505-001507	draco-23	3-B
U22	FM50S3	BA32-00008A	draco-22	1-B
U23	1uF	2203-000476	draco-22	3-D
U24	HD64F2169	0903-001231	draco-22	3-A
U25	MIC2562A	1203-002333	draco-29	4-C
U26	TS7S14F	0801-002252	draco-24	3-C
U27	R5C475IIE-LQFP	0904-001567	draco-28	3-A
U28	TSB43AB22	0904-001536	draco-30	2-B
U29	S524C20D21	1103-001239	draco-30	4-C
U3	2N7002LT1	0505-000110	draco-16	4-B
U30	LM4863MTEx	1201-001559	draco-26	2-C
U31	CS4202	1205-002251	draco-25	3-B

Ref	Value/Supplier	Code	Page	Loc
U32	MB3875	1203-002510	draco-37	3-C
U33	N	0801-002462	draco-25	2-D
U4	N	1204-001996	draco-15	4-A
U5-1	82845GL	0904-001723	draco-11	3-A
U5-2	82845GL	0904-001723	draco-12	4-B
U5-3	82845GL	0904-001723	draco-12	2-B
U5-4	82845GL	0904-001723	draco-13	3-B
U5-5	82845GL	0904-001723	draco-13	2-B
U500	N	1001-001097	draco-15	2-B
U501	CL-150PG-CD-T	0601-000189	draco-35	1-C
U502	CL-150PG-CD-T	0601-000189	draco-35	1-C
U503	82562ET	0904-001499	draco-33	4-B
U504	TA75S01F-TE85L	1201-001125	draco-16	4-C
U505	TC7S08FU	0801-000794	draco-16	4-D
U506	SI4465DY	0505-001507	draco-23	3-B
U507	TC7S08FU	0801-000794	draco-18	4-C
U508	ISL6207CB-T	1203-002705	draco-38	3-C
U509	1uF	2203-005198	draco-38	3-B
U510	ISL6207CB-T	1203-002705	draco-38	3-B
U511	ISL6207CB-T	1203-002705	draco-38	3-B
U512	NC7SZ125M5X	0801-002462	draco-27	4-A

Ref	Value/Supplier	Code	Page	Loc
U513	100nF	2203-005061	draco-20	1-C
U514	SI2307DS	0505-001341	draco-20	1-C
U515	HIP6301	1203-002707	draco-38	4-C
U516	LM358D	1201-000167	draco-37	2-B
U6	93LC46B	1103-001244	draco-19	1-B
U7	ADM1032ARM	1209-001382	draco-10	3-A
U8-1	82801DB	0904-001693	draco-18	2-A
U8-2	82801DB	0904-001693	draco-19	3-B
U8-3	82801DB	0904-001693	draco-20	3-A
U9	SI91822DH-AD	1203-002521	draco-10	4-B
USB1	JACK-USB-8P	3722-001641	draco-32	4-A
Y1	14.31818MHz	2801-003730	draco-15	4-A
Y2	14.31818MHz	2801-003730	draco-7	4-C
Y3	32.768KHz	2801-000111	draco-19	4-B
Y4	10MHz	2801-004047	draco-22	3-A
Y5	24.576MHz	2801-003898	draco-30	3-C
Y500	25MHz	2801-003892	draco-33	4-C
Y6	24.576MHz	2801-003898	draco-25	3-B
ZD1-1	SM05	0406-001005	draco-37	1-C
ZD1-2	SM05	0406-001005	draco-37	1-C